



# Overview

for the

**Avaya™ S8100 Media Server**

with

**Avaya™ G600 or CMC1 Media Gateways**

555-233-231  
Issue 2  
May 2003

## Notice

Every effort was made to ensure that the information in this document was complete and accurate at the time of printing. However, information is subject to change.

## Warranty

Avaya Inc. provides a limited warranty on this product. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Avaya's standard warranty language as well as information regarding support for this product, while under warranty, is available through the following website:

<http://www.avaya.com/support>

## Preventing Toll Fraud

"Toll fraud" is the unauthorized use of your telecommunications system by an unauthorized party (for example, a person who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf). Be aware that there may be a risk of toll fraud associated with your system and that, if toll fraud occurs, it can result in substantial additional charges for your telecommunications services.

## Avaya Fraud Intervention

If you suspect that you are being victimized by toll fraud and you need technical assistance or support, in the United States and Canada, call the Technical Service Center's Toll Fraud Intervention Hotline at 1-800-643-2353.

## How to Get Help

For additional support telephone numbers, go to the Avaya Web site:

<http://www.avaya.com/support/>

If you are:

- Within the United States, click *Escalation Lists*, which includes escalation phone numbers within the USA.
- Outside the United States, click *Escalation Lists* then click *Global Escalation List*, which includes phone numbers for the regional Centers of Excellence.

## Providing Telecommunications Security

Telecommunications security (of voice, data, and/or video communications) is the prevention of any type of intrusion to (that is, either unauthorized or malicious access to or use of) your company's telecommunications equipment by some party.

Your company's "telecommunications equipment" includes both this Avaya product and any other voice/data/video equipment that could be accessed via this Avaya product (that is, "networked equipment").

An "outside party" is anyone who is not a corporate employee, agent, subcontractor, or is not working on your company's behalf. Whereas, a "malicious party" is anyone (including someone who may be otherwise authorized) who accesses your telecommunications equipment with either malicious or mischievous intent.

Such intrusions may be either to/through synchronous (time-multiplexed and/or circuit-based) or asynchronous (character-, message-, or packet-based) equipment or interfaces for reasons of:

- Utilization (of capabilities special to the accessed equipment)
- Theft (such as, of intellectual property, financial assets, or toll-facility access)
- Eavesdropping (privacy invasions to humans)
- Mischief (troubling, but apparently innocuous, tampering)
- Harm (such as harmful tampering, data loss or alteration, regardless of motive or intent)

Be aware that there may be a risk of unauthorized intrusions associated with your system and/or its networked equipment. Also realize that, if such an intrusion should occur, it could result in a variety of losses to your company (including but not limited to, human/data privacy, intellectual property, material assets, financial resources, labor costs, and/or legal costs).

## Responsibility for Your Company's Telecommunications Security

The final responsibility for securing both this system and its networked equipment rests with you - Avaya's customer system administrator, your telecommunications peers, and your managers. Base the fulfillment of your responsibility on acquired knowledge and resources from a variety of sources including but not limited to:

- Installation documents
- System administration documents
- Security documents
- Hardware-/software-based security tools
- Shared information between you and your peers
- Telecommunications security experts

To prevent intrusions to your telecommunications equipment, you and your peers should carefully program and configure:

- Your Avaya-provided telecommunications systems and their interfaces
- Your Avaya-provided software applications, as well as their underlying hardware/software platforms and interfaces
- Any other equipment networked to your Avaya products.

## TCP/IP Facilities

Customers may experience differences in product performance, reliability and security depending upon network configurations/design and topologies, even when the product performs as warranted.

## Standards Compliance

Avaya Inc. is not responsible for any radio or television interference caused by unauthorized modifications of this equipment or the substitution or attachment of connecting cables and equipment other than those specified by Avaya Inc. The correction of interference caused by such unauthorized modifications, substitution or attachment will be the responsibility of the user. Pursuant to Part 15 of the Federal Communications Commission (FCC) Rules, the user is cautioned that changes or modifications not expressly approved by Avaya Inc. could void the user's authority to operate this equipment.

## Product Safety Standards

This product complies with and conforms to the following international Product Safety standards as applicable:

Safety of Information Technology Equipment, IEC 60950, 3rd Edition including all relevant national deviations as listed in Compliance with IEC for Electrical Equipment (IECEE) CB-96A.

Safety of Information Technology Equipment, CAN/CSA-C22.2 No. 60950-00 / UL 60950, 3rd Edition

Safety Requirements for Customer Equipment, ACA Technical Standard (TS) 001 - 1997

One or more of the following Mexican national standards, as applicable: NOM 001 SCFI 1993, NOM SCFI 016 1993, NOM 019 SCFI 1998

The equipment described in this document may contain Class 1 LASER Device(s). These devices comply with the following standards:

- EN 60825-1, Edition 1.1, 1998-01
- 21 CFR 1040.10 and CFR 1040.11.

The LASER devices operate within the following parameters:

- Maximum power output: -5 dBm to -8 dBm
- Center Wavelength: 1310 nm to 1360 nm

Luokan 1 Laserlaite  
Klass 1 Laser Apparat

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposures. Contact your Avaya representative for more laser product information.

### Electromagnetic Compatibility (EMC) Standards

This product complies with and conforms to the following international EMC standards and all relevant national deviations:

Limits and Methods of Measurement of Radio Interference of Information Technology Equipment, CISPR 22:1997 and EN55022:1998.

Information Technology Equipment – Immunity Characteristics – Limits and Methods of Measurement, CISPR 24:1997 and EN55024:1998, including:

- Electrostatic Discharge (ESD) IEC 61000-4-2
- Radiated Immunity IEC 61000-4-3
- Electrical Fast Transient IEC 61000-4-4
- Lightning Effects IEC 61000-4-5
- Conducted Immunity IEC 61000-4-6
- Mains Frequency Magnetic Field IEC 61000-4-8
- Voltage Dips and Variations IEC 61000-4-11
- Powerline Harmonics IEC 61000-3-2
- Voltage Fluctuations and Flicker IEC 61000-3-3

### Federal Communications Commission Statement

#### Part 15:

**Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.**

**Part 68: Answer-Supervision Signaling.** Allowing this equipment to be operated in a manner that does not provide proper answer-supervision signaling is in violation of Part 68 rules. This equipment returns answer-supervision signals to the public switched network when:

- answered by the called station,
- answered by the attendant, or
- routed to a recorded announcement that can be administered by the customer premises equipment (CPE) user.

This equipment returns answer-supervision signals on all direct inward dialed (DID) calls forwarded back to the public switched telephone network. Permissible exceptions are:

- A call is unanswered.
- A busy tone is received.
- A reorder tone is received.

Avaya attests that this registered equipment is capable of providing users access to interstate providers of operator services through the use of access codes. Modification of this equipment by call aggregators to block access dialing codes is a violation of the Telephone Operator Consumers Act of 1990.

This equipment complies with Part 68 of the FCC Rules. On the rear of this equipment is a label that contains, among other information, the FCC registration number and ringer equivalence number (REN) for this equipment. If requested, this information must be provided to the telephone company.

The REN is used to determine the quantity of devices which may be connected to the telephone line. Excessive RENs on the telephone line may result in devices not ringing in response to an incoming call. In most, but not all areas, the sum of RENs should not exceed 5.0. To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. REN is not required for some types of analog or digital facilities.

### Means of Connection

Connection of this equipment to the telephone network is shown in the following table.

Manufacturer's Port Identifier	FIC Code	SOC/REN/ A.S. Code	Network Jacks
Off/On premises station	OL13C	9.0F	RJ2GX, RJ21X, RJ11C
DID trunk	02RV2-T	0.0B	RJ2GX, RJ21X
CO trunk	02GS2	0.3A	RJ21X
CO trunk	02LS2	0.3A	RJ21X
Tie trunk	TL31M	9.0F	RJ2GX
Basic Rate Interface	02IS5	6.0F, 6.0Y	RJ49C
1.544 digital interface	04DU9-BN, 1KN, 1SN	6.0F	RJ48C, RJ48M
120A2 channel service unit	04DU9-DN	6.0Y	RJ48C

If the terminal equipment (for example, the media server or media gateway) causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice is not practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

If trouble is experienced with this equipment, for repair or warranty information, please contact the Technical Service Center at 1-800-242-2121 or contact your local Avaya representative. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant.

It is recommended that repairs be performed by Avaya certified technicians.

The equipment cannot be used on public coin phone service provided by the telephone company. Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

This equipment, if it uses a telephone receiver, is hearing aid compatible.

### **Canadian Department of Communications (DOC) Interference Information**

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

This equipment meets the applicable Industry Canada Terminal Equipment Technical Specifications. This is confirmed by the registration number. The abbreviation, IC, before the registration number signifies that registration was performed based on a Declaration of Conformity indicating that Industry Canada technical specifications were met. It does not imply that Industry Canada approved the equipment.

### **DECLARATIONS OF CONFORMITY**

#### **United States FCC Part 68 Supplier's Declaration of Conformity (SDoC)**

Avaya Inc. in the United States of America hereby certifies that the equipment described in this document and bearing a TIA TSB-168 label identification number complies with the FCC's Rules and Regulations 47 CFR Part 68, and the Administrative Council on Terminal Attachments (ACTA) adopted technical criteria.

Avaya further asserts that Avaya handset-equipped terminal equipment described in this document complies with Paragraph 68.316 of the FCC Rules and Regulations defining Hearing Aid Compatibility and is deemed compatible with hearing aids.

Copies of SDoCs signed by the Responsible Party in the U. S. can be obtained by contacting your local sales representative and are available on the following Web site:

<http://www.avaya.com/support>

All Avaya media servers and media gateways are compliant with FCC Part 68, but many have been registered with the FCC before the SDoC process was available. A list of all Avaya registered products may be found at:

<http://www.part68.org/>

by conducting a search using "Avaya" as manufacturer.

### **European Union Declarations of Conformity**



Avaya Inc. declares that the equipment specified in this document bearing the "CE" (*Conformité Européenne*) mark conforms to the European Union Radio and Telecommunications Terminal Equipment Directive (1999/5/EC), including the Electromagnetic Compatibility Directive (89/336/EEC) and Low Voltage Directive (73/23/EEC). This equipment has been certified to meet CTR3 Basic Rate Interface (BRI) and CTR4 Primary Rate Interface (PRI) and subsets thereof in CTR12 and CTR13, as applicable.

Copies of these Declarations of Conformity (DoCs) can be obtained by contacting your local sales representative and are available on the following Web site:

<http://www.avaya.com/support>

### **Japan**

This is a Class A product based on the standard of the Voluntary Control Council for Interference by Information Technology Equipment (VCCI). If this equipment is used in a domestic environment, radio disturbance may occur, in which case, the user may be required to take corrective actions.

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

### **To order copies of this and other documents:**

Call: Avaya Publications Center  
Voice 1.800.457.1235 or 1.207.866.6701  
FAX 1.800.457.1764 or 1.207.626.7269

Write: Globalware Solutions  
200 Ward Hill Avenue  
Haverhill, MA 01835 USA  
Attention: Avaya Account Management

E-mail: [totalware@gwsmail.com](mailto:totalware@gwsmail.com)

For the most current versions of documentation, go to the Avaya Web site:

<http://www.avaya.com/support/>

# Contents

<b>About This Document</b>	<b>11</b>
Purpose	11
Audiences	11
Using this document	11
Conventions	12
Security	12
Downloading this book and updates from the Web	13
Downloading this book	13
Ordering Documentation	13
Safety labels and security alert labels	14
Related resources	14
Technical assistance	15
Trademarks	15
Sending us comments	15
<b>1 Introduction</b>	<b>17</b>
Communications Needs	17
S8100 Communications Solution	17
S8100 Media Server	18
Basic Features/Capabilities	19
Hardware	19
Software	20
Capacities	20
Supported Features/Applications	21
New or Updated Features	21
Major Supported Features and Applications	22
Hardware	26
CMC1 Media Gateway	26
G600 Media Gateway	28
Reliability	30
<b>2 Desktop/Console Solutions</b>	<b>33</b>
Telephones for the global marketplace	33
4600-Series IP Telephones	34
IP Softphones	35
Wireless Handsets for X-Station Mobility	40
Teleconferencing Products	41
SoundStation Audioconferencing Systems	41

Attendant Consoles . . . . .	42
DEFINITY Attendant Console . . . . .	42
Avaya Softconsole™ Release 1 . . . . .	42
<b>3 Adjuncts</b>	<b>45</b>
Power Systems . . . . .	45
On hold and delayed announcement systems . . . . .	46
Headsets . . . . .	46
Audio and visual paging . . . . .	47
Alerts and sensors . . . . .	47
External speakerphones . . . . .	47
Security devices . . . . .	47
Call Accounting Systems . . . . .	48
eCAS . . . . .	48
eCAS Lite . . . . .	49
Quantum Series . . . . .	49
INTUITY Call Accounting . . . . .	49
Infotel for Windows Logging . . . . .	49
<b>4 INTUITY AUDIX Messaging System</b>	<b>51</b>
Application overview of INTUITY AUDIX . . . . .	51
Additional sources of information . . . . .	52
Accessing INTUITY AUDIX Administration . . . . .	52
Using Avaya Site Administration . . . . .	52
Review and test the Avaya Site Administration connection . . . . .	53
Using Telnet to access INTUITY AUDIX Administration . . . . .	54
Features of INTUITY AUDIX . . . . .	55
Voice Messaging . . . . .	55
Voice mailbox . . . . .	57
TCP/IP . . . . .	58
Avaya Message Manager . . . . .	59
FAX Messaging . . . . .	62
Automated Attendant . . . . .	63
Bulletin Board . . . . .	63
CornerStone Software . . . . .	63
<b>5 Call Center</b>	<b>65</b>
Automatic Call Distribution (ACD) . . . . .	66
Basic Call Management System . . . . .	68
Attendant Vectoring . . . . .	69
Call Center Basic . . . . .	69
Call Center Deluxe . . . . .	70
Call Center Elite . . . . .	70
CentreVu Virtual Routing . . . . .	71

CentreVu Advocate . . . . .	72
BCMS Vu. . . . .	73
CentreVu CT . . . . .	74
Requirements. . . . .	74
CentreVu Call Management System (CMS) . . . . .	75
CMS add-on packages . . . . .	76
CentreVu Supervisor . . . . .	76
CentreVu Explorer II . . . . .	77
CentreVu Visual Vectors . . . . .	78
CentreVu Compact Call Center Solutions Packages . . . . .	79
<b>6 Computer Telephony Integration</b>	<b>81</b>
Server-based solutions . . . . .	81
Third-Party applications. . . . .	82
<b>7 Wireless Solutions</b>	<b>83</b>
Medium-Range mobility. . . . .	83
Long-Range mobility . . . . .	85
DEFINITY Wireless Business System PWT . . . . .	85
EC500 . . . . .	86
Avaya Advantage. . . . .	86
<b>8 IP Telephony Applications</b>	<b>87</b>
Trunks . . . . .	88
IP Softphone . . . . .	88
Road Warrior . . . . .	88
Telecommuter . . . . .	88
IP Agent . . . . .	89
IP Telephones . . . . .	89
<b>9 Telecommuting/Virtual Office</b>	<b>91</b>
S8100 Media Server features for telecommuting . . . . .	91
Remote Call Coverage/ Call Forwarding Off-Net/Coverage of Calls Redirected Off-Net. . . . .	91
Extended User Administration of Redirected Calls (Telecommuting Access) . . . . .	91
Personal Station Access . . . . .	91
Station Security Codes . . . . .	92
Pipeline 15. . . . .	92
DEFINITY Extender. . . . .	93
Intuity AUDIX features for telecommuting . . . . .	93

<b>10</b>	<b>System Administration</b>	<b>95</b>
	Avaya Site Administration . . . . .	95
	Administration . . . . .	98
	Portless Administration/Administration Without Hardware . . . . .	98
	Automatic Station Relocation/Terminal Translation Initialization . . . . .	98
	Basic reporting . . . . .	99
	Performance measurements . . . . .	100
	Reports Generator . . . . .	101
	Call Charge information . . . . .	102
	Call Detail Recording . . . . .	103
	Call Detail Recording features . . . . .	103
	Variable format records . . . . .	103
	Call Detail Recording devices . . . . .	103
	Security . . . . .	104
	Call Restrictions . . . . .	104
<b>11</b>	<b>Networking</b>	<b>105</b>
	Uniform Dial Plan . . . . .	105
	Distributed Communication System — Integrated SDN and Non-Integrated SDN . . . . .	105
	Distributed Communications System and ISDN . . . . .	106
	S8100 Media Server DCS networks . . . . .	107
	QSIG global networking . . . . .	107
	World-Class Routing . . . . .	108
	Network management features . . . . .	109
	Time of Day Routing . . . . .	109
	Automatic Route Selection . . . . .	109
	Automatic Alternate Routing . . . . .	110
	Generalized Route Selection . . . . .	110
	Facility Restriction Level . . . . .	111
	Authorization codes . . . . .	111
	Network interfaces and equipment . . . . .	112
	Trunk group circuits . . . . .	112
	Digital interfaces . . . . .	113
	ISDN . . . . .	113
	Centralized Attendant Service . . . . .	114
	Main/Satellite/Tributary . . . . .	114
	Electronic Tandem Network . . . . .	115
<b>12</b>	<b>SNMP Native Agent Software</b>	<b>117</b>
	Agent Administration . . . . .	117
	S8100 Media Server Data . . . . .	117
	Via the SNMP MIB . . . . .	117
	Via the SNMP . . . . .	118

SNMP Traps .....	118
S8100 Media Server Co-Resident Modules .....	118
GAM .....	118
WatchDog .....	118
License Server .....	119
Avaya Site Administration .....	119
Logins and the LAC .....	119

**A Features 121**

Automatic routing features .....	121
Basic features .....	122
Call Center features .....	126
Private networking features .....	128
Trunk group features .....	129

**Index 131**



# About This Document

---

## Purpose

This document provides a high-level overview of the features, components, and capabilities of the Avaya™ S8100 Media Server with an Avaya™ G600 Media Gateway (formerly IP600) or an Avaya™ CMC1 Media Gateway (formerly Definity One).

This document is intended to provide an understanding of:

- The components of the S8100 Media Server and the G600 and CMC1 Media Gateways
- S8100 Media Server features
- Additional solutions to further tailor S8100 Media Server to future needs

## Audiences

This overview provides information for the following audiences:

- Customer end users and system administrators
- Avaya account executives, representatives, and distributors who require high-level information about the system and its use

## Using this document

This document provides a basic understanding of the components, features, and capabilities of S8100 Media Server and the starter packages. The information is useful in identifying applications to increase employee productivity and effectiveness.

Overview chapters are:

- [Chapter 1, Introduction](#) provides an overview of S8100 Media Server, including features, hardware and software.
- [Chapter 2, Desktop/Console Solutions](#) describes the telephones and consoles available with S8100 Media Server.
- [Chapter 3, Adjuncts](#) describes the adjuncts available with S8100 Media Server.
- [Chapter 4, INTUITY AUDIX Messaging System](#) describes Avaya's Intuity AUDIX application and features on S8100 Media Server, and provides a high-level overview of application capabilities and functionality.
- [Chapter 5, Call Center](#) describes advanced call-handling applications and call center management capabilities.

- [Chapter 7, Wireless Solutions](#) describes applications that enable employees to stay in touch with co-workers and clients from both on-site and off-site locations.
- [Chapter 6, Computer Telephony Integration](#) describes the applications that enable employees to combine computer and telephone functions to access client information.
- [Chapter 8, IP Telephony Applications](#) describes the capabilities and applications that support audio/voice over a LAN or WAN.
- [Chapter 9, Telecommuting/Virtual Office](#) describes applications that enable employees to work effectively off-site.
- [Chapter 10, System Administration](#) describes applications to help manage S8100 Media Server, including the Avaya Site Administration tool.
- [Chapter 11, Networking](#) describes connection applications for various voice and data networks.
- [Chapter 12, SNMP Native Agent Software](#) describes the SNMP interface to the system's alarm and error tables, performance measurements, and configuration data.
- [Appendix A, Features](#): provides a list of the telephone features of S8100 Media Server.

## Conventions

This section describes the conventions used in this book.

- *System* is a general term that encompasses all references to the Avaya Media Server or Gateway running Avaya™ Communication Manager.
- *S8100 system* is used as an abbreviation for either the Avaya™ S8100 Media Server with the Avaya™ G600 Media Gateway or the Avaya™ S8100 Media Server with the Avaya™ CMC1 Media Gateway.“
- Avaya™ S8100 Media Server is abbreviated as *S8100 server*.
- CMC1 Media Gateway is abbreviated as *CMC1*.
- G600 Media Gateway is abbreviated as *G600*.

## Security

S8100 Media Server security is extremely important to Avaya. *See Avaya™ Communication Manager Toll Fraud and Security Handbook (555-025-600)* and the S8100 Media Server documentation for security measures for your system.

## Downloading this book and updates from the Web

You can download the latest version of this book, *Overview for the Avaya S8100 Media Server with Avaya G600 or CMC1 Media Gateways*, 555-233-231, from the Avaya Web site. You must have access to the Internet, and a copy of Acrobat Reader must be installed on your personal computer.

Avaya makes every effort to ensure that the information in this book is complete and accurate. However, information can change after we publish this book. The Avaya Web site may contain new product information and updates to the information in this book.

### Downloading this book

To download the latest version of this book:

- 1 Access the Avaya web site at <http://www.avaya.com/support>.
- 2 Click **Product Documentation**. The system displays the Welcome to Product Documentation page.
- 3 Type **555-233-231** in the search window and then click **Search**. The system displays the Product Documentation Search Results page.
- 4 Scroll down to find the latest issue number, and then click the book title that is to the right of the latest issue number.
- 5 On the next page, scroll down and click one of the following options:
  - > **PDF Format** to download the book in regular PDF format
  - > **ZIP Format** to download the book in zipped PDF format

## Ordering Documentation

In addition to this book, other description, installation, maintenance, and administration books, and documentation library CDs, are available.

This document (555-233-231) and any other Avaya documentation can be ordered directly from the Avaya Publications Center toll free at 1-800-457-1235 (voice) and 1-800-457-1764 (fax). International customers should use +1.207.866.6701 (voice) and +1.207.626.7269 (fax).

## Safety labels and security alert labels

Observe all caution, warning, and danger statements to help prevent loss of service, equipment damage, personal injury, and security problems.

This book uses the following safety labels and security alert labels:

### CAUTION:

A caution statement calls attention to a situation that can result in harm to software, loss of data, or an interruption in service.

### WARNING:

A warning statement calls attention to a situation that can result in harm to hardware or equipment.

### WARNING:

Use an ESD warning to call attention to situations that can result in ESD damage to electronic components.

### DANGER:

A danger statement calls attention to a situation that can result in harm to personnel.

### SECURITY ALERT:

A security alert calls attention to a situation that can increase the potential for unauthorized use of a telecommunications system.

## Related resources

This section lists additional documentation that is available with information about installing, upgrading, and maintaining the S8100/G600/CMC1 products.

Title	Number
Installation and Upgrades for the Avaya™ S8100 Media Server with Avaya™ G600 or CMC1 Media Gateways	555-233-146
Maintenance for the Avaya™ S8100 Media Server with Avaya™ G600 or CMC1 Media Gateways	555-233-149
Upgrade Job Aids for the Avaya™ S8100 Media Server with Avaya™ G600 or CMC1 Media Gateways	n/a

## Technical assistance

Avaya provides the following resources for technical assistance.

### Within the US

For help with:

- Feature administration and system applications, call the Avaya DEFINITY Helpline:  
**1-800-225-7585**
- Maintenance and repair, call the Avaya National Customer Care Support Line:  
**1-800-242-2121**
- Toll fraud, call Avaya Toll Fraud Intervention:  
**1-800-643-2353**
- Avaya offers services that can reduce toll-fraud liabilities. For more information, contact your Avaya representative.
- Other security issues, call Avaya Corporate Security:  
**1-800-822-9009**

### International

For all international resources, contact your local Avaya authorized dealer.

## Trademarks

All trademarks identified by the ® or ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners.

## Sending us comments

Avaya welcomes your comments about this book. To reach us by:

- Mail, send your comments to:  
Avaya Inc.  
Product Documentation Group  
Room B3-H13  
1300 W. 120 St.  
Westminster, CO 80234 USA
- E-mail, send your comments to:  
*document@avaya.com*
- Fax, send your comments to:  
1-303-538-1741

Please be sure to include the name and number (555-233-231) of this book.



# 1 Introduction

---

## Communications Needs

With the use of the Internet and e-commerce, the paradigm of business is shifting from brick and mortar to the virtual enterprise. This shift is allowing small and large businesses alike to take advantage of new opportunities and find new ways to communicate with their customers.

Competition is fierce as this new technology begins to level the playing field, allowing small companies to more easily compete with larger companies without acquiring a large number of employees or large corporate infrastructure. To compete, the smaller businesses must present an image of a larger company through their sales and customer service operations, as well as their day-to-day communications with their customers. These small companies need sophisticated, highly reliable tools to effectively run their operations, improve customer service, and make the most effective use of their limited resources.

Larger companies face a similar challenge, having to present the same corporate image through all of their locations, large and small. It is critical that their customers receive the same level of service and have the same tools deployed to the field as are in use at the company's headquarters. Ensuring that the customer experience is consistent across all locations can help to improve customer satisfaction and build customer loyalty.

Thus, for both a small business and a small branch of a large corporation, the tools needed to provide the highest level of customer service and improve employee productivity are critical. The most critical of those tools are the communications systems used within the business. These systems provide not only the data and telecommunications resources for the business but also the foundation for the other service and productivity enhancing applications.

## S8100 Communications Solution

The Avaya™ S8100 Media Server, running Avaya™ Communication Manager, functions as the call controller, or gatekeeper, for the communications solution. The S8100 with either the G600 or CMC1 Media Gateway brings together the successes of three Avaya products to create a new standard in multiservice IP telephony:

- Call processing that runs on a customized surround-supported Windows 2000 Server operating system, co-resident with sophisticated and integrated voice/fax mail, call centers, announcements, Call Detail Recording (CDR), and Web-based system administration. Additionally, SNMP agent is supported as an option to the standard Expert systems interface.
- Complete IP Gateway and IP Gatekeeper functions that support 100% TCP/IP transport of merged voice and data to the desktop as well as to the network clouds.

- Integration with traditional DEFINITY server port architecture that leverages millions of lines of proven code and proven hardware to provide world class reliability/availability and feature richness with the emerging technology of Voice over IP.

This document provides an overview of the Avaya™ S8100 Media Server, running Avaya™ Communication Manager, with the Avaya™ G600 or Avaya™ CMC1 Media Gateways. The S8100 solution includes two media gateway configuration options:

- Avaya™ S8100 Media Server with the Avaya™ G600 Media Gateway
- Avaya™ S8100 Media Server with the Avaya™ CMC1 Media Gateway

### **G600 Media Gateway**

S8100 with the G600 Media Gateway is a high-functionality communications system for customers in the 25-60 line size or smaller with growth potential to 450 IP end points and 300 trunks. G600 is designed for communication environments that emphasize IP data and IP voice-over-data. This offer supports the May 2003 release of Communication Manager, INTUITY® AUDIX® Release 5.1 messaging, and Avaya Site Administration Release 1.9 on a single hardware platform.

### **CMC1 Media Gateway**

S8100 with the CMC1 Media Gateway is a high-functionality communications system for customers in the 25-40 line size or smaller with growth potential of 240 stations and 300 trunks. This offer provides the May 2003 release of Communication Manager, INTUITY® AUDIX® Release 5.1 messaging, and Avaya Site Administration Release 1.9 on a single hardware platform.

For both configurations, application integration results in easy administration on the Windows 2000 Server operating system. In addition, outside adjuncts and associated connectivity and maintenance costs are eliminated and functionality is consolidated into a single cabinet, creating a cost-effective platform.

Avaya S8100 Media Server allows for business growth without additional investment. The circuit packs, phones, and cabinet can be used seamlessly in networks with DEFINITY server systems, and the port circuit packs and telephones are common across the whole Avaya S8100 Media Server/DEFINITY server product line.

## **S8100 Media Server**

The Avaya™ S8100 Media Server with Communication Manager allows full functionality, including support for the 2400-, 4600-, 6200-, 6400-, and 8400- series telephones. The following features are offered:

- Station and trunk circuit packs, such as C-LAN and IP Media Processor
- Asynchronous Transfer Mode (ATM) and features, such as telecommuting
- Integrated Services Digital Network-Primary Rate Interface (ISDN-PRI) access and Distributed Communications System (DCS) and QSIG private networking
- Software options, such as Co-Resident Announcements, SNMP Agent, BCMS VU, and Centre Vu CT Server

- DEFINITY LAN Gateway enhancement allows adjunct routing to multiple CTI links using the processor Ethernet interface or C-LAN. This feature is co-resident on the processor and does not require any additional hardware.

See [Appendix A, Features](#) for a complete list of Avaya S8100 Media Server features.

## Basic Features/Capabilities

### Hardware

- TN2314 Processor** The S8100 Media Server uses the TN2314 processor. This processor circuit pack replaced the TN795 processor that had supported the platform before Release 10. The TN2314 circuit pack operates with a Pentium III 500 MHz processor. The Synchronous Dynamic RAM capacity is 256 MB, with an expansion capability to support 512 MB in future releases.
- RJ-45 Jack** To facilitate switch installation and ease of maintenance, S8100 provides a “Services Ethernet” RJ-45 jack located on the faceplate of TN2314 processor circuit pack.
- Hard Disk Drive** The S8100 contains a 20 GB hard drive. The hard drive partitions, size, and designated use are as follows:

Partition	Size	Use
C-partition	5GB	Executables, Program Files
D-partition	10 GB	Non-persistent data (e.g., INTUITY AUDIX messages)
Z-partition	5 GB	Reserved for future use

## Software

### Windows 2000 Server Operating System

S8100 runs under the Windows 2000 Server operating system. The Windows 2000 Server provides a suite of utilities that considerably enhance the efficiency of the platform.

#### Terminal Server

The Terminal Server allows a service technician or customer to establish a desktop session on a remote computer. With the Terminal Server, two independent remote desktop sessions can be performed simultaneously. This alleviates the need for service personnel to wait for the customer to log off prior to logging on. Another marked advantage of the Terminal Server is that pcAnywhere is no longer needed to access the switch.

#### DHCP Server

The Windows 2000 Server OS comes with a DHCP Server, thereby eliminating the need for the customer to supply their own DHCP Server as an external add-on.

#### TFTP Server

The Windows 2000 Server OS comes with a TFTP Server, thereby eliminating the need for the customer to supply their own TFTP Server as an external add-on.

#### Remote Access Server

The Windows 2000 Server OS provides a Remote Access Server (RAS), much the same as it was provided with the Windows NT OS.

#### Web Server

The Windows 2000 Server OS provides a Web Server, much the same as it was provided with the Windows NT OS.

### Communication Manager Base

The May 2003 release of the S8100 Media Server with the G600 or CMC1 Media Gateway supports all the features in the Communication Manager. See the Communication Manager documentation for more information.

## Capacities

### Call Center Agents

To support S8100 for small-end Call Center customers, the capacity of Call Center Agents is 100.

### Trunks

In support of the capacity for Call Center Agents, the number of trunks allowed is 300.

### Gateways/Cabinets/Slots

The S8100 supports up to three media gateways (either G600 or CMC1). A three-gateway configuration provides 27 available slots (30 slots total, two slots occupied by the processor, and one slot occupied by the Tone Detector/Call Classifier).

**Installation**                    The S8100 incorporates a hard disk drive that simplifies the switch installation process by offering the operating system, the May 2003 release of Communication Manager, and INTUITY AUDIX program files as pre-loaded software. This will insure a quicker and more reliable installation and will preclude the need for an “install wizard.”

## Supported Features/Applications

This section lists new or updated features for the May 2003 release of Communication Manager and describes some of the major features and applications supported by the S8100 Media Server. For a complete list of Communication Manager features supported by the S8100 Media Server, see [Appendix A, Features](#), and *Overview for Avaya™ Communication Manager, 555-233-767*.

### New or Updated Features

The following Communications Manger features have been updated or added for the May 2003 release. For a complete description of these features, see *Highlights of Avaya™ Communication Manager, 555-233-783*.

- ARS/AAR dialing without FAC
- Alphanumeric field designation
- Automatic Call Back (ACB) for analog telephones
- Avaya Extension to Cellular enhancements
- CDR display of physical extension
- Call redirection intervals
- IP station loss plan upgrades
- Leave Word Calling (LWC) — QSIG/DCS
- Media encryption
- NAT with shuffling
- Network Call Redirection (NCR) 2-B channel transfer
- No hold conference
- Posted messages
- Resource Reservation Protocol (RSVP)
- Separation of Bearer and Signaling (SBS)
- Timed call disconnection for outgoing trunk calls

## Major Supported Features and Applications

### AMIS Analog Networking

The Audio Messaging Interchange Specification (AMIS) Analog Networking feature lets subscribers exchange voice mail messages with voice messaging systems anywhere in the world, provided those systems also have AMIS analog networking capabilities. The Message Delivery feature allows subscribers to send recorded messages to any touch-tone telephone, including a residence telephone.

AMIS Networking involves:

- Establishing machine names
- Administration of dial strings for all AMIS nodes
- Administration of address ranges
- Testing with other vendors (this requires test mailboxes with password access)
- Post-implementation support for five consecutive business days, with the understanding that the translations have not been changed or modified by the customer

Customers implementing AMIS or TCP/IP networking should consider using the Node Implementation and Testing Offer, which includes administration and testing of end points. Ask your service representative for details.

**Note:** CMC1 customers who currently have DCP networking installed will need to purchase an Interchange to facilitate the TCP/IP-DCP conversion.

**Note:** S8100's TCP/IP design is targeted for Mach 4 and above systems. Systems using IP55 TCP/IP will not function with S8100.

### Analog Interface to Voice Messaging Platforms

An analog interface with external VMS platforms is provided with Communication Manager. This interface supports Aria and Serenade, Octel® 200, 250, 300, 350, and Unified Messaging. The analog interface should be used with the mode code.

### Announcements

The S8100 with the G600 or CMC1 Media Gateway supports 8 ports of integrated SSP announcements. They are stored on the hard drive and can be backed up just as translations are. The processor supports 1 hour of noncompressed speech (28.8 Mbytes). You can also import \*.wav files. You can add ports using the TN750C, but the TN750C cannot use \*.wav files. For any given announcement port, up to 256 users can be connected at any one time.

### Avaya Site Administration

Avaya Site Administration is a Windows-based system management tool that provides an easy-to-use interface with S8100 and INTUITY AUDIX. It can be purchased as part of the Avaya VisAbility™ Management Suite. The wizards built into Avaya Site Administration globally update records, add users, and complete other administrative and maintenance tasks. The S8100 is administered on a Windows-based computer. Shortcuts can be created to frequently used commands and to templates for frequently used tasks. Avaya Site Administration uses a graphical interface; however, the standard SAT (system administration terminal) interface remains available through terminal emulation.

**Note:** If Avaya Site Administration is run co-resident on the CMC1 Media Gateway, the email notification feature of Avaya Site Administration is not supported.

### Backup/Restore

When a new backup is created, it is placed in a 'parallel' directory to the existing backup, whether to the PCMCIA or to a destination disk over the LAN. In this way, two backups are alternated, wherein the oldest backup is the one overwritten by the current backup. The current backup is validated prior to overwriting the existing backup. A non-affirmative validation procedure results in the generation of a system alarm. The restore procedure remains unchanged.

The SAT screens and web pages for the backup/restore operation are not affected by these considerations.

### Call Accounting

Call Accounting controls communications costs with accurate reporting on calls processed and effective cost-allocation methods. The optional Call Accounting application stores call records from phone extensions and assigns costs to the calls. The system also creates ad-hoc reports to manipulate call data and charge-back call expenses to clients or departments. Detection of toll fraud and maintenance of call records are also features of call accounting. Call Detail Recording (CDR) records are written in real time to a file on the local hard disk. Because of Ethernet connectivity, this information is easily accessed from anywhere on the LAN or WAN.

### Call Center

Call Center functionality in S8100 supports up to 100 agents and consists of the following Basic, Deluxe, or Elite Call Center software:

- Basic Call Management System Vu (BCMS Vu) monitoring and reporting.
- Access to BCMS Vu through Avaya Site Administration using SAT emulation (only one BCMS Vu monitoring/reporting session may be active at one time).
- Scheduled printing of BCMS Vu historical reports is not supported.
- BCMS Vu support via the LAN (TN2314 processor), which is a stand-alone product that connects to the S8100 system via the LAN. This option is available at additional cost and is field installable.

### INTUITY AUDIX

INTUITY AUDIX provides a messaging communications solution for unified voice and fax messaging. Accessing voice mail and fax via phone, PC, laptop, and wireless saves the user valuable time. Release 5.1 of INTUITY AUDIX includes several enhancements in media, access, and connectivity that offer the first truly "universal" messaging product. The new processor board provides DSP resources for messaging and support for TCP/IP.

In addition, the INTUITY AUDIX CornerStone software base has been modified to support co-resident announcements.

#### INTUITY Audix Software Base

The INTUITY AUDIX application for the May 2003 release of Communication Manager is INTUITY 5.1. The software for CornerStone for the May 2003 release of Communication Manager is the same as for Release 10.

**Message Storage**

The INTUITY AUDIX recorded message storage time for the May 2003 release of Communication Manager is 100 hours.

**Number of IMAPI Sessions**

The number of IMAPI sessions for the May 2003 release of Communication Manager is 32 sessions.

**Fax Extended Dialing**

FAX messaging has extended capabilities. In former legacy products, fax destinations were limited to 10-digit addresses to send faxes to domestic locations. This extended dialing increases the digit address to 23 digits. This extension benefits customers with subscriber communities who deliver faxes to international locations. In addition, this feature provides strong administrative controls to regulate the delivery of faxes to domestic and international destinations.

**Disable/Enable Embedded Messaging**

Communication Manager supports the capability to disable and enable the embedded INTUITY AUDIX messaging system. A disable/enable link is configured from the administration web pages and allows the user to toggle between active/inactive on-board messaging capability. When the embedded message is active, a 'disable messaging' link is present. When the embedded messaging is inactive, the 'enable messaging' link is present, and all web page references to INTUITY AUDIX messaging are removed. In the active messaging state, the appropriate backup-restore pages display the various INTUITY AUDIX backup options, whereas in the inactive messaging state, the web pages are modified to not display the message-related backup options.

**Off-Board Messaging**

With the ability to turn off embedded messaging in Communication Manager, the S8100 development team has verified the capacity to support a variety of external messaging adjuncts, such as Off-board Messaging. INTUITY AUDIX, Unified Messaging, Octel® and Serenade are supported for external messaging.

- CentreVu CT Server, which is offered as a stand-alone product that connects to the S8100 system via the LAN. This option is available at additional cost and is field installable.
- Call Management System (CMS) support via the C-LAN board.
- TSAPI support via the C-LAN board or the processor Ethernet capability that is built into the TN2314 processor board.

**SNMP Native Agent**

SNMP Native Agent is a software module loaded on all systems at no additional cost. Native Agent provides an SNMP interface to the system's alarm and error tables, select performance measurements, and select configuration data. It also supports SNMP traps for the May 2003 release of Communication Manager alarms and restarts, INTUITY AUDIX alarms, and Windows 2000 Server events.

**Unified Messaging**

The Unified Messenger server software runs on the Windows operating system. The Unified Messenger server itself connects the telephone network to the Exchange, and performs the following functions:

- Plays and records voice messages
- Provides telephone answering service for individual subscribers
- Compresses audio messages in real-time for storage on the Exchange server
- Retrieves audio messages from the Exchange server, then decompresses and plays them
- Interprets DTMF for mailbox manipulation and control
- Performs text-to-speech conversion for audio playback of email messages
- Transports messages to and from subscribers on existing Octel® message servers
- Forwards inbound fax calls to an Exchange-compatible fax server
- Forwards faxes and email messages to a fax server for printing on a fax machine

In addition, Unified Messenger supports third-party Exchange-compatible fax servers. This enables individuals to receive faxes in their unified mailbox, view or send fax messages from their desktops, and direct faxes in their inbox to be printed at any fax machine worldwide.

**Web Browser Access**

S8100 can be administered through a web interface. Using a PEER WEB server through a LAN connection, the administrator can download software (for example, Message Manager), connect to Communication Manager or INTUITY AUDIX, schedule a backup or look at backup results, and restore from a backup.

## Hardware

The S8100 hardware is identical to the TN2314 processor circuit pack.

The major hardware components of the G600 or CMC1 Media Gateways include the following circuit packs: a TN744 call classifier, TN2302AP IP media processor (IP gateway), a TN799C C-LAN, and an S8100 Media Server.

The S8100 Media Server processor contains:


- Windows 2000 Server operating system with on-board Pentium processor chip
- Secondary (Motorola) processor running application management firmware
- Windows 2000 Server to firmware interface
- Tone clock functionality equivalent to a TN2182 circuit pack
- INTUITY AUDIX hardware/software with virtual ports

### CMC1 Media Gateway

The 10-slot CMC1 Media Gateway weighs 50-60 lbs. (fully loaded) and is approximately 11 x 25 x 25 inches. It includes slots for circuit packs and a power supply and supports up to 168 ports. Both shelves (see [Figure 1 on page 27](#)) have five slots (1-5 on the bottom shelf and 6-10 on the top shelf). The TN2314 circuit pack must be in slot 2. The cabinet is designed for wall mounting, but can be floor- or table-mounted. See [Figure 1 on page 27](#).

Two expansion cabinets (gateways) are supported in the May 2003 release. The cabinets must be side-by-side (vertically or horizontally for wall-mounting) and connected by a LAN.

Figure 1. CMC1 Media Gateway

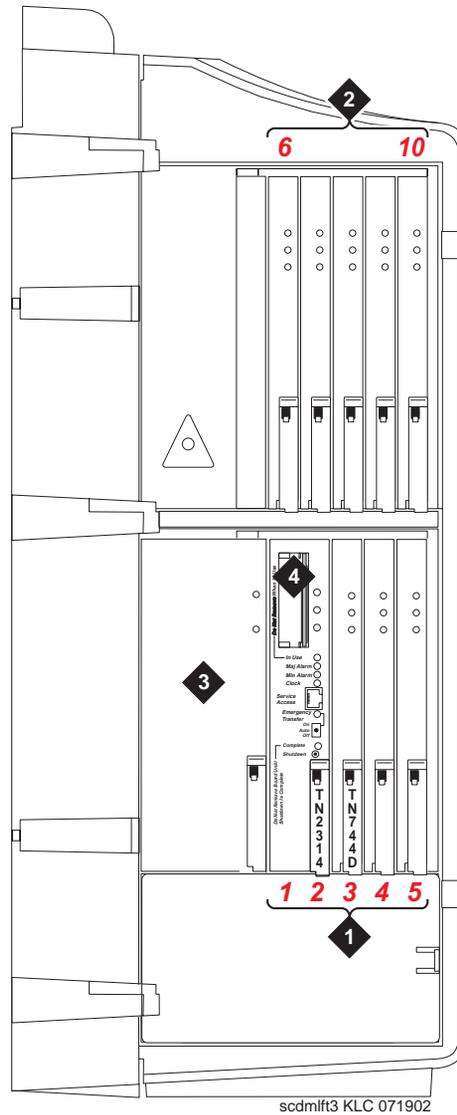

- |                 |                           |
|-----------------|---------------------------|
| 1. Slots 1 - 5  | 3. 650 Power Supply       |
| 2. Slots 6 - 10 | 4. PCMCIA Hard Disk Drive |

Slots 1 and 2 are reserved for the TN2314 circuit pack. Slot 3 is recommended for the TN744D circuit pack, but any other slot is acceptable.



technicians trained to install the G600 do not typically have the tools or proper training for data rack installation.

Installation requires 1 foot (30 cm) of clearance in the rear, and 18 inches (45 cm) of clearance in the front, which is consistent with the EIA 310 data rack standards. In a two-cabinet configuration, the dimensions of the TDM/LAN cable require that the B cabinet be mounted directly over the A cabinet (flush).

The G600 should be installed in a well-ventilated area. Maximum equipment performance is achieved at an ambient temperature between 40 and 120 °F (4 and 49 °C) for a short-term operation (not more than 72 consecutive hours or 15 days in a year) and up to 110 °F (43 °C) for a continuous operation.

The relative humidity range is 10% to 95% at up to 84 °F (29 °C). Above this, maximum relative humidity decreases from 95% down to 32% at 120 °F (49 °C). Installations outside these limits may reduce system life or affect operation. The recommended temperature and humidity range is 65 to 85 °F (18 to 29 °C) at 20% to 60% relative humidity.

The other Environmental Considerations and System Protection requirements described in *Hardware Guide for Avaya™ Communication Manager*, 555-233-200, under “Site Requirements” apply to the G600 as well.

<b>Cabinet Style and Power Distribution Unit</b>	<b>Power Sources</b>	<b>Power Input Receptacles</b>
Rack Mount Cabinet. AC power supply (650A integrated power supply)	Single phase 120 VAC with neutral Single phase 240 VAC with neutral	120 VAC, 60 Hz NEMA 5-15R 240 VAC, 50 Hz IEC 320 Japan installations use country specific receptacles for 100 and 200 VAC, 50/60 Hz

<sup>1</sup>There is no integrated DC power supply. DC rectifiers can be used if desired; follow manufacturer’s instructions.

<b>Cabinet Type</b>	<b>Circuit Breaker Size</b>
Rack Mount Cabinet (120 VAC) 60 Hz	15 A
Rack Mount Cabinet (240 VAC) 50 Hz	10 A

# Reliability

High reliability and availability has been a cornerstone of Avaya server systems. The hardware is designed to detect and correct errors as they occur, to minimize the number of components that cause system outage, and to simplify fault isolation to a replaceable component. Error detection and correction, system reconfiguration, and alarming escalation paths provide necessary performance elements. The software is designed to recover from intermittent failures and to continue providing service with a minimum of disruption.

The maintenance subsystem manages three categories of maintenance objects: hardware maintenance objects (MOs), software processes, and data relationships. Hardware MOs are tested, alarmed and removed from service by the software. When the problem is isolated, the object is replaced. If a software process encounters trouble, it is recovered or restarted. Data relationships are audited and corrected.

Studies have shown that 95% of problems experienced by Avaya server systems are self-corrected and occur without affecting the customer. All systems are provided with remote diagnostics capability, which enables rapid troubleshooting and maintenance in the cases where the system cannot heal itself. This sophisticated maintenance management implementation is the prerequisite to the high reliability of the Communication Manager server family.

The maintenance philosophy is carried forward into the S8100, with its new subsystems maintenance management needs added. For example, the following design elements help assure high availability of the Windows 2000 Server operating system:

- A secondary on-board processor complex supports initialization, monitoring, and recovery functions for all applications running on the Windows 2000 Server operating system. The secondary processor takes corrective action when problems are detected in a way to minimize user impact.
- DiskKeeper code is incorporated and runs regularly to eliminate disk fragmentation problems.
- Applications running on the operating system are thoroughly pretested to assure proper performance. This operating system is closed to any applications other than the manufacturer-provided ones to avoid interference of operation.
- The Windows 2000 Server event log is proactively scanned for potential service affecting items. If found, alarms are generated, and, if necessary, a service technician is dispatched.

As another example, the new cabinet uses a three fan, hot replaceable, assembly. The fans automatically sense temperature and adjust their operating speed accordingly. If one fan fails, the other two speed up and are more than adequate to provide sufficient cooling for weeks (or more). In parallel, an alarm is created that dispatches a technician to replace the fan unit.

Co-resident applications running on the Windows 2000 Server operating system reduce cost and complexity by eliminating unnecessary boxes, cabling, and administration tasks. The result is a system that is easier to install and configure than traditional solutions with less risk of error. The Avaya Site Administration tool, which is a purchase option with the Avaya VisAbility™ Management Suite, simplifies the task of configuring the S8100 and INTUITY AUDIX and, in turn, reduces the likelihood of down time from administration errors.

S8100 provides a common communications solution featuring business communication, multimedia messaging, call accounting, and system management applications. The system is small in footprint and line size and the single-cabinet platform allows applications to work together, eliminating cost and complexity.

S8100 offers superior reliability over traditional solutions for smaller businesses. Unnecessary boxes, cabling, and administration tasks are eliminated. The result is a system that is easier to install and configure than traditional solutions, with less risk of error.

S8100 also provides:

- System survival of minor power disruptions without service interruption.
- Automatic restoration of the last saved version following a power outage.
- Scheduled centralized backups of critical system information at remote sites. In an emergency, multiple copies of translations, INTUITY AUDIX subscriber information, and the Windows 2000 Server registry are available. Saved information can be quickly restored.
- IP trunk fail-over to the PSTN (QOS thresholds can be set to drive shift to and from PSTN).
- Option of Emergency Transfer equipment that cuts up to 6 analog lines directly through to CO analog trunks.



# 2 Desktop/Console Solutions

---

The communications needs of people in your company vary widely. Some may require only basic telephone service. Others may need effective messaging services or high-speed data communications and access to a variety of host and personal computers.

Avaya™ S8100 Media Server brings voice communications, data communications, and messaging together on the desktop, which enables you to customize the types of service for various users.

**Note:** Some applications and products described here may not be available in some countries. Please check with your local distributor for further information about the features and applications available to you.

## Telephones for the global marketplace

A wide variety of telephones, ranging from basic single-line to sophisticated digital service that integrates voice and data communications, are available with S8100 Media Server. You can incorporate a mixture of telephone types based on user job function. All of the telephones are easy to use and provide the ability to tap into the power of S8100.

S8100 supports three basic families of telephones — Digital Communications Protocol (DCP), Analog, and Internet Protocol (IP). These terms describe how each type of telephone communicates with the S8100 Media Server. These families of telephones are designed to accommodate the types of communications various users require. All telephones have touch-tone dialing and the message-waiting lamp for notification of messages.

The IP and DCP sets use digital transmission for integrated voice, data, and control signals. These telephones provide a rich array of time-saving and value-adding features.

With help from our many global customers, Avaya has developed the 4600-, 6400-, 8400-, and 6200-series telephones to meet the demand for telephones in the global marketplace.

## 4600-Series IP Telephones

The Avaya IP Telephones bring the rich features and functions of Avaya Communication Manager directly to the desktop. The 4600-series IP telephones are highly integrated, high function standards-based IP end points. They are designed for superior audio quality with full duplex speakerphone and echo cancellation capability. A universal serial bus and an infrared port are built in, ready to support future applications.

The 4600-series IP telephones can be used with static or dynamic addressing. Dynamic addressing requires a Dynamic Host Configuration Protocol (DHCP) server. Dynamic addressing is one key to reducing phone reconfiguration expenses incurred due to moves. Trivial File Transfer Protocol (TFTP) is supported and allows firmware to be upgraded over the LAN. A TFTP server will be provided free of charge to customers so that they can benefit from future upgrades.

S8100 supports the following 4600-Series telephones:

- The 4602 IP Telephone is an economical telephone with two programmable call appearance/feature keys, ten fixed feature buttons, and display.
- 4606 IP Telephone is a digital, single-line telephone with 6 call appearance/feature buttons and a 2-line by 16-character display. The 4606 has a built-in 2-way speakerphone and can be wall mounted. There are no soft keys associated with the display.
- 4612 IP Telephone is a digital, multiline telephone that has 12 call appearance/feature buttons and a 2-line by 24-character display. The 4612 has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. The 4612 has a built-in 2-way speakerphone and can be wall mounted.
- The 4620 IP Telephone is cost effective and provides a large screen graphic display, paperless button labels, call log, speed dial, 24 programmable feature keys, Web browser, and full duplex speakerphone.
- 4624 IP Telephone is a digital, multi-line telephone that has 24 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for the busy executive or executive assistant who requires extensive call handling and call coverage flexibility. The 4624 has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. The 4624 has a built-in 2-way speakerphone and can be wall mounted.
- The 4630 IP Screenphone is a full color, touch screen Web access IP telephone with six telephony applications including phone features, call log, speed dial, LDAP directory, voice mail, and web access.

### Requirements

The 4600-Series telephones require the TN2302 IP Media Processor circuit pack for the audio capability. They also require the TN799C Control-LAN (C-LAN) circuit pack for the signaling capability.

## IP Softphones

IP Softphones extend the level of Communication Manager services. They turn a PC or a laptop into an advanced telephone. Users can place calls, take calls, and handle multiple calls on their PCs. For a discussion of the types of Softphones available with IP Solutions for S8100, see [IP Softphone in Chapter 8, IP Telephony Applications](#).

The following DCP telephones are available:

- 6400-Series digital telephones
- 8400-Series digital telephones

### 6400-Series digital telephones

The 6400-Series digital telephones are versatile 2-wire DCP telephones that support all of the key/hybrid features of S8100. These telephones have a new, global design and include the following additional features:

- Date and time display.
- Feature button that allows switchhook control of a headset.
- Conference, Transfer, Hold, and Last Number Dialed fixed feature buttons.
- Group Listen capability that allows you to use your handset or headset while others in the room listen via a speakerphone. This 2-way handset, 1-way speaker mode allows you to serve as a spokesperson for a group.
- Station User Administration capability that allows you to program certain features on the telephone yourself.
- Whisper Page that allows an assistant to announce a second call to a company official during an active call on the official's telephone. The announcement is heard only by the official.
- Auto Call Times that allows each call to be timed automatically upon answer. The elapsed call displays on the telephone. The timer is stopped automatically when a call is ended or placed on hold.

The 6400 Tip/Ring Module enables a 6400-series analog adjunct, such as a fax machine or modem to operate independently on 12 channels with its own extension.

### 6400-Series DCP telephones

S8100 supports the following 6400-Series DCP telephones:

- 6402 telephone

The 6402 telephone is a digital, single-line DCP telephone without a display; it can be wall mounted. This cost-effective, entry-level telephone is designed for users with basic call handling requirements. The 6402 is ideal for areas where there is minimum use, such as reception areas, copy rooms, file rooms, or warehouse locations. This telephone has a Feature button for accessing up to 12 system features and a built-in, 1-way (listen-only) speakerphone that facilitates off-hook dialing and listening to voice mail or broadcast messages.

- 6402D telephone

The 6402D telephone is a digital, single-line DCP telephone with a 2-line by 16-character display. This telephone has a Feature button for accessing up to 12 system features. The 6402D has a 1-way (listen-only) speakerphone and can be wall mounted. There are no soft keys associated with the display.

- 6408+ telephone

The 6408+ telephone is a digital, multiline DCP telephone that has 8 call appearance/feature buttons. This telephone has no display and can be wall mounted. The 6408+ is designed for users who need multiline appearances and extensive features. The 6408+ has a built-in 2-way speakerphone and programmable keys so users can access more system features from the telephone.

- 6408D+ telephone

The 6408D+ telephone is a digital, multiline DCP telephone that has 8 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for users who need multiple line appearances and extensive features. The 6408D+ has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. The 6408D+ has a built-in 2-way speakerphone and can be wall mounted.

- 6416D+ telephone

The 6416D+ telephone is a digital, multiline DCP telephone that has 16 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for users with call coverage responsibilities who need multiline appearances and extensive features. The 6416D+ has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. A 24-button expansion module can be added to provide 24 additional auxiliary buttons. (The 24-button expansion module requires power from the station or the closet.) The 6416D+ has a built-in 2-way speakerphone and can be wall mounted when not used with the 24-button expansion module.

- 6416D+M telephone

The 6416D+M telephone is a digital, multiline DCP telephone that has 16 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for users with call coverage responsibility who need multiline appearances and extensive features. The 6416D+M has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys.

A 24-button expansion module can be added to provide 24 additional auxiliary buttons. (The 24-button expansion module requires power from the station or the closet.) The 6416D+M allows you to install a 100A Tip/Ring module, providing a connection between the telephone and such analog adjuncts as modems, fax machines, analog conference-quality speakerphones, answering machines, and TDD machines commonly used by the hearing impaired. The 6416D+M has a built-in 2-way speakerphone and can be wall mounted. The 6416D+M also has a built-in headset jack.

- 6424D+ telephone

The 6424D+ telephone is a digital, multiline DCP telephone that has 24 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for the busy executive or executive assistant who requires extensive call handling and call coverage flexibility. The 6424D+ has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. The 6424D+ has a built-in 2-way speakerphone and

can be wall mounted. A 24-button expansion module can be added to provide 24 additional auxiliary buttons. (The 24-button expansion module requires power from the station or the closet.)

- 6424D+M telephone

The 6424D+M telephone is a digital, multiline DCP telephone that has 24 call appearance/feature buttons and a 2-line by 24-character display. This telephone is designed for the busy executive or executive assistant who requires extensive call handling and call coverage flexibility. The 6424D+M has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. The 6424D+M allows you to install a 100A Tip/Ring module, providing a connection between the telephone and such analog adjuncts as modems, fax machines, analog conference-quality speakerphones, answering machines, and TDD machines commonly used by the hearing impaired. The 6424D+M has a built-in 2-way speakerphone and can be wall mounted. A 24-button expansion module can be added to provide 24 additional auxiliary buttons. (The 24-button expansion module requires power from the station or the closet.) The 6424D+M also has a built-in headset jack.

### Requirements

The 6400-Series telephones are supported by the following 2-wire DCP circuit packs:

- TN2224 (24-port circuit pack)
- TN2214 (international 24-port circuit pack)

### 8400-Series digital telephones

The 8400-Series telephones are versatile 2-wire/4-wire DCP telephones that offer flexibility and cost savings and support most of the key/hybrid features of S8100. (Table 3 on page 38 shows the differences between the 8400-Series telephones and 6400-Series telephones.) These telephones detect automatically whether they are plugged into a 2-wire or 4-wire digital line circuit card.

**Note:** The 8400-Series telephones are not offered with S8100 systems sales. However, you can purchase the 8410D+ from Avaya.

S8100 supports the following 8400-Series telephones:

- 8403 telephone

The 8403 is a 3-line telephone without a display that can be wall mounted. This telephone has a built-in, 1-way (listen-only) speakerphone and three programmable buttons.

- 8405B telephone

The 8405B is a 5-line telephone without a display and that can be wall mounted. The 8405B has a built-in 1-way speaker and programmable keys.

- 8405D+ telephone

The 8405D+ is a 5-line telephone with a 2-line, 24-character display that can be wall mounted. This telephone has a built-in 2-way speaker and programmable keys.

- 8410B telephone

The 8410B is a 10-line telephone without a display that can be wall mounted. The 8410B has a built-in 2-way speakerphone and programmable keys.

- 8410D telephone

The 8410D is a 10-line telephone with a 2-line, 24-character display. The 8410D has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the four display-associated soft keys. This telephone can be wall mounted.

- 8411D telephone

The 8411D is a 10-line telephone with a 2-line, 24-character display. This telephone is an enhanced version of the 8410D telephone that has a built-in RJ11C jack, which provides an interface to analog telephone devices (such as a telecopier or a modem) and an RS232 data interface for PassageWay Direct Connection. The 8411D has a built-in 2-way speakerphone and programmable keys. The 8411D has 12 additional features that are accessible via the 2-line by 24-character display and are selected by the 4 display-associated soft keys. This telephone cannot be wall mounted.

- 8434DX telephone

The 8434DX telephone is a 34-button telephone with a 2-line, 40-character display. The 8434DX has a built-in 2-way speakerphone and programmable keys. The 8434DX has 12 additional features that are accessible via the 2-line by 40-character display and are selected by the four display-associated soft keys. A 24-button expansion module can be added. (The 24-button expansion module requires power from the station or the closet.)

<b>Feature</b>	<b>6400-Series telephones</b>	<b>8400-Series telephones</b>
Whisper Page	Yes	Yes
Group Page	Yes	Yes
Bridged Appearance	Yes	Yes
Personal CO Line Appearance	Yes	Yes
Directed Call Pick-up	Yes	Yes
Group Listening	Yes	No
Station User Administration	Yes	No
Time/Day Default	Yes	No
Pull-out Tray	Yes	No

**1 of 2**

<b>Feature</b>	<b>6400-Series telephones</b>	<b>8400-Series telephones</b>
Headset without handset offhook	Yes	No
Dual-Purpose NEXT button	Yes	No
Auxiliary Jack	No	Yes
Tip/Ring Interface	6416D+M and 6424D+M only	Yes (8411)
2- and 4- wire	2-wire only	Yes
RS-232 CTI Interface	No	Yes (8411)
AD Labeling	Yes	Yes
Active Dialing	Yes	Yes
Context-Sensitive Help	Yes	Yes
Automatic Timer	Yes	No

**2 of 2**

### Requirements

The 8400-Series telephones are compatible with all 2-wire and 4-wire DCP circuit packs.

### Analog (single line) telephones

Single-line telephones are an economical choice for users who do not handle many calls and do not use modems and fax machines extensively.

All signals between analog telephones and the Communication Manager server are analog over a pair of wires. Only one incoming call can ring at a time, but the telephone can actually handle two calls — one active and one on hold.

Depending on the particular telephone, you can alternate between two calls or set up a three-way conference using the switchhook or flash button. You can access S8100 voice features either by entering access codes from your touch-tone keypad or by pressing feature buttons.

### 6200-Series analog telephones

The 6200-Series telephones are single-line, analog telephones.

There are three 6200 telephones available:

- 6210 telephone

The 6210 telephone is a single-line analog telephone that can be wall mounted. This telephone has a built-in Data jack that allows a user to bridge a fax machine, modem, or laptop computer onto the single analog line.

- 6218 telephone

The 6218 telephone is a single-line analog telephone that can be wall mounted. This telephone has a built-in Data jack that allows a user to bridge a fax machine, modem, or laptop computer onto the single analog line. The 6218 also has 8 speed dial buttons and a 2-way speakerphone. The 6218 telephone is available in the United States only.

- 6220 telephone

The 6220 telephone is a single-line analog telephone that can be wall mounted. This telephone has a built-in data jack that allows a user to bridge a fax machine, modem, or laptop computer onto the single analog line. The 6220 also has 10 speed dial buttons and a 2-way speakerphone.

## Wireless Handsets for X-Station Mobility

X-Station Mobility allows remote users to access switch features. That is, X-Station Mobility allows certain OEM wireless telephones remoted over a PRI trunk interface to be controlled by the S8100 as if the telephones were directly connected to the switch. The telephones are administered to be of the type “X-Mobile” and have additional administration information on the station form that assigns the capabilities of a remote station to the associated PRI trunk group. The wireless telephones thus have access to such Communication Manager features as call-associated display, bridging, message waiting, call redirection, and so forth.

The X-Station Mobility feature offers the following enhancements:

- **Cluster ID Administration** — assigns and reuses cluster IDs based on the radio controller. It significantly eases provisioning of DEFINITY Wireless Business Systems (DWBS) having more than 32 radio controllers.
- **Increased Radio Controller Capacity** — increases the maximum number of DWBS radio controllers from 50 to 150 to support customers with large, multiple building locations. Associated radio controllers can be placed in different port networks. However, the radio controllers must be isolated from one another to avoid interference.
- **Large Displays** — provides for all of the S8100 call information to be displayed. The information can be formatted to fit a variety of display dimensions, and formatting is administered through a field on the station form.


# Teleconferencing Products

## SoundStation Audioconferencing Systems

Avaya's SoundStation and SoundStation EX Audioconferencing Systems enable a group of people in a conference room to share their conversation with others through a telephone connection. The Soundstation equipment permits natural conversation among many people — whether strong or soft, or from a standing or sitting position.

- SoundStation — Three microphones and a digitally tuned speaker provide 360-degree coverage, whether you use the system in an office or a conference room. It connects to an analog telephone line. The built-in keypad includes a mute button and a flash key. An additional port allows you to connect the speakerphone to a tape recorder.
- SoundStation EX — This system includes all the features and functions of the SoundStation. It accommodates larger conferences by including two palm-sized external microphones that can be positioned up to 6 feet (1.8 m) on either side of the center console. An optional wireless microphone is available for stand-up presenters. See [Figure 3](#) for an illustration of the SoundStation EX with External Microphones.

**Figure 3. Soundstation EX with External Microphones**

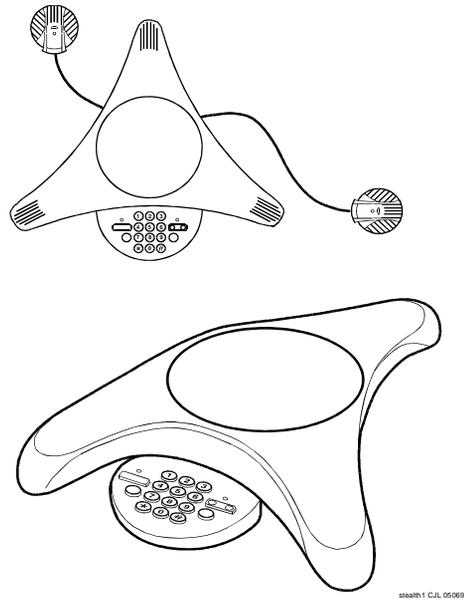

## Attendant Consoles

To increase the effectiveness of attendants handling calls, S8100 offers the following tools:

- DEFINITY 302D Attendant Console (requires connectivity to a 2-wire DCP circuit pack)
- Avaya Softconsole Release 1

### DEFINITY Attendant Console

The DEFINITY 302D Attendant Console is a digital call-handling station with push-button control that enables call attendants to answer, place, and manage calls and monitor selected system operations. The Attendant Display shows call-related information that helps the attendant operate the console. Attendants may select one of several available display languages.

### Avaya Softconsole™ Release 1

The Avaya Softconsole™ is a software application that enables call attendants to handle incoming calls efficiently using a personal computer. Using the familiar Microsoft Windows interface, attendants can easily track how long callers have been on hold and for whom they are waiting. Attendants can monitor up to six calls at once. They need not fumble with pen and paper when handling calls, as they can make notes on their computers about what each caller needs. Having the call-processing software on the same computer with spreadsheet, word-processing, or other software enables attendants to stay productive between calls.

Your company directory is displayed on screen with busy extensions shaded. A variety of search functions are available, so attendants can find names and extensions easily. Online telephone identification enables attendants to identify employees quickly. Calls are transferred with the press of a button. Online help makes it easy for attendants to remind themselves how to use the system.

The Avaya Softconsole is easily customized, so even if attendants from different shifts share the same computer, they can each preserve their preferences in the call-processing environment. The Avaya Softconsole is available in English, Dutch, Spanish, French, German, Italian, and Portuguese. For example, if a Spanish-speaking attendant takes over for a French-speaking attendant, a single press of a button converts all labels, error messages, and online help to Spanish.

#### Requirements

The following requirements must be met for the Avaya Softconsole to function properly:

- An IBM-compatible personal computer with:
  - > A Pentium-based, 100 megahertz or higher processor
  - > A minimum of 16 megabytes (MB) of random-access memory (RAM)
  - > A minimum of 4 MB of read-only memory (ROM)

- > A 3.5-inch diskette drive
- > An available COM port
- > Sufficient hard disk space. The space required to support PC Console depends on the number of users you are supporting, the amount of information stored for each person, and whether you will include each person's photograph in PC Console.
- Any of the following operating systems:
  - > Microsoft Windows 95
  - > Microsoft Windows NT
  - > Windows 98
  - > Windows 2000
- A 2- or 4-wire DCP telephone with a PassageWay<sup>®</sup> adapter, a CALLMASTER<sup>®</sup> IV, a CALLMASTER VI, a 6424D+M telephone, or a 6416D+M telephone.
- Local adjunct power (depending on your telephone)



# 3 Adjuncts

The Avaya™ S8100 Media Server with an Avaya™ G600 or an Avaya™ CMC1 Media Gateway provides the following equipment to supplement the services and features:

- Power systems
- On hold and delayed announcement systems
- Headsets
- Audio and visual paging
- Alerts and sensors
- Speakerphones
- Security devices
- Call Accounting systems

## Power Systems

Avaya offers the following solutions to provide power for equipment and protection from power disturbances or disasters:

- Uninterruptible Power Systems (UPS)

A UPS safeguards your S8100 and associated hardware and applications from utility power irregularities. During a power failure, the UPS battery activates and supplies power for a limited amount of time. This line of UPSs offers advanced battery management and hot-swappable extended battery modules and comes in a 2U-high rack-mounted unit.

- Surge Protectors

Surge protectors help protect PCs, fax machines, and other equipment from electrical surge damage. Alternating Current (AC) Protectors prevent voltage surges from entering the system via the AC utility line. Line Protectors prevent voltage surges from entering the system via incoming central office lines or via wiring for phones that extend to or from another building.

- Terminal Power Supplies

Terminal power supplies provide local power for phones and adjuncts that require additional power, such as DCP phones with headset adapters or adjunct speakerphones. Types of power supplies include

- > a desktop AC power module (North American standards)
- > 1151A global AC Ethernet-powered module battery backup (optional)

## On hold and delayed announcement systems

Avaya offers the following external announcement systems for S8100:

- Magic On Hold Express Systems

Magic On Hold Express systems provide businesses with fully customized, professionally produced announcements for customer-specific “on hold” environments. The announcements are delivered to your company from the production studio. Production options include legally licensed background music and/or customized information messages that play when a caller is placed on hold or in queue.

- Magic On Hold Systems

Magic On Hold systems provide businesses up to 3 minutes of continuous radio programming for customer-specific requirements. Production options include legally licensed background music and/or customized information messages that play when a caller is placed on hold or in queue.

- Professional Announcement Recordings

Professional Announcement Recordings (PARs) enhance Auto Attendant, Automatic Call Distribution (ACD), and Integrated Voice Response (IVR) applications. PARs greet and guide business callers using crisp, clear, concise voice messages that optimize a caller’s personal perception of automated communications. Callers hear professional productions that deliver important information.

- Delay Announcement Systems

Delay announcement systems serve announce only, information announcement, in-queue announcement, and broadcast messaging for businesses with automatic messaging applications. These systems occupy callers during the call process.

## Headsets

Headsets help increase productivity in telephone-intensive work assignments. Headsets are proven to reduce neck strain and muscle tension when telephones are used at least 3 hours per day. Avaya provides a complete product line for Call Center, traditional business office, computer telephony, and mobile applications.

## Audio and visual paging

Avaya's overhead voice paging equipment allows telephone users to make announcements by speaking into a telephone handset. S8100 supports as many as 9 paging zones, and 1 zone can be set up to activate every zone at the same time. A zone is the location of the loudspeakers: for example, conference rooms, warehouses, or storerooms.

Visual paging includes indoor LED message display signboards, wireless keyboards for sign programming, connector kits for integrating with the PagePac Plus equipment, and optional software for "ad-hoc" visual message programming.

## Alerts and sensors

Avaya provides a complete product line of alerts and sensors for your business. With alert devices, you can select the type of sound for incoming calls, such as bell, horn, or chime sounds. Or, you can use visual signals such as flashing lights to indicate a ringing call, a voice mailbox message, or a voice paging message.

Sensors detect and analyze central office ringing signals to determine if the signal is a standard voice, data, or fax call. Once it determines the type of signal, the sensor device routes the call to the appropriate end point.

## External speakerphones

External speakerphones provide total telephone operation without using a handset. Turning on a speakerphone is equivalent to lifting a handset when placing or answering a call. Turning off the speakerphone is equivalent to hanging up the handset. Although the majority of Avaya phones have built-in speakerphones, external speakerphones are preferred for applications such as conference calls.

## Security devices

Avaya provides the following security devices:

- Access Security Gateway (ASG)

The Access Security Gateway (ASG) is a built-in authentication feature that offers a more secure alternative to static login passwords for remote access to S8100. Using an encryption algorithm, the Access Security Gateway uses session-based challenge and response technology to limit access to the remote maintenance and administration port, system administration terminal, and NET CON channels. See *Installation and Upgrades for Avaya™ S8100 Media Server with the Avaya™ G600 and CMC1 Media Gateways* (555-233-146) for information on how to administer this feature.

- Remote Port Security Device

The Remote Port Security Device (RPSD) is a single-line dial-up port protection system that prevents unauthorized access to a host resource. Host resource dial-up ports are protected by the installation of the RPSD lock on the analog telephone line leading to the port. Access is provided only when the calling party uses the RPSD key, a unit that is installed on the analog telephone line at the calling party's end.

The RPSD works with all data communications protocols and can be used in the following applications:

- > Protecting organizations with remote and home offices that communicate over the public telephone network via dial-up lines
- > Safeguarding companies that administer their communication and voice processing systems remotely from a centralized site, helping to ensure that critical network routing information, traffic data, and PBX feature translations are not compromised
- > Controlling dial-up access by a supplier that provides remote maintenance services ensuring that only the service provider has access to the maintenance ports.

## Call Accounting Systems

**Note:** Call Accounting Systems (CAS) do not run co-resident on the S8100 platform. They are supported *only* if they can interface to the S8100 for CDR records and be able to retrieve data over LAN.

Avaya provides the following call accounting systems to reduce service expenses, optimize resources, assign costs, and identify abuse. These products aid in clearly understanding these issues and communicating them to others.

### eCAS

eCAS is a totally Web-based call accounting system designed to help reduce telecom costs and improve workplace productivity. The system's user interface looks and functions like a Web site, using hyperlinks, reports distributed by email, and a search engine to simplify every call accounting task. eCAS call accounting software is for general businesses, ranging from 25 to 20,000 extensions at one to 100 locations. It provides essential user-definable reports, giving you the ability to analyze usage trends. It also simplifies cost allocation, generates telecom fraud alarms, and is accessible virtually everywhere using a standard Web browser.

## eCAS Lite

eCAS Lite software is designed specifically to serve the needs of small businesses. It's a complete, off-the-shelf product that is easy-to-use and customer installable. Although eCAS has a reduced feature set, it provides the same user interface as eCAS and is the ideal solution for single switch environments with up to 100 extensions. eCAS Lite comes complete with V&H coordinate tables, local and AT&T Basic International Rates so you can easily define and manage your rate plans at no additional cost.

## Quantum Series

The Quantum Series is a suite of telemanagement applications. This powerful client/server-based system enables large enterprise businesses to manage voice, data, and converged infrastructure and related costs in one fully integrated system. This solution allows customization to meet the specific requirements of large, sophisticated customers. The suite is comprised of modules that can be used as standalone systems, or part of a larger integrated platform. The modules include: Cable-Master Connectivity Management, Directory/Directory Assistance, Call-Master Call Accounting; Phone Bill Management, Asset and Inventory Management, and Consolidated Billing, which facilitates integration with general ledger systems.

## INTUITY Call Accounting

INTUITY Call Accounting is fully integrated on the INTUITY platform. It is geared to meet the needs of low-end Communication Manager server and MERLIN LEGEND® customers. It provides a full range of reporting capabilities including organization reports for bill-back, account code reports for client billing, tracking of ISDN, ANI, abandoned calls and demographics, as well as busy trunk utilization.

## Infotel for Windows Lodging

Infotel for Windows Lodging interfaces with almost any Property Management System (PMS) on the market to provide you with powerful PC-based telemanagement. Automated night reports give you the precise information you need. Built-in alarms alert property management if the PBX stops producing CDR to help prevent you from losing revenue. In case of PMS malfunction, the system will store your records until the PMS becomes available. The system also allows you to offer flexible pricing plans for guests.



# 4 INTUITY AUDIX Messaging System

---

Fewer than 30% of person-to-person business calls reach the intended party on the first attempt. This makes the day-to-day business communications frustrating and can impact productivity. Integration of communications with Avaya's INTUITY™ AUDIX® Messaging System helps ensure that calls are not lost.

In addition to call-answer capability, INTUITY AUDIX provides new opportunities through multimedia messaging. A multimedia message can include text, voice, and fax components. Multimedia messaging allows users to mail a single message to persons on a mailing list, send a message with multiple components to other subscribers, or categorize and store messages for later reference.

This section provides a high-level overview of INTUITY AUDIX and describes its application and features within S8100. This section includes:

- Application overview
- Additional sources of information
- Accessing INTUITY AUDIX administration
- Features of INTUITY AUDIX

## Application overview of INTUITY AUDIX

INTUITY AUDIX is a multimedia messaging application on the S8100 platform that allows users to integrate voice, text, fax messages, and binary files into a single message.

For example, a sales manager who wants to inform a distributed sales force of a new compensation plan can send a message with both voice and text. The voice component might be, "This message is going to all members of the Northeast Sales region. Congratulations on your excellent results last year. As of January 1st, the compensation plan for new product sales will be changed. Please print the attached text message for detailed information." The text message could be created in Message Manager and specify the plan details.

## Additional sources of information

The following additional information for administering INTUITY AUDIX is available:

- INTUITY AUDIX System Administration documentation on the S8100 server documentation CD
- The Message Manager Installation chapter in *Installation and Upgrades for the Avaya™ S8100 Media Server with the Avaya™ G600 and CMC1 Media Gateways* (555-233-146)
- INTUITY AUDIX help topics in the Avaya Site Administration online help application
- Command Line Administration Quick Reference on the Avaya™ S8100 Media Server Configuration documentation CD

The Avaya™ S8100 Media Server documentation CD contains the following information:

- Messaging Solutions Quick Reference Guide
- INTUITY AUDIX Wallet Card
- Message Manager Quick Reference Guide

## Accessing INTUITY AUDIX Administration

INTUITY AUDIX Administration tools can be accessed one of two ways:

- Through the Avaya Site Administration application
- Dialing directly to the INTUITY AUDIX application using Telnet or a terminal emulator that uses Telnet

## Using Avaya Site Administration

To establish a connection for INTUITY AUDIX administration:

1. On the Avaya Site Administration window browser, click **Tasks** tab, then click **Add System**.
2. Click **Add Voice Mail System**.
3. Choose a name for INTUITY AUDIX in Avaya Site Administration in the System Name field.

**Note:** Your telecommunications manager can assign a name or you can choose a name. The name will appear in the **Tree** tab.

4. Indicate the connection method:
  - > Modem or data module
  - > Direct serial port connection
  - > LAN connection

5. When prompted by the Add Voice Mail System Wizard, provide additional information about the connection.
6. Indicate automatic or manual Avaya Site Administration login to INTUITY AUDIX each time you login.
7. If Avaya Site Administration automatically logs in, enter the INTUITY AUDIX login and password information.

## Review and test the Avaya Site Administration connection

To review and test the Avaya Site Administration connection:

1. Review the Voice Mail System Summary and make any needed corrections.
2. Click **Test** to try the connection.

If the connection works, Avaya Site Administration displays the login prompt or the INTUITY AUDIX Command Prompt screen. If the connection does not work, Avaya Site Administration displays an error dialog box with troubleshooting information.

3. Click **Next** and **Finish**.
4. Click the **Tree** tab and confirm that it displays in the tree.

To later change the voice mail system or connection information, right-click **Voice Mail System** in the Avaya Site Administration **Tree** tab and choose properties.

Add as many systems as desired to Avaya Site Administration. If connecting to systems directly using serial ports, you can connect as many switches or INTUITY AUDIX systems that have ports. If connecting to systems over a network, you can connect to as many systems as needed.

To connect to INTUITY AUDIX administration:

1. On the Avaya Site Administration browser pane of the Avaya Site Administration window, click the **Tree** tab.
2. Right-click the INTUITY AUDIX system you want to administer.
3. In the pull-down menu, select **4410 Emulation** or **513 Emulation**.
4. At the `login:` prompt enter login/user name.
5. At the `password:` prompt, enter your password.
6. At the `TERM:` prompt, click **F7** (Continue).

The system displays the INTUITY AUDIX Command Prompt screen.

7. For more information see the following documentation on the S8100 server documentation CD.
  - > INTUITY AUDIX System Administration
  - > Command Line Administration Quick Reference
  - > Online help topics available from INTUITY AUDIX administration screens

## Using Telnet to access INTUITY AUDIX Administration

To access INTUITY AUDIX via Telnet or another terminal emulator:

1. Set up a connection to local Telnet or other terminal emulator using the following information:
  - > Local machine name for host name
  - > Specified port number for port
  - > VT100 for Term type
2. Once the connection is established, enter login/user name at the Telnet login: prompt.
3. Enter a password at the password: prompt.
4. At the TERM prompt: enter a terminal type, such as vt100, 4410, or 514.

The system displays the INTUITY AUDIX Command Prompt screen.

For more information about using Telnet, see Chapter 2, “Connectivity and Access” in *Installation and Upgrades for the Avaya™ S8100 Media Server with the G600 and CMC1 Media Gateways* (555-233-146).

## Features of INTUITY AUDIX

The following INTUITY AUDIX features allow users to send, receive, and organize voice, text, and fax messages:

- Voice Messaging
- Voice Mailbox
- Transmission Control Protocol/Internet Protocol (TCP/IP)
- Message Manager
- Fax Messaging
- Automated Attendant
- Bulletin Board
- CornerStone Software

### Voice Messaging

The INTUITY AUDIX Messaging System software permits recording and exchanging voice messages with other users. It contains stored voice prompts that help users create, send, retrieve, answer, save, or forward spoken messages. The feature also answers calls for users who are busy or unavailable. In addition to a personal answering service, INTUITY AUDIX can be used as a messenger to individuals or groups, as an information service, as an office receptionist, or as an automated attendant.

Users and callers instruct the INTUITY AUDIX Messaging System feature by pressing touch-tone keys in response to detailed voice prompts.

Nuances and inflection are integral parts of person-to-person communication. The INTUITY AUDIX software uses a high-quality voice-encoding algorithm known as Code-Excited Linear Prediction (CELP) to capture the nuances and subtle inflections of the human voice.

Voice Messaging is similar to an electronic mail system in that messages can be sent to other individuals or groups without directly calling the recipient. The message is stored in the recipient's INTUITY AUDIX mailbox. Recipients can access stored messages at their convenience.

Voice Messaging enables a user to:

- Send messages to other INTUITY AUDIX and Message Manager users
- Listen to messages received from other INTUITY AUDIX and Message Manager users
- Forward messages received with comments attached
- Reply to messages received from other INTUITY AUDIX and Message Manager users
- Create mailing lists containing up to 250 recipients

In addition to basic capabilities, the Outcalling function of INTUITY AUDIX Messaging System allows the feature to:

- Automatically place a call from INTUITY AUDIX to a user when messages are waiting
- Specify the number to be called by INTUITY AUDIX when messages are waiting (may be an office, home, car, or pager)

**Call Answer**

Call Answer answers a call and records a message when the user is unavailable. This function enables the Voice Messaging feature to:

- Answer incoming calls
- Create personal greetings for incoming calls
- Disable call answer so that a caller hears a greeting, but cannot leave a message
- Customize a set of standard greetings
- Record up to 9 different personal greetings using the Multiple Personal Greeting function
- Play a single greeting for all calls, or assign various personal greetings to play in response to different types of calls, for example, internal and external, busy and no answer, or out-of-hours

**Voice Messaging languages**

The INTUITY AUDIX Messaging System feature provides a standard American English announcement set. The announcement set can be replaced or augmented with a number of options, including non-English languages and Telecommunications Device for the Deaf (TDD). For the most recent list of language alternatives, contact your Avaya account representative.

**Multilingual support**

Optional multilingual functions allow callers to interact with the INTUITY AUDIX application using different languages. For example, callers can follow voice prompts in languages that may or may not match the language of the people they are calling. An administrator can install up to 9 languages on the INTUITY AUDIX application and operate them simultaneously.

Users can also record personal greetings in two different languages. Prompts are delivered in the selected languages.

**Customized announcements**

Announcements comprise sets of spoken instructions or voice prompts in the INTUITY AUDIX Messaging System application. For example: “To access your mailbox, press star R.”

## Voice mailbox

A mailbox is a storage area on a computer disk for messages, personal greetings, and mailing lists. INTUITY AUDIX users acquire a mailbox when they are administered on the application. Each user accesses this mailbox with a private password.

Callers can leave messages in a user's mailbox, but cannot perform other operations related to the user's mailbox. After a user logs in, the feature voices the name of the user and reports the number of new messages received. Each message consists of a message header and a message body.

## Incoming mailbox

Mailboxes are divided into two sections, the incoming mailbox, and the outgoing mailbox. The incoming mailbox receives messages from other users, from the INTUITY AUDIX application, and from callers redirected to the mailbox because no one answered. The user can save, delete, reply to, or forward messages. There are three categories of incoming messages: New, Unopened, and Old. [Table 4 on page 57](#) describes each category.

**Table 4. Incoming mailbox categories**

Category	Description
New	A message and header that a user has not listened to. The Message Waiting Indicator (MWI) on the user's telephone turns on when a new message is present and turns off after the user has listened to it.
Unopened	A message where the header, but not the message itself, has been listened to. The MWI does not stay on for this type of message.
Old	A message that the user has listened to but not deleted.

The system administrator can set the order in which these categories are played to the user.

## Outgoing mailbox

The outgoing section of a mailbox stores messages that users create, send, or forward. In most cases, messages remain in the outgoing section until delivered. [Table 5 on page 58](#) describes the outgoing mailbox categories listed in default order. The INTUITY AUDIX administrator can change this order.

Table 5. Outgoing mailbox categories

Category	Description
Filed	Messages that users create and save in the outgoing section of a mailbox. Users can later access these messages to modify them, address and send them again, or delete them.
Undelivered	Messages that have not been sent or messages scheduled for delivery at a future date or time. Users can review, change, or cancel messages and their addresses at any time before delivery.
Nondelivered	Messages that INTUITY AUDIX could not deliver. The application attempts to deliver a message 10 times (or the administered number of times), then places the message in this category. This usually indicates that the intended recipient's incoming mailbox is full, that the recipient's application cannot recognize or accept a message component (for example, is not fax-enabled), or that there were transmission problems (for example, with an AMIS analog line).
Nondeliverable	Messages defined as "nondeliverable" can be rescheduled for delivery with a new address, or altered to allow forwarding, if needed.
Delivered	Message headers that identify messages delivered but not yet listened to or that identify messages containing nondeliverable components. The latter type of message header is an <i>Incomplete Delivery</i> header. For example, if a message contains more than the four components allowable (that is, a voice, fax, text, and file attachment), the additional components are not delivered, and the message header indicates that a component was not delivered.
Accessed	Message headers that identify messages that have been listened to. A message is considered accessed even if only the header has been listened to.

## TCP/IP

INTUITY AUDIX Transmission Control Program/Internet Protocol (TCP/IP) provides the ability to exchange messages with subscribers on other INTUITY AUDIX systems. The remote system can be next to or geographically distant from the local S8100 system.

INTUITY AUDIX TCP/IP uses the proprietary INTUITY AUDIX digital protocol to exchange messages, user profiles, and message-status information with other machines. The digital protocol uses a digital file format, similar to a data-file transfer between two computer systems, to transmit the information. Digitally transmitted messages are communicated quickly and with excellent sound quality.

TCP/IP allows you to exchange voice, fax, text messages, and attached files from other INTUITY AUDIX systems. This enables a user to:

- Address messages by name only, known as name addressing. This function applies *only* to administered remote recipients. *Administered* refers to remote users who have been entered in the database of the local application.
- Include the names and telephone numbers of remote recipients in personal mailing lists. Nonadministered remote recipients can be included only by telephone number.
- Hear the spoken name of the intended recipient. If the administrator has not recorded these names, the user hears only the remote mailbox ID.
- Access the names and number directory (\* \* N) to look up telephone numbers by name.
- Assign aliases to remote recipients on systems administered for AUDIX TCP/IP. Administered remote recipients can be included by name or by telephone number. Nonadministered remote recipients can be included by telephone number only.
- Use automatic addressing to respond to incoming messages.

TCP/IP enhances INTUITY AUDIX Messaging in many ways:

- Customers who exceed the capacity of one INTUITY AUDIX application at a single location can network multiple machines. This enables users to exchange messages as if they were on the same machine.
- Customers with business offices in more than one location, whether in the same building or in different cities, can exchange messages with every location.

The following functions can be used for messages exchanged between remote users:

- The ability to play a recorded name, when addressing or receiving a message, if a name is recorded for the remote user
- The ability to forward messages to one user or a group of users, respond to messages, and create group mailing lists

The following are additional sources of information:

- INTUITY AUDIX System Administration documentation on the S8100 server documentation CD
- Online help topics available from the TCP/IP browser screens

## Avaya Message Manager

Avaya Message Manager is a combination of communications modules that function as one software feature. Users can create, send, and receive compound messages containing multiple media types: voice, fax, text, or file attachments to other users inside or outside the corporate environment.

Message Manager is a Windows-based graphical user interface (GUI) that allows INTUITY AUDIX application message headers to be viewed on a PC screen through a local area network (LAN) connection. The INTUITY AUDIX application is called the “INTUITY AUDIX server” when it connects to a LAN.

What distinguishes Message Manager from ordinary voice messaging products is the way users interact with the feature. Users access information visually, instead of listening to voice prompts and using a touch-tone keypad. Viewing message headers on-screen is faster for users because they can quickly view who called, when, and why, without having to listen to prompts, press keys, or remember instructions. The on-screen information helps users access and prioritize important data, more easily develop mailing lists, and track multiple personal greetings.

Message Manager is available in the following languages:

- English
- French
- Spanish
- Brazilian Portuguese
- German
- Dutch

Additional languages are being considered for future releases.

Message Manager includes the basic functions listed in [Table 6](#).

**Table 6. Message Manager functions and descriptions**

Function	Description
Send messages to multiple recipients	You can create and send a message with one or more message components to one or several people. The message is delivered as soon as possible or can be scheduled for a later delivery time.
Addressing	You can send the message to just one person, to a list of people, or to someone who is on a remote INTUITY AUDIX system.
Send faxes	The fax software for Message Manager is used to create and send a new fax message. Creating a new fax is similar to printing a hard copy of your work in another program.
Fax from other applications	Although faxes can be stored in and sent from Message Manager, creating and sending a new fax is actually done from any other Microsoft Windows application that allows printing.
Create a custom fax cover page	You can use the Fax Cover Page Designer to add text or bitmap graphics to the fax cover page. You can also use the Designer to change the location and size of the Message Manager text display areas.
Use the Outgoing Folder	After a message is sent, you can check delivery status by opening the Outgoing Folder. The Outgoing Folder lists all messages sent, the time sent, and whether the recipient has received or accessed the message. Additional information is available by double-clicking a message header in this folder.

1 of 2

Table 6. Message Manager functions and descriptions

Function	Description
Build Personal Phonebook	You can use the Personal Phonebook in Message Manager to store “cards” with the addresses of INTUITY AUDIX subscribers, as well as other numbers and notes. As subscribers are added to the Phonebook, you can quickly add them to an address list. The Personal Phonebook is stored on your PC and can be used while working offline.
Build INTUITY AUDIX lists	With INTUITY AUDIX lists, you can store the addresses of sets of people you want to send simultaneous messages to, such as a project team or a corporate department. You can quickly address a message to an entire address list. INTUITY AUDIX lists are stored on the INTUITY AUDIX server and are not available offline.
Work offline	If you work away from the office, you may want to edit messages you have received or compose new messages, then later log in and send them during a single call. This saves toll charges because an INTUITY AUDIX server connection is not required, except when ready to send or receive messages.
Minimize or lock Message Manager	<p>You can minimize Message Manager and still be notified of new messages. Log in to Message Manager, then use standard Windows techniques to minimize the program and keep it active. Later, you can restore the program to retrieve messages or to create and send new messages.</p> <p>A Lock function provides additional security. When you click the Lock button, the application is minimized and requires your INTUITY AUDIX password to be restored. Locking Message Manager prevents others from accessing your INTUITY AUDIX mailbox. This function is inactive while working offline.</p>
Record your name or greetings	When you install Message Manager, you can use the name and personal greeting that were recorded through the INTUITY AUDIX telephone interface. You can also select a menu option to record your name or display a screen to record and manage greetings. The INTUITY AUDIX server uses the choices you make in Message Manager for playing names or greetings to your callers.
Outcalling	If you are away from the office, you can be notified of new INTUITY AUDIX messages. Use the Outcalling function to enter a telephone number that the INTUITY AUDIX server then dials to notify you of new messages.
Sound card	Message Manager uses an audio connection to your telephone to play or record voice messages or greetings. However, you can use your computer’s sound card with speakers and a microphone instead. This is the only way to play or record voice messages while working offline.

2 of 2

The following information is available to Message Manager users:

- Message Manager Quick Reference Guide, available on the S8100 server documentation CD
- Message Manager online help, available by selecting Contents from the Message Manager Help menu
- A file customized just for your site, described in the Updating Your Site-Specific Information section of the Message Manager Installation chapter in *Installation and Upgrades for the Avaya™ S8100 Media Server with the Avaya™ G600 and CMC1 Media Gateways* (555-233-146).

## FAX Messaging

The Avaya FAX Messaging feature combines the send and receive capabilities of a stand-alone fax machine or fax modem on a PC with the capabilities of Avaya messaging. Besides sending, receiving, and printing a fax over the telephone, a user can also forward a fax, annotate a fax with a voice message, or send and broadcast a fax to multiple telephone users. These features allow a user to handle a fax message just as they would a voice message.

The following information can be provided to FAX Messaging users who have Message Manager:

- Message Manager Quick Reference Guide, available on the S8100 server documentation CD
- Message Manager online help, available by selecting Contents from the Message Manager Help menu

The following information can be provided to FAX Messaging users who do not have Message Manager:

- Messaging Solutions Quick Reference Guide, available on the S8100 server documentation CD
- Online help available from the telephone user interface by pressing \* H or \* 4 at any time

## Fax Extended Dialing

The Fax Extended Dialing feature allows subscribers to send and print faxes to telephone numbers of up to 23 digits. This extension benefits customers with subscriber communities who deliver faxes to international locations. It also enables a shortcut key (\* \* 5) for all fax printing and sending. You control what fax numbers subscribers can call by allowing or denying dial strings.

Fax Extended Dialing works with the INTUITY AUDIX telephone interface and with Message Manager Release 4.6 and later. The Fax Extended Dialing feature is currently not available for subscribers who use Message Manager Release 4.5.6 and earlier or the Aria on INTUITY AUDIX telephone interface.

## Automated Attendant

An automated attendant is an interactive telephone answering system. It answers incoming calls with a prerecorded announcement and routes each one based on the caller's response to menu options and prompts.

The system administrator sets up an automated attendant so that callers hear a menu of options. Callers indicate the desired menu option by pressing the corresponding touch-tone key. The automated attendant executes the selected option. Callers from rotary or dial-pulse button telephones are, typically, told that they can hold or call another number to speak with a live attendant.

An automated attendant menu system, or *menu tree*, can be designed to contain subordinate layers of menus or bulletin boards. These sub-menus, or *nested menus*, play additional options, including a choice leading to another nested menu.

The voiced menu options that callers hear are actually personal greetings that the administrator records for the automated attendant's extension. As with any personal greeting, the content of the message can be changed. The Multiple Personal Greetings function provides different menus and options for different types of callers.

If your messaging system has multiple language sets available, the menu options route callers to a sub-menu voiced entirely in another language. The Multiple Personal Greetings function can record menus in various languages.

For more information on setting up and maintaining automated attendants, see the INTUITY AUDIX System Administration documentation on the S8100 server documentation CD.

## Bulletin Board

A bulletin board is an electronic messaging system. Callers dial the bulletin board's telephone number and the system answers and plays a recorded message. The major difference between a bulletin board and an automated attendant is that a bulletin board does not have an option to route callers to a live attendant.

## CornerStone Software

The CornerStone software supports co-resident announcements.



# 5 Call Center

The Avaya™ S8100 Media Server Call Center applications efficiently connect each caller to the appropriate representative. Before the call is routed, information is captured about the caller and integrated with existing databases (see [Chapter 6, Computer Telephony Integration](#)). The combined data is used to match the caller to an agent. Additional features politely inform callers waiting in queue (a holding place for incoming calls) of the length of time it will take to process the call. Detailed call statistics are constantly available to the agents and supervisors.

Calls into the S8100 Media Server Call Center are queued up and routed based on information the system continually acquires. Each caller can be presented with a variety of options for leaving a voice message, a fax, or monitoring the status of the call. Using CONVERSANT voice response software, the system responds appropriately to spoken information.

The following are switch features:

- Automatic Call Distribution (ACD), which manages call traffic and workflow
- Basic Call Management System (BCMS), an optional product which provides call management reporting for smaller Call Center operations
- Attendant Vectoring
- Call Center Basic, Call Center Deluxe, and Call Center Elite, which enable you to set up a Call Center (switch)
- CentreVu Virtual Routing
- CentreVu Advocate

The following are PC applications:

- BCMS Vu, which enhances the capabilities of the Basic Call Management System
- CentreVu Computer Telephony (CT)
- CentreVu Call Management System (CMS).

CMS add-ons enhance CMS, and include:

- > CentreVu Supervisor
- > CentreVu Explorer II
- > CentreVu Visual Vectors

CentreVu Compact Call Center Solutions packages are available in Basic and Enhanced versions.

S8100 provides an applications platform that consists of several elements. When these elements are integrated to meet business requirements, advanced call distribution and management capabilities deliver the performance and growth necessary for your business success.

**Note:** Some applications and products are unavailable in some countries. Please check with your local distributor for further information about which features and applications are available to you.

## Automatic Call Distribution (ACD)


If your company has departments (such as sales, billing, or customer service) that handle large volumes of incoming calls, you can benefit by using S8100's powerful ACD capabilities. ACD is the basic building block for Call Center applications.

ACD offers a method of distributing incoming calls efficiently and equitably among available employees or agents. ACD also offers a number of ways to connect an agent to a call. For example, with most idle agent distribution, an incoming call is routed to the agent who has been available for the longest time, resulting in more balanced agent workload.

Agents in an ACD environment are assigned to a hunt group, a group of agents handling the same types of calls. S8100 supports up to 99 different hunt groups. Each hunt group has associated trunks, stations, recordings, and queues. You can assign many ACD features on a per-hunt group basis to meet the different needs of diverse agent groups. You can link a telephone number to an ACD hunt group by associating a published number (often an 800 number) with the hunt group's extension number.

In the [Figure 4 on page 66](#) example of a travel agency, Hunt Group A receives calls only when agents are available since it has no queue. Calls to Hunt Group B can be queued while agents are unavailable and then redirected to Hunt Group C if not answered within an administrable time. Calls to Hunt Group C are redirected to Intuity AUDIX if they are not answered within an administrable time.

**Figure 4. A Basic Example of Automatic Call Distribution**

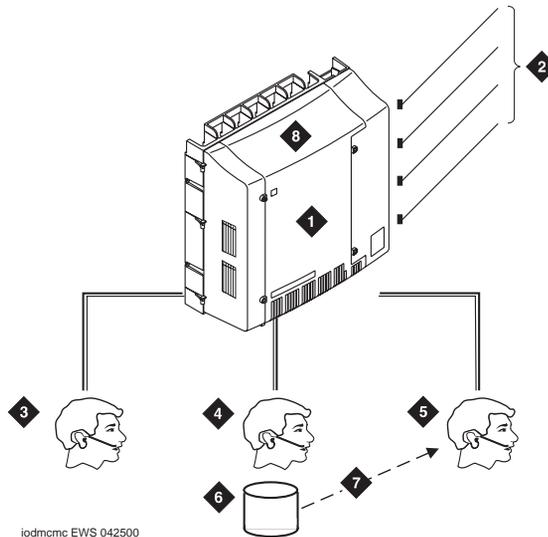

- |                             |                                 |
|-----------------------------|---------------------------------|
| 1) S8100                    | 5) Group C: General Information |
| 2) Incoming Trunks          | 6) Queues                       |
| 3) Group A: Business Travel | 7) Call Coverage to Group C     |
| 4) Group B: Personal Travel | 8) Intuity AUDIX                |

Communication Manager places all Automatic Call Distribution calls into a queue. Each call stays in the queue until an agent becomes available, until an optional timed interval elapses, or until the caller abandons. If the call has not been answered after an administrable period of time, an announcement can be played for the queued caller. The call can then be connected to music to let the caller know that the call has not been dropped, sent to a coverage path, or connected to another announcement.

You can set a maximum queue length in a group to anywhere from 0 to 200 calls, and establish a queue warning level. If the preset maximum queue length is reached, additional incoming calls are redirected to a call-coverage path (if administered), ensuring that calls are routed to an extension that will answer or give a busy signal. A priority-queuing feature allows you to designate which calls should receive priority; these calls override the standard first-in-first-out queuing pattern.

Two features provide for redirection of ACD hunt group calls:

- Intraflow allows an ACD call to be redirected from one hunt group to another through coverage paths that are assigned to determine call-redirection criteria.
- Interflow allows new calls in a hunt group's queue to overflow and be sent to another ACD hunt group on another system using the Call Forwarding All Calls feature. Interflow can be useful during the evening, during peak operation times, or at other times when agents are unavailable.

ACD agents can use any S8100 telephone. The CALLMASTER digital telephone is particularly recommended to meet the needs of ACD agents. A number of special ACD agent features can be assigned to agents' telephones to enable them to perform their jobs effectively. In addition, special features are available to assist supervisors in observing and monitoring the performance of these agents.

Additional features provide even more options when using ACD:

- Queue-Status lamps or displays (on telephones with a digital display) show call status for calls waiting in an ACD queue. Queue-Status also displays oldest call waiting time.
- Dialed Number Identification Service allows agents to identify (via display telephones) the purpose of each incoming call and appropriately greet the caller.
- Automatic Available hunt group allows the CONVERSANT Voice Information System or other "nonhuman" agent positions to be staffed automatically and made available.
- Each agent can be logged in to as many as four hunt groups at once.
- Malicious Call Trace allows you to designate stations that can trace emergency or threatening calls. When an agent receives a malicious call, the agent presses the Malicious Call Trace button. The system gathers trace information and connects a voice recorder to the call. All equipment used to complete the call is held up (the call cannot be disconnected) until the feature is deactivated.

- Redirection on No Answer allows an unanswered, ringing call to be redirected to an ACD queue or to a Vector Directory Number after an administered interval. The agent position will also be taken out of service.
- Station Hunting allows calls to be routed first to the called extension, then according to a linear, circular, or modified circular sequence of extensions. The circular sequences work to distribute calls equitably, ensuring that there are no overworked “first” extensions in a hunt group.

## Basic Call Management System

The Basic Call Management System (BCMS), an integrated, internal capability of S8100, is a cost-effective solution for small start-up Call Centers or for existing companies with minimum system-measuring/reporting requirements. BCMS helps you fine-tune your Call Center’s operation by providing reports with the data necessary to measure Call Center agent performance.

This feature offers call-management control and reporting at a low cost for Call Centers of up to 100 agents. BCMS is ideal for companies that need call management features.

BCMS collects and processes S8100 Media Server ACD call data (up to 7 days) within the system; an adjunct processor is not required to produce call-management reports.

BCMS provides various measurements for monitoring the operations of an ACD application. BCMS software organizes ACD calls and Call Center measurements into different reports that supply useful information for managing ACD facilities and personnel. The reports can be displayed on the system administration terminal in real time.

The following reports can be generated:

- Real-time reports
  - > Agent Status
  - > System Status
  - > Vector Directory Number Status
- Historical reports
  - > Agent
  - > Agent Summary
  - > Split
  - > Split Summary
  - > Trunk Group
  - > Vector Directory Number

## Attendant Vectoring

This is an S8100 Media Server feature for calls where the caller is seeking an attendant. It provides a lower-priced solution for customers who want to vector attendant calls that go to an attendant without purchasing the full vectoring software. This alternative provides some powerful capabilities, such as announcement in queue, time-of-day routing, and routing with coverage. Some of the vector steps include:

- Announcement
- Busy
- Disconnect after announcement
- Go to step/vector:
  - > Time-of-day
  - > Unconditionally
  - > Queue-fail
- Queue-to:
  - > Attendant group
  - > Attendant
  - > Hunt-group
- “Route-to number with coverage y/n”
- Wait-time hearing silence/ring back/music
- Stop

## Call Center Basic

The Call Center Basic package, an S8100 Media Server feature, enhances your Call Center by providing the following features:

- Automatic Call Distribution (ACD)
- Auto Available Split
- Most Idle Access (MIA) Across Splits/Skills Option
- MIA Treatment for After Call Work (ACW)
- Multiple Call Handling on Request
- Forced Multiple Call Handling
- Move Agent/Change Skills while Staffed
- Multiple Announcement Boards
- Redirect on no Answer (RONA)
- Service Observing by Class of Restriction

- Service Observing Remote
- Timed After Call Work/Agent Pause Between Calls
- VuStats (including the Service Level and Login IDs enhancements)

**Note:** 12-Agent Call Center Basic is included with S8100 software.

## Call Center Deluxe

The Call Center Deluxe package, an S8100 feature, enhances the basic package by including sophisticated Call Center capabilities such as advanced routing, vectoring, and expected wait-time announcements. The Call Center Deluxe package includes the capabilities of the basic package, plus the following features:

- Call Work Codes (CWC)
- Call Vectoring
- Call Prompting (Administrable Interdigit Timeout and Administrable Converse Data-Passing Rate)
- Redirect on No Answer to Vector Directory Number
- Support Network-Provided Digits (Caller Information Forwarding)
- Service Observing on Vector Directory Numbers
- Vector Directory Number-of-Origin Announcement
- Vector Directory Number Return Destination
- Vector Administration (Route-to with/without Coverage and Multiple Audio/Music Sources)
- Vector-Initiated Service Observing
- Vectoring Advanced Routing
- Automatic Number Identification/Information Indicator (ANI/II) Digits Routing
- Avaya Site Administration Routing
- Best-Service Routing Single Site
- Estimated Wait Time Routing (EWT) Routing
- Vector Directory Number Calls Routing
- Wildcard Matching

## Call Center Elite

The Call Center Elite package, an S8100 feature, enhances your Call Center by including all the capabilities of the deluxe package in addition to the following features:

- Expert Agent Selection
- Reason Codes for Login, Logout, and ACW

## CentreVu Virtual Routing

CentreVu™ Virtual Routing, an S8100 feature, helps you provide the best possible service to your customers while using all your Call Center resources wisely and cost-effectively. CentreVu Virtual Routing allows multiple locations to work together as a single virtual Call Center. Its smart routing capabilities monitor and anticipate changing conditions across your virtual Call Center network to find the best place to deliver each call, every time.

CentreVu Virtual Routing can help you:

- Save on network costs
- Optimize existing resources
- Balance agent workloads
- Ensure consistent and reliable customer call handling and service
- Equalize enterprise-wide call volume across sites or across multiple splits/skills at a single site

CentreVu Virtual Routing provides Best Service Routing — the ability to automatically deliver each call to the best place based on a combination of criteria. You can use Best Service Routing with CentreVu Advocate to make your multisite routing even more precise and effective. Once Best Service Routing delivers a call to the “right” Call Center or split/skill, CentreVu Advocate determines the best agent to handle the call based on the caller’s needs and the caller’s value to your business.

In addition to Best Service Routing, CentreVu Virtual Routing offers Enhanced Look-Ahead Interflow (LAI) multisite routing. LAI can help improve customer service and satisfaction by speeding the distribution of calls among locations or skills/splits with low call volumes and long hold times.

CentreVu Virtual Routing also supports enhanced information forwarding to provide valuable details along with each routed call. The information “attached” to each call may include:

- Vector Directory Number (VDN)
- Caller-supplied collected digits
- Dialed Number Identification Service (DNIS)
- Accumulated time waiting

CentreVu Virtual Routing also passes along a Universal Call ID (UCID), a unique identification “tag” that is attached to each call and remains with the call as it is routed throughout your network. By passing Universal Call ID, CentreVu Virtual Routing enables lifetime tracking of calls routed among Call Centers, S8100 Media Server systems, or adjuncts such as CONVERSANT for interactive voice response.

## CentreVu Advocate

You can leverage your Call Center as a strategic business asset with Avaya's innovative CentreVu™ Advocate software solution. CentreVu Advocate, an S8100 feature, eliminates the chaos and randomness associated with call handling and provides directed routing with customer-pleasing results. This breakthrough software offers new methodology for aligning your enterprise objectives with agent and management performance and customer needs.

With CentreVu Advocate, you can drive Call Centrally Center performance according to your business plan. This application features expert routing algorithm software from Bell Labs that lets you implement complex customer service, agent resource, and enterprise planning strategies as a critical formula in Call Center operations. With CentreVu Advocate, you can transform your Call Center into a powerful strategic advantage for your enterprise. CentreVu Advocate works in conjunction with and requires Expert Agent Selection (EAS).

Advocate will provide your Call Center with the most innovative methods and enhanced flexibility in selecting the optimum agent for a call or the best call for an agent. With CentreVu Advocate, you determine which call to select the moment an agent becomes available.

CentreVu Advocate provides the following features:

- Service Objective

This capability enables you to establish a unique service objective for each skill in your Call Center. Service Objective can be used to establish different levels of service for multiple types of calls with various media and priority handling needs. You can match the service levels your customers expect by combining the power of your service-level plan with the power of Service Objective.

- Predicted Wait Time

Predicted Wait Time will enable your Call Center to predict service-affecting events while minimizing the impact on your key Call Center metrics. By balancing the average speed of call answering across skills, this feature provides more uniform customer service levels. By matching the needs of your caller to the skills of your agent, Predicted Wait Time ensures that all calls are given the best possible service. Predicted Wait Time will help your Call Center build stronger customer relationships and will improve your overall Call Center efficiency.

- Least Occupied Agent

This capability distributes calls evenly across all available agents in order to balance the workload among those with few skills and those with several skills. When one or more agents are available, Least Occupied Agent uses agent occupancy rather than position in an idle agent queue to determine which agent to select when a call arrives. Least Occupied Agent can help you maintain your staff by promoting agent fairness and eliminating hot seats.

- Service Level Supervisor with Reserve Agents

Service Level Supervisor gives you the ability to set Estimated Wait Time (EWT) thresholds for skills and to assign agents as reserve, in the event a skill overruns its threshold. Service Level Supervisor will override your agents' normal call handling preference to assist calls from a skill whose threshold has been exceeded. This feature allows your Call Center to rapidly adjust to high traffic conditions with the flexibility of automatically activating predefined Reserve Agents when a skill is in an over-threshold condition. This feature will improve your overall efficiency by eliminating the need for your supervisors to manually intervene when traffic conditions change and by effectively scheduling workloads for agents with multiple skills.

- Percent Allocation

Percent Allocation allows you to designate the percentage of time your agents spend in each skill. Incoming calls are matched to those agents with the "best fit" based on their allocated skill percentage. By scheduling an agent's time among multiple skills, you can better utilize and schedule your agents. Percent Allocation can also improve agent performance and satisfaction by assuring them a certain amount of time in each skill.

## BCMS Vu

BCMS Vu Release 2 is a 32-bit client/server software application that works with the Basic Call Management (BCMS) software. The BCMS Vu client runs on Windows 95/98, Windows NT 4.0 or Windows 2000. (BCMS Vu client does not support Windows 3.1 or later or Windows for Workgroup 3.11 or later.) The BCMS Vu server runs on Windows NT 4.0 or Windows 2000.

Using BCMS Vu, Call Center managers can:

- Capture BCMS historical data and store the data on the PC for up to 1 year (depending on the amount of information being stored)
- Report on the historical data
- Monitor the BCMS real-time data in graphical and tabular form
- Display BCMS real-time data on a wallboard
- Display text messages on a wallboard
- Schedule printing of real-time reports

BCMS Vu enables Avaya's maintenance engineers to perform remote diagnostics and maintenance.

**Note:** The Web interface on the S8100 Media Server includes the ability to download call center clients for BCMS Vu.

## CentreVu CT

Computer Telephony Integration (CTI) is the linking of telephone communication systems to personal computers, which can increase productivity and customer satisfaction through the exchange of information between the PC and the telephone. CTI applications integrate data processing, data communications, and voice communications.

### Requirements

System requirements for single machines running BCMS Vu and CentreVu™ CT are:

- An IBM-compatible Pentium single processor
- A minimum of 64 megabytes (MB) of RAM for the server (Windows 2000 server) and 32 MB of RAM for the clients (Windows 2000)
- A minimum of 500 MB of hard-disk space (recommended)
- The requirements for disk space on a user's PC depend on the size of the Call Center configuration and on the requirements for storing the historical data.
- 10 Base-T network interface card
- A double-speed (2X) or higher CD-ROM drive
- A second serial port is required for remote maintenance if connecting to an external modem. A third serial port is required if you are connected to a wallboard.
- A PC with:
  - A sound board and speakers are required for CD-ROM training
- Microsoft Windows NT 4.0 or Windows 2000 is required for BCMS Vu Server and CentreVu CT and Windows 95/98/NT/2000 is required for BCMS Vu Client.
- BCMS software installed on the S8100 Media Server
- LAN connectivity between the BCMS Vu Server and the S8100 Media Server

For more information on LAN connectivity and installing BCMS Vu, see *BCMS Vu Software Release 2.0 Version 2 Installation Guide*.

**Note:** The Web interface on the S8100 Media Server includes the ability to download call center clients for BCMS Vu and CentreVu CT.

## CentreVu Call Management System (CMS)

The performance of the CentreVu™ Call Center is critical to your business success. The CentreVu™ Call Management System (CMS) supplies the tools needed to use the knowledge of the present as well as the past to improve performance in the future. Call Center supervisors and managers can answer questions about call handling, agent workload, and traffic capacities to create a Call Center that delivers maximum productivity while controlling expenses.

CentreVu CMS offers you one of the most comprehensive and advanced Call Center management systems in the industry. CentreVu CMS has sophisticated control mechanisms and reporting capabilities for effective management of Call Centers of all sizes, including multi-location operations.

CentreVu CMS provides a comprehensive array of real-time and historical reports on virtually every aspect of Call Center operations. Managers can get real-time reports, updated as often as every three seconds, and historical reports that summarize call data into daily, weekly, or monthly totals.

Enhanced features built into the standard software include customization of real-time and historical reports, exception notification, and the ability to design, test, change, and store call vectors in real-time. These features allow your Call Center managers to fine-tune the Call Center on the fly to maintain peak performance levels. You will be able to quickly:

- Analyze trends
- Establish performance benchmarks
- Plan new marketing or customer service campaigns
- Match personnel resources to caller volumes and skill needs
- Identify areas for productivity gains and cost savings
- Identify training needs by agent and application

Optional features include Multiple ACD reports and “what if” forecasting. CentreVu CMS provides the information needed to manage the people, traffic load, and equipment in an ACD environment.

CentreVu CMS operates on a Sun SPARCserver or Ultra enterprise 3500 platform with a high performance reduced-instruction-set computer (RISC) processor in conjunction with the ACD features of CentreVu Call Center. Status information is sent to CentreVu CMS from the S8100 Media Server while ACD activities are in progress. This information includes specific event data on calls by agent, agent group, station, queued calls, trunks, trunk groups, and agent actions. With optional Call Vectoring, vector and Vector Directory Number (VDN) data is also tracked and stored. CentreVu CMS provides the information needed to manage the people, traffic load, and equipment in an ACD environment.

**Note:** S8100 Media Server does not support the CMS High Availability option.

## CMS add-on packages

The following sections describe CMS add-on packages:

- CentreVu™ Supervisor
- CentreVu™ Explorer II
- CentreVu™ Visual Vectors

### CentreVu Supervisor

CentreVu Supervisor is an effective management tool that expands the capabilities of the CentreVu Call Management System (CMS). CentreVu Supervisor gives call center managers access to these capabilities and much more — all from the convenience of a desktop or laptop PC.

Now you can view your Call Center through a user-friendly, graphical user interface (GUI). With CentreVu Supervisor, the powerful capabilities of CentreVu CMS are expanded to provide a variety of administrative tools and reports to maximize your Call Center performance. CentreVu Supervisor enables you to:

- Generate status reports in full customizable color graphical formats that are easy to interpret at a glance
- Perform administration tasks easily using a mouse versus a series of commands
- Run other PC applications while actively monitoring Call Center conditions
- Create thresholds for each individual supervisor or manager
- Connect to a LAN allowing a CentreVu Supervisor user to print reports on any network printer for which the user has permissions
- View reports on the Web, saving time and distribution costs
- Schedule reports, printing and other administrative operations at a later time
- Access multi-site, real-time reporting for optimal Call Center management

CentreVu Supervisor gives Call Centers access to these capabilities from the convenience of desktop PC supported by Windows 95, Windows 98, Windows 2000, or Windows NT 4.0.

The recommended PC configuration to support Call Center client applications in a Windows environment is:

- Processor: Pentium 133 MHz or faster
- RAM: 48 megabytes
- Resolution: SVGA with a graphics adapter supporting 16-bit color (64K colors) or higher, with 800 x 600 resolution or higher
- Available free disk space: 30 megabytes or more before installation of CentreVu Supervisor (English)
- Communications: TCP/IP protocol stack

## CentreVu Explorer II

CentreVu™ Explorer II takes your CentreVu™ CMS reporting capabilities to the next level by providing a more granular view of agent and call activity throughout your call center operation. CentreVu Explorer II is an optional, server-based application that collects and stores the historical information that is gathered in CentreVu CMS. Using standard web-browser software and CentreVu Explorer II's graphical user interface, you can easily access CentreVu Explorer's unique query and reporting capabilities from virtually any client PC.

CentreVu Explorer II gives your Call Center the following advantages:

- **Cradle-to-Grave Reporting**

All queries result in the return of accurate information produced by your Call Center. With CentreVu Explorer II, you have a complete view of all touch points for a caller, including the number of times the caller was transferred or placed on hold plus each call's total hold and call-handling time for the caller for months and even years after the actual call was received.

- **Continuous Query Engine**

CentreVu Explorer II's query engine enables thousands of query combinations to transform your current Call Center information into strategic knowledge.

- **Reporting Engine**

Common queries can be created and shared with all system users for efficient and consistent reporting.

- **Efficient Automatic Number Identification (ANI) Analysis**

CentreVu Explorer II implements powerful analysis and queries of ANI.

- **Customer Classification**

Using Information Indicator (II) digits, available with ISDN, CentreVu Explorer II allows the analysis of a call's origin, identifying customers who call from pay phones, prisons, hotels, coin, and cellular phones (to mention a few).

- **Abandoned Call Analysis**

CentreVu Explorer II provides details not only for callers who abandon the queue, but also those callers who abandon while placed on hold by the agent. Without expensive custom software, information is rarely available regarding callers who abandon a Call Center.

- **Special Call Treatment Analysis**

CentreVu Explorer II tracks and stores unique call events such as calls marked as malicious, calls having audio problems, or calls that were service observed.

Detailed call information, along with the CentreVu Explorer II software, is stored on a Microsoft Windows 2000 server with SQL 7.0 connected to the Call Center's local area network (LAN). Call Center personnel simply use their desktop PCs, equipped with standard Web browsers, to access the server and retrieve, sort, and analyze call data stored in the CentreVu Explorer II's local database. CentreVu Explorer II enables you to track how each and every incoming call was handled.

You can use your Windows-based workstations with a Web browser to connect to the LAN and use the CentreVu Explorer II GUI to access the local database and access details such as how many times a call has been put on hold or transferred, and by whom. With CentreVu Explorer II, your Call Center managers can select and analyze a comprehensive array of detailed call criteria, produce a variety of reports, and perform database administration, all from the convenience of their desktop PCs.

CentreVu Explorer II transforms valuable CentreVu Call Center information into powerful knowledge. With CentreVu Explorer II, you can feel confident that you're making informed decisions and evaluating your business armed with all the knowledge available to you.

## CentreVu Visual Vectors

CentreVu™ Visual Vectors is a client application that communicates with CentreVu CMS through CentreVu Visual Vectors server software residing on the CMS platform. CentreVu Visual Vectors is a Java application that provides a GUI for creating and editing vectors and administering VDN assignments. Icons are provided for vector steps, with the capability to display actual vector contents in text format. Customers can use "drag and drop" operations to construct or edit vectors. Additional information can be associated with the vector steps. For example, comments can be attached with descriptions of announcements or route-to-destinations. The vector editor can be used in a standalone mode to create or edit vectors and store them in a local scratchpad on the client for later installation on an ACD.

## CentreVu Compact Call Center Solutions Packages

The CentreVu™ Compact Call Center solutions are an easy and cost-effective way for businesses to implement small Call Centers. Two packages are available:

- Basic Package

The Basic Package offers the following features:

- > Support for 6, 12, 25, 50, or 100 agents
- > Call Center software Right-to-Use (RTU) license
- > Basic Call Management System RTU license
- > BCMS Vu Release 2 single-user license
- > CD-ROM-based ACD/Vectoring training
- > CD-ROM-based Basic Call Management System administrative training

- Enhanced Package

The Enhanced Package offers the following features:

- > Support for 6, 12, 25, 50, or 100 agents
- > Deluxe Call Center software RTU license
- > Basic Call Management System RTU license
- > BCMS Vu Release 2 single-user license
- > CD-ROM-based ACD/Vectoring training
- > CD-ROM-based Basic Call Management System administrative training
- > S8100 Media Server Integrated Announcement circuit pack, which is the hardware that connects into Communication Manager to enable delayed announcements
- > Call Classifier circuit pack, which enables calls centers to offer callers simplified call prompting capabilities for basic menu selections and routing options without the need for a CONVERSANT system



# 6 Computer Telephony Integration

Computer Telephony Integration (CTI) is the linking of telephone communication systems to personal computers, which can increase productivity and customer satisfaction through the exchange of information between the PC and the telephone. CTI applications integrate data processing, data communications, and voice communications.

Avaya™ S8100 Media Server with the Avaya® G600 and CMC1 Media Gateways supports the following types of CTI applications.

- Server-based solutions, which require the Avaya CentreVu™ Telephony server, the co-resident DEFINITY LAN Gateway (DLG) function, which resides on the S8100 Media Server processor board (TN2314), and connectivity to DLG via the S8100 Media Server or via the TN799 C-LAN board.
- Enterprise class IP solutions, which enable users to control telephone calls (both incoming and outgoing) directly from a personal computer.
- www.messenger, which provides quick and easy access to your telephone, fax, and text messages through your Web browser.

## Server-based solutions

S8100 Media Server supports third-party CTI applications via ASAI and Computer Telephony Adjunct links. These CTI links are supported on S8100 via the DEFINITY LAN Gateway functionality which is co-resident on the S8100 Media Server Processor board (TN2314).

The co-resident DEFINITY LAN Gateway supports multiple ASAI and Computer Telephony Adjunct links. The CTI links are normally routed from the CTI Server (an external Windows NT or Windows 2000 server) running CentreVu and the TN2314 Processor card via TCP/IP.

For security reasons, the links may be routed from the CTI Server to a C-LAN board (TN799) in the S8100 Media Server system. The C-LAN board requires use of one additional slot in the G600 or CMC1 Media Gateway cabinet. The maximum message rate over the CTI link is 100 messages per second full duplex, regardless of whether the link is going directly to the TN2314 Processor board or being routed via a TN799 C-LAN board.

## Third-Party applications

All of the third-party CTI applications currently supported by Avaya servers are also supported by S8100, except for those that require adjunct routing. The following is a description of two CTI applications that are currently available. Availability varies by country.

### Intuition

Intuition is designed to be a cost-effective software application providing easier entry into CTI for small Call Center customers. Intuition automates the business process by using sophisticated rules-based intelligence. It “listens” for events such as inbound and outbound calls, Dynamic Data Exchange (DDE), hot key and time-based events, then applies the rules you define. For example, you can define an Intuition Rule that runs a script or opens a spreadsheet when you get a call from a stockbroker.

While Intuition is similar to Sixth Sense, Intuition integrates closely with SoftPhone Agent v.5 and includes the following new features:

- Script Recorder for creating scripts by recording user keystrokes
- Simulation for telephony events
- Auto-attendant support for scriptless call handling
- Enhanced User Interface

### FastCall Agent 3.0

FastCall Agent is the next generation of Avaya’s CTI middleware product called FastCall. The new release is designed to offer even easier installation and usability. FastCall Agent provides a broad range of CTI functionality without requiring changes to applications or development of custom software programs.

FastCall Agent resides between the telephone system and computer applications – thus the term “middleware.” This approach allows the agent to enable these applications with inbound and outbound CTI capabilities without computer code changes within the application itself. This provides a great degree of flexibility for companies with multiple departments, particularly when each department has a different application.

In addition, changes to the application do not affect FastCall Agent. FastCall Agent can be reconfigured to adapt to a new application quickly and easily. FastCall Agent “screen pops” populate a call center agent’s Windows-based application screen based on the calling number (ANI), called number (DID, DNIS, ACD group, or other telephone system identifier), or the caller’s touch tone input as the incoming call is received. These applications could include databases, help desk packages, sales force automation programs, personal information managers (PIMs), contact managers, word processors, spreadsheets, customized inquiry systems, or a combination of these applications.

# 7 Wireless Solutions

---

Most businesses today struggle to improve customer service and increase profits while controlling staff size and costs. To maintain a balance between service and costs, employees must be more productive, responsive, and mobile in performing their jobs. Wireless solutions offer cost control by:

- Reducing time and resources paging employees
- Not having to interrupt work to find a telephone
- Not having to rush to answer calls
- Not having to be tethered to a desk waiting for an important call

Reliable wireless tools remove the fear of losing customers who cannot reach you at your desk.


Avaya is the top U. S. provider of wireless solutions for business. Avaya's cordless telephones and speakerphones provide the freedom to place and receive calls while out of the immediate work area. Avaya's Mobility Solutions offer a range of options, from cordless telephones to integrated cellular business systems that greatly enhance the flexibility of wireless services.

**Note:** Some applications and products are unavailable in some countries. Please check with your local distributor for further information about features and applications available to you.

## Medium-Range mobility

The TransTalk™ 9000 depicted in [Figure 5](#) is a multi-line, single- or multi-zone solution that allows you to roam up to 700 feet (213 meters) from the base station. In most business environments it covers up to 500,000 square feet (45,000 square meters).

Figure 5. TransTalk 9000

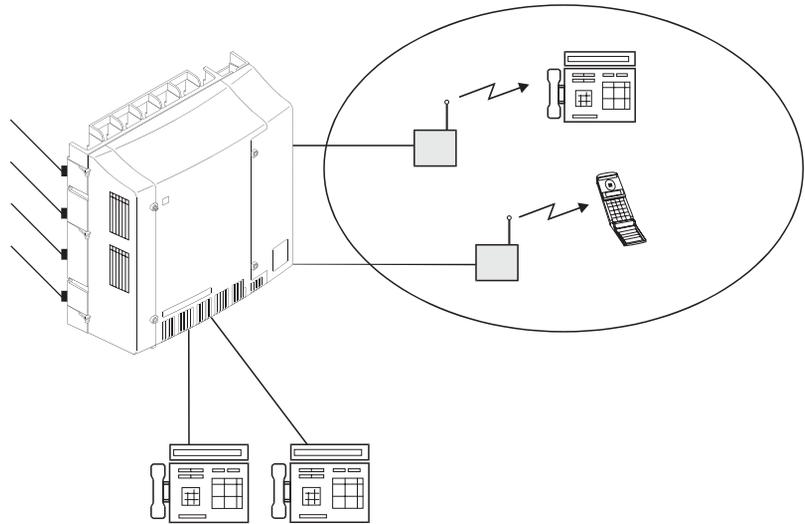

TransTalk 9000 is available in two configurations:

- Complete System: carrier that holds up to six radio modules, MDW 9031 pocketphone, and corresponding charging cradles, radio modules, and holsters
- Stand-alone: a single radio module, wireless telephone, charging cradle, and holster


Avaya's wireless telephones offer the following features:

- Crystal-clear voice quality
- Consistent privacy and secure operation
- Intercom feature
- Conference and transfer capabilities
- Programmable feature buttons
- Automatic registration
- Trouble lights
- Extended battery life
- Battery pack and optional battery backup
- Rapid battery charger (2½ hours)
- Dynamic power adjustment
- Mute button
- Mobility-range test capabilities

## Long-Range mobility

Avaya offers powerful long-range solutions for contact with customers, coworkers, and suppliers from anywhere in the office. These in-building wireless systems provide overlapping zones that enable mobility without changing telephones. (See [Figure 6 on page 85.](#)) The telephone connection is “handed off” from one transmitter to another, as directed by a single radio controller.

**Figure 6. Long-Range mobility**

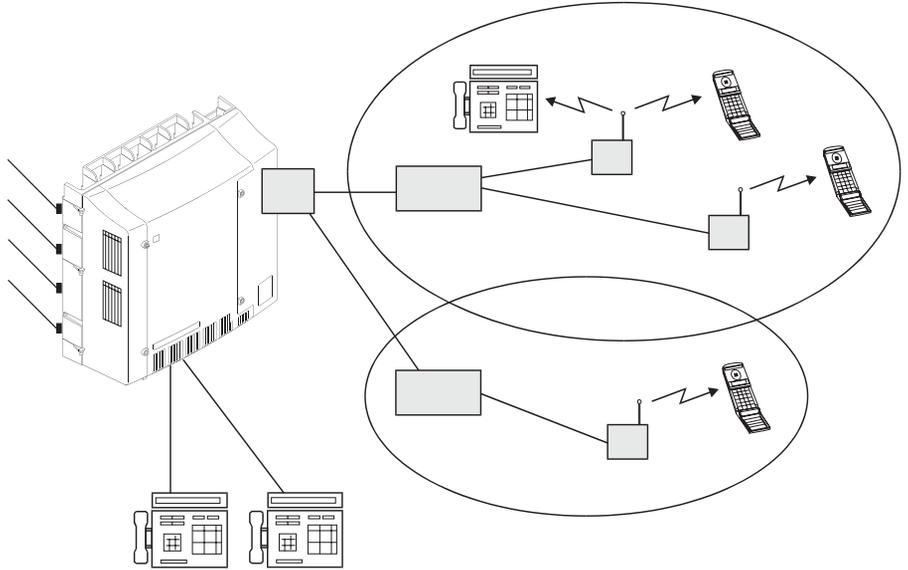

## DEFINITY Wireless Business System PWT

The DEFINITY Wireless Business System PWT is fully integrated with the S8100 system, offering full access to S8100 features. Avaya’s Wireless System-Engineering Expert-Design System analyzes a building or campus space and determines how the wireless system should be configured. By determining the ideal location for base stations within the structure or structures, this software simplifies one of the most difficult aspects of wireless implementation — ensuring maximum efficiency and lower lifecycle costs.

The DEFINITY Wireless Business System PWT relies on the S8100 media server to manage mobility. It uses Personal Wireless Telecommunications-based technology, which is a leading protocol in the United States. This protocol permits up to 12 simultaneous conversations per base station and defines the radio interface between the portable telephones and the base stations in the system.

## EC500

The powerful Avaya™ EC500 mobility communications solution enables callers to easily reach you—and your entire staff—with just one call.

Fast and efficient connections between you, your associates, and your customers are a critical part of your company's success. Business communication frequently involved phone transfers, voice-mail messages, and a frustrating wait for a return call. Avaya gives you a better solution.

The Avaya EC500 offers one-number portability and one-number access to anyone in your company. Your customers don't have to wait through numerous transfers only to reach a voice mailbox. If you are in a cellular-accessible area, the Avaya EC500 gives your customers easy, immediate access to you. The Avaya EC500 can help you increase customer satisfaction and raise productivity levels within your organization.

This enterprise-class software solution connects business calls arriving on the S8100 to any cellular phone regardless of the cellular standard in use. The EC500 will bridge the calls smoothly and efficiently.

### Avaya Advantage

By moving beyond simple call forwarding, beyond standard-dependency, the Avaya™ EC500 offers an efficient, powerful solution for your business communication needs. The Avaya EC500 can help your company make the most of the time, energy and resources you've invested to keep your employees accessible and responsive. You want your customers to reach your company simply and easily, and you want the quality and efficiency of the call to be flawless. With the Avaya EC500, call control remains on the server and reduces the number of "rings" before a call is sent to its final destination. Most call forwarding systems route calls to consecutive locations—after three to four unanswered rings at each position—finally arriving at the called party's voice mail account. The Avaya EC500 helps ensure your customers experience a speedy and high-quality connection to your company.

**One-Number Portability** The Avaya™ EC500 solution allows for a high level of accessibility by bridging your digital cell phone to your office number. Both phones ring simultaneously, giving you the option of answering on your cellular phone or on your office desk set. The EC500 provides one-number portability that is cellular standard independent. All cellular standards are supported—Time Division Multiple Access, Code Division Multiple Access, and Global System for Mobile Communications.

**Simultaneous Ringing** With Avaya™ Call Processing software, all connected phones ring simultaneously. Calls are immediately delivered to the intended party, and if that party is not available, the call is deposited directly into their voice mail account. This substantially reduces caller wait time.

**Office Caller ID** When you call into the office switch using an Avaya EC500 cell phone, it adopts your office extension number. You can then place calls and the switch will display your name and internal extension, not your cell phone number. You also receive simplified access to the corporate voice mail system. Using the office caller ID feature, you can log into your voice mailbox by entering only your personal identification number.

**Software Only Solution** This software-only solution does not require the expense of a wireless office system. It utilizes your existing cell phones and cellular service when coupled with Avaya Call Processing software servers.

# 8 IP Telephony Applications

The capabilities and applications of the Avaya™ S8100 Media Server with the Avaya™ G600 and CMC1 Media Gateways are extended with the introduction of IP Telephony solutions, which are part of the Avaya Multivantage Communications Applications family. IP solutions support audio/voice over a LAN or WAN, and ensure that remote workers have access to communication system features from their PCs.

Although voice quality can and will vary based on LAN conditions, the S8100 server offers features that enable management of the quality of voice communications. S8100 supports 3 Quality of Service methods:

- IP standard, Differentiated Services (DiffServ) — sets Type-of-Service (TOS) in IP header of voice packets
- Ethernet standard 802.1 p/q — sets priority level in the layer 2 Ethernet packet header
- UDP port range administration — ports largely dedicated for voice packets

IP trunk bypass to PSTN trunk is also supported with administrable thresholds for latency and packet loss.

Also included are hairpin and IP-IP direct connections, two features that make voice communications more efficient. These features increase the efficiency of voice communications by reducing both per port costs and IP bandwidth usage. Hairpin connections reroute the voice channel connecting two IP endpoints, so that the voice goes through the media processor board in IP format, thereby bypassing the TDM bus. IP-IP direct connections route the voice channel connecting two IP endpoints by sending the voice directly through the LAN or WAN between the two endpoints, instead of carrying a mixed connection of IP signaling and TDM bus signaling.

**Note:** To maximize voice quality using the IP solutions, you must consider both your hardware and network configurations. For example, with IP Softphones, you can send the audio over traditional circuit switch lines, providing high quality voice, or over IP using LAN connections. When making calls over the LAN, tune your computers and data network for the best voice quality.

S8100 supports a trunk configuration, four types of softphones, and three models of IP telephone. IP solutions are implemented using the TN2302AP, which is an IP-media processor circuit pack. The TN2302AP IP media processor provides H.323 trunk connections and H.323 voice processing for IP telephones. The features that use the TN2302AP also require the TN799C C-LAN circuit pack.

## Trunks

IP solutions support the TN2302AP IP media processor, which enables H.323 trunk service using IP connectivity between two Avaya server systems. The H.323 trunk groups can be configured as Avaya server-specific tie trunks, generic tie trunks, or direct-inward-dial (DID) “public” trunks. In addition, the H.323 trunks support ISDN features such as QSIG and BSR.

Up to 64 S8100 Media Servers can be networked through DCS with full feature transparency. More than 1000 S8100 Media Servers can be networked with near full feature transparency. S8100 Media Servers network seamlessly with Avaya server systems.

## IP Softphone

Avaya™ IP Softphone for Windows operates on a PC equipped with Microsoft Windows 95/98/NT/2000 and with TCP/IP connectivity to the S8100 via the C-LAN circuit pack. S8100 used with IP Softphone offers enhancements to information display, security, and serviceability. For example, the administrator can obtain information about the IP Softphone connection type and can list registered IP stations.

Release 9 introduced the improved audio quality via i-Clarity and a call-bar option for the visual graphical user interface (phone picture is already available). A lightweight directory access protocol (LDAP) client allows access to LDAP-compliant databases. The Avaya IP Softphone Release 9 and later is CTI/TAPI compliant.

Multiple call appearances, conference, transfer, hold, mute, redial, and volume control are provided by the IP Softphone. Access to Communication Manager station features is standard. Multiple audio voice codes are supported as well as multilanguage.

IP Softphone supports the following softphone configurations: Road Warrior and Telecommuter.

### Road Warrior

This application enables use of the full feature set from temporary remote locations anywhere in the world. The road-warrior application consists of two software applications running on a PC that is connected to the S8100 over an IP network. The single network connection between the PC and S8100 carries two channels, one for the signaling path and one for the voice path. On the S8100, the road-warrior application requires the TN79C C-LAN circuit pack for signaling and the TN2302AP IP Media Processor for voice processing.

### Telecommuter

This application enables telecommuters to use the full S8100 Media Server feature set from home. It consists of a PC and a telephone with separate connections to S8100. The PC provides the signaling path and the user interface for call control. A standard telephone provides a high-quality voice path. The telecommuter application requires the TN799C C-LAN circuit pack for signaling. The telecommuter application does not use the TN2302AP IP Media Processor.

## IP Agent

The Avaya™ IP Agent application provides a variation of the telecommuter application. IP Agent emulates an Avaya set and provides use of the call end capabilities required for Call Center operations from a remote location, such as the agent's home.

## IP Telephones

The 4600-series IP telephones use the IP technology with Ethernet line interfaces and downloadable firmware. These telephones emulate DCP 6400-series telephones and provide all of the same features except for the group listen speakerphone feature. The first release of the 4600-series IP telephones uses the dual connection architecture to register and communicate with the S8100 switch. This series of telephones includes the 4606, 4612, and 4624 models.



# 9 Telecommuting/Virtual Office

Avaya's research and independent industry studies show that telecommuters are generally 15 to 30 percent more productive. Telecommuters convert travel time into productive work time, are less likely to be distracted by normal office routines, and frequently end up working longer hours with greater output. During severe weather, telecommuters can continue working while others are stuck at home without access to work-related systems and tools.

Special Avaya™ S8100 Media Server system modules are available for telecommuting workers. In addition, many standard S8100 Media Server and voice messaging features are effective for telecommuters.

## S8100 Media Server features for telecommuting

S8100 includes several features that make telecommuting more convenient. See [IP Softphone](#) in [Chapter 8, IP Telephony Applications](#).

### Remote Call Coverage/ Call Forwarding Off-Net/Coverage of Calls Redirected Off-Net

Remote Call Coverage and Call Forwarding Off-Net allow calls to be redirected to a remote location. This allows calls that are placed to your office telephone number to be redirected to your home office. If not answered, you can administer the system to monitor calls and retrieve them for additional processing, or leave calls at the remote location. There is a one-second delay before the caller connects to the remote telephone.

### Extended User Administration of Redirected Calls (Telecommuting Access)

Extended User Administration of Redirected Calls (also called Telecommuting Access) allows you to change the active call coverage path or forwarding extension from any on-site or off-site location. This feature allows you to change the path or extension from your home office.

### Personal Station Access

Personal Station Access allows you to transfer telephone station preferences and permissions to any other compatible telephone. Preferences can include the definition of terminal buttons, abbreviated dial lists, and Class of Service and Class of Restrictions permissions. It can be used on-site or off-site using DEFINITY Extender. This feature has several telecommuting applications. For example, several telecommuting employees can share an office on different days of the week.

## Station Security Codes

Station Security Codes protect access to telephone stations and can be changed by the telephone users. This feature allows you to ensure protection of your console features.

All of these features are described in detail in *Administrator's Guide for Avaya™ Communication Manager*, (555-230-506), which is on the documentation CD under the following feature names:

- Call Coverage
- Call Forwarding
- Extended User Administration of Redirected Calls
- Personal Station Access
- Station Security Codes

## Pipeline 15

The Ascend Pipeline 15 is an Integrated Services Digital Network-Basic Rate Interface (ISDN-BRI) terminal adapter that provides single user access to remote services, such as corporate headquarters, intranet, or the internet over an ISDN-BRI line. The Pipeline 15 supports high-speed digital connections while simultaneously offering two analog ports for sharing the ISDN-BRI line with analog devices such as a telephone, fax machine, answering machine, and/or modem. By combining separate transmission services over a single line, the Pipeline15 allows users to consolidate billing and achieve superior consolidated performance.

Installing and configuring the PipeLine 15 is easy. The Pipeline 15 connects to an IBM-compatible PC, Macintosh, or UNIX workstation via an RS-232 serial cable and has a powerful graphical user interface that lets users set up and configure their unit in less than 15 minutes.

The Pipeline 15 supports integrated Multilink PPP, Multilink Protocol Plus, and Bandwidth Allocation Control Protocol, which will save users money each year by dynamically adding and subtracting bandwidth based on need. The Pipeline 15 also supports caller line ID devices on its two analog ports and advanced analog calling features such as hold, drop, conference, and transfer.

Additionally, a comprehensive series of Pipeline and SuperPipe access routers are available.

## DEFINITY Extender

DEFINITY Extender is a single-box remote voice and data solution for telecommuters, remote agents, and branch offices using S8100. DEFINITY Extender helps increase the productivity and performance of remote workers by allowing them to access the features of the S8100 Media Server system and their corporate LAN. With the DEFINITY Extender, remote voice access is just as simple as remote data access for off-premises employees.

The DEFINITY Extender product family provides off-site employees with all of the features of their S8100 Media Server system, no matter where they are located, over analog or ISDN-BRI connections. A switch module located at the S8100 location and a remote module located at the off-premises location are all you need to provide an off-premises employee with full voice and data communications functionality.

## Intuity AUDIX features for telecommuting

The following Intuity AUDIX features are useful for telecommuting:

- Multiple Personal Greetings allow subscribers to prepare a pool of up to 9 personal greetings to save time and provide personalized customer service. Separate messages can indicate the subscriber is on the telephone, away from the desk, or on vacation.

**Note:** Multiple Personal Greetings only works in a centralized environment. With the Mode Codes interface, you cannot set up separate internal and external greetings.

- Outcalling automatically dials a prearranged telephone number or pager when messages are received in a user's mailbox. The system tells whoever answers that messages have been received and allows them to log in to the Intuity AUDIX system.
- Priority Outcalling provides outcalling notification of priority messages only. This allows the telecommuter to be relatively undisturbed by notifications of messages that do not require immediate attention.
- Call Answering for Nonresident Subscribers provides Intuity AUDIX system mailboxes for remote users who do not have a telephone but do have an extension number on S8100.

For example, when working at home, you set Priority Outcalling so the system will call you when you have messages marked "priority" by the caller. Then you activate a personal greeting that says something like, "Thanks for calling. I'm working away from the office today. I'll be checking voice mail periodically, so please leave a message. If your message is urgent, press 2 after recording it. This will give your message priority status. The system will notify me of your priority message almost immediately."



# 10 System Administration

The S8100 Media Server supports the Avaya VisAbility™ Management Suite, which offers a variety of modular tools for managing your system.

Telephone and facility administration features allow you to administer telephones, computers, facilities, and features throughout your system or network. Traffic management features allow you to measure, manage, and report on the voice and data communications traffic throughout your system or network. Maintenance features allow you to view the health of your system and perform maintenance procedures on your own system.

Avaya's broad system management philosophy extends S8100's power and flexibility into the tools for managing the system. These tools are based on the user-friendly architecture of Avaya's server products.

## Avaya Site Administration

The Avaya Site Administration application is available as a purchase option as part of the Avaya VisAbility™ Management Suite.

Avaya Site Administration is a general-purpose system management tool that simplifies basic administration. With this application, users can easily navigate, display, add, modify, and/or remove the S8100 Media Server system and related objects. The standard SAT (system administration terminal) interface is still available for use through SAT emulation.

**Note:** Avaya Site Administration release 1.9 is loaded on some of our newer hardware platforms. Release 1.9 is only available in English. Non-English speaking personnel must use Avaya Site Administration release 1.5.

Avaya Site Administration streamlines common system administration tasks by providing:

- Shortcuts to administration commands
- The ability to schedule tasks to run at a later date
- The ability to print button labels
- The ability to easily create Intuity AUDIX subscribers with either a default mailbox or a custom mailbox

Avaya Site Administration provides a Windows 32-bit graphical user interface and runs on Windows 95, Windows 98, Windows NT 4.0, and Windows 2000 or later. Designed to support Intuity AUDIX systems, Avaya Site Administration requires an active S8100 or Intuity AUDIX connection for proper operation.

Avaya Site Administration provides the following functionality:

- Browser

The Browser provides navigation and access to features and services. The user creates hosts and related data objects and accesses S8100 and/or Intuity AUDIX hosts from the Browser. The Browser is based on a standard tree view and forms the central user interface component in Avaya Site Administration.

- Emulation

Avaya Site Administration's emulation support includes AT&T 4410 and provides the most basic form of system administration.

- Graphically Enhanced DEFINITY Interface (GEDI)

The GEDI feature provides users with a Windows-like interface to:

- > Add objects
- > Remove objects
- > Change objects
- > View the status of objects
- > Duplicate objects
- > Test objects
- > Generate tasks that may be scheduled to run at a later date and time

- Scheduler

The Scheduler lets users specify a task to run at a specific date and time. A task is a collection of one or more operations that users specify to run at a predetermined time. Tasks are generated from either the Graphically Enhanced DEFINITY Interface, the Add User Wizard, or Call Accounting Data Export.

- Event Log

The Event Log allows users to view the results of running and completed tasks.

- Job Viewer

The Job Viewer allows users to view the task or job status while it is being executed. The Job Viewer also shows the queue of jobs to be run.

- Button Label Printing

The Button Label Printing feature lets users print button labels for the handsets using a standard Windows laser printer. This feature also provides a graphical print preview. The Button Label Printing feature supports printing multiple labels of the same type.

- Add User Wizard

The Add User Wizard assists in creating station and subscriber details by automatically providing help such as available extensions and ports and allowing users to base the creation on an existing template.

- Call Accounting Data Export

The Call Accounting Data Export feature lets users export information on stations, trunks, agent login identification, Authorization Codes, and trunk circuits from the S8100 Media Server system to share with any third party call accounting program that supports Avaya Site Administration.

- Import/Export Capability

Avaya Site Administration provides easy graphical exporting and importing of agent login, coverage paths, hunt groups, data modules, stations, trunk groups, and VDNs. Users can export data fields to databases such as Microsoft Excel. Users can then change the data, import the data back into Avaya Site Administration, and then resend the data to the S8100 Media Server system. The import/export capability can also assist users in creating corporate directories and custom reports.

- Global Change Capability

The global change capability lets users select and change field values in one or more of the following objects that matches a search filter:

- > Agent login ID
- > Coverage path
- > Data module
- > Hunt group
- > Station
- > Trunk group
- > VDN

- Create Station Templates Wizard

The Create Station Templates wizard steps users through instructions on how to create station templates.

- Add Bridged Appearances Wizard

The Add Bridged Appearances wizard steps users through instructions on how to add bridged appearances to telephones.

- Out-of-Service Trunks

The Out-of-Service Trunks feature creates a task that checks periodically for out-of-service trunks. If an out-of-service trunk is found, the users are notified either in the Avaya Site Administration message box or by email.

- Reports

Avaya Site Administration provides the following reports:

- > Browse Dial Ranges lets users quickly and easily view the complete dial ranges in the S8100 Media Server system.
- > Browse Stations lets users quickly view all assigned stations in the S8100 Media Server system.
- > Browse Unused Ports lets users view the available ports in the system.
- > Find Unused Extension lets users view unused and available extensions.

## Administration

S8100 includes features that simplify and accelerate the administration process.

### Portless Administration/Administration Without Hardware

The Administration Without Hardware feature offers the capability to administer station forms without specifying a port location. Administered stations will not cause alarms or errors when the station is translated but not yet installed. These station types are referred to as “phantom” stations. Phantom extensions are used for Automatic Call Distribution Dialed-Number Identification Service (ACD-DNIS). This feature allows a phantom extension to be administered on the switch for each call type that needs to be identified to agents. The phantom ACD extension is either “call forwarded” (via an attendant console) to an ACD split or has its coverage path defined to include the ACD split. The name field administered for the phantom extension will identify to the ACD agent which service the caller is attempting to reach, allowing the agent to properly address the caller.

The Administration Without Hardware feature also supports the ability to store station templates (models). These can later be used with the duplicate station command to implement many station forms of the same type in the switch.

The Administration Without Hardware feature can be used to streamline system initializations, major additions, and rearrangement/changes by allowing telephone translations to be entered before the actual ports are assigned.

The Administration Without Hardware feature can be used on the following telephone types:

- Analog telephones
- Digital Communications Protocol (DCP) telephones
- Hybrid telephones

S8100 supports telephone types in addition to those listed above. These include:

- Attendant consoles
- Voice/computers (such as DCP telephones with voice and data capabilities)
- Data modules
- Analog queue warning ports
- Announcement circuit packs

### Automatic Station Relocation/Terminal Translation Initialization

TTI is part of the Portless Administration/Administration Without Hardware feature, but can also be a stand-alone feature. TTI associates the terminal translation data with a specific port location through the entry of a special feature-access code, a TTI security code, and an extension number from a telephone that is connected to a wired — but untranslated — jack.

After a telephone is connected to an appropriate jack, the telephone user can dial the appropriate codes followed by a pretranslated extension number of an Administration Without Hardware telephone. The system will complete the administration of the telephone by associating the translation data with the port location and performing appropriate checks.

TTI reduces labor associated with system initializations, major additions, rearrangement and changes, and building wiring. Translation data entry can be performed without knowledge of the physical layout of circuit packs. End-users can move their own station equipment if a building is wired to support it, reducing costs for station moves. Individual lines need only be wired to the correct type of port, rather than to a specific port.

System administrators maintain control over who uses the TTI, and when, through security codes.

## Basic reporting

S8100 has built-in capabilities for generating reports. These reports are available without special hardware or software.

- System Measurements reports supply information on the status of all communication facilities. These reports help determine the efficiency of resources, including (but not limited to) trunk groups, hunt groups, and the attendant group.
- System Status reports supply information associated with the attendant group, major and minor alarms, and traffic measurements.
- The Recent Change History feature reports on the most recent administration and maintenance commands entered. S8100 also supplies:
  - > New site data on the station form. New fields include the set color, building, floor, and headset. In addition, user-defined validation checks are provided for a subset of the site data items.
  - > Scaling enhancements, as well as a ranging and filtering capability, for large switches. These enhancements allow your system administrator to restrict data reporting to only the desired amount of switch parameters.

S8100 also includes the following reports:

- The Class of Restriction report lists the extensions that have a particular Class of Restriction value or that fall within a range of Class of Restriction values.
- The Class of Service report lists the extensions that have a particular Class of Service value or that fall within a range of Class of Service values.
- The Site Data report lists, by extension, the site data associated with stations in the system. Ranging and filtering capabilities are provided for selected site fields.

## Performance measurements

A number of performance measurements are available on the S8100. These measurements are available in the form of switch-based reports for local or remote access, and can be collected for subsequent analysis and reporting by adjuncts and operation support systems using the operation support system interface protocol. These reports include:

- Socket; DSP; packet loss reports for managing Voice over IP
- Call Coverage reports
- Coverage Points

These measurements can be used to engineer group sizes at coverage points and to detect station user abuse of the call-coverage feature.

- The Traffic Summary report offers additional measurements that help configure the switch, determine the switch's capacity for growth, and report unauthorized switch-access attempts.

These measurements can be used to verify that your system and its users are not experiencing performance degradation due to overloaded switch resources.

- Attendant Position report
- Security Violations report
- Tandem Traffic report

The following measurements are useful in helping you evaluate the network engineering design for possible reconfiguration. They can help you decide how to reconfigure networks for lower-cost operation.

- Hunt Group Measurements
- Automatic Route Selection Pattern Measurements
- Trunk Group Detailed Measurements

The following measurements and reports are needed for engineering and load balancing a large switch. These measurements include:

- Blockage Study report
- Port Network and Link Usage

All of these measurements are accessible to an external host via the operation support system interface.

## Reports Generator

The Reports Generator is an easy-to-use, graphical reporting tool that does the following:

- Maintains a location database of all the systems managed
- Provides automated connections via predefined scripts to the various systems
- Captures all predefined reports immediately, or schedules off-peak downloading to your personal computer
- Creates faxable order forms and keeps a record of all purchases for all systems in the network
- Provides cut-through administration capability with a 513 terminal emulator
- Provides flexible sorting and formatting options for report display and export to other applications
- Provides an easy-to-navigate interface, with simple setup procedures

The scheduler can be used for off-peak, automatic polling of systems for daily reports required for monitoring your S8100 Media Server environment. It can also be set up to invoke special scripts or personal computer applications.

The Reports Generator produces all standard reports, plus the following:

- The Unused Extension Report shows all unused extensions.
- The Configuration Pictorial graphically depicts your system, with cabinet, carrier, and slot representation. It maps the station data to the configuration data so you can easily determine where stations are assigned for a port on a circuit pack. You can easily see which ports are free on which slots and what the port names are.
- The Configuration Summary provides a total system inventory with totals of circuit packs in use and the total number of free ports. It also recommends ways to consolidate and conserve resources.
- The Station Reports allow you to sort station data in a variety of columns.
- The Phone Directory allows you to create and maintain a directory list for general distribution. You can define some extensions as unlisted, and they will not be printed in the directory.
- The Out of Service Trunks report notifies you during off-peak hours of any trunks that are not functioning.

All of these reports can export data formatted for use by other database management applications.

## Call Charge information

S8100 provides two ways to know the approximate charge for outgoing calls:

- Advice of Charge — For ISDN trunks

Advice of Charge collects charge information from the public network for each outgoing call. Charge advice is a number representing the cost of a call; it is recorded as either a charging or currency unit.

- Periodic Pulse Metering — For non-ISDN trunks

Periodic Pulse Metering accumulates pulses transmitted from the public network at periodic intervals during an outgoing call. At the end of the call, the number of pulses collected is the basis for determining charges.

Call-charge information helps you to account for the cost of outgoing calls without waiting for the next bill from your network provider. This information is especially important in countries where telephone bills are not itemized. You can also use this information to let employees know the cost of their telephone calls, encouraging them to save money on toll calls.

**Note:** This is unavailable in some countries. Please check with your Account Executive or local distributor for availability in your country.

## Call Detail Recording

Call Detail Recording (CDR) helps you manage call costs by letting you monitor and analyze call patterns and usage in your system.

### Call Detail Recording features

S8100 CDR includes the following capabilities:

- Distinguish voice from data on trunk calls
- Determine if a data call used a conversion resource, such as a modem pool
- Choose whether to record the vector directory number in the “Dialed Number” field of the CDR record, or record either the split or the agent extension in the same field
- Allow CDR records to be generated for internal calls (calls to and from a set of extensions, including data endpoints) so administered (a maximum of 500 extensions in large configurations)
- With Call Privacy, allow up to seven digits of the dialed number to be blanked from the CDR record
- Provide CDR call splitting, which allows incoming and outgoing calls to be split into separate call records in order to track calls that transferred to other internal parties

### Variable format records

S8100 provides many different selectable formats. This offers a flexible means of incorporating new fields in the call detail record as new switch features and new CDR devices become available. The variable format allows you to define a record in terms of its content (from a set of available data elements), the position of its fields, and the spacing between the fields. This method can be used to construct the 15-, 18-, and 24-word standard formats and custom formats.

If calls come in while the CDR link is down and the buffer is filled to maximum, S8100 gives you the following administrable call-record handling options:

- Block the calls with reorder
- Allow the calls to overwrite records
- Route the calls to an attendant with the option to proceed as a Non-Call Detail Recording call

### Call Detail Recording devices

There is no RS-232 interface provided by S8100 for LAN. Your CDR output records are stored in D:\Avaya Data\CDR\ in files Cas.in and Cdr.out.

See [Call Accounting Systems](#) (page 48) for a description of the available call accounting systems.

## Security

In addition to the toll-fraud detection options available with the Call Accounting Systems described in the previous section, S8100 includes many other security features, some of which are an integral part of the system design.

### Call Restrictions

By dialing an access code, administrators and attendants have the ability to restrict users from making or receiving certain types of calls. There are five restrictions:

- Outward — Users cannot place external calls.
- Station-to-station — Users cannot place or receive internal calls.
- Termination — Users cannot receive any calls (except priority calls).
- Toll — Users cannot place toll calls.
- Total — Users can neither place nor receive any calls.

# 11 Networking

The Avaya™ S8100 Media Server with the Avaya™ G600 or Avaya™ CMC1 Media Gateway provides powerful voice and data capabilities and connections to a variety of voice and data networks. S8100 builds on Avaya's established networking strengths to offer you network-management features, network interfaces, a variety of private-network configurations, and end-to-end Integrated Services Digital Network (ISDN) capabilities. Avaya's leadership in developing and supporting open international networking standards is also apparent in S8100's compatibility with the QSIG global standards.

**Note:** Some applications or products are unavailable in some countries. Please check with your local distributor for further information.

## Uniform Dial Plan

Uniform Dial Plan provides a common 4- or 5-digit dial plan that can be shared among a group of private-network switches. Interswitch and intraswitch dialing both require 4- or 5-digit dialing. This feature is used with either:

- An electronic tandem network (ETN)
- A main/satellite/tributary configuration and Distributed Communications Systems (DCS).

In addition, it can provide uniform 4- or 5-digit dialing between 2 or more private-switching systems without ETN, main, satellite, and tributary switches, or DCS.

With Uniform Dial Plan (UDP), a unique 4- or 5-digit number is assigned to each station in the network. A unique number (private-network location code plus extension) can be used at any location in the ETN to access that station. S8100 enhances the standard uniform dial plan with the unrestricted 5-digit uniform dial plan, which allows up to five digits to be parsed for call routing.

## Distributed Communication System — Integrated SDN and Non-Integrated SDN

For a multilocation company that requires several systems, DCS may be the answer. DCS is an arrangement of private-network switches, referred to as nodes. The maximum number of nodes that can be in a DCS complex varies from 20 to 63, depending on the particular configuration of switches. DCS nodes can be physically located in the same building, spread across a campus, or scattered across the country or around the world. Digital trunks interconnect the switches that serve the DCS complex. The links connecting nodes in a DCS network may also be provided via a Virtual Private Network (VPN).

The functions and features of DCS are made possible by the use of an advanced interprocessor data link connecting each switch, allowing call-processing information to be passed from one switch to another. The data link supplies selected feature transparency and efficient utilization of shared facilities.

Feature transparency means that features work the same from a user's perspective, whether the telephones involved are assigned to the same switch or to different switches. Users in a DCS can dial each other with four or five digits as if they were all on the same switch.

Here are some examples of feature transparency in a DCS:

- Leave Word Calling (LWC) allows you to press a button on your telephone and leave a standard “call me” message with your name and phone number. When your S8100 is linked with other switches in a DCS, you can call any employee in the DCS complex and press the LWC button to automatically leave a standard message.
- Calling-Party Name Display — If your telephone is equipped with a digital display, information about the person calling you is displayed before you pick up the receiver. With DCS you know who is calling and whether that person is in a nearby building or across the country.
- Centralized Messaging services for an entire DCS complex (subnetwork) may be coordinated by one system, depending on the traffic volumes and versions of the main and remote switches. This means that switches with smaller messaging requirements do not share a voice messaging system with another switch.

S8100 features DCS over ISDN-PRI with path replacement for optimizing trunks. Thus, when you transfer out of your Intuity AUDIX voice messaging system, for example, S8100 sets up a new path that optimizes system resources.

### Distributed Communications System and ISDN

DCS nodes are connected by digital trunks (for example, using DS1 or ISDN-PRI facilities). S8100 can send DCS messages over ISDN-PRI D channels. As a result, you are not limited to private or leased facilities between your various locations. You can also use public-network services. (See [Figure 7](#).)

The SDN supports every DCS transparency except the following:

- DCS attendant control of trunk group access
- DCS attendant direct trunk group selection
- DCS busy verification of terminals


All other capabilities and limitations associated with the DCS still apply.

INTUITY AUDIX Messaging Systems networked via DCS can also be supported over ISDN-PRI. (See [Chapter 4, INTUITY AUDIX Messaging System](#), for more information.)

## S8100 Media Server DCS networks

If your company has two or more sites with S8100 or other Avaya switches, you can network them using the DCS over ISDN-PRI feature (DCS+). This requires a system to use ISDN-PRI signaling. The network connections can be either ISDN-PRI or DS1 private-network dedicated facilities. [Figure 7](#) shows a network using ISDN-PRI signaling.

**Figure 7. A Network Using DCS with ISDN-PRI**

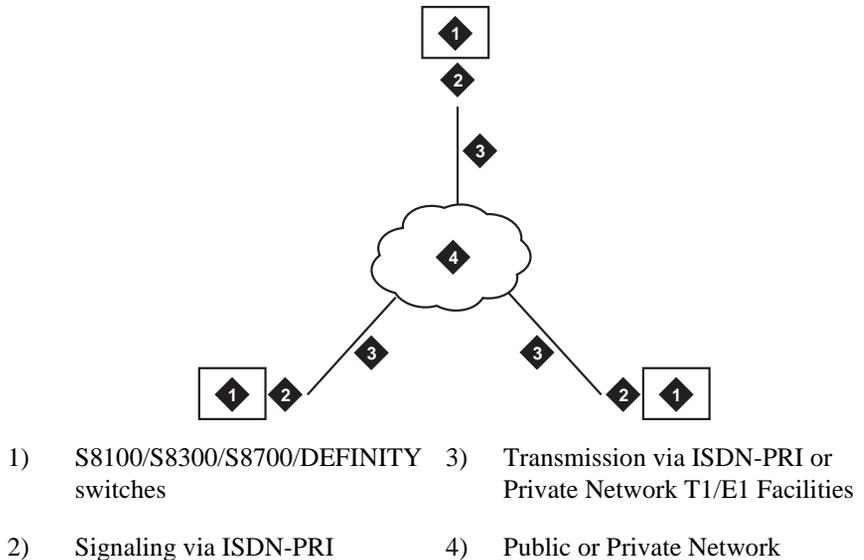

## QSIG global networking

S8100 is a pioneer in providing compatibility with the QSIG global networking protocol. This means that you can connect S8100 with other switches throughout the world. Avaya developed the QSIG Global Networking feature to comply with the QSIG standards developed by the European Computer Manufacturer's Association and the International Standardization Organization. It supports the ISDN-PRI connection from switch to switch as long as both switches support the same protocol.

Avaya's implementation of QSIG features the Name Identification supplementary service and the Call Forwarding and Call Transfer features. QSIG enables the system to move calls from their original paths to new paths that cost less or use resources more efficiently. New paths can be set up after a call has been transferred or after a call has been forwarded using the Diversion with Rerouting feature. S8100's implementation of QSIG also supports the ISO QSIG private network diversion supplementary service, as described in the QSIG standard.

## World-Class Routing

S8100 is a world-class system that meets the needs of global customers. One capability essential in meeting these needs is the ability for users to flexibly dial any location in the world, regardless of the dial plan used at that location. To fulfill this requirement, S8100 provides World-Class Routing.

World-Class Routing is a powerful enhancement to S8100's call-routing capabilities, linking several call-routing features to build a communications network capable of providing flexible call routing for any type of dialing plan while accommodating changes in both international and domestic dialing plans.

The following are key components of World-Class Routing:

- Digit Conversion converts a dialed number for public network number to a private network number and vice versa. Dialed numbers matching entries in the digit conversion tables are treated and converted. Converted calls can be routed via the most optimum route, resulting in reduced network charges and appropriate use of the private network.
- Toll Analysis compares a dialed number to entries in the system's list. Based on the results, calls may be restricted from completion.
- Automatic Route Selection (ARS) digit analysis compares a dialed public network number with entries in the system's tables, mapping the number to a selected public network routing pattern.
- Automatic Alternate Routing (AAR) digit analysis compares a dialed private network number with entries in the system's tables, mapping the number to a selected private network routing pattern.

World-Class Routing supports the ARS and AAR as separate features, but through generalized administration applicable to both features, provides both with the same routing abilities. In addition, there are a number of capabilities that enhance the flexibility of routing in supporting your domestic and/or global calling requirements.

For example, 18-digit routing allows S8100 to determine call routing by analyzing up to 18 digits with no restriction on the grouping or format of the digits, eliminating any assumptions about the use of a particular dialing plan.

International Direct Distance Dialed calls generally consist of an international access code, a country code, and a national number. Both codes may vary in length. S8100's support for International Direct Distance Dialed calls eliminates any restriction on the grouping and format of digits on ARS numbers. Call routing is determined by the digits and the length of the dialed number.

Multinational World-Class Automatic Alternate Routing allows the Automatic Alternate Routing number (Electronic Tandem Network number) to be any number of digits in length.

Digit conversion can be used to reroute numbers, initially dialed to use ARS, into AAR and vice versa. This utility can analyze a maximum of 18 digits. In this way, destinations in a customer's network can be called using the public network number. This feature can also be used to reroute certain Direct Distance Dialed destinations to specified alternate destinations (such as intercept, attendant, or another Direct Distance Dialed number).

## Network management features

S8100 has a variety of features that enable you to manage your network resources effectively. Here are just a few examples of S8100 features that can be used to manage your network:

- Time of Day Routing
- Automatic Route Selection (ARS)
- Automatic Alternate Routing (AAR)
- Additional Network Feature Path Replacement
- Subnetwork Trunking
- Generalized Route Selection
- Facility Restriction Level
- Bearer Capacity Class
- Remote Network Access
- Public Network Call Priority
- Authorization Codes

### Time of Day Routing

Time of Day Routing allows you to select the most economical routing of Automatic Route Selection and Automatic Alternate Routing calls based on the time of day and week a call is made.

With Time of Day Routing, your company can take advantage of lower calling rates during specific times. If your company has locations in different time zones, you can maximize the use of your public or private network facilities by utilizing those in the location that has the lowest calling rates at the particular time a call is made. You can also use this feature to change the routing patterns when an office is closed and to eliminate unauthorized calls. You can set up eight separate time of day charts to control routing at different times of the day.

### Automatic Route Selection

ARS routes public network calls on the most desirable (usually the most economical) trunking facilities available on your S8100 when the call destinations are accessible through your public network.

S8100 supports up to 254 routing patterns. Each routing pattern consists of up to 6 routing preferences (types of facilities) set up in the order you want them checked when a call is placed. Typically, the least expensive facility will be first on the list; the most expensive will be last.

If Generalized Route Selection is not being used when a call is made, the system selects a routing pattern based on the digits dialed. The system checks the routing preferences in that pattern in the order they were listed, and the first available facility is used to place the call. If a facility is not available, the call can be queued until a facility becomes available.

## Automatic Alternate Routing

AAR enables you to ensure that private network calls will be routed over the various trunking facilities available in your private network in the most effective manner possible. As with ARS, you set up various patterns for routing calls — in this case, with the private network. Depending on your S8100's configuration, you can have up to 254 routing patterns. Each pattern includes a primary preference — the most preferred and direct route — and 5 alternate preferences. If the primary preference in a pattern is unavailable, the system searches the alternate preferences in the specified order until it finds one available.

## Generalized Route Selection

Generalized Route Selection gives you the capability to not only select the optimal call routing based on the dialed number, but also to select the appropriate facility based on the type of call. Generalized Route Selection enhances ARS and AAR by incorporating additional parameters (such as the type of call) to be used in the decision of how a call is routed.

Different types of calls require the use of different types of facilities. For example, high-speed data calls must use digital facilities, whereas voice and voice-grade data calls can use either analog or digital facilities. S8100 uses Generalized Route Selection to differentiate between these and other types of calls and route them on the appropriate trunks. Based on the call types and available trunk facilities, voice and data calls may be routed over different trunk types or integrated on the same trunk group. S8100 also provides the capability to route calls based on the data format and the need for restricted or unrestricted facilities.

In order to select the appropriate trunking facility for a call, S8100 must know the type of call being made. In order to do this, each originating facility (such as a telephone or data module) has a bearer-capability class assigned. Some originating facilities, such as data modules, may have multiple bearer-capability classes. Each trunk group in the routing pattern is assigned a list of allowed bearer-capability classes. When a user makes a call, the system queries the originating facility for its bearer-capability class and then tries to route the call on a trunk group with a bearer-capability class that matches the bearer-capability class of the originating facility. If an exact match is not found, the system then tries to find a trunk group with a compatible bearer-capability class.

Since the system automatically chooses the right trunk based on the system administration, S8100's dial plan can be independent of the type of call being dialed. This flexibility makes life easier for your system users, who do not have to worry about dialing a different access number for different call types.

## Facility Restriction Level

Facility Restriction Levels are used to limit user calling privileges for incoming and outgoing calls. The Facility Restriction Level determines if a call attempt is permitted and which routes can be used or denied in the routing process. Eight levels of Facility Restriction Levels can be assigned to telephones, computers, and system management tools. S8100 does not require the Facility Restriction Level to be in an ascending order when administered in the patterns or preferences through system management.

When a call is attempted, the system compares the Facility Restriction Level of the telephone with the Facility Restriction Level of the trunk routes available to complete the call. If the Facility Restriction Level of the telephone is equal to or higher than the Facility Restriction Level of trunks, the call is completed; if it is lower, the call is blocked on that preference and compared to the Facility Restriction Level of the next route available. If the call fails to match the Facility Restriction Level on the available preferences, the call may queue for the first available and compatible trunk group (equal to or higher).

S8100 also provides a feature called Alternate Facility Restriction Levels that allows the attendant to temporarily change the Facility Restriction Levels on originating facilities to a different set of Facility Restriction Levels. It is used to grant users greater access to trunking facilities than is normally provided, such as when charges are lower during evening hours.

## Authorization codes

Authorization codes are used on particular calls to temporarily raise a telephone's Facility Restriction Level. This feature is useful for those who make calls from telephones other than their own or from outside the network. If a call you dial is blocked because the telephone's Facility Restriction Level is too low, you can enter your authorization code. If the Facility Restriction Level associated with the authorization code is equal to or higher than the Facility Restriction Level of the trunk facilities required to place the call, the call is then completed. Up to 5000 different authorization codes will be in effect for your system at any one time. Using S8100 Media Server's system management tools, you can assign authorization codes and change their associated Facility Restriction Level and network access permissions.

## Network interfaces and equipment

S8100 supports a variety of interfaces to voice and data networks. Trunks supply links between S8100, the public network, and other switches. DS1 interfaces offer high-speed digital connectivity between switches.

### Trunk group circuits

Trunks provide the communications links between S8100 and other switches, including central office switches and other premises switches. Trunks that perform the same function are grouped together and administered as trunk groups. Trunks interface with S8100 via port circuit packs. S8100's trunk group circuit types include the following:

**Local exchange trunks** Local exchange trunks connect S8100 to a central office. The following are some of the types available:

- Central office trunks, which connect S8100 to the local central office for incoming and outgoing calls
- Foreign exchange trunks, which connect S8100 to a central office other than the local one
- Wide Area Telecommunications Service trunks, which allow you to place long-distance outgoing voice-grade calls to telephones in defined service areas, priced according to distance in the service area, length of the call, time of day, and the day of the week
- 800-service trunks, which let your business pay the charges for inbound long-distance calls so that callers can reach you toll-free
- Direct Inward Dialing (DID) trunks, which connect S8100 to the local central office for incoming calls dialed directly to stations without attendant assistance
- Digital Service 1 (DS1) trunks, which can be used to provide ISDN-PRI local exchange trunk services. DS1 by itself can be used to provide local exchange trunk services

**Tie trunks** Tie trunks carry communications between S8100 and other switches in a private network. Several types of trunks can be used, depending on the type of private network you establish.

**Auxiliary trunks** Auxiliary trunks connect devices with the switch. Some of the features that are supported with this type of trunk are recorded announcements, telephone dictation service, malicious call trace, and loudspeaker paging.

- Miscellaneous trunks** Miscellaneous trunks perform functions that do not fit neatly into any of those already described:
- Release-link trunks are used between switch locations to provide Centralized Attendant Service (CAS).
  - Remote-access trunks provide off-premises users with access to S8100's features and networking.

## Digital interfaces

Avaya supports both T1 and E1 facilities. As industry standards around the world, T1 and E1 facilities provide the latest alternative to analog trunking.

- E1 interface** S8100 supports E1 connections. T1/E1 access and conversion allows simultaneous connection to both T1 (1.544 Mbps) and E1 (2.048 Mbps) facilities (using separate circuit packs).

- T1 interfaces** When planning your networking requirements, one of the options you should consider is multiplexing over Digital Services 1 (DS1) facilities. As the industry standard for interconnecting digital systems, DS1 is an economical alternative to analog trunking arrangements. Multiplexing up to 24 digitized voice/data communications paths onto a single T1 carrier or other high-speed digital facility (such as fibre or microwave) can reduce your network trunking and equipment costs.

Used to connect switches to the public network or to other switches in a private network, DS1 also delivers high-speed, end-to-end digital connectivity. Voice and data calls are completed at transmission speeds of up to 64 Kbps.

S8100 offers several options in supporting the DS1 interface. The options include support for voice-grade DS1, alternate voice/data, and Digital Multiplexed Interface. The voice-grade DS1 interface is a T1 D4 channel-bank-compatible interface.

## ISDN

S8100 provides complete Integrated Services Digital Network (ISDN) support. ISDN eliminates the need for multiple, separate access arrangements for voice, data, facsimile, and video services and networks. Using inexpensive twisted copper, ISDN can deliver voice, data, and video services in digital format.

ISDN is a global access standard established by the Consultative Committee for International Telephone and Telegraph designed to help you move and manage information with unprecedented ease and productivity — anywhere in the world. ISDN uses a layered protocol that conforms to layers one, two, and three (physical, link, and network layers) of the 7-layer Open Systems Interconnect Reference Model of the International Standards Organization.

S8100 supports the ISDN-PRI, which is used for connecting premises equipment such as switches to the network and acts as a powerful interface between intelligent equipment such as switches and computers. However, trunk-side BRI is supported in countries that support the Euro-ISDN (ETSI) standards.

## Centralized Attendant Service

S8100 owners who have more than one switch location can benefit greatly by using the Centralized Attendant Service (CAS) feature. CAS reduces the number of required attendants, and, in most cases, all those attendants can be located at one of the switch locations, called “main.” Switches at the other locations, called “branches,” redirect their calls to the CAS main. Thus, a company can have a centralized attendant group at the headquarters office and can handle calls from there for the branch offices.

All locations in a CAS arrangement have a listed directory number. Calls to a branch listed directory number terminate at the main location, even if the branch location has an attendant. These listed directory number calls are routed to the centralized attendant group over trunk circuits called release-link trunks or over QSIG trunks. These release-link trunks are used only for centralized attendant calls and signaling.

After a call is processed by the centralized attendant, it can be extended back to the branch location. The release-link trunk is then dropped and made available for other calls to the centralized attendant.

If an S8100 is a node within a DCS and CAS is provided, a centralized attendant can do the following:

- Control access to specific trunks at other nodes
- Directly access specific trunks at another location
- Place test calls to telephones and trunk groups at other nodes
- Receive a visual warning that all trunks in a remote trunk group are busy or that the number of busy trunks in a remote group has reached a specified level

This feature ensures that all calls directed to an attendant at your company are handled efficiently.

## Main/Satellite/Tributary

If you have modest network requirements, a main/satellite/tributary configuration is an attractive possibility for private networking. In this configuration, one S8100 location is the main, and remote switches are satellites or tributaries. Attendant positions and public network facilities are usually concentrated at the main.

All calls to or from a satellite pass through the switch at the main. The system appears to be a single switch with one listed directory number. A uniform dial plan provides a common 4-digit or 5-digit dial plan for a main/satellite configuration.

A tributary is similar to a satellite, but it has one or more attendant positions and its own listed directory number. Calls to its listed directory number go directly to the tributary.

The switches in a main/satellite/tributary network are connected by tie trunks. Trunks and switching facilities can be added as requirements grow.

An important S8100 networking feature is Main/Satellite Extended Trunk Access. Extended Trunk Access allows dialed digits that are undefined at a satellite or tributary switch to be routed over a trunk group to a main switch for interpretation. This flexibility means changes to the network numbering plan do not have to be propagated to all switches. Extended Trunk Access improves your control and reduces administration costs by making trunk networks considerably easier to maintain.

## Electronic Tandem Network

If your company requires a medium-to-large network spanning a large geographic area, nationwide or even worldwide, Electronic Tandem Network (ETN) is the answer. An ETN is a wide-area private network that tandems calls through one or more switches to route the calls to their destinations.

An ETN consists of tandem switches, inter-tandem tie trunks that interconnect them, access or bypass trunks from tandem switches to main switches, and the software and equipment to support call routing over the trunking facilities. Different ETN locations are connected via analog or digital tie trunks. For example, a DS1 interface can act as a high-speed (1.544 Mbps) digital backbone for voice and data communications between ETN locations.

An ETN can be configured hierarchically. An ETN can connect individual switches; it can also connect other private networks (such as Main/Satellite/Tributary networks) together.

Within an ETN, each location is identified by a unique private network location code, similar to the public network office codes that exist within an area code. When accessing the ETN, a user dials a feature access code for the Automatic Alternate Routing feature plus the 7-digit number, for a total of eight digits.



# 12 SNMP Native Agent Software

The Avaya™ S8100 Media Server with the Avaya™ G600 or Avaya™ CMC1 Media Gateway includes an SNMP (Simple Network Management Protocol) Native Agent. Native Agent provides an SNMP interface to the system's alarm and error tables, select performance measurements, and select configuration data. Native Agent also supports SNMP traps for S8100 alarms and restarts, Intuity AUDIX alarms, and Windows 2000 events.

Avaya Fault and Performance Manager, Avaya's SNMP-based fault and performance management product, also supports S8100. Avaya Fault and Performance Manager runs on Windows 2000 and UNIX workstations, and collects fault, performance, and configuration data from switches via the Avaya Proxy Agent. Fault and Performance Manager receives S8100 data by sending SNMP requests to S8100's SNMP Native Agent.

Users can integrate Fault and Performance Manager with a Network Management System (NMS), either HP OpenView or Tivoli NetView. This allows users to manage their S8100 Media Servers and data networks from a central location. The NMS catches traps that Native Agents send, colors the S8100 icons according to the trap's severity, and records the traps in the NMS trap log. A network manager can use the NMS to copy and move the icons created for different S8100 devices to specific OpenView or NetView maps of their choosing. The network manager can then look at the S8100 data that the Native Agent provides by using the NMS's MIB browser.

## Agent Administration

All SNMP Agent Administration can be performed from the command line and Web server. An administrator specifies the community string that Agent uses for authentication. However, Agent must be restarted for community string administration changes to take effect. In addition, an administrator can specify the MIB access permissions and whether traps can be received for up to 50 different network managers (IP addresses). Again, Agent must be restarted for network manager administration changes to take effect.

## S8100 Media Server Data

The S8100 SNMP Native Agent provides an MIB interface to all the configuration and fault data that the Avaya Proxy Agent provides for Avaya servers (except, of course, for data that does not apply to S8100). The supported data is as follows:

### Via the SNMP MIB

Agent provides S8100 version information for the active switch processing element (including memory resident software version, update identifier, and update state). It also supports retrieval of S8100 alarms, errors, and restarts.

## Via the SNMP

Agent allows retrieval of S8100 status data, system time, trunk group information, board data, DS1 board data, ATM board data, port data, station data, and data modules. It provides retrieval of information regarding trunk outage data, lightly-used trunks, long and short trunk holding times, and trunk group performance measurements. In addition, it provides tables of the S8100 Media Server's external devices, of the trunks in a trunk group, tables allowing access to the contents of the S8100 Media Server's bulletin board, and tables of the S8100 Media Server's signaling groups.

## SNMP Traps

The S8100 Media Server agent generates SNMP traps for S8100 alarms and restarts. Per requests by the Avaya Proxy Agent customers, it also generates traps for resolved alarms. The same traps are generated for all alarms. SNMP traps are sent for each new S8100 alarm, when S8100 alarms are resolved, and for S8100 restarts.

The agent will generate SNMP traps for Intuity AUDIX alarms that are sent to the Global Alarm Monitor (GAM), and send SNMP traps for Windows 2000 events that are sent to the GAM.

For Intuity AUDIX alarm traps, the SNMP Native Agent also implements the portions of the CornerStone MIB that apply to alarms. For S8100 Media Server data, S8100 uses a new MIB, which is a modified subset of the Avaya Proxy Agent MIB.

## S8100 Media Server Co-Resident Modules

The SNMP agent uses the S8100 co-resident modules as follows:

### GAM

The SNMP agent will not send alarms to the GAM for INADS alarm reporting, but will receive alarm notifications from the GAM. The SNMP agent generates TCP/IP alarm notifications (traps) based on alarm notifications received from the GAM.

### WatchDog

The SNMP agent is registered with the S8100 Media Server WatchDog process. This allows it to start automatically when the operating system is booted. An administrator will also be able to start and stop the native agent manually. The SNMP native agent will not subscribe to the S8100 Media Server WatchDog "heartbeat" (handshake) service.

## License Server

The SNMP agent will use the license server.

## Avaya Site Administration

The SNMP Native Agent does not require Avaya Site Administration. Administration of SNMP Native Agent is via GAS commands.

## Logins and the LAC

The LAC is modified to provide a special interface for the SNMP. This interface allows the SNMP agent to access S8100 at a craft level without knowing the password for this login. The interface will be restricted to local machine instances of SNMP only.



This appendix provides a list of the features of the Avaya™ S8100 Media Server with the Avaya™ G600 or Avaya™ CMC1 Media Gateways arranged in the following categories:

- Automatic Routing Features
- Basic Features
- Call Center Features
- Private Networking Features
- Trunk Group Features

This appendix lists the S8100 capabilities available in the U.S. and most other countries. *Some of the listed features are optional and some may not be available in specific countries.* Please check with your local Avaya representative for further information about system features and what is available in your country.

*Administrator's Guide for Avaya™ Communication Manager (555-233-506)* describes each feature in detail and provides complete implementation and administration information. Some features are systems of their own and have their own documentation, such as Call Detail Recording, INTUITY AUDIX Messaging System, and Call Management System. See your local distributor for more information on each of these features.

## Automatic routing features

S8100 provides a variety of automatic routing features for public and private networks. Automatic Alternate Routing (AAR) and Automatic Route Selection (ARS) are the foundation for these automatic routing features. They route calls based on the preferred (normally the least expensive) route available at the time the call is placed. Generally, AAR routes calls over a private network and ARS routes calls using the public network numbering plan. However, both AAR and ARS support public and private networks. You can use the other features listed in this section when you use AAR and ARS.

- Automatic Alternate Routing (AAR)
- Automatic Route Selection (ARS)
- AAR/ARS Overlap Sending
- AAR/ARS Partitioning
- Alternate Facility Restriction Levels
- Facility Restriction Levels and Traveling Class Marks
- Generalized Route Selection
- Subnet Trunking
- Time of Day Routing

## Basic features

The following features are supported with S8100:

- Abbreviated Dialing
- Administered Connections
- Administrable Language Displays
- Administration Change Notification
- Administration Without Hardware
- Alphanumeric Dialing
- Alternate Operations Support System Alarm Number
- Answer Detection
- Attendant Auto-Manual Splitting
- Attendant Backup Alerting
- Attendant Call Waiting
- Attendant Calling of Inward Restricted Stations
- Attendant Console
- Attendant Control of Trunk Group Access
- Attendant Crisis Alert
- Attendant Direct Extension Selection With Busy Lamp Field
- Attendant Direct Trunk Group Selection
- Attendant Display
- Attendant Intrusion (Call Offer)
- Attendant Override of Diversion Features
- Attendant Priority Queue
- Attendant Recall
- Attendant Release Loop Operation
- Attendant Serial Calling
- Attendant Split Swap
- Audible Message Waiting
- Audio Information Exchange Interface
- Authorization Codes
- Auto Start and Don't Split
- Automatic Callback

- Automatic Call Timer
- Automatic Circuit Assurance
- Automatic Exclusion
- Automatic Incoming Call Display
- Automatic Route Selection/Automatic Alternate Routing Shortcut Dialing
- Automatic Transmission Measurement System
- Block Collect Call
- Bridged Call Appearance — Multi-Appearance Telephone
- Bridged Call Appearance — Single-Line Telephone
- Bulletin Board
- Busy Verification of Terminals and Trunks
- Call Charge Information
- Call Coverage
- Call Detail Recording
- Call Forwarding
- Call Park
- Call Pickup
- Call Waiting Termination
- Class of Restriction
- Class of Service
- Code Calling Access
- Conference — Attendant
- Conference — Terminal
- Consult
- Controlled Toll Restriction
- Coverage Callback
- Coverage Incoming Call Identification
- Crisis Alert to a Digital Station
- Customer-Provided Equipment Alarm
- Data Call Setup
- Data Hot Line
- Data Privacy
- Data Restriction
- Default Dialing

- Demand Print
- Dial Access to Attendant
- Dial Plan
- Dialed Number Identification Service
- Distinctive Ringing
- Dual DCP I-Channels
- Easy Beyond Today
- Emergency Access to the Attendant
- Enhanced Abbreviated Dialing
- Enhanced Voice Terminal Display
- Extended User Administration of Redirected Calls
- External Device Alarming
- Facility Busy Indication
- Facility Test Calls
- Fiber Link Administration
- Go to Cover
- Group Listen
- Group Paging
- Hold
- Hold — Automatic
- Hunt Groups
- Individual Attendant Access
- Integrated Directory
- Integrated Services Digital Network — Basic Rate Interface (ISDN-BRI)
- Intercept Treatment
- Intercom — Automatic
- Intercom — Dial
- Internal Automatic Answer
- Last Number Redial
- Leave Word Calling
- Line Lockout
- Listed Directory Number
- Loudspeaker Paging Access

- Manual Message Waiting
- Manual Originating Line Service
- Manual signaling
- Meet-Me Conferencing
- Misoperation Handling
- Modem Pooling
- Multi-Appearance Preselection and Preference
- Music-on-Hold Access
- Night Service
- Numeric Terminal Display
- PC/PBX Connection
- Personal Station Access
- Personalized Ringing
- Power Failure Transfer (Emergency Transfer)
- Priority Calling
- Privacy — Attendant Lockout
- Privacy — Manual Exclusion
- Public Network Call Priority
- Pull Transfer
- Recall signaling
- Recorded Announcements
- Recent Change History
- Recorded Announcement
- Recorded Telephone Dictation Access
- Remote Access
- Restriction — Controlled
- Ringback Queuing
- Ringer Cutoff
- Ringing — Abbreviated and Delayed
- Security Violation Notification
- Send All Calls
- Station Hunting
- Station Security Codes
- Station Used As Virtual Extension

- Station User Administration
- Telephone Self Administration
- Temporary Bridged Appearance
- Tenant Partitioning
- Terminal Translation Initialization
- Terminating Extension Group
- Timed Reminder and Attendant Timers
- Transfer
- Transfer — Outgoing Trunk to Outgoing Trunk
- Translation Copy Protection
- Trunk Flash
- Trunk Group Busy/Warning Indicators to Attendant
- Trunk Identification By Attendant
- Trunk-to-Trunk Transfer
- Visually Impaired Attendant Service
- Voice Message Retrieval
- Voice Terminal Alerting Options
- Voice Terminal Display
- Whisper Page
- World Class Tone Detection
- World Class Tone Generation

## Call Center features

S8100 offers the following features designed to help you set up and maintain a modern Call Center:

- Abandoned Call Search
- Add/Remove Skills
- Agent Call Handling
- Auto-Available Split
- Automatic Call Distribution
- Basic Call Management System
- BCMS-VU (additional cost)
- Best Services Routing (Queue to Best)

- Call Prompting
- Call Vectoring
- Calling Party/Billing Number
- CentreVu Advocate
- CentreVu CT Server (additional cost)
- CentreVu Virtual Routing
- Direct Agent Announcement
- Duplicate Agent
- Expert Agent Selection
- Flexible Billing
- Holiday Vectoring
- Inbound Call Management
- Intraflow and Interflow
- Enhanced Look-Ahead Interflow
- Malicious Call Trace
- Multimedia Call Handling
- Multiple Call Handling
- Queue Status Indications
- Reason Codes
- Redirection on No Answer
- Remote Agent Logout
- Service Observing
- Universal Call ID
- VDN in a Coverage Path
- VDN of Origin Announcement
- Voice Response Integration
- VuStats

## Private networking features

The great expandability of S8100 makes it a logical choice for setting up private networks. Consequently, the system includes many private networking features:

- Centralized Attendant Service
- Distributed Communications System
- DCS Alphanumeric Display for Terminals
- DCS Attendant Control of Trunk Group Access
- DCS Attendant Display
- DCS Automatic Callback
- DCS Automatic Circuit Assurance
- DCS Busy Verification of Terminals and Trunks
- DCS Call Coverage
- DCS Call Forwarding
- DCS Call Waiting
- DCS Distinctive Ringing
- DCS Leave Word Calling
- DCS Multiappearance Conference/ Transfer
- DCS Over ISDN-PRI D-channel
- DCS Trunk Group Busy/Warning Indication
- DCS With Reroute
- Enhanced DCS
- Extended Trunk Access
- Extension Number Portability
- Inter-PBX Attendant Calls
- Node Number Routing
- Private Network Access
- QSIG
- QSIG Call Completion
- QSIG Call Forwarding (Diversion)
- QSIG Call Independent Signaling Connections
- QSIG Call Transfer
- QSIG DCS Interworking - Called Number ID
- QSIG Message Waiting Indication (MWI)
- QSIG Name and Number Identification

- QSIG Path Replacement With Replacement
- QSIG Value- Called Number ID
- Transit Counter
- Uniform Dial Plan
- User to User Information over Public Network

## Trunk group features

S8100 offers an array of features for managing trunk groups efficiently:

- ATM-CES Trunks
- ATM Trunks
- Brazil — R2 MFC Backwards Signal
- Call-by-Call Service Selection
- Caller ID on Analog Trunks
- CAMA - E911 Trunks
- DS1 Trunk Service (T1 and E1)
- Digital Multiplexed Interface
- Facility and Non-Facility Associated Signaling
- IP Trunks
- ISDN — BRI and PRI
- Wideband Switching



---

## Numerics

- 4600-series IP telephones, [34](#), [89](#)
- 6400-series DCP telephones, [35](#)
- 6400-series digital telephones, [35](#)
- 800-service trunks, [112](#)
- 8400-series digital telephones, [37](#)

---

## A

- accessing Intuity AUDIX administration, [52](#)
- adjuncts
  - alerts, [47](#)
  - audio paging, [47](#)
  - call accounting systems, [48](#)
  - delayed announcement systems, [46](#)
  - external speakerphones, [47](#)
  - headsets, [46](#)
  - Magic On Hold, [46](#)
  - Magic On Hold Express, [46](#)
  - on hold systems, [46](#)
  - paging, [47](#)
  - power systems, [45](#)
  - professional announcement recordings, [46](#)
  - sensors, [47](#)
  - visual paging, [47](#)
- administration, [98](#)
- Administration Without Hardware, [98](#)
- Advice of Charge, [102](#)
- alerts, [47](#)
- Alternate Facility Restriction Level, [111](#)
- announcement recordings, [46](#)
- announcement systems, [46](#)
- announcements, Intuity AUDIX, [56](#)
- Application Starter Packages
  - DSA, [24](#)
  - System Administration, [24](#)
- ASAI and Computer Telephony Adjunct links, [81](#)
- Attendant Position reports, [100](#)
- Attendant Vectoring, [69](#)
- audio paging, [47](#)
- audioconferencing systems, [41](#)
- authorization codes, [110](#), [111](#)

- Automated Attendant, [63](#)
- Automatic Alternate Routing
  - description, [110](#)
  - Multinational World Class, [108](#)
  - World Class Routing, [108](#)
- Automatic Available hunt groups, [67](#)
- Automatic Call Distribution (ACD)
  - Automatic Available hunt groups, [67](#)
  - Call Center, [66](#)
  - Dialed-Number Identification Service, [67](#)
  - hunt groups, [67](#)
  - Interflow, [67](#)
  - Malicious Call Trace (MCT), [67](#)
  - Queue Status, [67](#)
  - queuing, [67](#)
  - redirection of hunt group calls, [67](#)
  - Redirection on No Answer, [68](#)
  - Station Hunting, [68](#)
- Automatic Route Selection
  - description, [109](#)
  - Generalized Route Selection, [109](#)
  - World Class Routing, [108](#)
- Automatic Routing features, [121](#)
- Automatic Station Relocation, [98](#)
- auxiliary trunks, [112](#)
- Avaya CTI server, [81](#)
- Avaya FAX Messaging, [62](#)
- Avaya FreeWorks Solutions, [83](#)

---

## B

- Basic Call Management System, [68](#)
  - Call Center, [68](#)
  - reports, [68](#)
- BCMS Vu, [73](#)
- Bearer Capability Class
  - description, [110](#)
  - requirements, [110](#)
- Bulletin Board, [63](#)

## C

- Call Accounting, 23
- call accounting systems, 48
  - eCAS, 48
  - eCAS Lite, 49
  - Infotel for Windows Lodging, 49
  - INTUITY Call Accounting, 49
  - Quantum Series, 49
- Call Answer, 56
- Call Answering for Nonresident Subscribers, telecommuting, 93
- Call Center
  - Attendant Vectoring, 69
  - Automatic Call Distribution (ACD), 66
  - Basic Call Management System, 68
  - BCMS Vu, 73
  - Call Center Basic, 69
  - Call Center Deluxe, 70
  - Call Center Elite, 70
  - CentreVu Advocate, 72
  - CentreVu Call Management System, 75
  - CentreVu Explorer II, 77
  - CentreVu Supervisor, 76
  - CentreVu Virtual Routing, 71
  - CentreVu Visual Vectors, 78
  - Drop-In Solutions, 79
  - features, 126
  - IP600 functionality, 23
  - routing, 65
- Call Charge information, 102
- Call Coverage
  - call redirection, 67
- Call Detail Recording, 103
- Call Forwarding All Calls, Interflow, 67
- Call Forwarding Off-Net, telecommuting, 91
- call management systems
  - Attendant Vectoring, 69
  - CentreVu Call Management System, 75
  - CentreVu Explorer II, 77
  - CentreVu Supervisor, 76
  - CentreVu Visual Vectors, 78
- call redirection
  - Call Coverage, 67
  - Interflow, 67
  - Intraflow, 67
- call restrictions, 104
- Calling-Party Name Display, 106
- CallMaster digital telephones, 67
- CE marks, 4
- central office trunks, 112
- Centralized Attendant Service, 114
- centralized messaging, 106
- CentreVu Advocate, 72
- CentreVu Call Management System, 75
- CentreVu Compact Call Center Drop-In Solutions, 79
- CentreVu Explorer II, 77
- CentreVu Supervisor, 76
- CentreVu Virtual Routing, 71
- CentreVu Visual Vectors, 78
- Class of Restriction
  - reports, 99
- Class of Service
  - reports, 99
- Compact Call Center Drop-In Solutions, 79
- Compact Modular Cabinets
  - description, 26
- Computer Telephony Integration Solutions
  - FastCall, 82
  - Intuition, 82
  - Server-Based Solutions, 81
  - third-party applications, 82
- configurations
  - main/satellite/tributary, 114
- console solutions, 33, 117
- CONVERSANT
  - voice response software, 65
- cordless telephones, 83
- co-resident DEFINITY LAN Gateway (DLG), 81
- CTI links, 81

## D

- DEFINITY Extender, 93
- DEFINITY LAN Gateway (DLG), 81
- DEFINITY Wireless Business System
  - R1 - PWT, 85
- delayed announcement systems, 46
- desktop solutions, 33, 117
- Dialed-Number Identification Service
  - ACD, 67
- Digit Conversion, 108
- digital interfaces, 113
- Digital Networking
  - Intuity AUDIX, 58
- Digital Service 1 trunks, 112
- Digital Services 1 (DS1) interface
  - DEFINITY ECS support, 113
  - multiplexing, 113
- Direct Inward Dialing trunks, 112
- distributed communications system (DCS)
  - feature transparency, 106
  - ISDN, 106
  - networks, 107
  - nodes, 106

documentation  
 conventions, 12  
 using, 11  
 Drop-In Solutions, 79  
 DS1 interface, 113

---

## E

E1 interfaces, 113  
 EC500 mobility communications solution, 86  
 electromagnetic compatibility standards, 3  
 Electronic Tandem Network, 115  
 equipment  
 network, 112  
 Extended User Administration of Redirected Calls  
 Telecommuting Access, 91  
 external speakerphones, 47

---

## F

Facility Restriction Level, 111  
 authorization codes, 111  
 description, 111  
 FastCall, 82  
 FAX Messaging, 62  
 feature transparency  
 distributed communications system (DCS), 106  
 features  
 Alternate Facility Restriction Level, 111  
 basic, 122  
 Call Center, 126  
 Centralized Attendant Service, 114  
 Intuity AUDIX, 55  
 Intuity AUDIX telecommuting, 93  
 Network Management, 109  
 networking, 128  
 supported by S8100/G600/CMC1, 121  
 telecommuting, 91  
 trunk group, 129  
 foreign exchange trunks, 112

---

## G

Generalized Route Selection  
 Automatic Route Selection, 109  
 description, 110  
 generating reports, 99

---

## H

hardware  
 combo board, 26  
 TN2314 circuit pack, 26  
 headsets, 46  
 historical reports, 68  
 hunt groups  
 Automatic Available, 67  
 interflow, 67  
 overflow, 67  
 queuing, 67  
 redirection of ACD calls, 67

---

## I

interfaces  
 digital, 113  
 EI, 113  
 network, 112  
 T1, 113  
 Interflow  
 ACD hunt groups, 67  
 Call Forwarding All Calls, 67  
 international  
 availability of Mobility features, 83  
 international direct distance dialed calls, 108  
 Intraflow  
 Call Coverage paths, 67  
 redirection of ACD hunt group calls, 67  
 Intuition, 82  
 Intuity AUDIX  
 administration, accessing, 52  
 announcements, 56  
 Call Answer, 56  
 Digital Networking, 58  
 features, 55  
 mailboxes, 57  
 TCP/IP, 58  
 telecommuting features, 93  
 voice messaging, 55  
 voice messaging languages, 56  
 Intuity AUDIX Messaging, 51  
 IP agent, 89  
 IP Softphones, 35, 88  
 IP Solutions  
 Softphones, 88  
 IP telephones, 89  
 IP Telephony, 87  
 ISDN, 113  
 capabilities and features, 113  
 DCS, 106

## L

Leave Word Calling, [106](#)  
 local exchange trunks, [112](#)

## M

Magic On Hold, [46](#)  
 Magic On Hold Express, [46](#)  
 main/satellite/tributary configurations, [114](#)  
 Malicious Call Trace (MCT), ACD, [67](#)  
 measurements  
   performance, [100](#)  
 Mobility Solutions  
   description, [83](#)  
   long range, [85](#)  
   medium range, [83](#)  
 multiline digital cordless business telephone, [83](#)  
 Multinational World Class Automatic Alternate  
   Routing, [108](#)  
 Multiple Personal Greetings, telecommuting, [93](#)  
 multiplexing, DS1 interface, [113](#)

## N

network  
   equipment, [112](#)  
   interfaces, [112](#)  
   management, [109](#)  
 Network Management features, [109](#)  
 networking features, [128](#)  
 networking solutions, [105](#)

## O

Outcalling, telecommuting, [93](#)

## P

paging, [47](#)  
 performance measurements, [100](#)  
 Periodic Pulse Metering, [102](#)  
 Personal Station Access, telecommuting, [91](#)  
 Pipeline 15, [92](#)  
 Portless administration, [98](#)

power systems, [45](#)  
 Priority Outcalling, telecommuting, [93](#)  
 private networking features, [128](#)  
 professional announcement recordings, [46](#)

## Q

QSIG Global Networking, [107](#)  
 Queue-Status, ACD, [67](#)  
 queuing  
   ACD, [67](#)

## R

real-time reports, [68](#)  
 redirection of calls  
   Interflow, [67](#)  
   Intraflow, [67](#)  
 Redirection on No Answer, ACD, [68](#)  
 release-link trunks, [113](#)  
 reliability, [30](#)  
 remote access  
   telecommuting, [91](#)  
   trunks, [113](#)  
 Remote Call Coverage, telecommuting, [91](#)  
 reporting, [99](#)  
 reports  
   Attendant Position, [100](#)  
   Basic Call Management System, [68](#)  
   Class of Restriction, [99](#)  
   Class of Service, [99](#)  
   historical, [68](#)  
   real-time, [68](#)  
   Security Violations, [100](#)  
   Site Data, [99](#)  
   Tandem Traffic, [100](#)  
   Traffic Summary, [100](#)  
 Reports Generator, [101](#)  
 road warrior, [88](#)  
 routing  
   Automatic Alternate Routing, [110](#)  
   Automatic Route Selection, [109](#)  
   Call Center calls, [65](#)  
   Generalized Route Selection, [110](#)  
   Time of Day, [109](#)

## S

S8100/G600/CMC1  
 backup/restore, 23  
 capacities—IMAPI sessions, 24  
 capacities—Intuity AUDIX, 24  
 extended FAX addresses, 24  
 external messaging adjuncts, 24  
 S8100/G600/CMC1 functionality, 18  
 security, 12, 104  
 Security Violation Notification, 104  
 Security Violations reports, 100  
 sensors, 47  
 Server-Based Solutions, 81  
 Site Data  
   reports, 99  
 SNMP, 117  
 SNMP Native Agent Software, 117  
 software  
   CONVERSANT voice response, 65  
 Software Defined Network (SDN), DCS features not supported, 106  
 speakerphones, 83  
   external, 47  
 standards  
   electromagnetic compatibility, 3  
 Station Hunting, ACD, 68  
 Station Security Codes, telecommuting, 92  
 surge protectors, 45  
 Switch features, 65  
 System Administration, 24  
 system administration, 95

## T

T1 interfaces, 113  
 Tandem Traffic reports, 100  
 telecommuter, 88  
 telecommuting, 91  
   Call Answering for Nonresident Subscriber, 93  
   Call Forwarding Off-Net, 91  
   DEFINITY Extender, 93  
   Extended User Administration of Redirected Calls, 91  
   features, 91  
   Intuity AUDIX features, 93  
   Multiple Personal Greetings, 93  
   Outcalling, 93  
   Personal Station Access, 91  
   Pipeline 15, 92  
   Priority Outcalling, 93  
   Remote Call Coverage, 91  
   Station Security Codes, 92

telecommuting/virtual office, 91  
 telephones  
   4600 series, 34  
   6400 series, 35  
   6400 series DCP, 35  
   8400 series, 37  
   CallMaster digital, 67  
   cordless, 83  
   multiline digital cordless business, 83  
   speakerphones, 83  
   wireless, 84  
 terminal power supplies, 45  
 Terminal Translation Initialization, 98  
 tie trunks, 112  
 Time of Day Routing, 109  
 TN2302AP IP media processor, 88  
 TN2314 circuit packs  
   contents of, 26  
 Toll Analysis, 108  
 Traffic Summary reports, 100  
 Transmission Control Program/Internet Protocol (TCP/IP)  
   Intuity AUDIX, 58  
 TransTalk 9000, 83  
 trunk group circuits, description, 112  
 trunk group features, 129  
 trunking facilities, selecting, 110  
 trunks  
   800-service, 112  
   auxiliary, 112  
   central office, 112  
   Direct Inward Dialing, 112  
   DS1, 112  
   foreign exchange, 112  
   local exchange, 112  
   miscellaneous, 113  
   release-link, 113  
   remote access, 113  
   tie, 112  
   Wide Area Telecommunications Service, 112

## U

Uniform Dial Plan, 105  
 uninterruptible power systems (UPS), 45

---

**V**

- virtual office, [91](#)
- Virtual Office Solutions, [91](#)
- visual paging, [47](#)
- voice messaging
  - Intuity AUDIX, [55](#)

---

**W**

- Web Browser
  - access, [24](#)
- Wide Area Telecommunications Service trunks, [112](#)
- wireless
  - Solutions, [83](#)
  - telephones, features, [84](#)
  - X-Station Mobility, [40](#)
- World Class Routing, [108](#)

---

**X**

- X-Station Mobility, [40](#)