



# LG Intuition Power Button Replacement

This guide will replace the power button in your LG Intuition.

Written By: Thomas Morrissey



## INTRODUCTION

If your power button is not responding to pressing or is not turning on the device, use this guide to replace your power button.

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Battery




- Turn the device so the two bottom screws are shown.

## Step 2



- Remove the two 7mm screws holding the back panel of the phone using the P5 bit and magnetic driver.

## Step 3

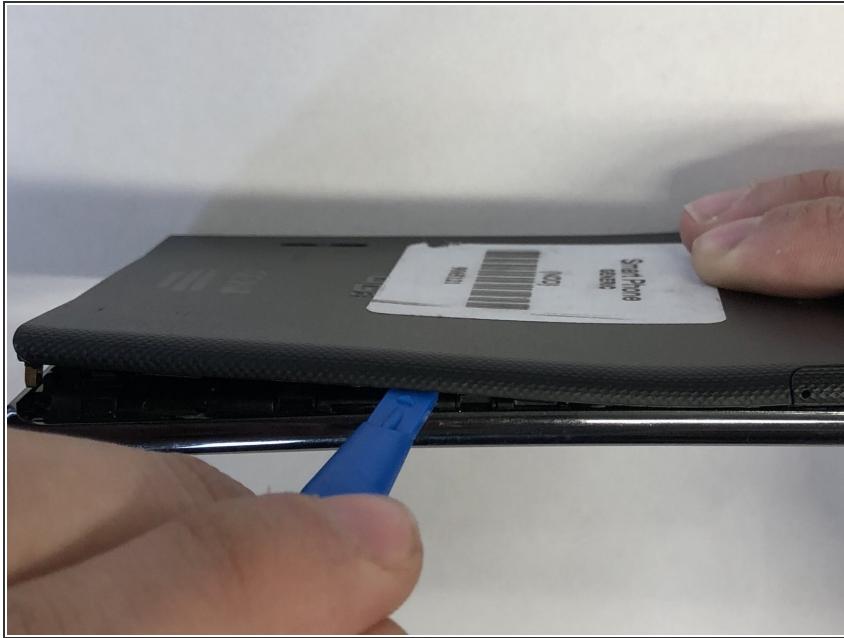


- Carefully use the plastic opening tool to pry the back panel of the phone from the front screen. This will expose the battery and other parts.

## Step 4



- Use the Phillips #0 screwdriver to remove the 5mm screw holding the metal bracket that protects the battery's ribbon cable.

## Step 5

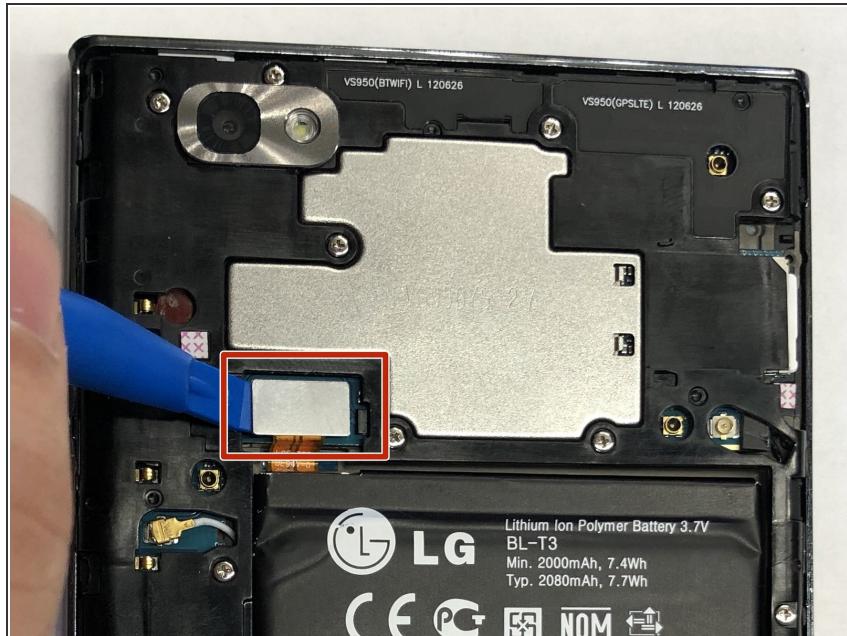

- Carefully use the plastic opening tool to pry the ribbon cable connecting the battery to the motherboard of the phone.

## Step 6



- Gently raise the battery from its compartment.

## Step 7 — Plastic Motherboard Shield




- Remove the thirteen 5mm screws holding the plastic shield covering the motherboard using the Phillips #00 screwdriver.

## Step 8




- Carefully use the plastic opening tool to pry the plastic shield from the motherboard. This will expose the motherboard and ribbon cables for each component.

## Step 9 — Camera

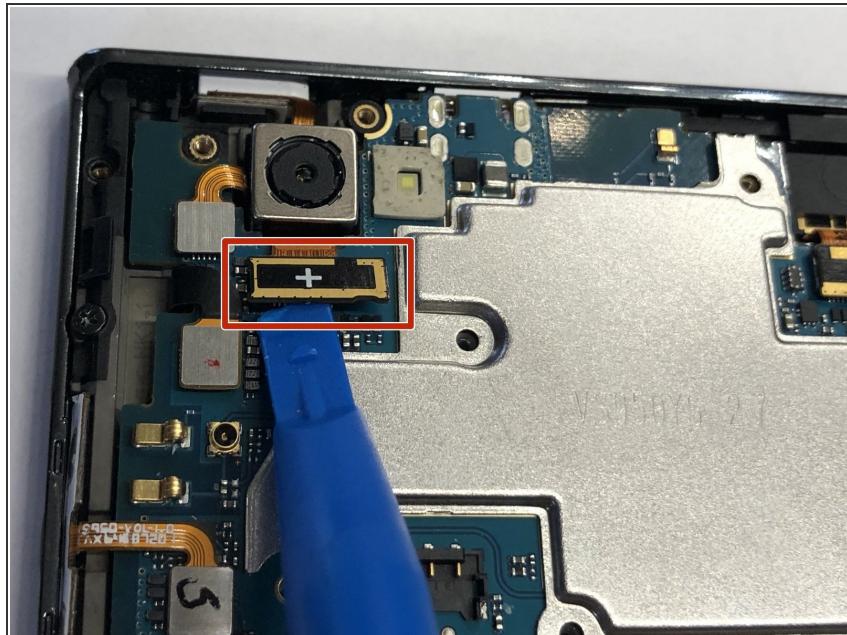


- Carefully use the plastic opening tool to pry the ribbon cable below the camera itself from the motherboard.

## Step 10

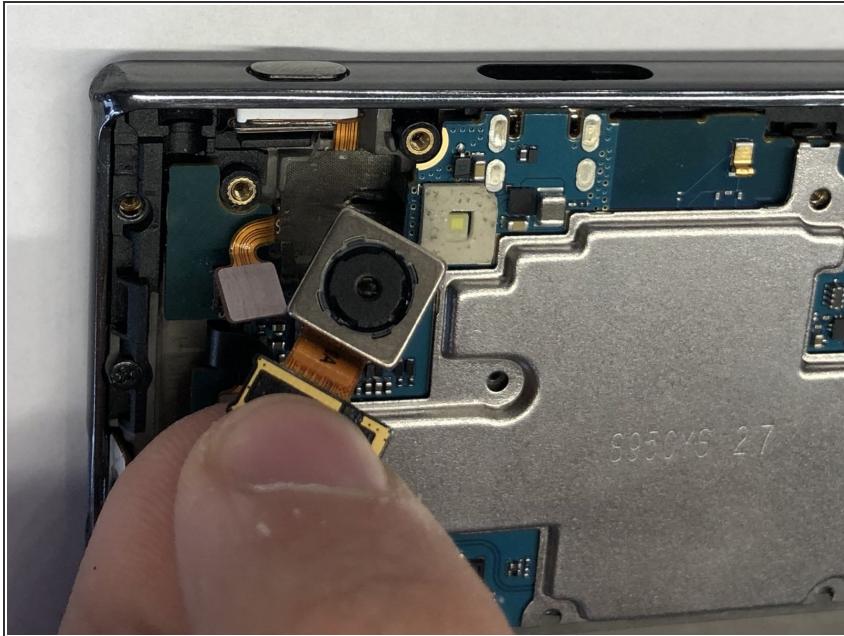

- Using the ribbon beneath the camera lift it upwards and pull the camera out.

## Step 11 — Volume Buttons

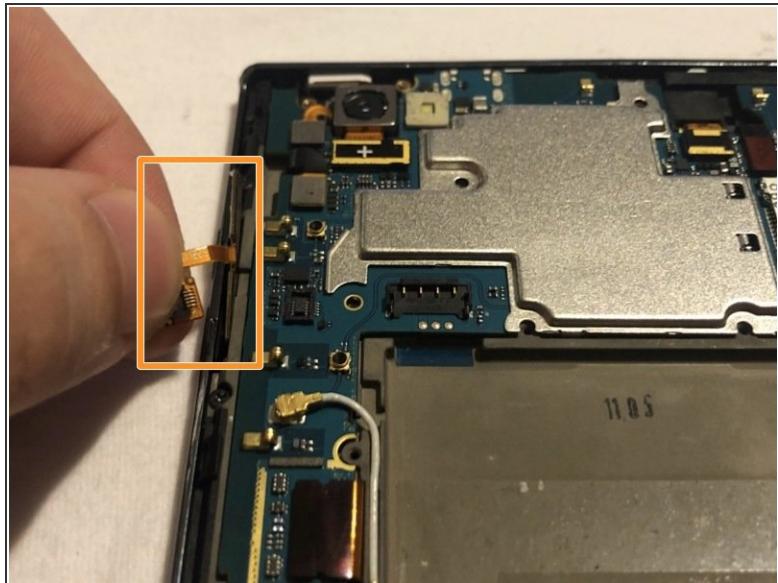


- Carefully use the plastic opening tool to pry the ribbon cable connecting the battery to the motherboard of the phone.
- Slowly pull the ribbon cable upward releasing the volume buttons from the phone.

## Step 12 — Screen Protector




- Carefully use the plastic opening tool to pry the ribbon cable below the volume buttons on the left side of the phone.
- Carefully use the plastic opening tool to pry the ribbon cable to the left of the camera.

## Step 13

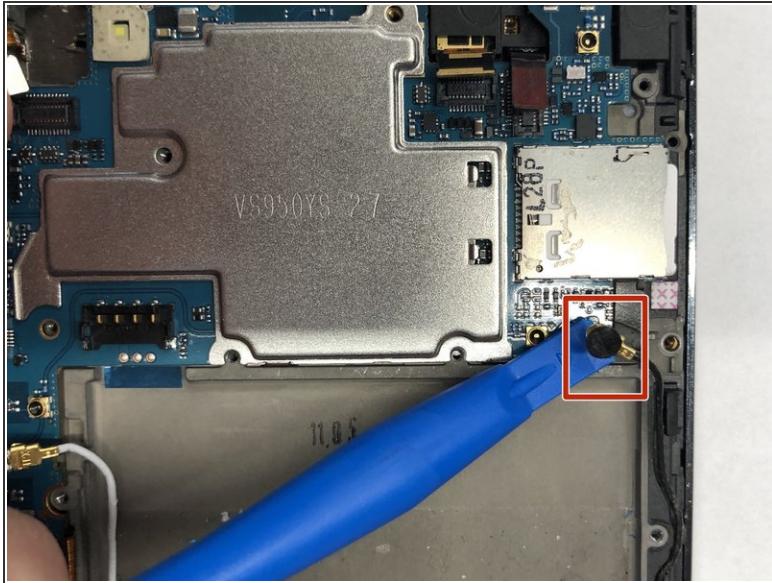


- Carefully use the plastic opening tool to pry the wire that connects to the bottom home and back display buttons.
- Carefully use the plastic opening tool to pry the second wire on the right side of the battery that also connects to the bottom home and back display buttons.

## Step 14

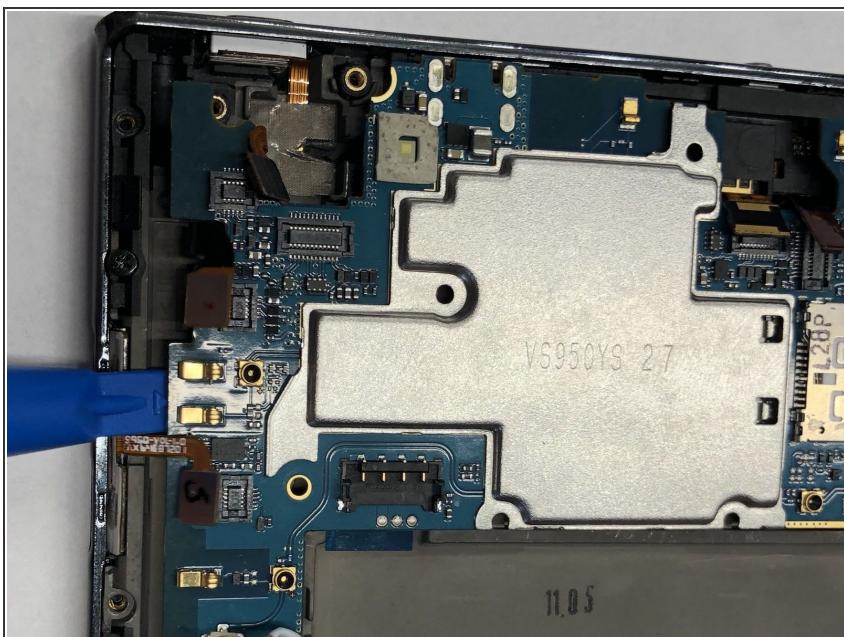

- Carefully use the plastic opening tool to pry the motherboard from the front screen.

## Step 15

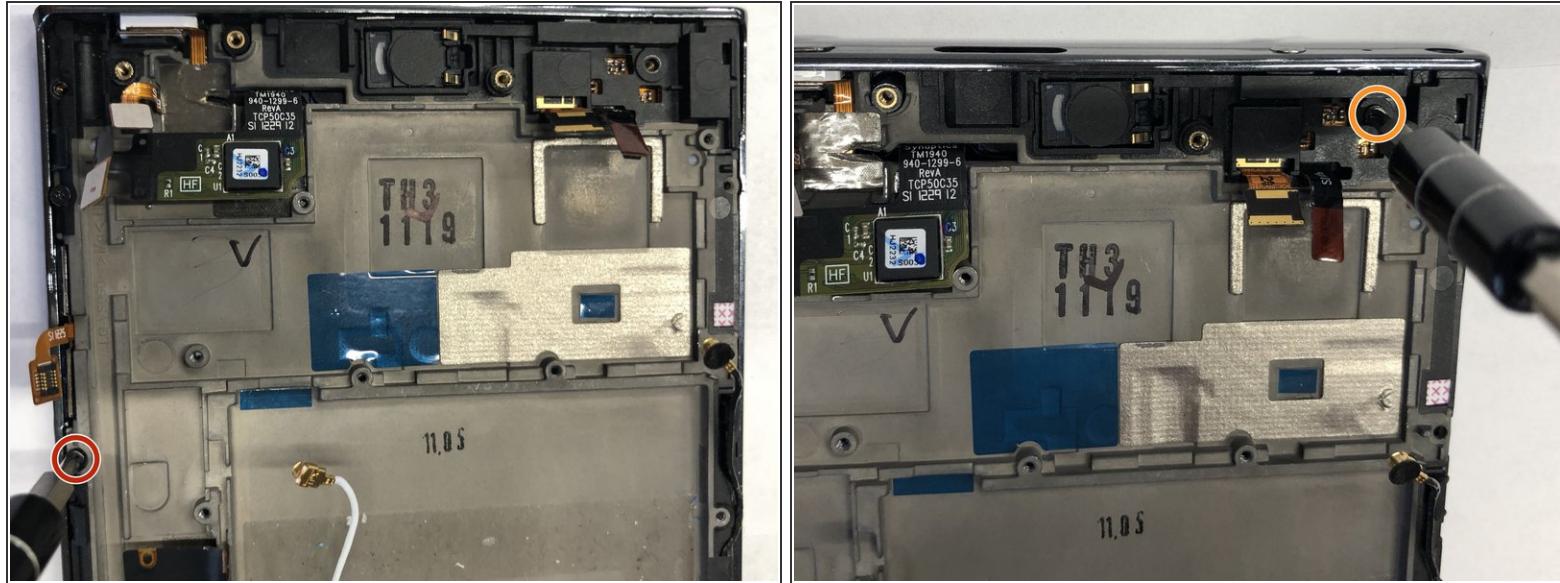


- Remove the 5mm Phillips #00 screw below the volume buttons holding the plastic shield onto the screen display.
- Remove the 5mm Phillips #00 screw on the top right of the phone.

## Step 16



- Carefully pull the ribbon cable upward and away from the front screen display.

## Step 17

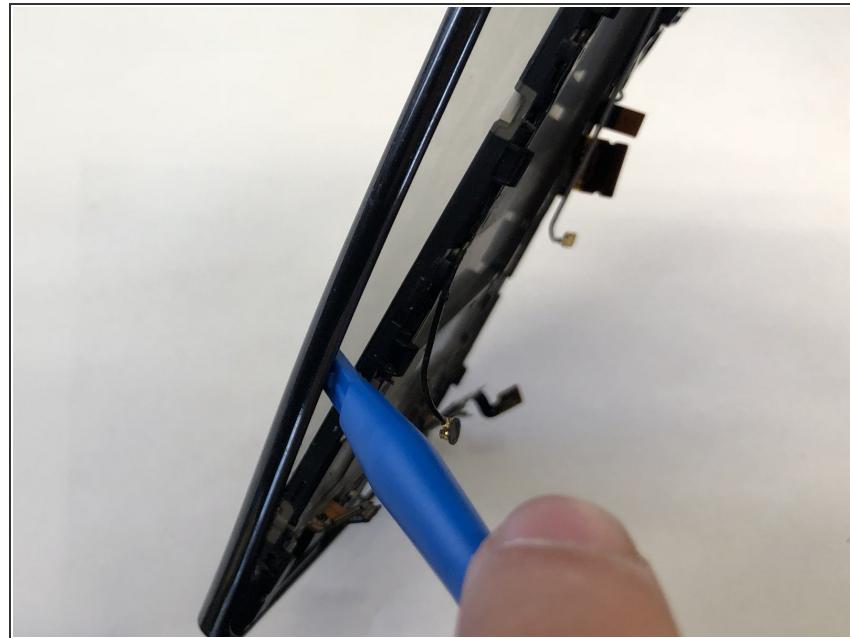


- Carefully use the plastic opening tool to pry the screen protector from the display and motherboard.

## Step 18



- Slowly separate the front screen from the screen protector. This will remove the screen protector from the phone.

## Step 19 — Power Button

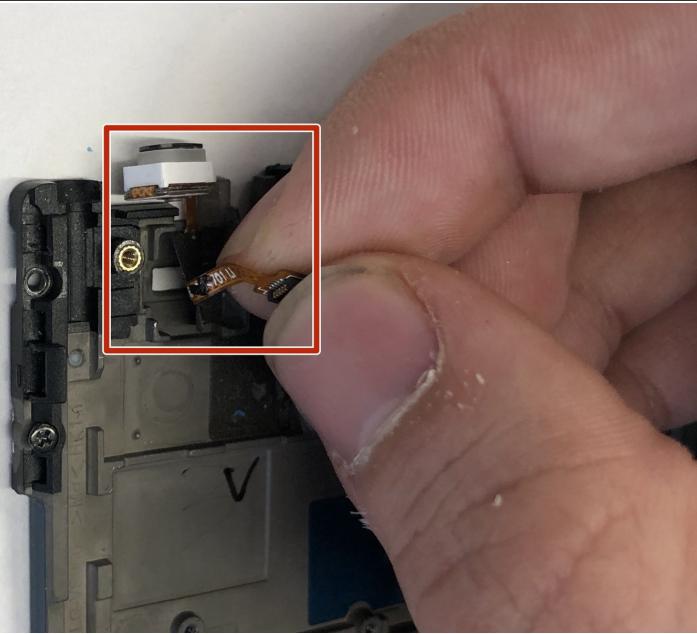

- Slowly separate the power button from the screen display. This will release the power button.

To reassemble your device, follow these instructions in reverse order.