




LG Stylo 3 Plus Headphone Jack Replacement

Use this guide to replace the headphone jack in your LG Stylo 3 Plus.

Written By: Justin Ogihara

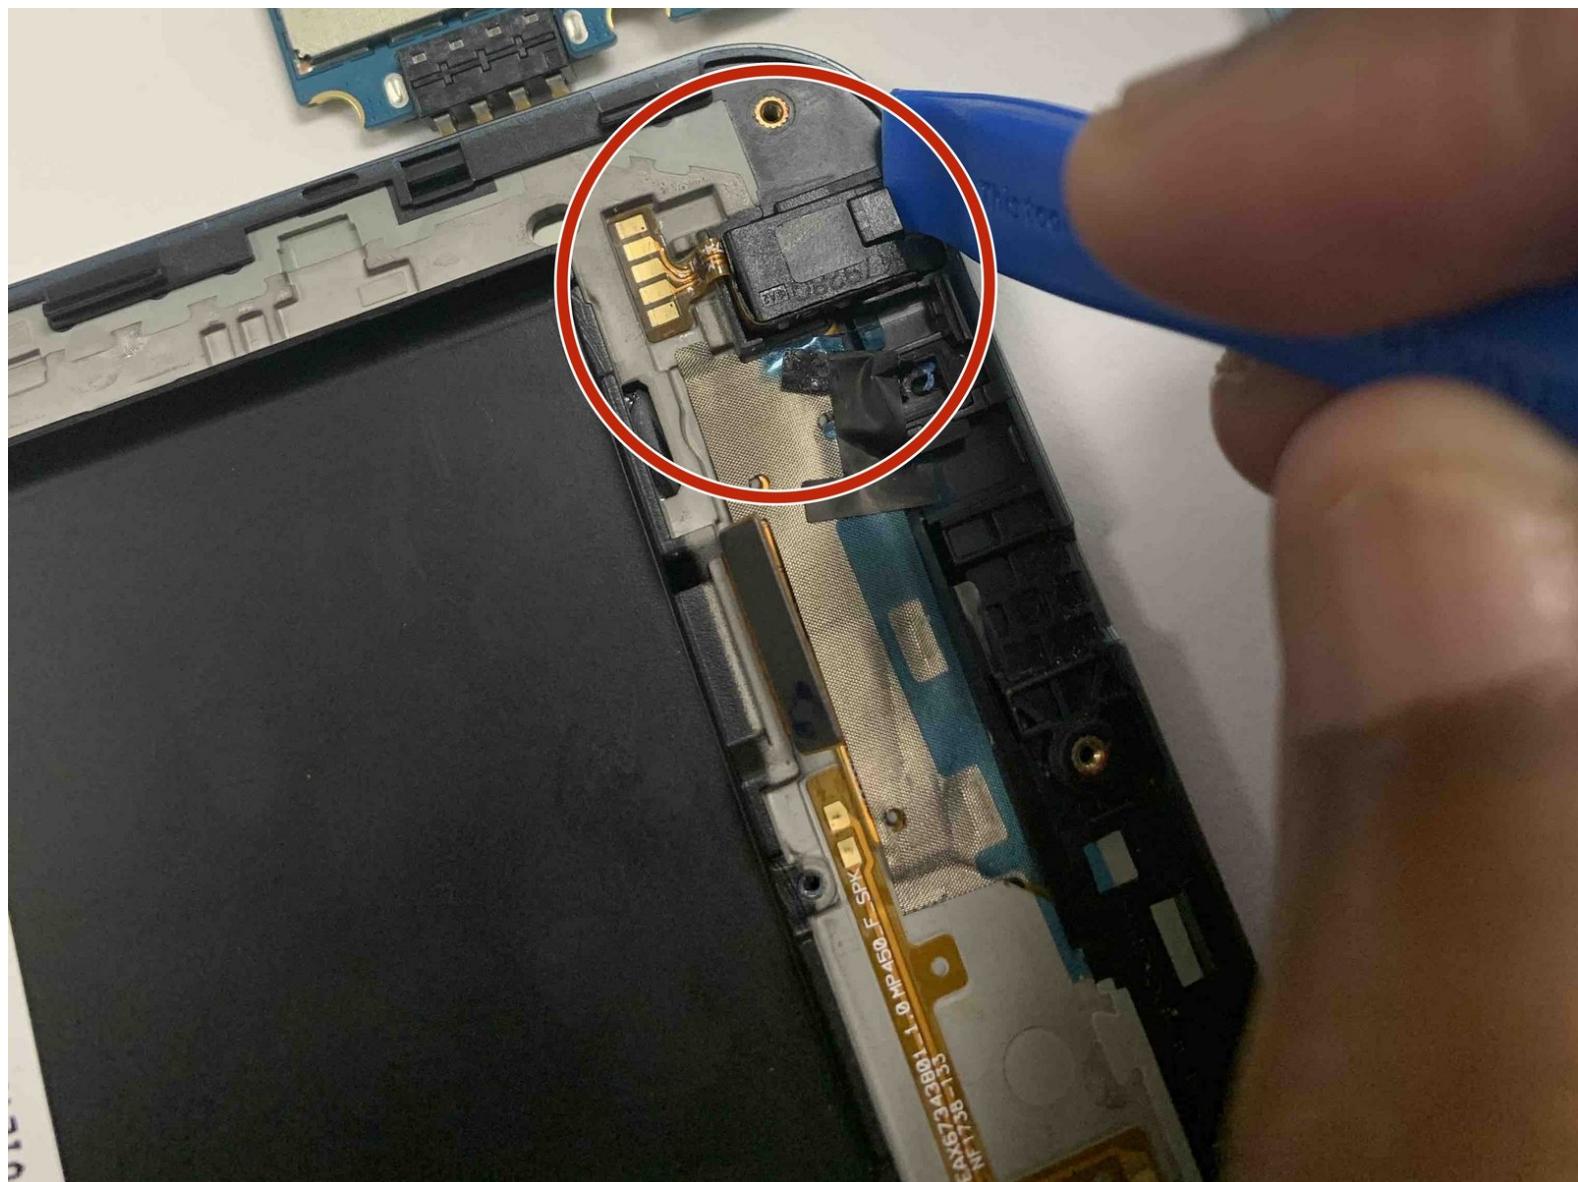

INTRODUCTION

The headphone jack is a component that is prone to accumulating dirt and dust particles. The accumulation of dirt and dust particles may affect the functionality of headphone jack. If you've cleaned the headphone jack thoroughly but it still doesn't properly play audio from an auxiliary cable, the headphone jack may be faulty. Follow this guide to replace the headphone jack in your device.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)

Step 1 — Back Cover



ⓘ Power off the phone before beginning disassembly.

- Place the phone face down.
- Insert a fingernail or a plastic opening tool into the gap on the side of the phone.
- Carefully slide your finger or the tool throughout the edge of the phone to ease the back case off.

Step 2 — Battery



- Place the back cover off to the side.
- Insert the opening tool into the small gap below the battery.
- Carefully pop the battery out to prevent damage.

Step 3 — Rear Camera




- Remove the twelve 4mm screws using the Phillips #000 screwdriver.
- Use the plastic opening tool to remove the inner case.
- Carefully remove the inner case.

Step 4



- Use your fingernail or the plastic opening tool to flip the flex cable.
- Use the precision tweezers to carefully grasp and pull out the camera.

Step 5 — Front Camera

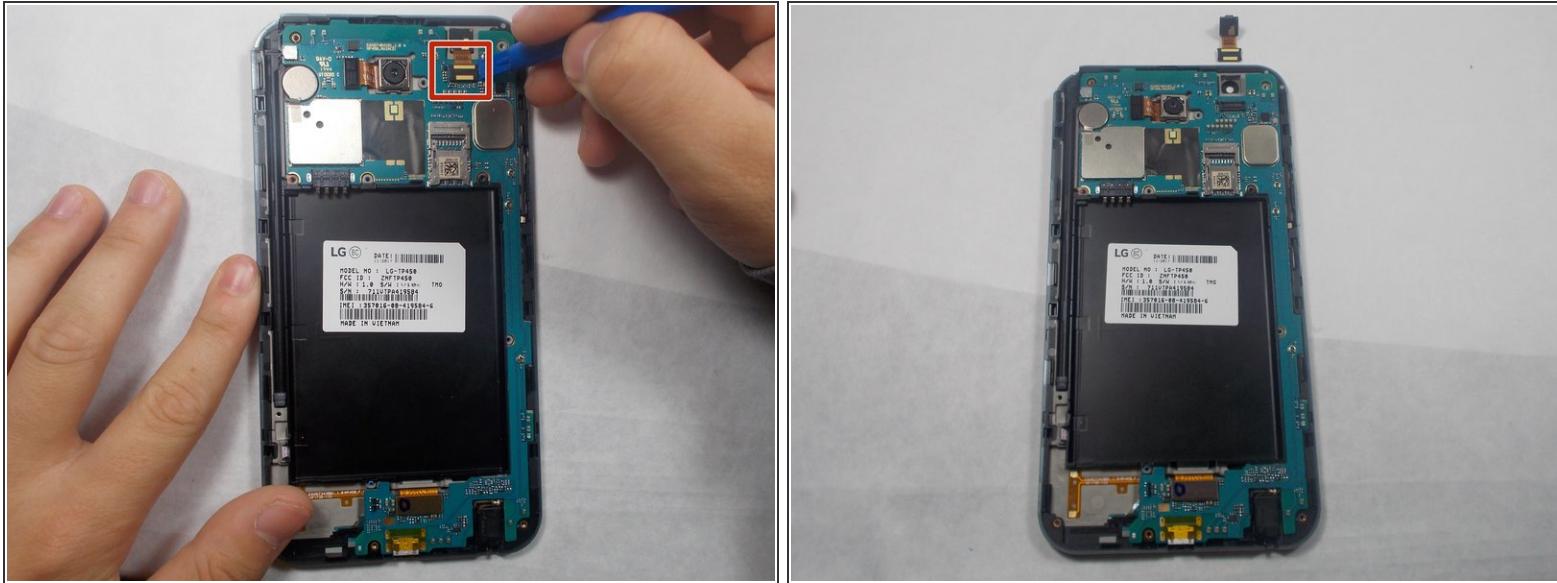

- Carefully flip open the flex cable box with the plastic opening tool.
- Using precision tweezers, carefully lift the front camera off the device.



Step 6 — Motherboard



- Gently flip open the flex cable box using a blue plastic opening tool.
- Carefully remove the motherboard with your hands or a blue plastic opening tool.

⚠ Make sure all parts are secure while taking out motherboard.

Step 7 — Headphone Jack

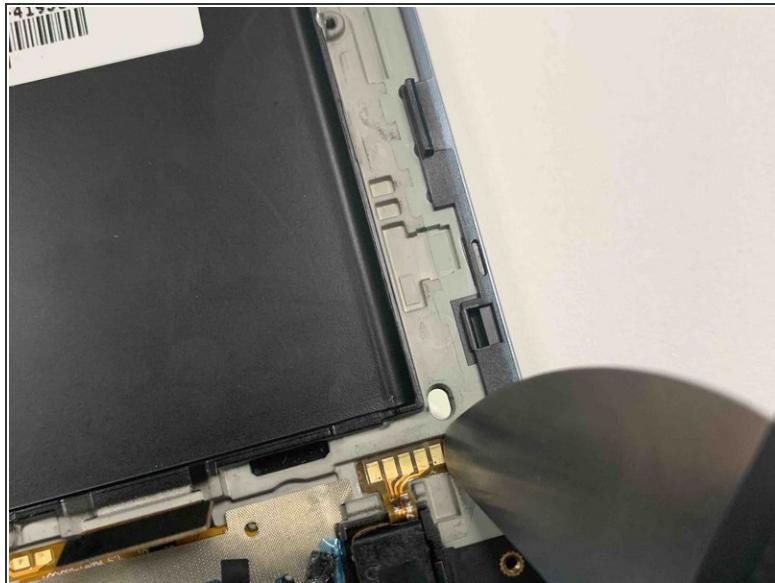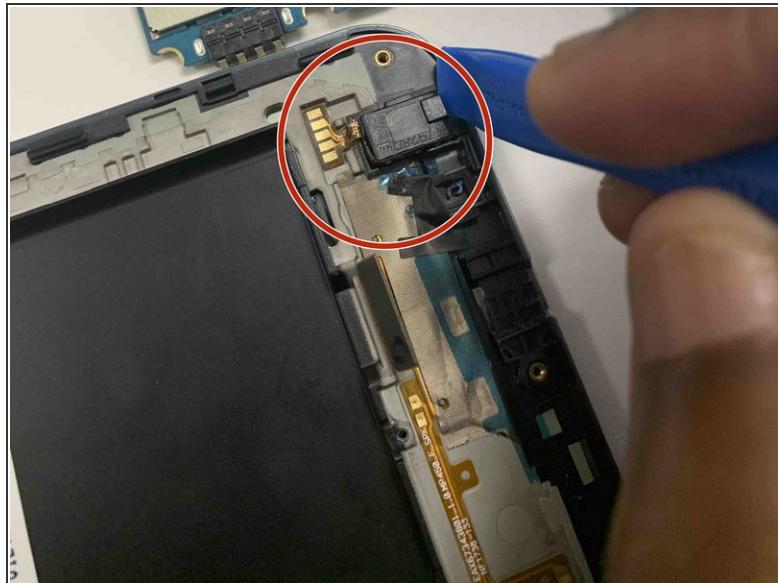

- Remove the headphone jack.

To reassemble your device, follow these instructions in reverse order.