




Lenovo Ideapad 110S-11IBR USB & Headphone Jack PCB Board Replacement

This guide aims to teach you how to replace the USB 2.0 and 3.5 mm headphone ports of the Lenovo Ideapad 110S-11IBR.

Written By: Andrew Hollingsworth

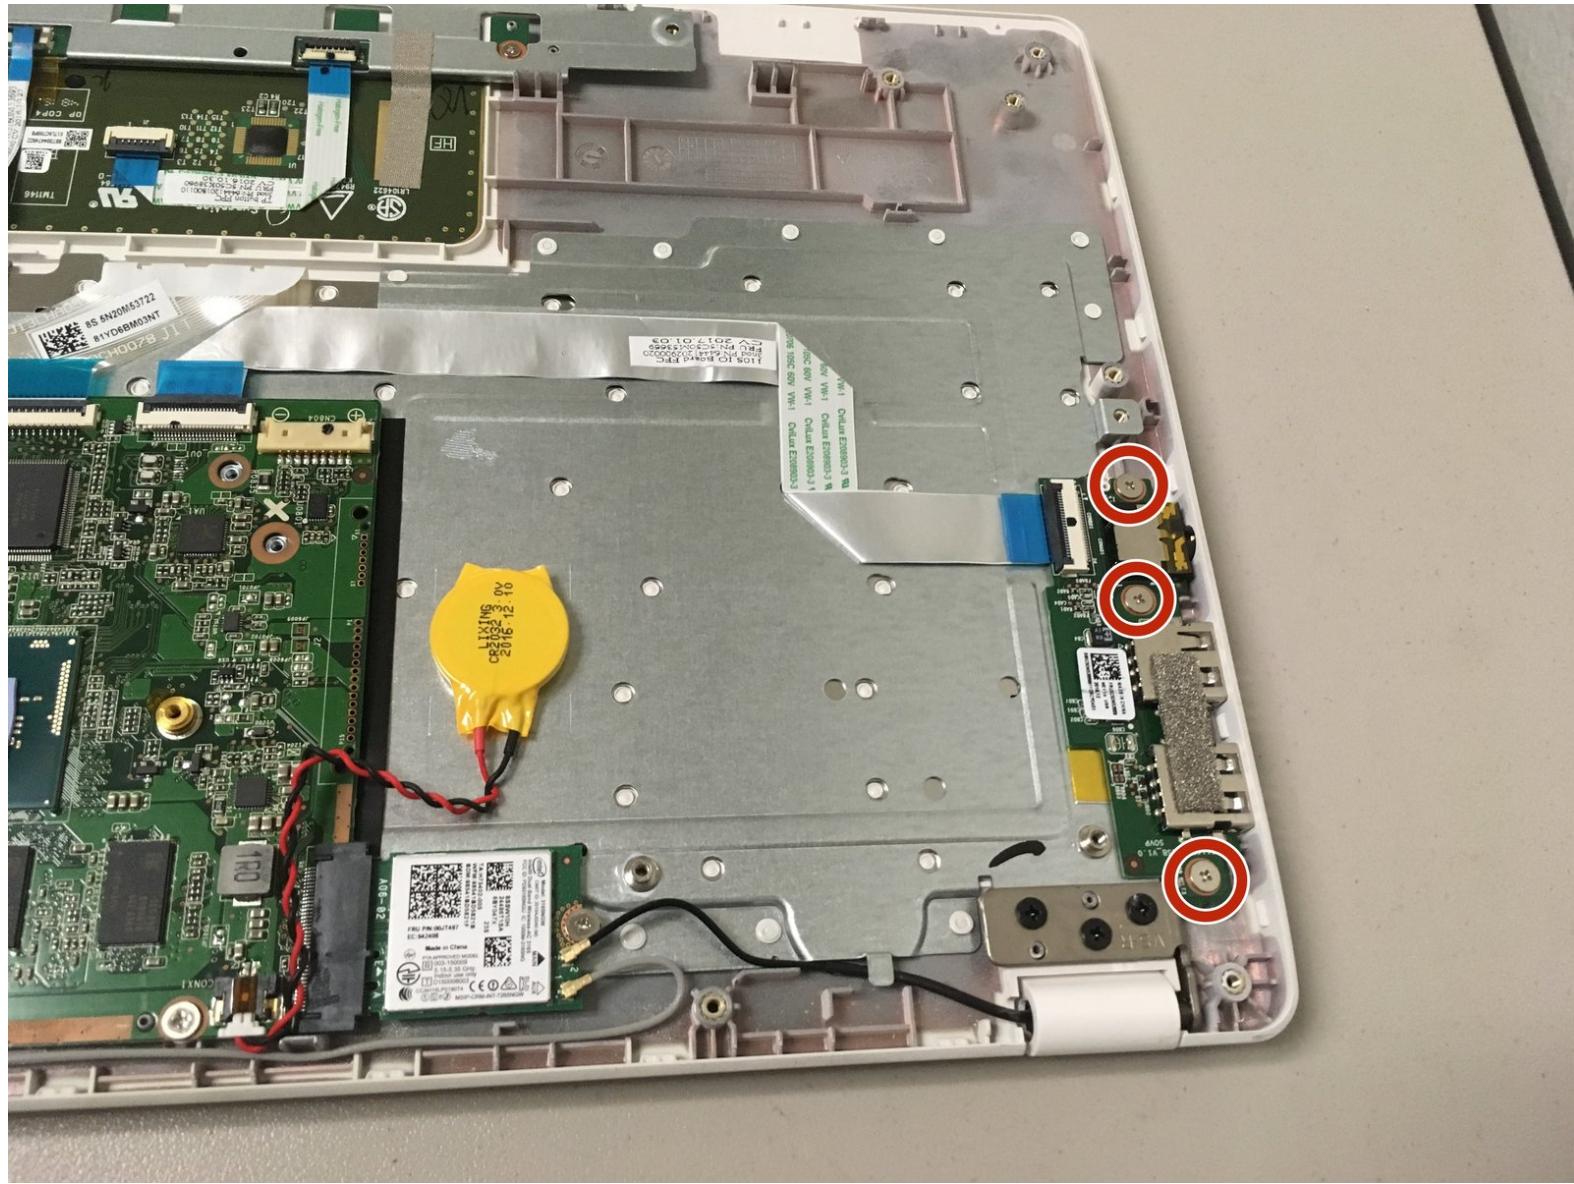

This document was generated on 2020-03-28 08:42:24 AM (MST).


INTRODUCTION

This guide aims to teach you how to replace the USB 2.0 and 3.5 mm headphone ports of the Lenovo Ideapad 110S-11IBR.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Phillips #000 Screwdriver](#) (1)


Step 1 — Battery

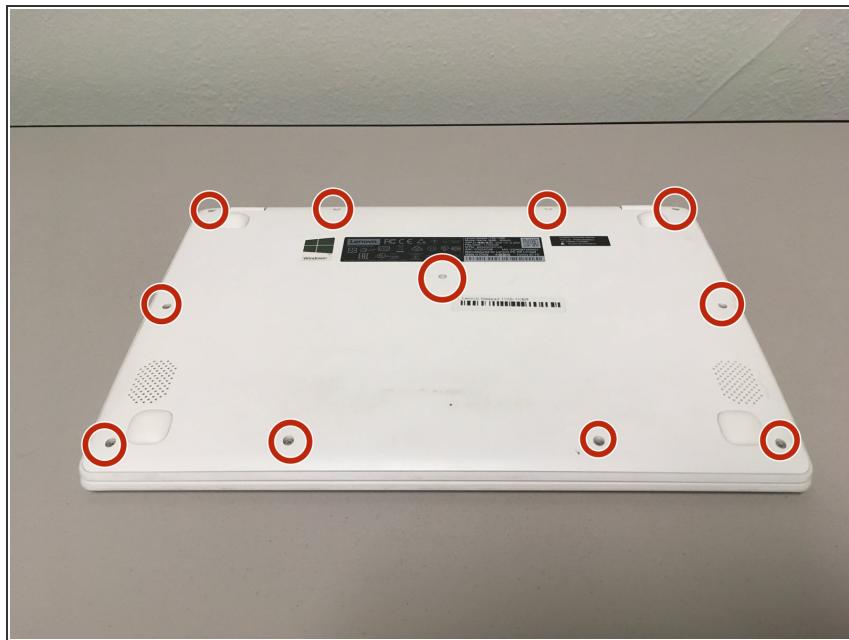

⚠ Ensure that your device is completely OFF before performing this procedure.



- Unscrew the eleven 4 mm Phillips #0 screws on the bottom of the device.

Step 2

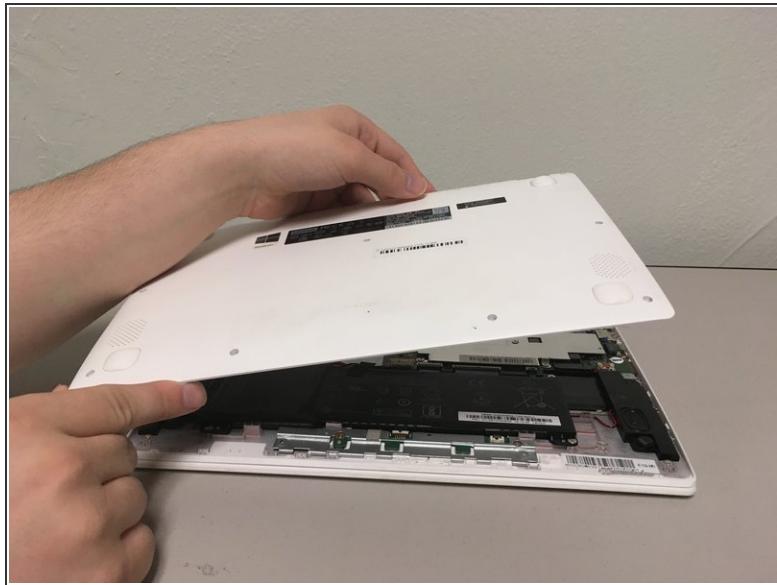


- Separate the back lid from the laptop using a plastic opening tool.
- Lift the back lid off of the device.

Step 3

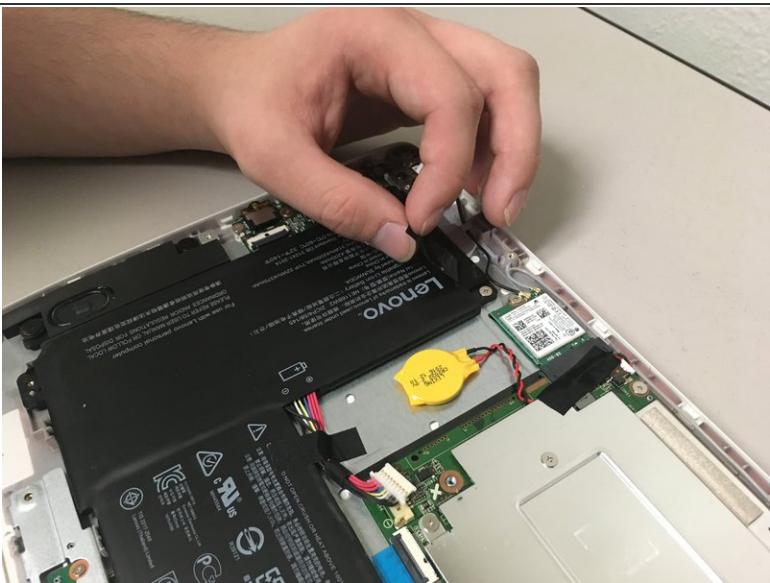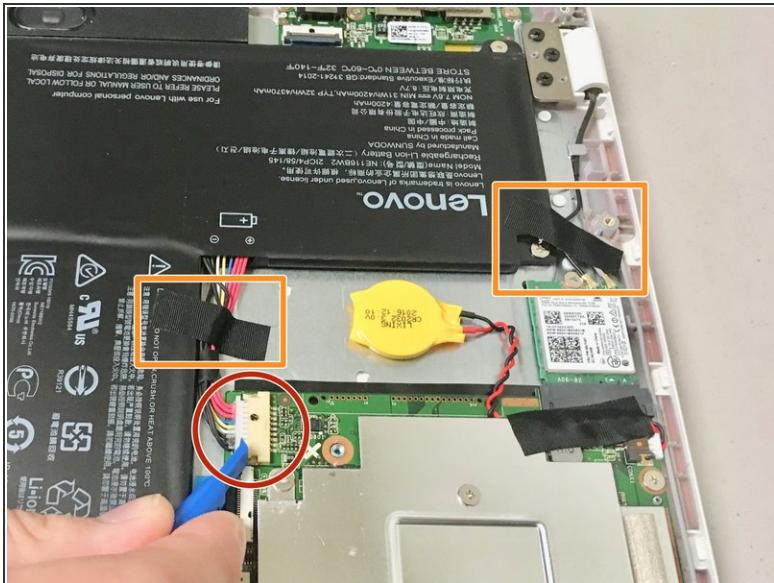



- Remove the battery connector from its socket by pulling the cable away from the hinge using your fingers or a plastic opening tool.
 Do not pull on the socket itself or you risk damaging the motherboard.
- Remove the two pieces of tape that are holding the battery down.

Step 4

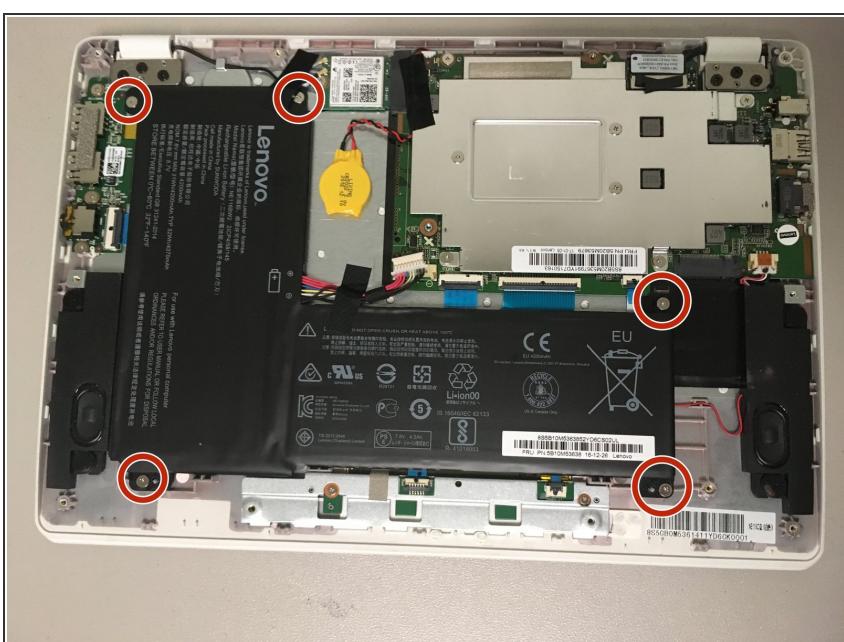

- Remove the five 4 mm Phillips screws securing the battery.

Step 5

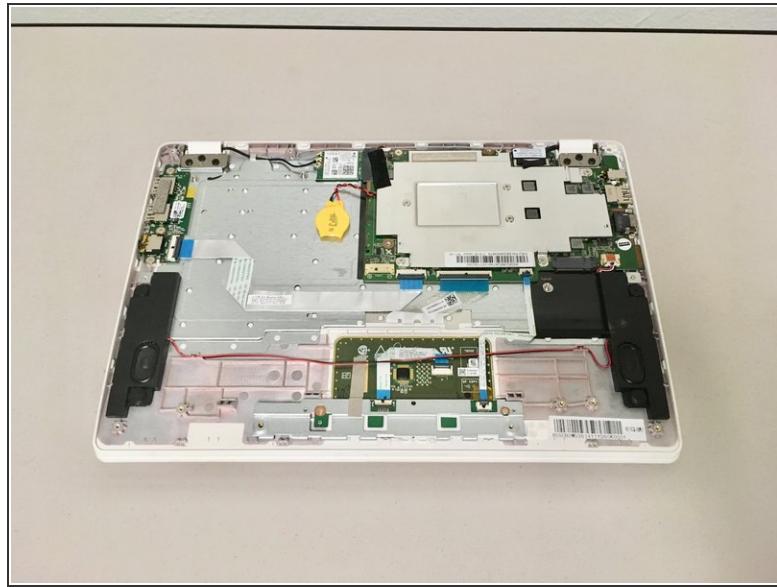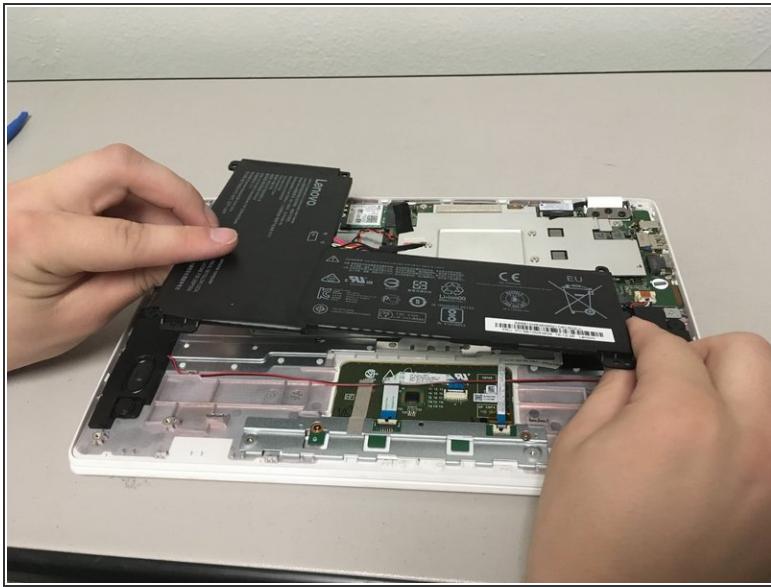



- Lift the battery up and out of the device.

Step 6 — USB & Headphone Jack PCB Board



- Unscrew the three 4 mm Phillips screws.

Step 7

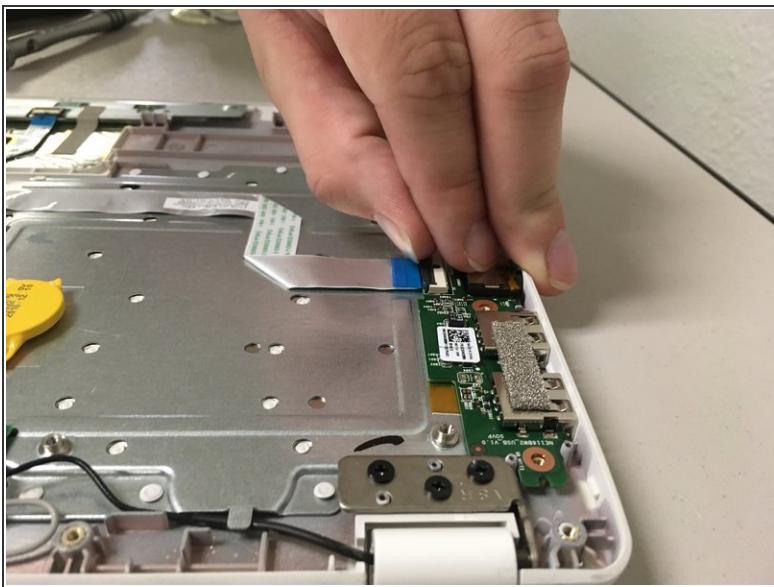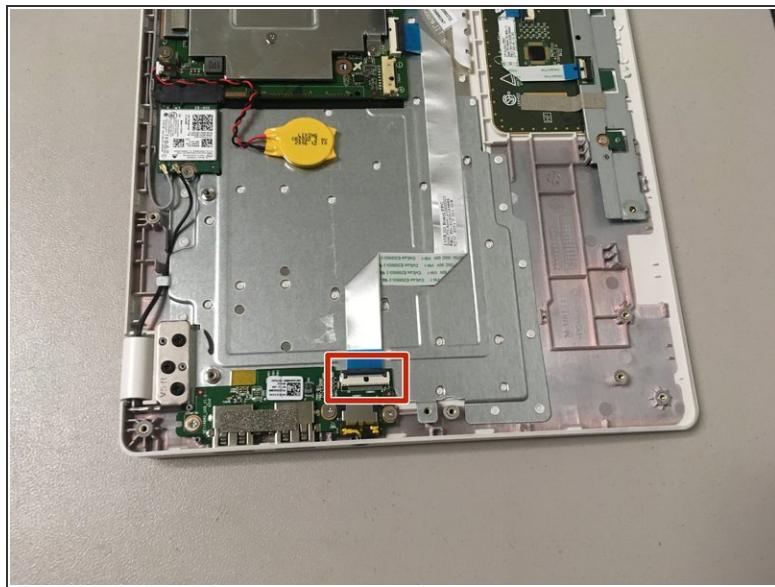

- Unlatch and remove the ribbon cable.

 Ribbon cables can be fragile, so avoid excessively bending it.

Step 8



- Remove the card from the laptop.

To reassemble your device, follow these instructions in reverse order.