




Lenovo Ideapad Yoga 2 11 Trackpad Replacement

This guide will show you how to remove and replace the trackpad for your Lenovo Ideapad Yoga 2 11".

Written By: Andria Chen

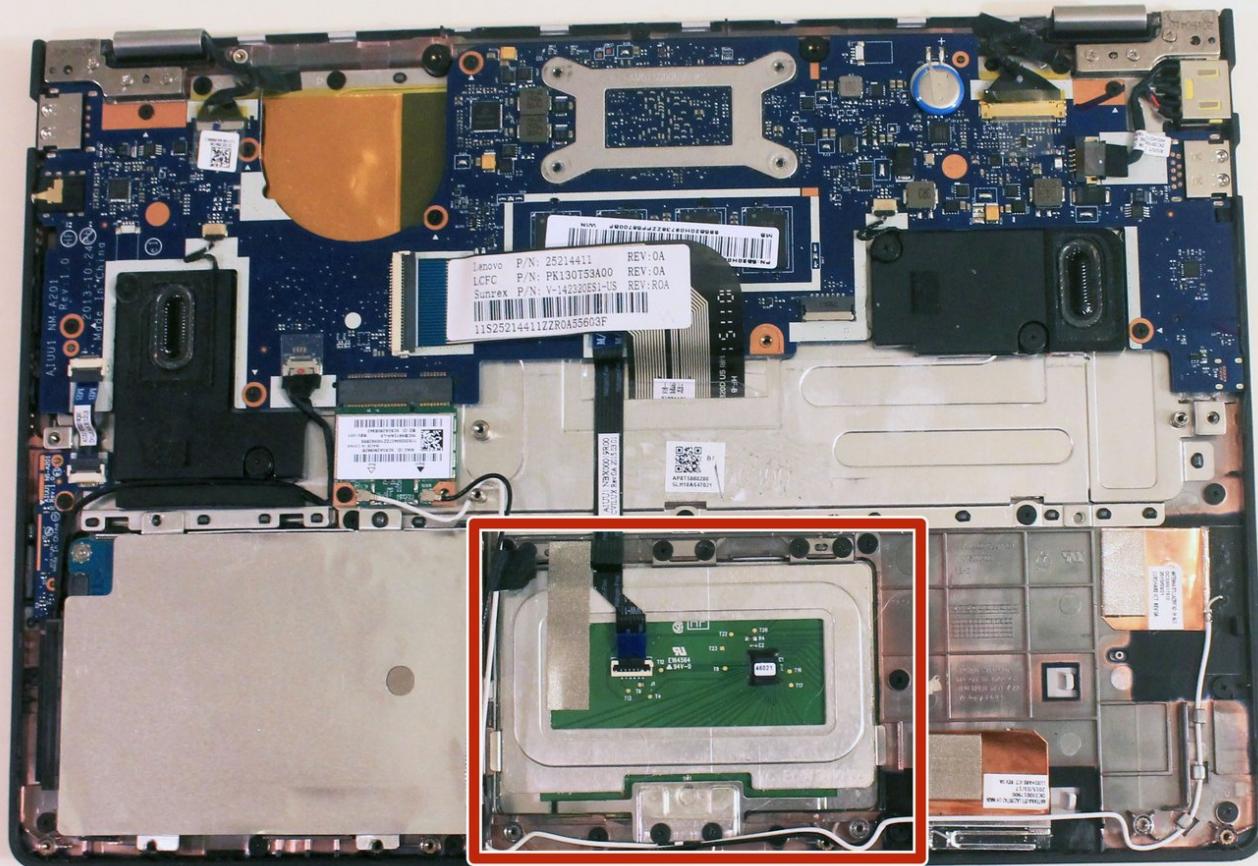

INTRODUCTION

If your trackpad stops working or has any performance issues, you can follow this guide to remove and replace it.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [Phillips #000 Screwdriver](#) (1)
- [Tweezers](#) (1)

Step 1 — Back Panel



- Begin by turning your closed laptop so that you are looking at the bottom panel.

Step 2




- Locate the 10 screws (6mm) around the border of the panel.
- Using the Torx T5 Screwdriver, remove the screws.

Step 3



- Now that the screws are removed, gently lift the back panel upwards to detach it from the rest of your laptop.

Step 4 — Battery

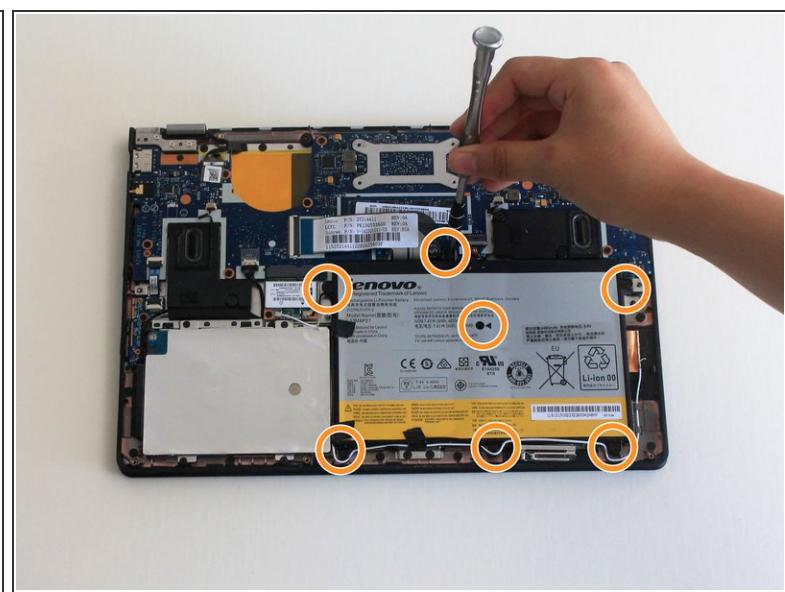


- Locate the battery in the bottom right corner.
- Using a Phillips #000, remove the 6 screws (3.5mm) on the border of the battery and the 7th screw (6.5mm) that is in the center of the battery.

Step 5




- Locate the cable connecting to the battery. It is located at the top-center of the battery.
- Use a pair of tweezers and place it so that the tweezer is around the cables. Gently pull the cables towards the battery to disconnect the cable.

Step 6

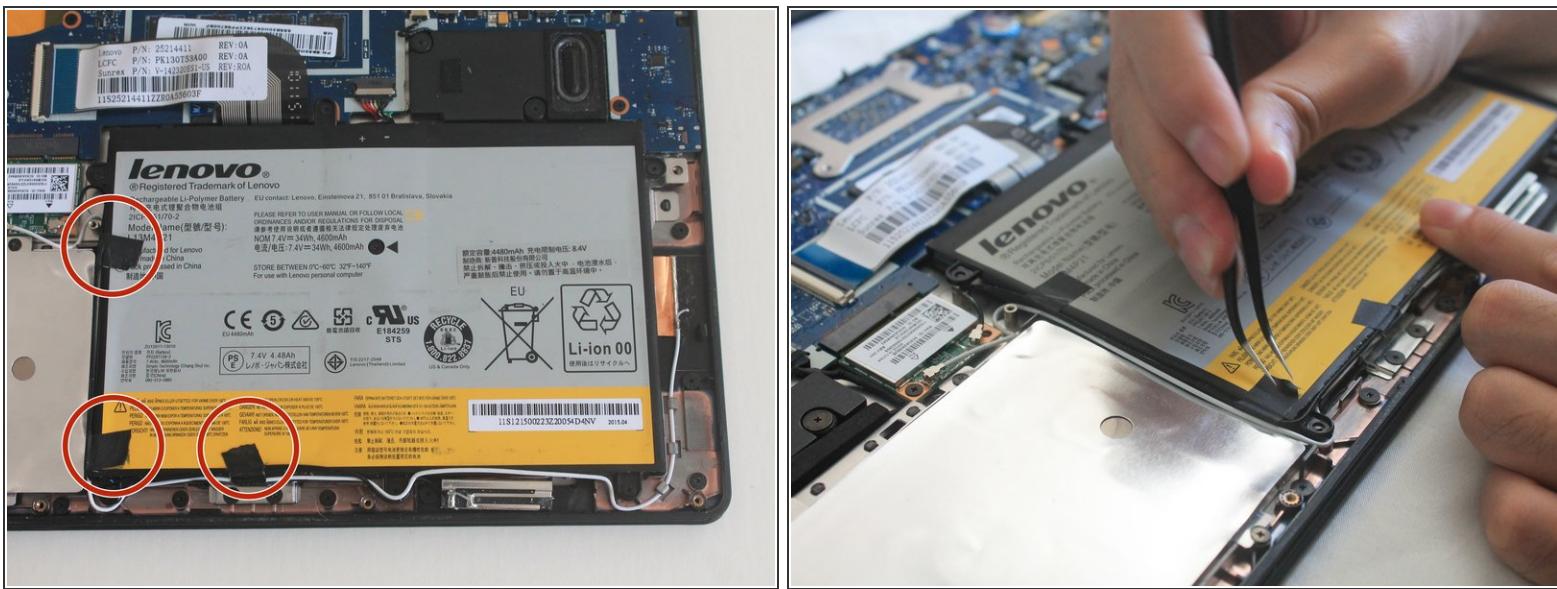


- There may be tape around the edge of the battery to secure some wires. Use a pair of tweezers to remove the tape so that the wires are no longer attached to the battery.

Step 7

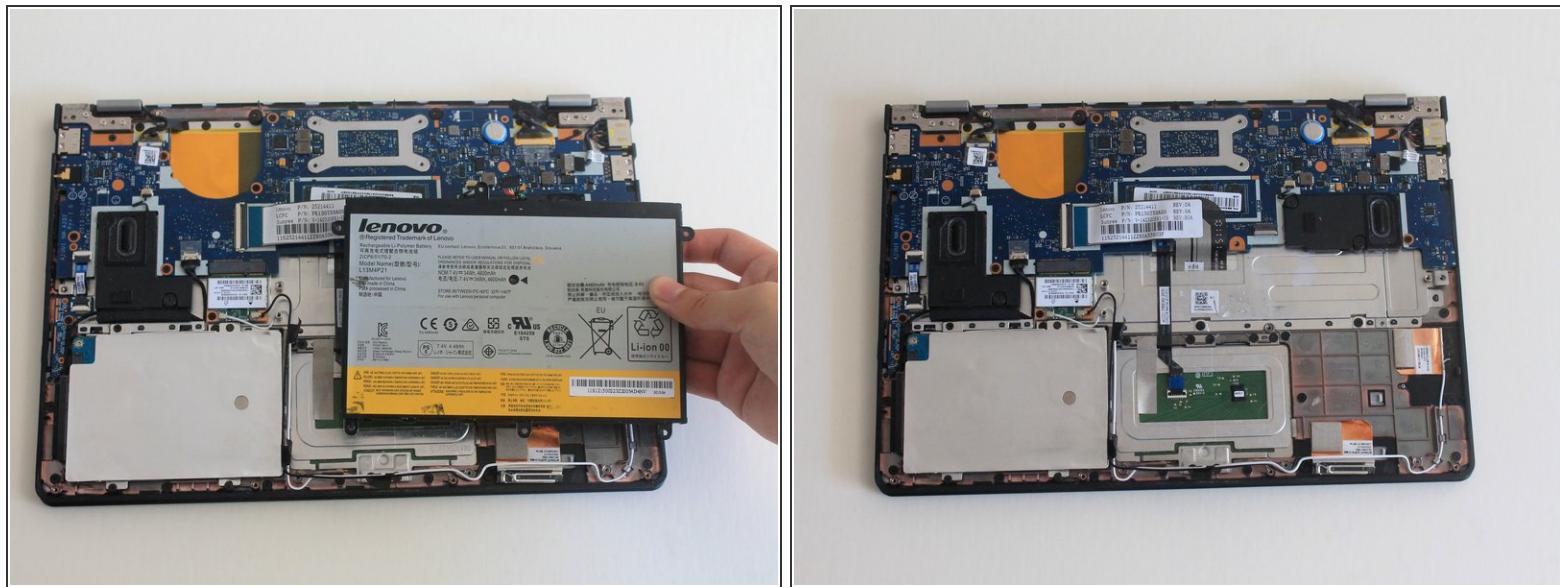



- After you have unscrewed the screws, unplugged the cable, and removed the tape and wires, you can remove the battery from your laptop.

Step 8 — Trackpad

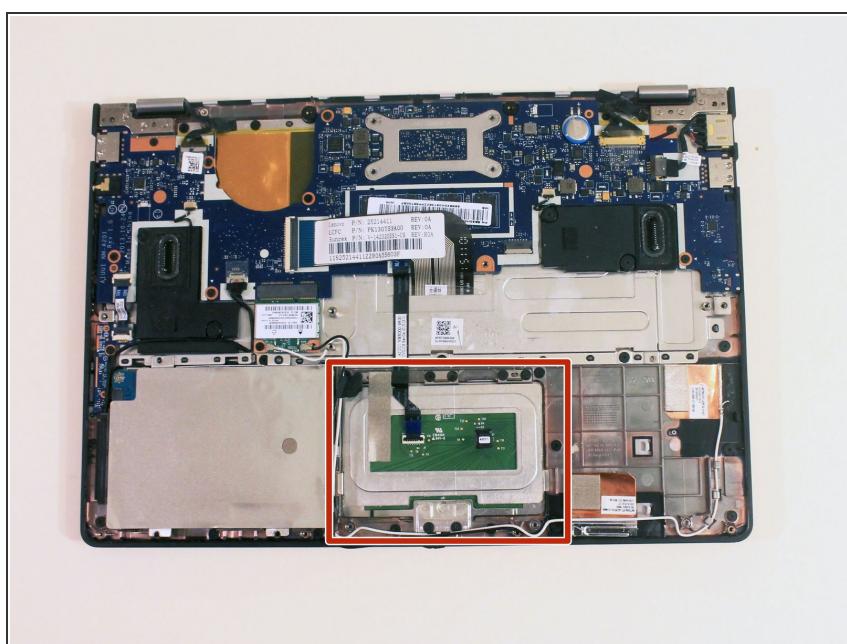


- After removing the battery, locate the trackpad of your laptop.

Step 9

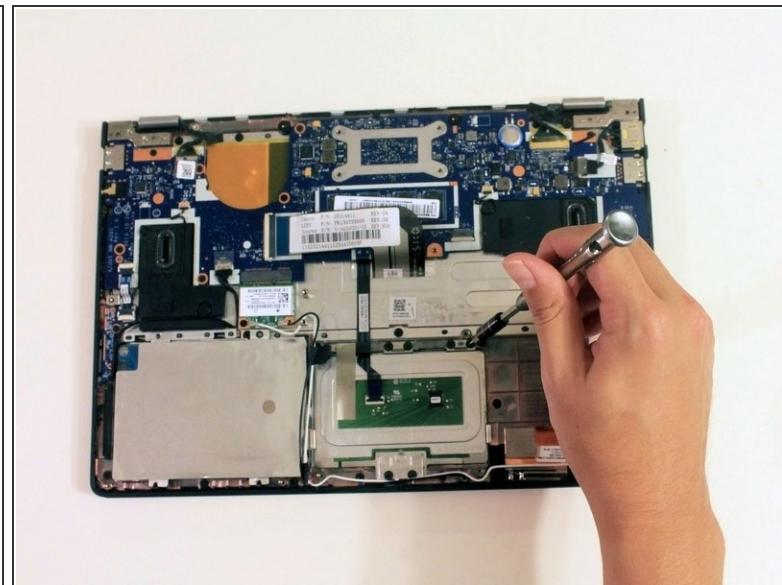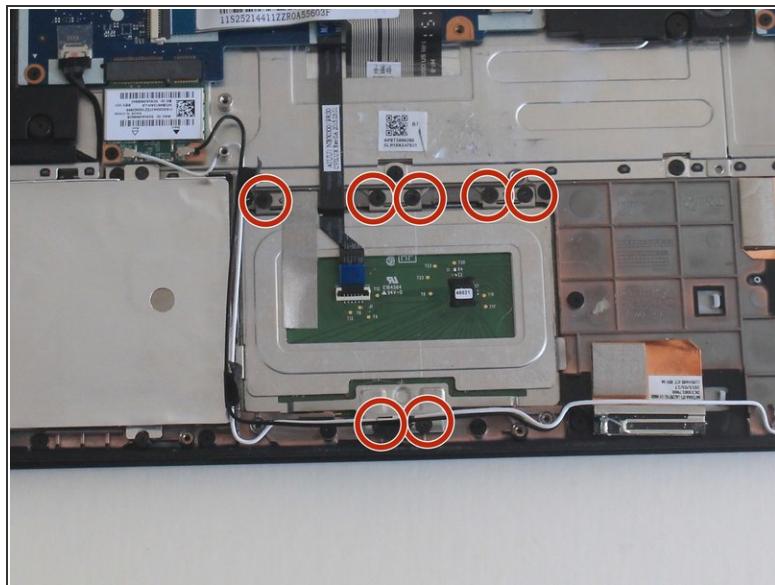


- Unscrew 7x 2mm screws holding touchpad in place.

Step 10

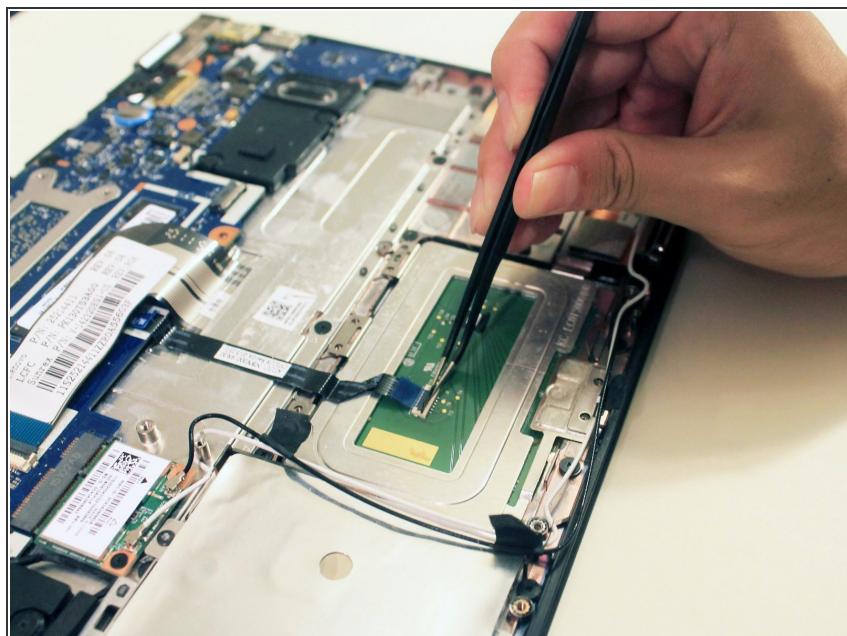


- Lift up the plastic cover over the ribbon cable.

Step 11

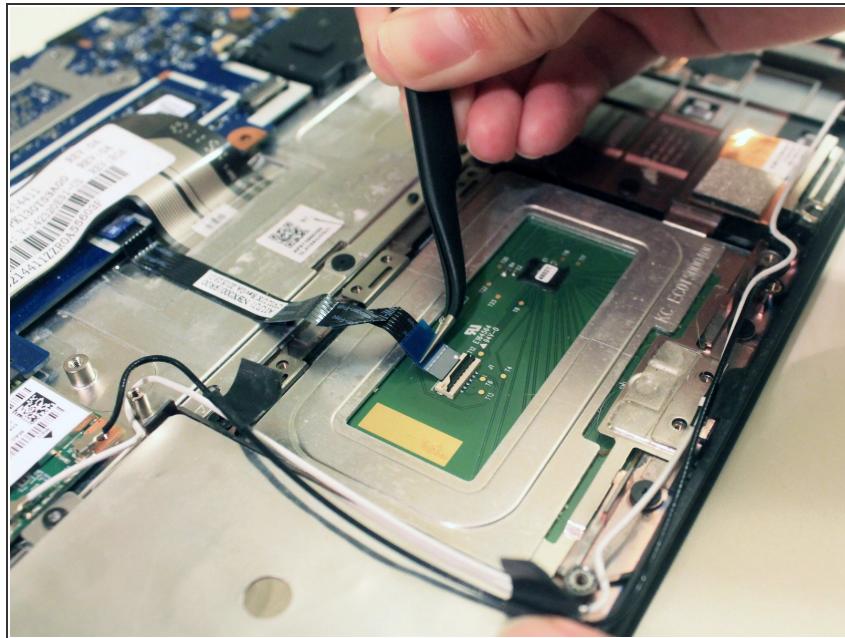

- Gently tug ribbon cable from its position.

Step 12

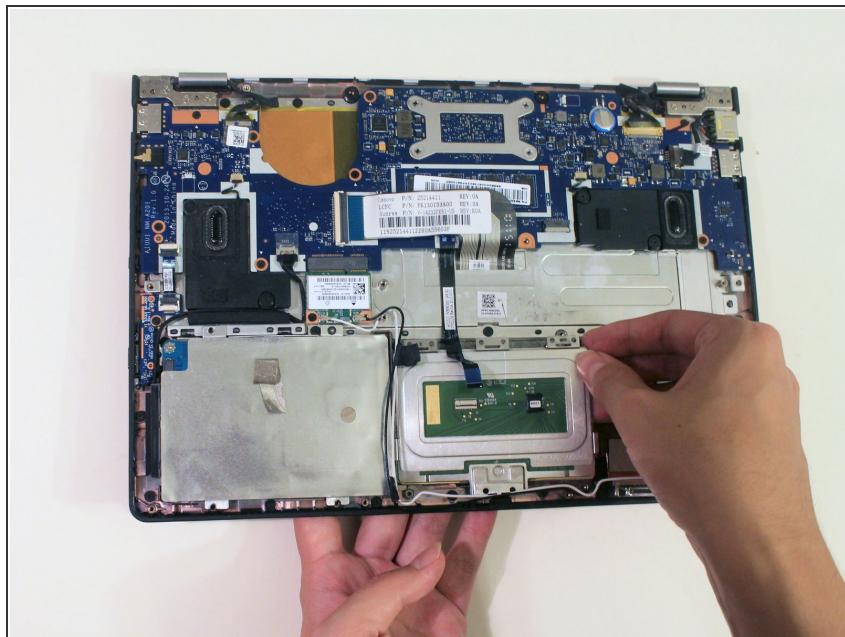

- Lift trackpad from the computer.

To reassemble your device, follow these instructions in reverse order.