




Logitech Webcam Pro 9000 USB Connection Replacement

Written By: Cory Davis

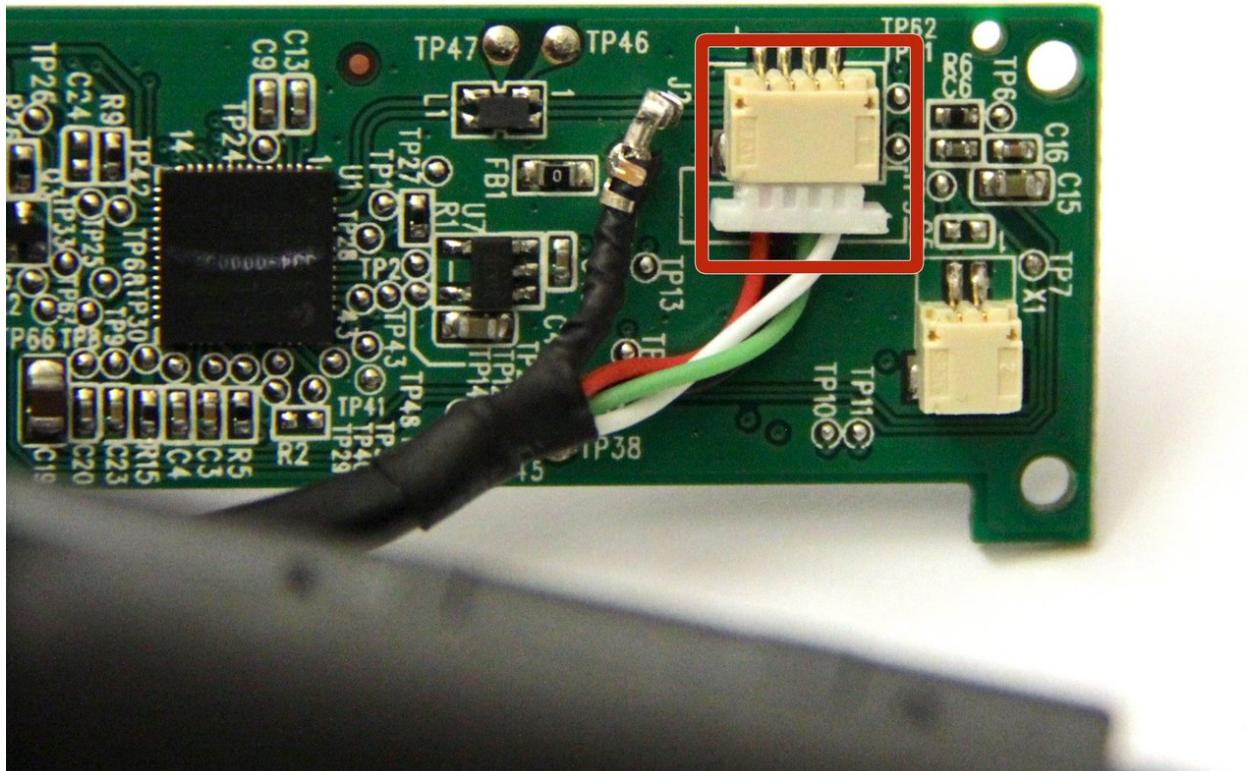

This document was generated on 2019-10-20 01:38:59 AM (MST).

 **TOOLS:**

- [Soldering Workstation \(1\)](#)
- [Desoldering Braid \(1\)](#)
- [Spudger \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)

Step 1 — Front and Back Cover




- Remove the two 8 mm Phillips #0 screws on the back cover.

⚠ The motherboard is attaching the two covers together, so don't separate them entirely just yet.

i There is a button that loosens as the Phillips screws are removed. Don't be alarmed if it falls out.


Step 2

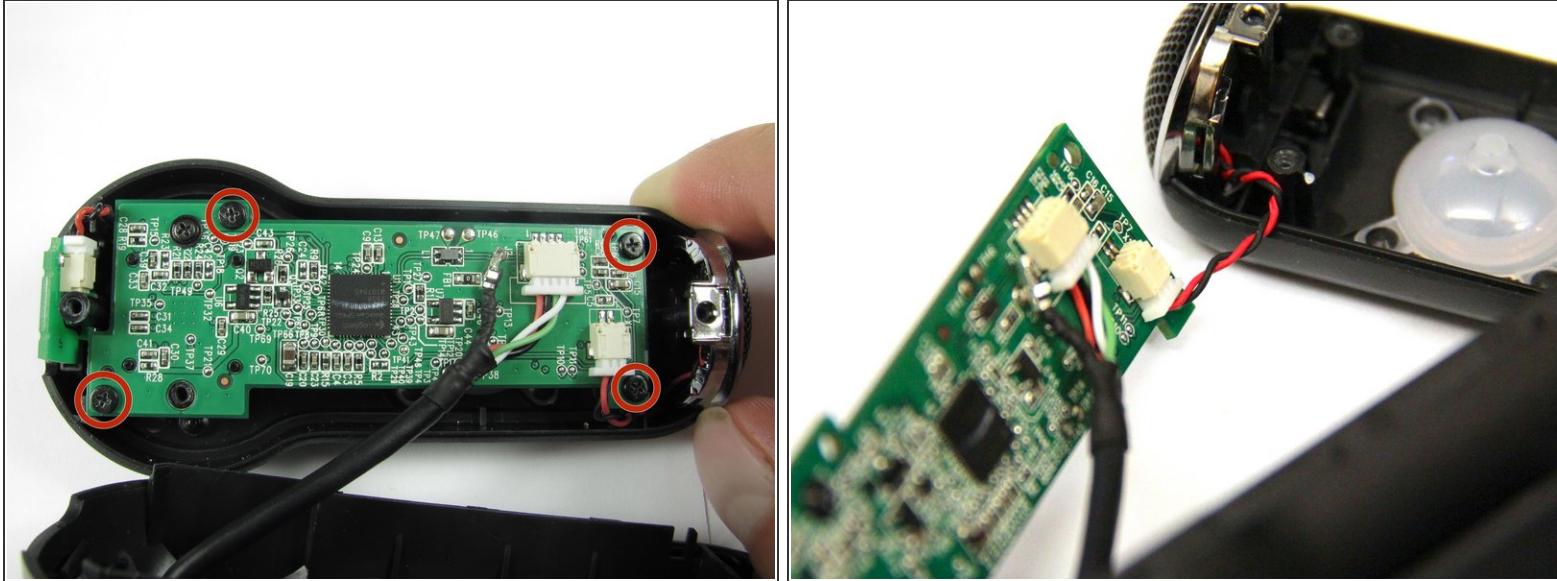

- Remove the four 6mm Phillips#0 screws connecting the motherboard and front cover.


⚠ DO NOT detach the wire connecting the motherboard to the front cover.

Step 3 — USB Connection

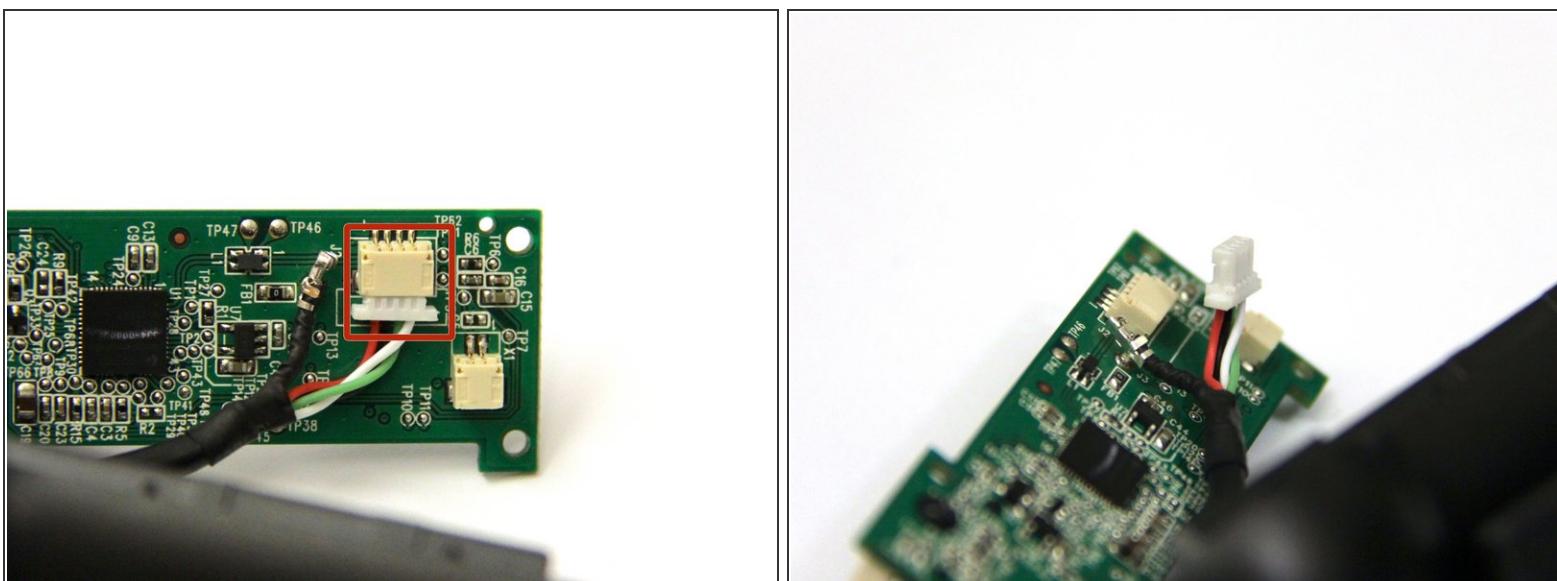

- Grasp the white wire connector on the back of the motherboard to remove the USB cable.
- Wiggle the connector back and forth to remove it from the socket.

Step 4

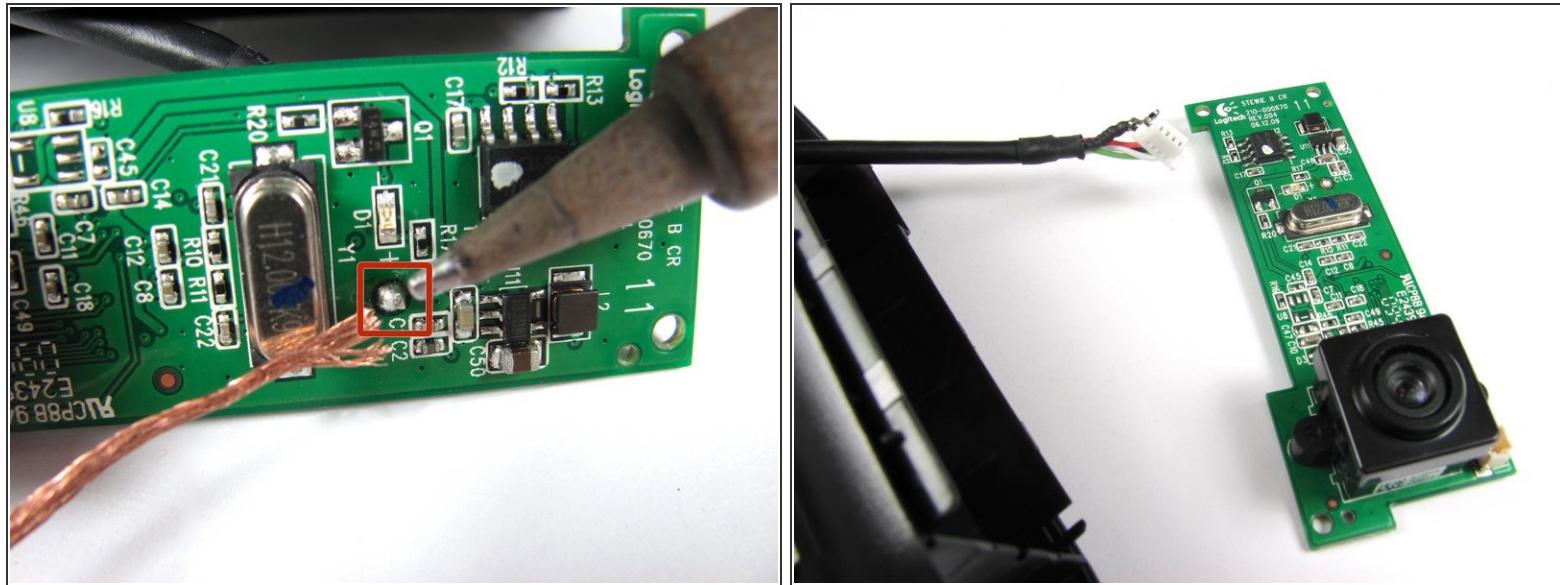

- Desolder the joint on the front of the motherboard to completely detach the USB cable.
- ⓘ Follow this [link](#) to learn how to properly solder and desolder your parts.

To reassemble your device, follow these instructions in reverse order.