




# Mid F900 Microphone Replacement

Replace a dying or dead microphone within your device

Written By: Matthew Oliva

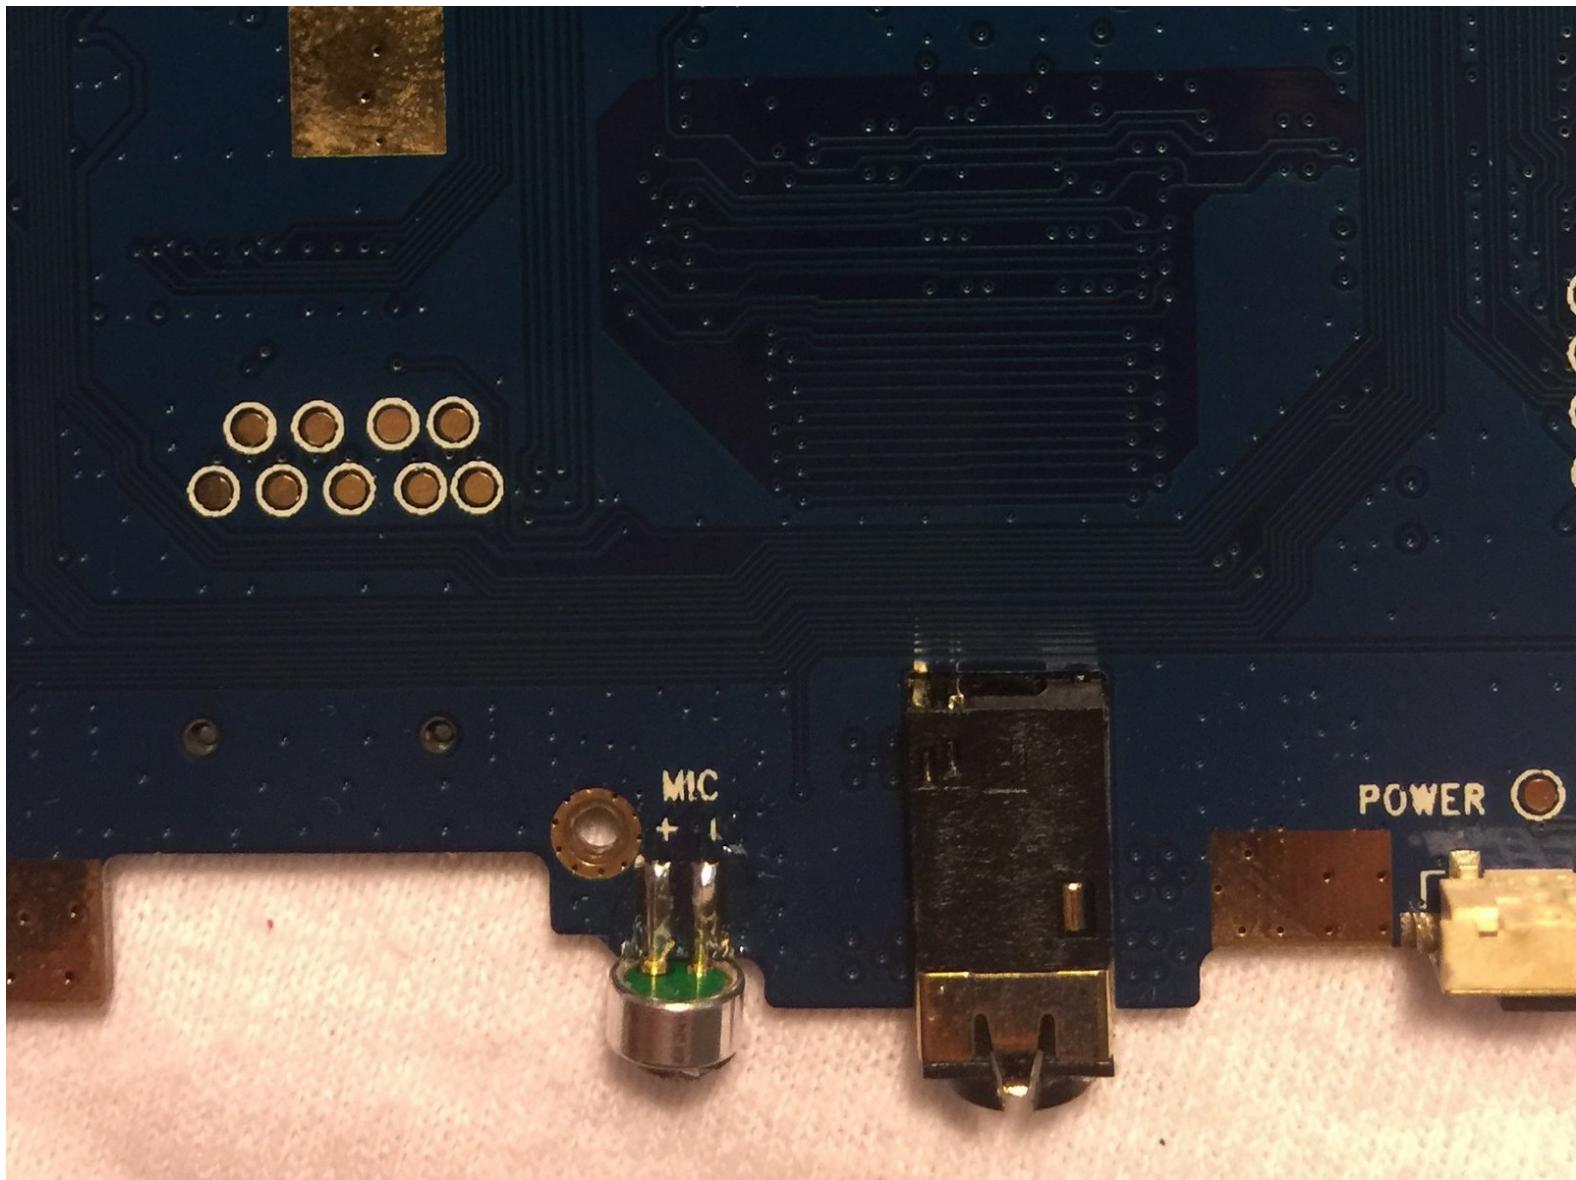

## INTRODUCTION

This is a guide to replace the microphone in the device. Make sure to follow all the steps correctly and handle with care.

### TOOLS:


- [JIS Driver Set \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Soldering Iron \(1\)](#)

## Step 1 — Back Cover





- Using a J00 Phillips-head screwdriver, remove the two screws located at the bottom of the device.
- *(i)* Screws are 5mm x 1mm in size.

## Step 2

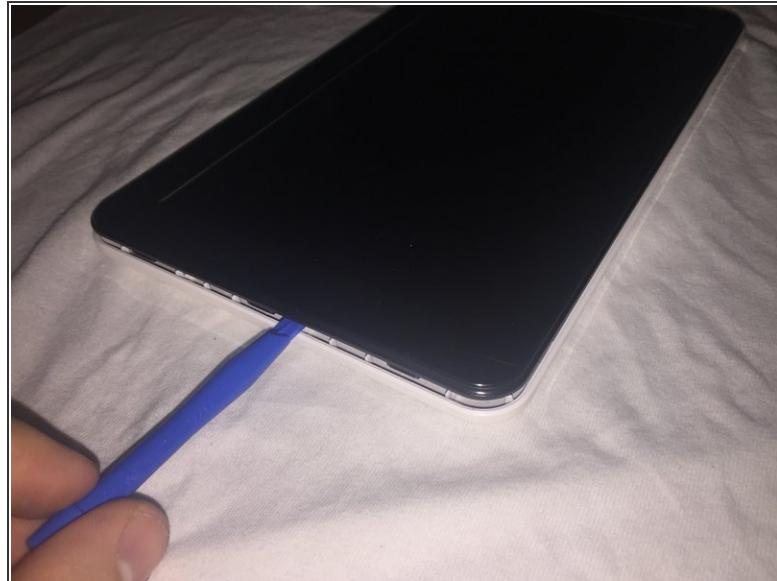

- Use the plastic opening tool to pry off the white back-plate of the device.

## Step 3 — Motherboard

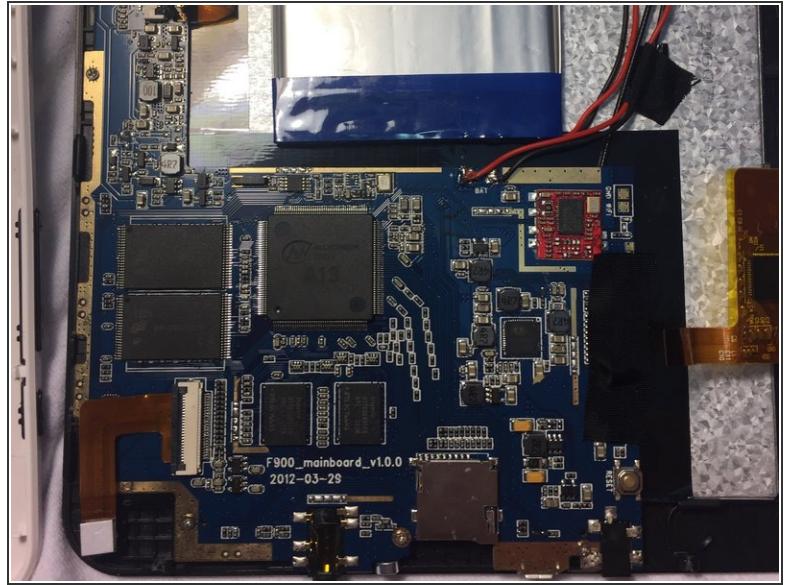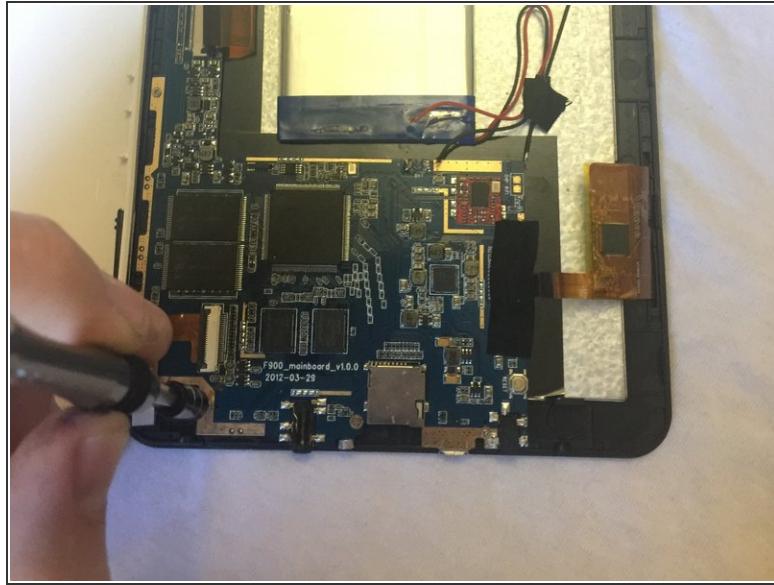

- Using a +00 Phillips head screwdriver, remove the screws securing the motherboard to the device housing.
- (i) Screws are 4mm x 1mm in size.



## Step 4



- Desolder the two black and red wires connected to the motherboard.
- Unclip and remove the ribbon cables attached to the motherboard.


*(i)* For soldering help, use the [How to Solder and Desolder Connections](#) guide.

## Step 5

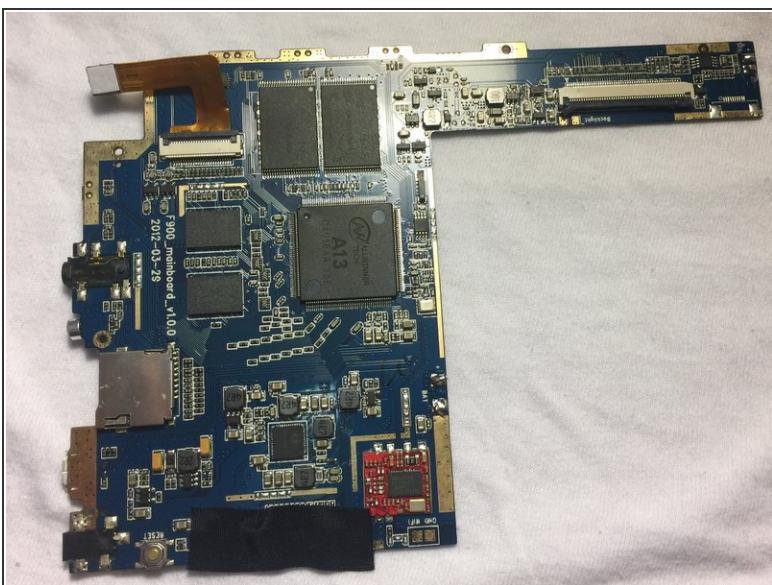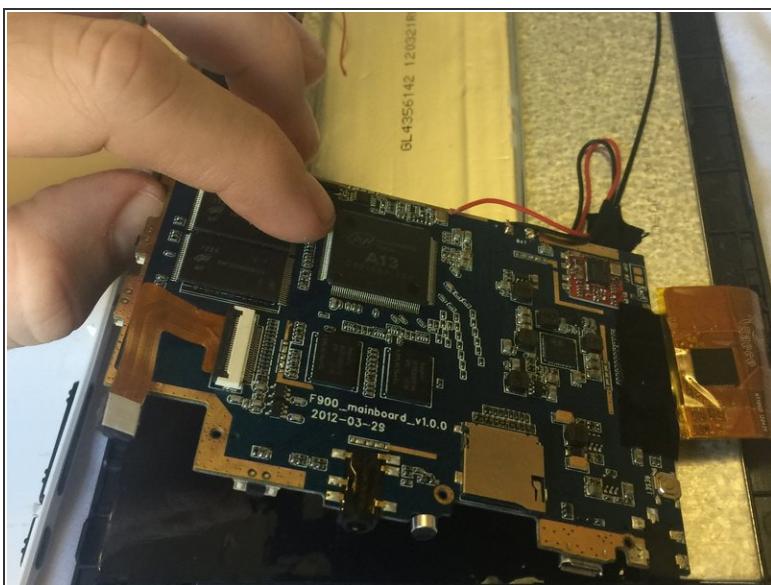

- Carefully lift and remove the motherboard from the device housing.

## Step 6 — Microphone

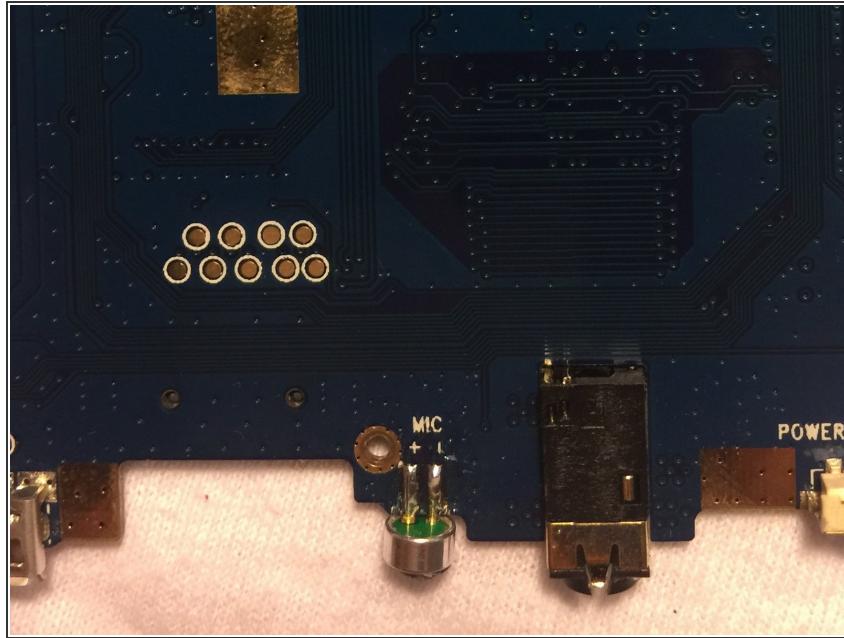

- Flip the motherboard over to bring the underside into view.
  - Find and desolder the microphone near the bottom of the motherboard and remove it.
  - Solder the new microphone in its place.
- i** For soldering help, check out the [How to Solder and Desolder Connections](#) guide.

To reassemble your device, follow these instructions in reverse order.