

Meridian IVR

5250 Gateway Development Guide

Publication number: 555-9001-318
Product release: Meridian IVR 2.0/I
Document release: Standard 1.0
Date: February 1996

© 1996 Northern Telecom
All rights reserved

Printed in the United States of America

Information is subject to change without notice. Northern Telecom reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant.

Nortel, Meridian IVR, Meridian Mail, ACCESS, and Meridian 1 are trademarks of Northern Telecom. DEC and VT420 are trademarks of Digital Equipment Corporation. HP, LaserJet, and ThinkJet are trademarks of Hewlett-Packard Company. X Window System and X are trademarks of the Massachusetts Institute of Technology. NCD is a trademark of Network Computing Devices Inc. UNIX is a registered trademark of AT&T. Voicetek and VTK are trademarks of Voicetek Corporation. Motif is a trademark of Open Software Foundation Inc. Touch tone is a trademark of Bell Canada. IBM is a trademark of International Business Machines Incorporated.

Publication history

February 1996

This document is the first standard issue for Meridian IVR release 2.0/I.

Contents

About this guide	ix
Who should use this guide.	ix
How to use this guide.	ix
Additional manuals.	x
<hr/>	
Chapter 1: About the 5250 gateway	1-1
The 5250 communication protocol.	1-1
The 5250 gateway hardware and software	1-3
TRS	1-4
TRSC.	1-5
Vendor communication software and hardware.	1-5
TRS configurations	1-5
<hr/>	
Chapter 2: Template files	2-1
Determining the required transactions.	2-1
Action templates	2-5
Action template syntax	2-6
Screen templates.	2-13
Screen template syntax.	2-15
Initial-action templates.	2-26
<hr/>	
Chapter 3: Getting started	3-1
Setting up the trs.conf file	3-2
Setting up the trs.sdf file	3-6
A complete sample transaction	3-9
Initial-action template.	3-9
Action template performing a transaction	3-13

Chapter 4: Call flow interface	4-1
Using the COMI, COMO, and COMA cells to access the host computer	4-2
Setting the COMI cell parameters	4-3
Setting the COMO cell parameters	4-7
Setting the COMA cell parameters	4-10
Sample application using the COMI, COMO, and COMA cells . .	4-11

Appendix A: SCO	A-1
Communication scripts	A-2

Appendix B: Host connectivity	B-1
IBM 5250 emulation characteristics	B-1
The 3270/5250 SNA/SDLC card	B-2
The 3270/5250 Token Ring card	B-2
9-Pin connector pinouts	B-4
Configuring 5250 for SDLC host communications	B-4
Verifying that Express recognizes the hardware	B-9
Defining the node	B-10
Defining the link	B-14
Defining the station	B-19
Defining the remote Logical Unit	B-22
Defining the symbolic destination	B-25
Defining the 5250 users/sessions	B-27
Configuring 5250 for Token Ring host communications	B-34
Verifying that Express recognizes the hardware	B-38
Defining the node	B-40
Defining the link	B-43
Defining the station	B-46
Defining the remote Logical Unit	B-50
Defining the symbolic destination	B-53
Defining the 5250 users/sessions	B-55
Testing 3270 and 5250 host communications	B-62

Glossary	Glossary-1
-----------------	-------------------

List of figures

Figure 1-1	Terminals connected to a mainframe.....	1-2
Figure 1-2	Logical terminal sessions running on a host computer	1-3

Figure 1-3	5250 gateway configuration	1-4
Figure 1-4	Meridian IVR 2.0/I 5250 gateway software architecture	1-5
Figure 2-1	Terminal operator vs. voice response system.....	2-3
Figure 2-2	Action and screen templates.....	2-4
Figure 2-3	Action template syntax	2-6
Figure 2-4	Action template example	2-7
Figure 2-5	Reset-action template sequence sample	2-9
Figure 2-6	Reset-action template sample.....	2-10
Figure 2-7	Logout action flow	2-11
Figure 2-8	Logout-action template sample	2-12
Figure 2-9	Fields and the system prompt	2-14
Figure 2-10	Fields in a host computer application.....	2-15
Figure 2-11	Screen template syntax.....	2-16
Figure 2-12	Screen template example	2-17
Figure 2-13	Field-descriptor syntax	2-20
Figure 2-14	Format of key-descriptor line.....	2-23
Figure 2-15	Sleep descriptor format	2-25
Figure 3-1	trs.conf file syntax	3-3
Figure 3-2	Initial action template	3-4
Figure 3-3	trs.conf file sample	3-6
Figure 3-4	trs.sdf file sample	3-8
Figure 3-5	Initial-action template sample.....	3-10
Figure 3-6	Logout-action used by the initial-action template ..	3-12
Figure 3-7	Action template sample.....	3-14
Figure 3-8	Reset-action template sample.....	3-15
Figure 3-9	Logout-action template sample	3-16
Figure 4-1	Accessing the mainframe	4-1
Figure 4-2	Activating the gateway from a COMI cell	4-2
Figure 4-3	COMI cell parameter window	4-4
Figure 4-4	COMO cell parameter window	4-7
Figure 4-5	COMO cell.....	4-9
Figure 4-6	COMA cell in the clean-up handler	4-11
Figure 4-7	Application accessing the TRS process from the COMI and COMO cells.....	4-12
Figure 4-8	COMI/COMO cell parameters, TRS templates, and host screens.....	4-14
Figure B-1	ARNET SDLC card	B-2
Figure B-2	Madge Smart 16/4 AT Plus Ringnode token ring host card	B-3
Figure B-3	Token Ring pin arrangements.....	B-4

Figure B-4 Subminiature STP cable pinoutsB-4

List of tables

Table 2-1 Valid field I/O entries 2-22
Table 2-2 Valid key names 2-24
Table 4-1 Branches of the COMO cell 4-10
Table 4-2 Application cell functions for Figure 4-7 4-13
Table A-1 Default settings for EXPRESS A-1

List of procedures

Procedure 2-1 Accessing billing information 2-5

About this guide

Who should use this guide

This Meridian IVR 2.0/I 5250 Gateway Development Guide is written for Meridian IVR 2.0/I application developers whose voice applications require access to mainframe resources using the 5250 communication protocol.

This guide assumes that you are familiar with 5250-based applications, and experienced in creating voice applications with Meridian IVR 2.0/I. You should also be familiar with the UNIX operating system and the vi text editor (or another text editor installed on your application processor).

How to use this guide

This guide contains the following chapters and appendices:

Chapter 1: About the 5250 gateway

Provides an overview of the 5250 communication protocol and the features of the Meridian IVR 2.0/I 5250 Gateway.

Chapter 2: Template files

Shows you how to write template files that capture the actual flow of screens and fields that must be traversed to transmit information to and from the mainframe computer.

Chapter 3: Getting started

Describes the steps you must perform to activate the 5250 gateway software for use with Meridian IVR 2.0/I. This chapter also includes a sample set of template files that would be required to perform a specific transaction.

Chapter 4: Call flow interface

Explains how to integrate the templates you created in Chapter 3 with your Meridian IVR 2.0/I application call flow.

Appendix A: SCO

Provides information on configuring vendor host communication packages specifically for use with Meridian IVR 2.0/I and TRS on SCO.

Appendix B: Host connectivity

Shows you how to interface with different host computers over systems such as IBM 3270 and 5250.

Additional manuals

The information supplied with your vendor's host connectivity package will be necessary for hardware and software installation and configuration.

You may find the following manuals useful while reading this guide.

Manual	NTP Number
<i>Meridian IVR Application Development Guide</i>	(555-9001-310)
<i>Meridian IVR System Administration Guide</i>	(555-9001-300)

Chapter 1: About the 5250 gateway


This chapter introduces you to the Northern Telecom (Nortel) 5250 Gateway and provides:

- background on the 5250 communication protocol
- descriptions of the 5250 Gateway hardware and software
- a description of how Meridian IVR 2.0/I interfaces with a host computer
- a brief explanation of terms used in this guide

The 5250 communication protocol

The 5250 communication protocol has its origin in the Systems Network Architecture developed by IBM. These terminals gives multiple users access to resources residing on a host computer.


Figure 1-1
Terminals connected to a mainframe

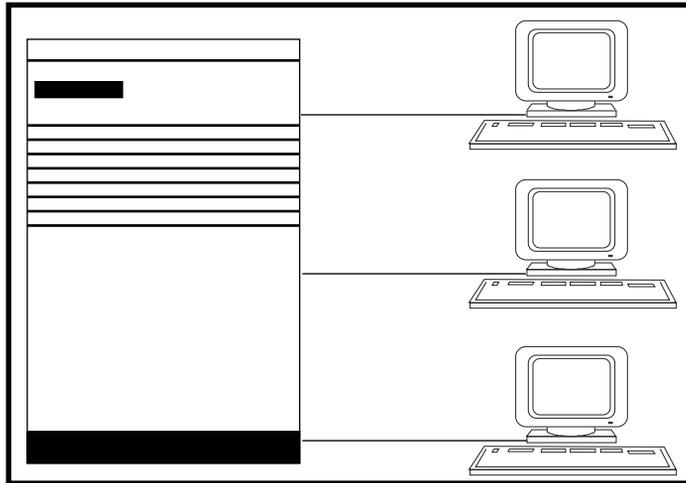

The 5250 terminal uses a specific protocol for displaying information on its screen and returning screen contents to the host. This protocol is based on each field on an input screen having unique attribute information. These attributes identify the characteristics of the information written to the screen (e.g., highlighted, reverse video, writable). When a user enters information, field attributes are modified. This protocol became a standard for information transfer and presentation across the IBM product line.

The 5250 communication adapter uses the same technology. One 5250 adapter installed in an application processor can emulate up to 64 concurrent 5250 terminal sessions over a single synchronous connection. By complying with the 5250 communication protocol, Meridian IVR 2.0/I applications can support multiple logical 5250 terminal sessions. No physical terminals are required. Your Meridian IVR 2.0/I applications can access the same host resources as operators sitting at 5250 terminals.

Figure 1-2
Logical terminal sessions running on a host computer

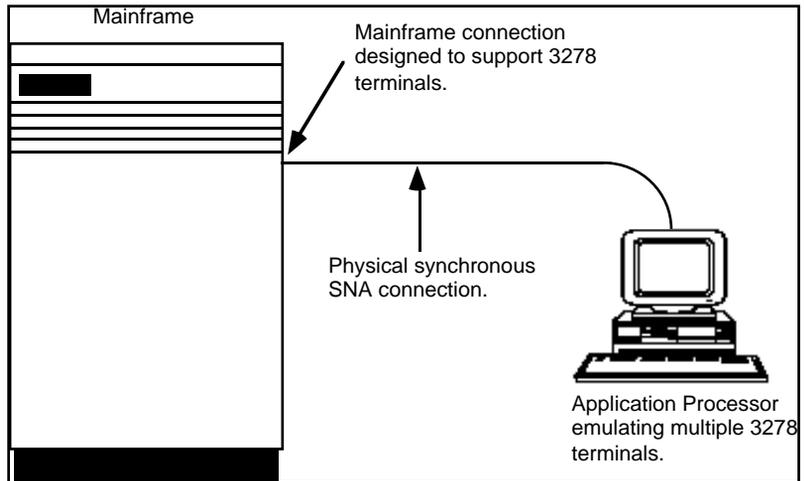

Consider a menu-driven program on a host. This program allows an operator to enter and retrieve account information stored in a database. Instead of connecting a 5250 terminal to the host and retrieving information manually, you could write a Meridian IVR 2.0/I application that logs on to the host, manipulates the host application, then stores the desired information in the Meridian IVR 2.0/I application's buffers. These buffers can then be played to a caller.

Taken a step further, your application could simultaneously run multiple terminal sessions, processing different transactions for different callers.

The 5250 gateway hardware and software

You can install the 5250 Gateway on application processors with the following operating systems:

- SCO Open Desktop

The application processor must have


- a synchronous SNA protocol connection to one or more host computers

The 5250 Gateway consists of

- the Terminal Resource Server (TRS)
- the Terminal Resource Server Client (TRSC)
- vendor communication software and hardware

Figure 1-3 shows the typical hardware configuration for the 5250 gateway.

Figure 1-3
5250 gateway configuration

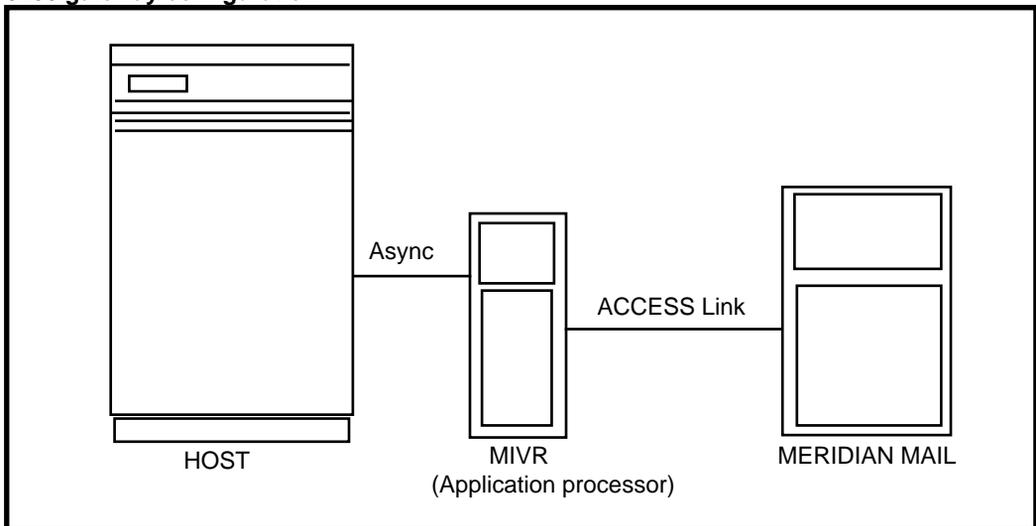

TRS

The Terminal Resource Server (TRS) controls all host communication sessions. TRS controls all installed terminal emulation packages and manages all host connections. TRS runs as a stand-alone process within the Meridian IVR 2.0/I architecture, and starts automatically at Meridian IVR 2.0/I startup.

TRS passes information between Meridian IVR 2.0/I and the TRS Client (TRSC). It acts as a translator between Meridian IVR 2.0/I and the Host.

To use TRS, place a COMI cell in the Meridian IVR 2.0/I call flow at the point where you need to establish a host connection. The COMI cell sends requests for information to the TRS process, which then passes the requests on to the host. A COMO cell retrieves the information sent to TRS by the host, and then ends the transaction. A COMA cell aborts the host transaction in the case of a hang-up or an error. For information on using Meridian IVR 2.0/I cells, see the Application Development Guide and the Meridian IVR 2.0/I Cell Catalog.

TRSC

The Terminal Resource Server Client (TRSC) communicates with the specific vendor communication package. It takes data from TRS and formats it for use by the different vendor hardware and software. There is a different TRSC for every different host connectivity package.

Vendor communication software and hardware

The vendor communication software and hardware manage the actual host connection. They are responsible for transmitting and receiving data complying with the SNA network protocol.


Apertus

Apertus provides a multiprotocol adapter board, an expander box, and an application called Express.

Each component of the host connectivity process is a self contained process, but they all work together in the architecture shown in [Figure 1-4](#).

Figure 1-4

Meridian IVR 2.0/I 5250 gateway software architecture

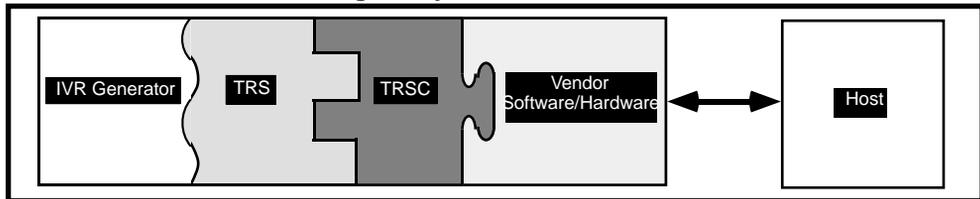

TRS configurations

TRS runs on a fully-integrated node, where you install the 5250 hardware and software on the application processor.

Integrated TRS configuration

The simplest 5250 configuration is a single, fully-integrated node consisting of an application processor. The 5250 hardware and software is installed as part of the MIT. TRS is installed during installation of Meridian IVR 2.0/I. This puts all the communication tools in one centralized location, simplifying the host connectivity procedure.

In an integrated environment, you store TRS and its associated files on the application processor in the /u/ivr/3270 directory.

Note: The etc/services file residing on the client application processor and the TRS server must include the following directive:

```
trs 1001/tcp
```

Once this configuration has been properly set up, the client application processor can access the TRS server system's 5250 Gateway resources to communicate with the host computer.

Chapter 2: Template files

The TRS process uses action and screen templates to maneuver through the screens of a host application. These templates provide the host with the same input as a terminal operator. These templates also receive the output from the host.

This chapter explains how to

- determine the actions a terminal operator performs to enter and retrieve information
- create the action and initial action template files that define the sequence of host application screens for each transaction
- create the screen template files that define the sequence of fields encountered on each screen

Note: If you make backups of your template files, do not store them in the `/u/ivr/3270` directory, or in any subdirectory under `/3270`. You should make a directory at the same hierarchical level or higher as `/3270` (for example, `/u/ivr/3270bak`). TRS searches the `/3270` directory and any subdirectories within it for files with the `.act` or `.scn` extensions.

Determining the required transactions

Imagine that you are an operator sitting at a terminal. In order to perform a specific task, you type information and press function keys until you accomplish the desired task. Perhaps a caller asks you to look up a customer's account balance, or enter an order. The series of steps you perform at the terminal enable the application on the host computer to complete the transaction.

To develop a voice application that accesses the same information as a terminal operator, you need to tell Meridian IVR 2.0/I how to execute the same series of actions that the terminal operator executes. You provide this information in ASCII files called screen and action template files.


Screen and Action template files provide the layout and content of each screen in the host application as the terminal operator sees them. Figure 2-1 compares a transaction done by a terminal operator to one done by a customer calling into a voice response system.

Note: The first step performed by the terminal operator is not performed by the action template. It is performed by the initial-action template (described later in this chapter). The initial-action template handles the login and moves the application to the appropriate screen to begin the transaction.

TRS requires two types of template files:

- Action templates, which describe the sequence of screens traversed in order to perform a specific transaction. Figure 2-4 shows an example of an action template.


Figure 2-1
Terminal operator vs. voice response system

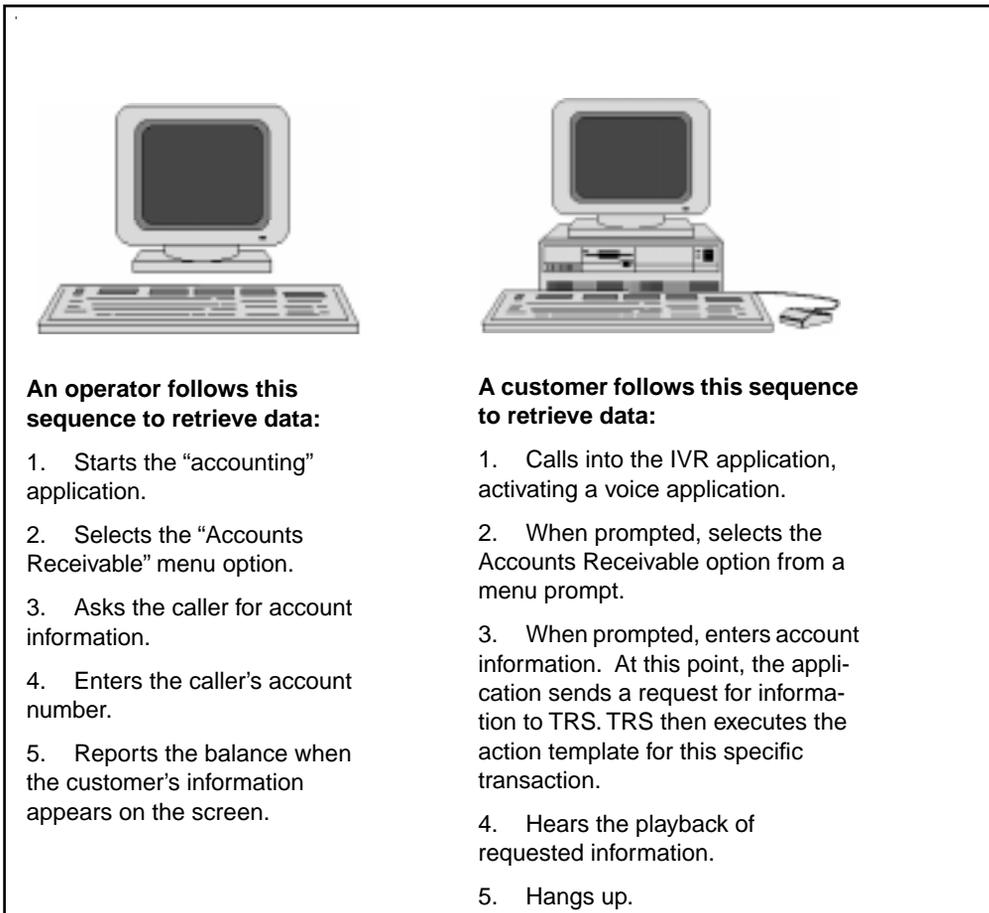

- Screen templates, which validate each screen, define the fields on the screen that require data, and define all keystrokes required for the screen.

Figure 2-2 shows how screen templates relate to action templates.

Figure 2-2
Action and screen templates

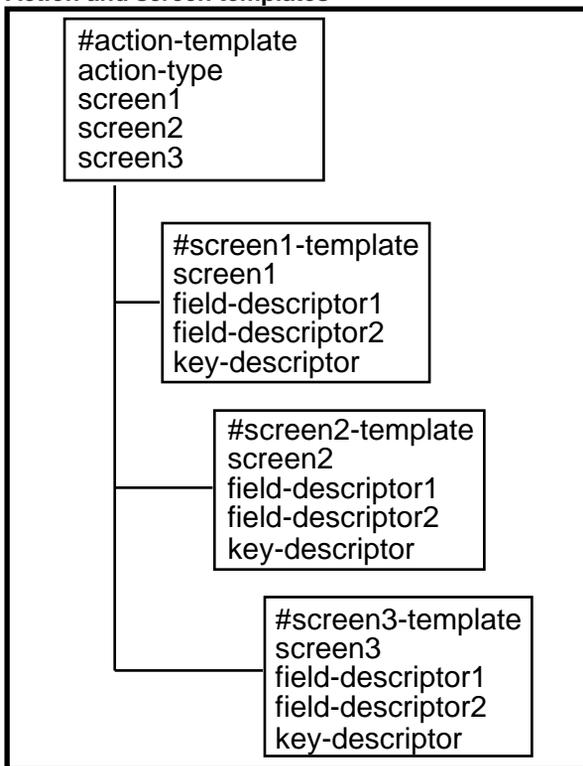

5250-based applications often have format inconsistencies that make it difficult for TRS to efficiently determine when the host application is ready for input and what region of the host screen contains vital information. These inconsistencies are due to the character based nature of the 5250 protocol.

In addition, the 5250 communication protocol has no way of notifying TRS that host data transmission has ended. From the terminal operator's perspective, it is easy to tell when host transmission ends because the operator's requested information appears on the screen. From TRS's perspective, there is nothing inherent in the 5250 protocol to provide notification of the end of host output. The TRS encounters a stream of data from the host, and from this must determine the identity of each screen as well as locate the end of each screen. To enable TRS to do this, as well as cope with screen inconsistencies, you must create a file called *screen.conf*.

The action templates, screen templates, and screen.conf file are ASCII text files that use a simple syntax to define the screen flow and input/output fields. The sections that follow provide a detailed explanation of the templates, as well as the information necessary to create the screen.conf file.

Action templates

A 5250 transaction typically moves through several screens until it locates specific information. The screens may be a series of commands issued at the operating system prompt, or they may be screens within an application running on the host computer. Whenever Meridian IVR 2.0/I references an action template, the 5250 Gateway executes the screen templates listed in the action template, moving through the application just as a terminal operator would. An action template must specify the same sequence of screens that the terminal operator traverses.

A separate action template defines each transaction. In the example shown in Figure 2-1, if you want to select a menu option other than “Accounts Receivable,” you would define another action template.

Action templates describe the flow of the screens that comprise a particular transaction. For example, if you want a transaction to access billing information for a specific client, as a terminal operator you would perform the following steps:

Procedure 2-1 **Accessing billing information**

- 1 Log in to the computer.
- 2 Start the “acct” application.
- 3 Select the “Accounts Receivable” menu.
- 4 When prompted, enter the client’s account number and press <Enter>. A screen appears displaying the client’s billing information.
- 5 Read the account information on the screen.

In an Meridian IVR 2.0/I 5250 transaction, an initial-action template performs steps 1 and 2. The TRS automatically executes the initial-action template at TRS startup (initial-action templates are described later in this chapter.). An action template created to execute this transaction would perform steps 3 through 5.

Action template syntax

An action template is an ASCII file created with a text editor. The action template files you create must reside in the /u/ivr/3270 directory or in a subdirectory below /u/ivr/3270, and must have the file name extension .act. For example, if you created an action template called getbalance.act, it would have this path:

```
/u/ivr/3270/getbalance.act
```

The syntax of an action template is shown in Figure 2-3.

Figure 2-3
Action template syntax

```
#comment  
action-name app-name reset-action logout-action <manual mode>  
screen-template  
screen-template  
•  
•  
•
```

The lines depicted as • are additional screen templates used in the transaction. Each screen template corresponds to a specific host application screen, and is listed in the action template in the same order as encountered during an actual terminal session. (Screen templates are discussed later in this chapter.) The example in Figure 2-4 illustrates an action template file which describes a transaction for retrieving account information.

Figure 2-4
Action template example

```
#Example action template file: filename is getbalance.act
getbalance  accounting  reset_cust  logout_cust
#acctrec chooses the billing option from the main menu
acctrec
#acctno specifies the account number for the customer
acctno
#customer displays the customer information
customer
```

In Figure 2-4, action-name is `getbalance`, the name of the action template file without the `.act` extension. The app-name is `accounting`. The reset-action is `reset_cust` (file name `reset_cust.act`), and the logout-action is `logout_cust` (file name `logout_cust.act`). Manual mode is omitted because manual mode is not required for this transaction (a description of manual mode follows).

The remaining lines identify the sequence of screens (`acctrec`, `acctno`, and `customer`) TRS must traverse to retrieve the customer billing information. These screens are listed in the order that they must be accessed.

An explanation of each entry in the action template syntax follows.

#comment

The first line of the template in Figure 2-3 is a comment. The comment line is not required, but is recommended to describe the purpose of the action template. It is good practice to heavily comment files so that you or others can easily make changes to the templates in the future.

Comments lines start with the “#” symbol and can be embedded anywhere in the action template. A comment takes the entire line; no non-comment fields may precede or follow the comment in that line.

action-name

The action-name is the file name of the action template file without the .act extension. The action-name is required to begin the transaction. For example, if the action template's file name is getbalance.act, you would enter getbalance for the action-name.

app-name

When you install the 5250 Gateway on your application processor, you must create a trs.conf file that assigns TRS session numbers to the application on the host computer (the trs.conf file is described in Chapter 3). Choose a name for the host computer application name; it does not need to match any actual application name on the host computer.


As an example, this guide uses the app-name "accounting" to represent the host computer "acct" application.

The app-name you specify in the action template must exist in the trs.conf file (discussed in Chapter 3). Meridian IVR 2.0/I passes the app-name to TRS function, which uses the name to start the appropriate session with the host computer.

reset-action

The reset-action specifies an action template to be processed when the transaction completes or if the transaction fails. Typically, the reset-action template is used to bring the host computer application back to its main screen so it is ready to process the same type of transaction. Figure 2-5 shows the sequence a sample reset-action template follows.

Figure 2-5
Reset-action template sequence sample

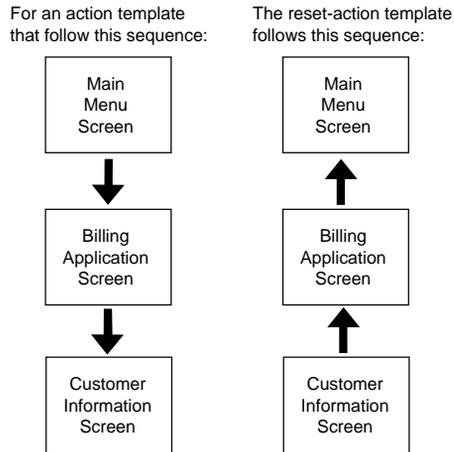

Entering a hyphen in the reset-action entry indicates that no reset-action template is specified.

If no reset-action template is specified and the transaction being executed by the action template fails, the logout-action template (described in the next section) is executed. If the transaction succeeds and there is no reset-action template specified, the host computer application remains at the screen where the transaction ended.

When you create a reset-action template, do not specify reset-action or logout-action templates in it. For example, Figure 2-6 shows a sample reset-action template.

Figure 2-6
Reset-action template sample

```
#This reset-action template returns the host computer application
#to the main menu screen from the customer information screen
#filename: reset_cust.act
reset_cust  accounting  -  -
clrcust
#exit the customer information screen
atmenu
#leave the session at the menu screen
```


The action template using this reset-action template would enter reset_cust as the reset-action entry.

logout-action

The logout-action specifies a logout-action template to be executed if the reset-action template fails, or if the transaction fails and there is no reset-action template specified. If the transaction succeeds, the logout-action template is not executed.

The TRS uses the logout-action template to return the failed transaction to the initial screen (usually a login screen). After it successfully executes the logout-action template, it executes the initial-action template (described later in this chapter) after 30 seconds. Figure 2-7 shows the flow of the logout action template.

Figure 2-7
Logout action flow

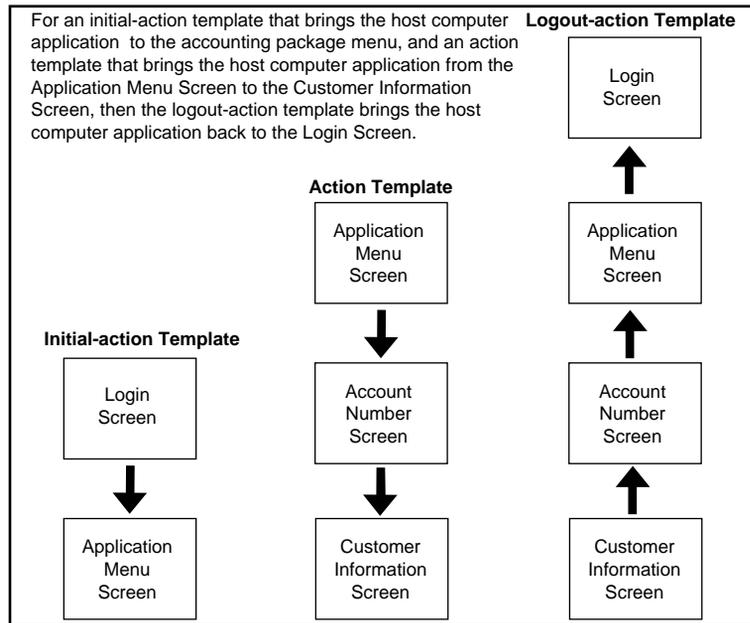

The logout-action template locates the screen where the transaction failed. If for example, the transaction failed at the account number screen, the logout-action template locates the screen template with the appropriate validation tag and starts from that screen.

Entering a hyphen “-” for the logout-action entry indicates that no logout-action template is specified. If neither a reset-action template nor a logout-action template is specified and the transaction fails, the host computer application remains at the point where the transaction failed. Future transactions that try to use this session would also experience errors because the screen where the session remained would not be the expected starting screen (unless the transaction can start from any screen).

When you create a logout-action template, do not specify reset-action or logout-action templates. Figure 2-8 shows a sample logout-action template.

Figure 2-8
Logout-action template sample

```
#This logout-action template returns the application to the login
#screen from the customer information screen
logout_cust  accounting  -  -
clrcust
#exits the customer information screen
clrmenu
#exits the acct application, shows the system prompt
```

screen-template

The screen-template (the file name of the template without the .scn extension) identifies the screen template used during the 5250 transaction. Enter the screen templates in the exact order they appear during the transaction. Each screen template must be listed on a separate line. The syntax for screen templates is described later in this chapter.

<manual mode> (optional field)

The <manual-mode> entry allows you to attach a session resource to a particular channel. You can then use the same session for consecutive Meridian IVR 2.0/I transactions. This type of session is not released when the transaction is finished. To exit manual mode you must execute a COMA cell in the Meridian IVR 2.0/I application or process another action template that does not contain the manual mode option. Chapter 4 describes how to use the COMA cell.

To specify manual mode, enter manual after the logout-action template name. If you omit manual, automatic mode is used for the template. In automatic mode, the session assigned to the action template is free for use when the transaction is completed.

Note: You should not specify a reset-action template in an action template that uses manual mode. Manual mode is designed to stay at a specific screen. The next transaction received by the session will start at the last screen of the action template that used manual mode. This next transaction should use automatic mode and specify a reset-action template that brings the session back to the starting screen of the first action template (that specified manual mode).

Screen templates

Screens used by the host computer could be a series of commands entered at the system prompt coupled with the system's response to those commands, or screens defined by applications on the host computer. You should define screen templates that issue the system commands to start the application (usually as part of the initial-action template), and then screen templates that make menu selections and enter or retrieve data from the screens displayed by the application. This guide uses an accounting application as an example.

Each screen contains fields. For the 5250 Gateway, a field is any place on the screen where data is entered or displayed. For example, the cursor location after a system prompt where you would type a command is considered a field. Also, within an application, the area on the screen where an account balance is displayed is also considered a field (the traditional definition of a field).

For a specific transaction, specific data is entered in certain fields, and data is read from other fields. A screen template identifies those fields on the screen that are used to process a transaction. Only the fields that are used in the transaction are included in the template. Figure 2-9 shows a sample screen.

Figure 2-9
Fields and the system prompt

```
login: vad  
Password:  
Last login: Fri Apr 16 16:01:34 from publisher  
ULTRIX V4.2 (Rev. 96) System #9: Mon Jul 29 10:08:24 EDT 1994  
  
$acct
```

The entry shown for the screen in Figure 2-9 has not yet had the <Enter> key pressed. If <Enter> was pressed the application would have been started and the screen replaced by the application screen. In Figure 2-9, “vad” has been entered into the login field. A sample application screen showing fields is shown in Figure 2-10.

Figure 2-10
Fields in a host computer application

Account Number:845-23-87
Customer:Jane K. SmithCurrent Balance:2482.14
Address:19 Alpha RoadPayment Due:150.00
ChelmsfordPayment Due Date:4/30/93
MA 01824

Options:

1Print invoice
2Enter payment
3Enter purchase
4Exit

Type menu selection:

In Figure 2-10, “Jane K. Smith” is entered in a field.

Different transactions may access different fields on a screen. For example, a transaction to locate the payment due would only need to access that field, while a transaction retrieving the customer’s balance would only need to access the Current Balance field.

A screen template is an ASCII file created with a text editor. The screen template files you create must reside in or under the Meridian IVR 2.0/ /u/ivr/3270 directory, and must have the file name extension .scn. For example, if you created a screen template called customer.scn, it would have this path:

```
/u/ivr/3270/customer.scn
```

For each accessed field, there should be a field descriptor specified that governs how data is retrieved from or entered in the field. The screen template can include both data input entries as well as data output entries.

Screen template syntax

The syntax of a screen template is shown in Figure 2-11.

Figure 2-11
Screen template syntax

```
#comment  
screen-name validation tag offset validation tag  
field-descriptor  
field-descriptor  
•  
•  
•  
key-descriptor  
sleep-descriptor
```

The lines depicted as • are additional field-descriptor lines. The example in Figure 2-12 illustrates a screen template file that obtains the balance from the screen shown in Figure 2-10.

Figure 2-12
Screen template example

```
#Screen template file to obtain the current balance; filename: customer.scn  
customer1,1Account  
#places balance into buffer  
0,0Balance:$
```

In Figure 2-12, the first line is a comment describing the screen template file. The screen-name is “customer,” the name of the screen template file without the .scn extension. The “1,1” represents the location of the validation tag on the screen. The row is listed first, followed by the column. “Account” is the screen validation tag.

The fourth line is the field-descriptor that describes an action to take. This field descriptor is going to find an exact match to “Balance:” and place the contents of the field into a buffer. The field-descriptor line has many variations, depending on what you want to do with a field. For example, the fourth line in Figure 2-12 could be entered as:

```
2,48—$
```

This would place the contents of the field starting at 2,48 into the next buffer. See “field-I/O” later in this section.

An explanation of each entry in the screen template follows.

#comment

The first line of the template in Figure 2-12 is a comment. The comment line is not required, but is recommended to describe the purpose of the action template. It is good practice to heavily comment files so that you or others can easily make changes to the templates in the future.

Comments lines start with the “#” symbol and can be embedded anywhere in the action template. A comment takes the entire line. No non-comment fields may precede or follow the comment in that line.

screen-name

The first non-comment line specifies the name of the screen. This is the screen template file name without the .scn extension.

validation-tag offset

This entry specifies the position of the validation-tag by row and column. You may enter 0,0 for the validation-tag offset in only two cases:

- To indicate that you do not want to validate this screen (you would also need to enter a hyphen, “-”, as the validation-tag). You should only ignore the identity of a screen if you want TRS process to perform the actions specified in the screen template regardless of what screen is actually active. For example, if you want to execute a command at the system prompt, you would not need to verify that you are at a specific screen, as long as you are sure the screen has a system prompt.

Note: In general, you should validate screens whenever possible. This ensures data for the host computer application is sent to the correct screen, and data sent back to the Meridian IVR 2.0/I application is from the correct screen.

- To tell TRS to search the screen for the validation tag. If you do not know the exact location of the validation tag or if the location of the validation varies, you can tell TRS to search the screen for the tag. Enter 0,0 for the offset, then enter the validation tag in the appropriate field.

validation-tag

This entry specifies the validation-tag used on the screen. The entry should be text that always appears in the same location every time this screen displays. For the example, “Account” is always displayed starting at location 1,1 whenever a customer’s Account Receivable screen is displayed.

At the end of the previous screen template, you may want to use a clear screen function (or execute the ENTER key 24 times using key-descriptor lines) so you know the starting point for information on the screen, especially if the screens you are accessing on the host computer scroll. For example, if you execute an application and it starts displaying information at the current cursor location, you need to know the current cursor location to be able to validate that screen.

Enter a hyphen, “-”, for the validation-tag to indicate that you do not want to validate this screen (you would also need to enter 0,0 as the validation-tag offset). As described previously, you should only use this method of validation if you want TRS process to perform the action specified in the template regardless of what screen is actually active.

Note: If the screen you need to validate is a blank screen, enter this line for the items: screen-name, validation-tag offset, and validation-tag:

```
blank    1,1    BLANKSCREEN
```

The word “blank” is a placeholder; the 1,1 and BLANKSCREEN are required.

field-descriptor

This line identifies the location and name of a field on the screen, and the action to be performed. You can enter as many field-descriptor lines as necessary to perform the task needed on the screen. The field-descriptor lines should be entered in the same order as they are accessed for the transaction. Figure 2-13 shows the syntax for field-descriptor lines.

Figure 2-13
Field-descriptor syntax

```
row,column  field-name  field I/O
```

Note: If the application running on the host is stream-based, meaning the screen scrolls as the user enters data and retrieves responses, you should enter the field-descriptor as follows:

```
0,0 - BLANKOUT
```

In this instance, the field-descriptor will clear TRS memory space associated with the application screen so that your application call flow will know where to retrieve the appropriate data.

row,column

If TRS is going to read information from a field on the host screen, this entry locates the field on the screen. If you know the exact location of the field TRS is reading from, you can enter it in row, column format. If you do not know the exact location of the field TRS is reading from, or if the location of the field varies, you can enter 0,0 and TRS will search for a match to the name specified in field name. For unformatted, character-based applications, you must specify the exact location.

In 5250 transactions, writing to the terminal screen always occurs at the current cursor position. Therefore, if the field I/O action is writing text to the host screen, TRS will write the text to the screen at the current cursor position regardless of the row,column you specify.

If you enter “0,0” and a hyphen for the row,column and field-name entries, the field I/O specified is executed at the current cursor location.

To locate field-names on the screen for reading, the offset of the upper left corner of the screen is 1,1 and the lower right corner is 24,80.

field-name

This entry identifies the field being accessed on the terminal screen. If the field-descriptor is 0,0 (that is, for an exact match), the field-name must uniquely match text on the screen or must be a hyphen to indicate that the field is at the current cursor position. When entering the field name, keep in mind that TRS process right-justifies all field names and removes all extra white space. If the transaction fails, this field identifies the current screen so the reset-action template can be executed.

If you enter “0,0” and a hyphen for the row,column and field-name entries, the field I/O specified is executed at the current cursor location.

To specify a location on the screen that does not have an associated field-name, use a hyphen, “-”, for the field-name entry. If you do, you must specify a location, such as 24,8 for the location of the action specified by the field-I/O entry.

field-I/O

This entry indicates the action to be taken on the field. Table 2-1 explains the valid entries for this field.

Table 2-1
Valid field I/O entries

Entry	Description
*	Inputs the contents of the next input buffer (transmitted from the Meridian IVR 2.0/I application) into the field.
\$num	Outputs the contents of the field into the next output buffer. num is a number in the range 1–31 and represents the number of characters in the field TRS will put in the output buffer. If you do not assign num a value, TRS will place 31 characters into the buffer.
%n\$	Outputs the contents of the field into an internal variable named n, which must be a number from 1–9
%n*	Enters the contents of internal variable n into the field.
%n\$num	Outputs the first num characters of the field into variable n.
text	Any text string to be entered in the field. If any of the special characters listed in this table are to be entered as text, enclose the entire text in quotes (e.g., "\$abc").
BLANKOUT	Clears TRS memory space associated with the host application screen before retrieving output.

Note: Place the asterisk and dollar sign characters in quotation marks if your field-descriptors require their use without their associated buffer commands.

For retrieving data into an output buffer, \$num indicates the number of characters to be retrieved from the field; using \$ without a number retrieves characters until an attribute is encountered, or a maximum of 31 characters have been retrieved.

Internal variables (indicated by the % symbol) are used within the 5250 screens only and cannot be transmitted through the TRS gateway. You can only use internal variables to store and enter data from one screen to another in the host computer application. To send the data to the Meridian IVR 2.0/I application that called TRS process, you need to store the data in an output buffer.


When entering a field-descriptor, the entries on the line should be separated by white space or tab characters. If you are entering text for the field I/O, TRS ignores any white space you include with the value until it encounters the new line character (e.g., the value includes several words).

Note: The order of the field-descriptor lines in your screen template file determines how data is entered and retrieved from the screens and written into the input and output buffers of a COMO cell. Chapter 4 describes how to use Meridian IVR 2.0/I cells to retrieve data from the host computer.

key-descriptor

Identifies a key to be used with the screen. To send information to the computer for processing or to execute a command, the terminal operator presses a key on the terminal keyboard. If you do not specify a key, nothing is sent to the host and the current screen does not change. The key could be the ENTER key or a function key. The format of this line is similar to the field-descriptor. Figure 2-14 contains the format of the key-descriptor.

Figure 2-14
Format of key-descriptor line

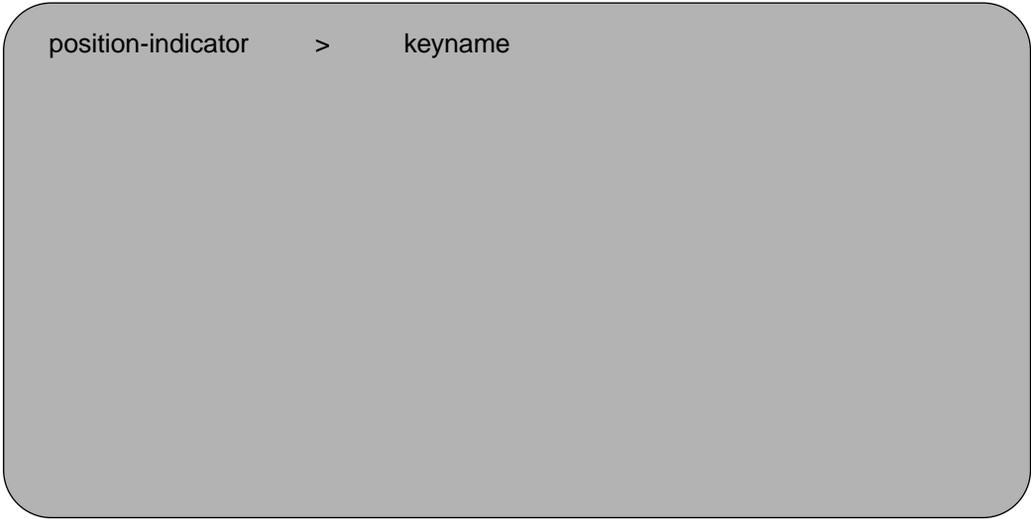

```
position-indicator    >    keyname
```

position-indicator

This entry should be set to 0,0.

>

This character indicates that this line contains a key.

keyname

The name of the key for this screen. Table 2-2 lists the valid keys you can enter.

Table 2-2
Valid key names

ATTENTION	FORWARDWORD	PF11
BACKSPACE	HOME	PF12
BACKTAB	INSERTCHAR	PF13
BACKWORD	NEWLINE	PF14
CLEAR	PA1	PF15
CURSORDOWN	PA2	PF16
CURSORLEFT	PA3	PF17
CURSORLEFTDBL	PF1	PF18
CURSORRIGHT	PF2	PF19
CURSORRIGHTDBL	PF3	PF20
CURSORUP	PF4	PF21
DELCHAR	PF5	PF22
DUP	PF6	PF23
ENTER	PF7	PF24
ERASEEOF	PF8	RESET
ERASEINPUT	PF9	SYSREQUEST
FIELDMARK	PF10	TAB

This line may appear anywhere after the screen-name line (that is, the first non-comment line). As with field-descriptor lines, the entries on this line must be separated by white space or tab characters.


sleep-descriptor (optional)

A sleep-descriptor causes the transaction to pause for a specified number of seconds. You can use a sleep-descriptor to pause the transaction for a specified period of time before or after processing a key-descriptor. The waiting period takes into account the time the host computer may take to process the information entered on the screen, and to move to the next screen. The transaction waits at any point where you place a sleep-descriptor.

Usually, a sleep-descriptor is placed after a key-descriptor to indicate that the session should wait for a specified amount of time to ensure that the next screen is ready.

Each sleep-descriptor follows the syntax shown in Figure 2-15.

Figure 2-15
Sleep descriptor format

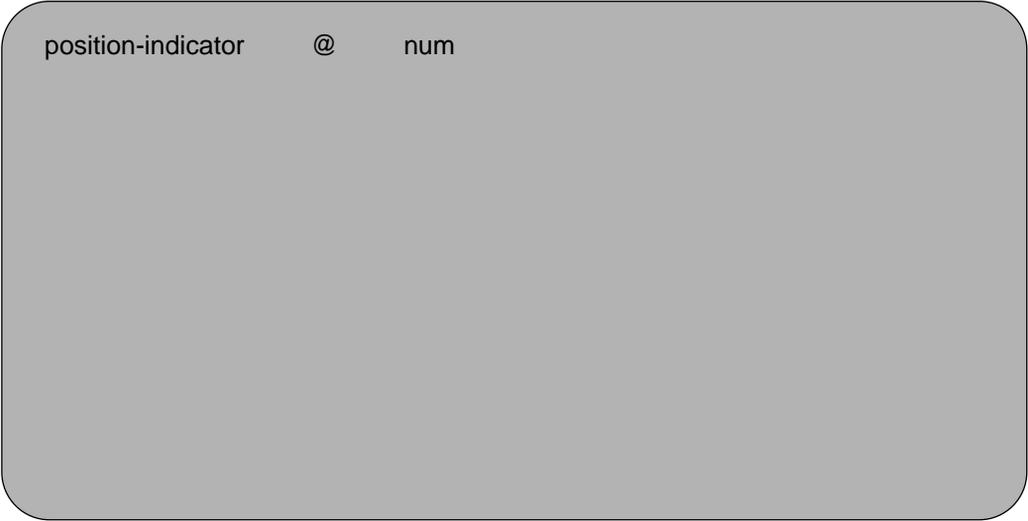

```
position-indicator @ num
```

position-indicator

This entry should be set to 0,0.

@

Identifies that this line is a sleep-descriptor.

num

Specifies the number of seconds that the session should sleep. For example, to wait 25 seconds, you would code the sleep-descriptor as

0,0 @25

Initial-action templates

Before you can process any information on the host computer using the 5250 Gateway, you need to set the starting point for each of your terminal sessions. For example, you may want session 2 to start processing at an application's main menu, whereas session 5 should start at the system prompt.

You should automatically initialize each terminal session by defining initial-action templates. Initial-action templates are action templates that specify a sequence of screen templates that position the terminal session at the desired location on the host computer whenever TRS is started up.

The initial-action template follows the same format and syntax as defined for action templates earlier in this chapter. If you must use "*" or "\$" characters in your field-descriptors, put them in quotation marks.

Instead of referencing these action templates in the COMI cell, you specify initial-action templates in an ASCII file named *trs.conf*. See Chapter 3 for information on the configuration and syntax of the *trs.conf*.

Chapter 3: Getting started

Before you use your 5250 Gateway product, you must complete these tasks:

- Install the 5250 communication adapter board. See the documentation accompanying your host connectivity hardware for installation information.
- Create the action and screen templates necessary to navigate through the host application and return the desired information (discussed in Chapter 2).
- Create the trs.conf and trs.sdf files (discussed in this chapter).
- Download the communication board configurations. You must download the board configurations each time you power up your application processor. You can configure your application processor to automatically download the configurations (this process is described later in this chapter).
- If you are going to connect to the host via modem, make sure you configure the modem with the correct settings and attach it to the 5250 board.
- Start Meridian IVR 2.0/I on the application processor. The TRS processes start when you issue the MIVR start command.
- If you have a dial-up connection, you must know the telephone number of the 5250 host.
- Start the 5250 Gateway.

During startup, the `trs.log` file remains empty unless the verbose option (`-v`) is added. To debug the application put the TRS process into debug mode. Check the `trs.log` file or the `trs.temp` file for errors. To put the TRS process into verbose mode go to `/u/ivr/startup` and change the `./trs -b` line so that it reads `./trs -b -v`.

Note: Everytime any of the control files are modified, (`trs.sdf`, `trs.conf`, action templates, or screen templates) Meridian IVR must be stopped and then restarted so that the `trs` process can pick up the changes.

To check your template and action file run `./trs -c`. This displays information on the version of `trs` and also verifies the correctness of the application templates and action files.

If you need to use the application processor as a terminal connection to the 5250 host, you must first:

- Start the terminal connection software (described later in this chapter).
- Make sure the terminal you use for terminal connection has been previously defined for this purpose. See the documentation included with your communication board for more information.

Setting up the `trs.conf` file

The `trs.conf` file specifies the initial-action template for each session you define on the Meridian IVR 2.0/I application processor. The `trs.conf` file must reside in the `/u/ivr/3270` directory. The TRS only reads from the `/u/ivr/3270` directory. 5250 sessions, therefore, should be set up under the `/u/ivr/3270` directory. [Figure 3-1](#) shows the syntax for the `trs.conf` file.

Figure 3-1
trs.conf file syntax

```
app-name:board-number>session-number:initial-template:heartbeat:protocol
```

The colons (:) and the greater than (>) symbols are used as field delimiters and must be placed in the specified positions without any additional white space.

app-name

The app-name entry identifies the application on the mainframe to which you assign the session. The name entered here is the same name you enter in the action templates that are executed by the Meridian IVR 2.0/I application.

board-number

The board-number entry should be 0 for the first (or only) board, 1 for the second.


session-number

The session-number entry determines the number of Logical Units to activate at startup.

initial-template

The initial-template entry identifies an initial-action template (without the .act file extension) for setting the startup action for the specified sessions when connecting to the host computer. The start-up action brings the specified sessions to the screen on the host computer where the action templates start when processing requests. Figure 3-2 shows the flow of a sample initial-action template.

Figure 3-2
Initial action template

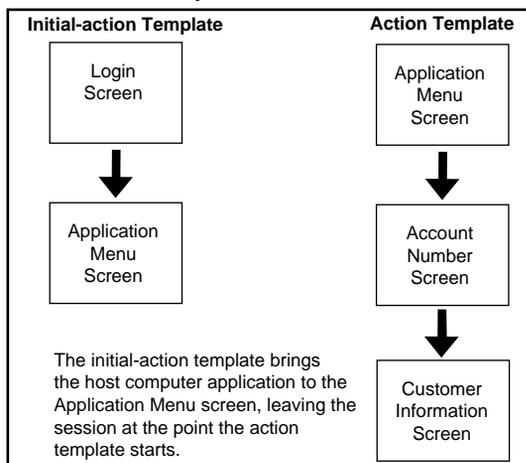

The initial-action template follows the same format described earlier for action templates. The screen templates specified by the initial-action template must also be created. The screen template for a login screen (or the login prompt) must specify the correct login ID and password (if appropriate) to access the host computer. You should not specify a reset-action template in the initial-action template, although you should specify a logout-action template.

heartbeat

You can specify an optional heartbeat action for the application specified by `app-name`. You can use this feature to send an indication to the host that a session is still active. Some hosts log out sessions that remain idle for a period of time. You can also use the heartbeat action to check connectivity, verifying that the session remains on the appropriate screen. Typically, the heartbeat action contains a `logout-action` template which brings the session back to the login screen if the connectivity with the mainframe fails. If you do not need a heartbeat action, enter a hyphen for this action.

You specify the heartbeat in this format: `actiontemplate@n`, where `n` is the number of seconds between each execution of the action template when the session is idle.

The heartbeat action template uses the same syntax as the action templates described earlier in this chapter, and usually only specifies a single screen template. That screen template is usually the last screen specified in the initial-action template. Typically, your screen template would only include a key-descriptor line, usually the `ENTER` key and `validation-tag`.

protocol

The protocol entry indicates the communications protocol being used by `app-name`. This field is required and should be set to `5250`.

Example “trs.conf” file

Consider the following example. Initial-action template files `login.act` and `signin.act` have been defined and reside in the `/u/ivr/3270` directory. There are four applications which you want to access on the host computer:

- `accounting`, accesses the accounting software
- `market`, tracks stock market activity
- `banking`, retrieves credit balances
- `airline`, for purchasing tickets on a local commuter carrier

The application names shown here are not necessarily the actual names assigned on the host computer, but they are the names assigned on the application processor for the `trs.conf` file and all action templates that use these applications.

You want to set up the 5250 Gateway to initialize the sessions as follows:

- initialize sessions 2-3 for accounting with `signin.act`
- initialize sessions 4-8 for market with `login.act`
- initialize sessions 9-10 for banking with `login.act`
- initialize sessions 15-17 for airline with `signin.act`

Figure 3-3 illustrates how you should set up `trs.conf` to implement this configuration.

Figure 3-3
trs.conf file sample

```
#trs.conf file to set up sessions for the Meridian IVR application processor
accounting:0>2-3:signin:ping@60:3270
market:0>4-8:login:-:5250
banking:0>9-10:login:-:5250
airline:0>15-17:signin:ping@60:5250
```

Setting up the `trs.sdf` file

The `trs.sdf` file maps the short name of each session to the LU number. To find the Session User Name and the Session Short Name, run the utility `<express -c -u express>` from the root account. Then, go to “Server Configuration”, and “Define User/Sessions”, and “<Users>”. The Express Username is listed to the right of the User label. The Session Short Name is listed to the right of the Session label. The first LU number must start with 2, then 3 and so on. Addresses 0 (zero) and 1 are reserved.

TRS requires the trs.sdf file when using Apertus's Express host connectivity package. See the documentation accompanying the Apertus Express package for information on configuring Express for your environment. Configuring Express provides you with the values for the trs.sdf file. The trs.sdf file follows this format:

U: <i>Express Username</i>	
Session Short Name	LU Number
Session Short Name	LU Number
Session Short Name	LU Number
•	•
•	•
•	•

You can list up to eight sessions and LUs under each Express Username. You can add comments anywhere in this file by preceding them with a pound sign. [Figure 3-4](#) shows an example trs.sdf file.

Figure 3-4
trs.sdf file sample

```
U: express
a 2
b 3
c 4
d 5
e 6
f 7
g 8
h 9
U: expressa
i 10
j 11
k 12
l 13
m 14
n 15
o 16
p 17
U: expressb
q 18
r 19
s 20
t 21
```

ATTENTION!

You must add a space in the U: express lines for the code to work.

A complete sample transaction

The following sections provide an example of action and screen templates and their corresponding mainframe screens:

- initial-action template
- action template
- reset-action template
- logout-action template
- screen templates that support the above action templates

The sample transaction being performed in this section uses these templates in the following way:

- The initial-action template logs on to the host computer and starts up the “acct” application.
- The action template chooses the “Accounts Receivable” option from the application’s menu and retrieves a customer’s balance.
- The reset-action template returns to the application’s menu screen and waits for the next transaction.

The logout-action template is included in case an error occurs at any time during the transaction.

Initial-action template

Once the TRS process is invoked, the initial-action template `acctinit.act` brings the session assigned to the accounting application to the menu screen. **Figure 3-5** shows the initial-action template, its supporting screen templates and the corresponding screens on the host computer.

Figure 3-5
Initial-action template sample

Templates	Corresponding Screens
<pre>#initial action template to start #the accounting application #filename: acctinit.act acctinit accounting - clrinit acctlog1 acctlog2 atactmenu</pre>	<pre>login:</pre>
<pre>#screen template that logs #into the host #filename: acctlog1.scn acctlog1 1,1 login: 0,0 - vad 0,0 > ENTER 0,0 - quality 0,0 > ENTER 0,0 @ 3</pre>	<pre>login: vad Password: ***** login: vad Password: ***** Last login: Fri Oct 7 16:01:34 from Publisher ULTRIX V4.2 (Rev 96) System #9: Wed Oct 12 10:08:24 EDT 1994 \$</pre>
<pre>#screen template that starts #the accounting application #filename: acctlog2 acctlog2 0,0 ULTRIX 0,0 - acct 0,0 > ENTER 0,0 @ 5</pre>	<pre>login: vad Password: ***** Last login: Fri Oct 7 16:01:34 from Publisher ULTRIX V4.2 (Rev 96) System #9: Wed Oct 12 10:08:24 EDT 1994 \$ acct</pre>
<pre>#screen template that validates #the accounting menu screen #filename: atactmenu.scn atactmenu 1,20 ACME Accounting</pre>	<pre>ACME Accounting 1. Accounts Receivable 2. Accounts Payable 3. Reports 4. Inventory 5. Exit Enter menu selection:█</pre>

The initial-action template starts the accounting session with the host computer by accessing accounting from the trs.conf file. It then executes the screen templates acctlog1, acctlog2, then atactmenu.

The screen template `acctlog1.scn` does the following:

- enters the login name
- enters the password
- waits three seconds for the host to process the login action

The screen template `acctlog2.scn` does the following:

- at the system prompt, enters the command to run the application
- types the ENTER key to start the application
- waits five seconds for the host to run the accounting application

The screen template `atactmenu.scn` validates the accounting main menu screen, but performs no action.

The `acctlog1` and `acctlog2` screen templates use “0,0” as the row,column location and a hyphen for the field-tag to indicate that all text will be entered at the current cursor position. This method is used because the login prompt and the first prompt may not always appear in the same location on the screen. Prompts vary from system to system, and can include longer, customized names.

Note: No key-descriptor is specified for the “atactmenu” screen template. This means once the screen is validated, this screen remains active until the next transaction is executed.

The initial-action template shown in [Figure 3-5](#) specifies the `clrinit.act` logout-action template, and does not specify a reset-action template. [Figure 3-6](#) shows the `clrinit` logout-action template, its corresponding screen templates, and the associated application screens.

Figure 3-6
Logout-action used by the initial-action template

Templates	Corresponding Screens
<pre>#logout-action template for the #acctinit initial-action template #filename: clrinit.act clrinit accounting — — clrmenu logout</pre>	<pre>ACME Accounting 1 Accounts Receivable 2 Accounts Payable 3 Reports 4 Inventory 5 Exit Enter menu selection: █</pre>
<pre>#screen template to exit the #accounting application #filename: clrmenu.scn clrmenu 1,20 ACME Accounting 0,0 — 5 0,0 > ENTER 0,0 — Y 0,0 > ENTER</pre>	<pre>ACME Accounting 1 Accounts Receivable 2 Accounts Payable 3 Reports 4 Inventory 5 Exit Enter menu selection: 5 Do you really want to exit? Y</pre>
<pre>#screen template to log off the host #computer, preparing for the initial #action template to be executed #filename: logout.scn logout 0,0 — 0,0 — logout 0,0 > ENTER</pre>	<pre>\$ logout login:</pre>

The final screen template listed, `logout`, brings the host application back to the initial screen, leaving the connection open and waiting for the TRS process to log in. TRS always executes the initial-action template for a session (after a pause of 30 seconds) after any `logout`-action template is executed.

Action template performing a transaction

As shown in [Figure 3-5](#), the initial-action template brings the session to the application's menu screen. The action template created to get a customer's balance starts at that screen. [Figure 3-7](#) shows the action template, its screen templates, and the corresponding host computer screens that perform the following functions:

- chooses the Accounts Receivable option from the application's menu
- enters (on the line that pops up at the bottom of the screen) the customer account number from an input buffer provided by the COMI cell
- when the customer information screen displays, the template places the current balance in an output buffer to be transmitted to the COMO cell
- executes a reset-action template to return the session application to the application's menu screen

Figure 3-7
Action template sample

Templates	Corresponding Screens
<pre>#action template to perform steps #required to retrieve customer's balance #filename: getbalance.act getbalance accounting clr_cust logout_cust accrec #choose Ac. Rec menu acctno #enters account number customer #retrieves balance</pre>	<pre>ACME Accounting 1 Accounts Receivable 2 Accounts Payable 3 Reports 4 Inventory 5 Exit Enter menu selection: █</pre>
<pre>#screen template to choose accounts #receivable option, filename:accrec.scn accrec 1,20 ACME Accounting 0,0 — 1 0,0 > ENTER</pre>	<pre>ACME Accounting 1 Accounts Receivable 2 Accounts Payable 3 Reports 4 Inventory 5 Exit Enter menu selection: 1 Enter account number: █</pre>
<pre>#screen template to enter acct number #in popup field, filename: acctno.scn acctno 1,11 Enter account number: 0,0 — * 0,0 > ENTER</pre>	<pre>ACME Accounting 1 Accounts Receivable 2 Accounts Payable 3 Reports 4 Inventory 5 Exit Enter menu selection: 1 Enter account number: 845-23-87</pre>
<pre>#screen template to obtain balance #filename: customer.scn customer 1,1 Account Number: 2,48 — \$9</pre>	<pre>Account Number: 845-23-87 Customer: Jane K. Smith Current Balance: 2486.14 Address: 19 Alpha Road Payment Due: 150.00 Chelmsford MA 01824 Payment Due Date: 4/30/93 Options: 1 Print invoice 2 Enter payment 3 Enter purchase 4 Exit Enter menu selection: █</pre>

The number 1 and the account number are entered at the current cursor location. Therefore, you do not need to specify a location or a field-tag. The last line in the “customer” screen template places the contents of the field starting at location 2,48 (the number 2486.14) into the next output buffer.

The reset-action template is designed to return the session to the “acct” application’s menu screen where it awaits the next transaction. [Figure 3-8](#) shows the reset-action template, and its accompanying screen templates.

Figure 3-8
Reset-action template sample

Action Template	Screen Template
<pre>#reset-action template for the getbalance #action template, filename: clr_cust.act clr_cust accounting — — clr_cust #exits customer info screen atacctmenu #validates application menu screen</pre>	<pre>#screen template to clear customer info #screen, filename: clrcust.scn clrcust 1,1 Account Number: 0,0 — 4 0,0 > ENTER</pre>
	<pre>#screen template that validates the acctng #menu screen, filename: atacctmenu.scn atacctmenu 1,20 ACME Accounting</pre>

Notice that the atacctmenu screen used in the reset-action template is the same screen used in the initial-action template. This screen template verifies that the menu screen has returned, but it performs no function.

Figure 3-9 shows the logout-action template, and its accompanying screen templates, that return the host computer to the login screen if an error occurs and the reset-action template also experiences an error.

Figure 3-9
Logout-action template sample

Action Template	Screen Template
<pre>#logout-action template for the getbalance #action template, filename: logout_cust.act logout_cust accounting — — circust #exits customer info screen clrmnu #exits applicatoin menu logout #logouts out to prepare for login</pre>	<pre>#screen template to clear customer info #screen, filename: clrcust.scn clrcust 1,1 Account Number: 0,0 — 4 0,0 > ENTER</pre>
	<pre>#screen template to exit the #accounting application #filename: clrmnu.scn clrmnu 1,20 ACME Accounting 0,0 — 5 0,0 > ENTER 0,0 — Y 0,0 > ENTER</pre>
	<pre>#screen template to log off the host #computer, preparing for the initial #action template to be executed #filename: logout.scn logout 0,0 — 0,0 — logout 0,0 > ENTER</pre>


The logout-action template brings the host computer back to the login screen. The TRS then executes the initial-action template, as it does whenever any logout-action template is successful.

If the transaction fails before the customer screen is accessed, the logout-action template searches the other screen templates until a valid tag match is found, then it executes that screen template and the following screen templates.

Chapter 4: Call flow interface

Now that you understand how to script host transactions as action and screen templates, you can begin integrating these templates into your Meridian IVR 2.0/I Applications (Figure 4-1).

Figure 4-1
Accessing the mainframe

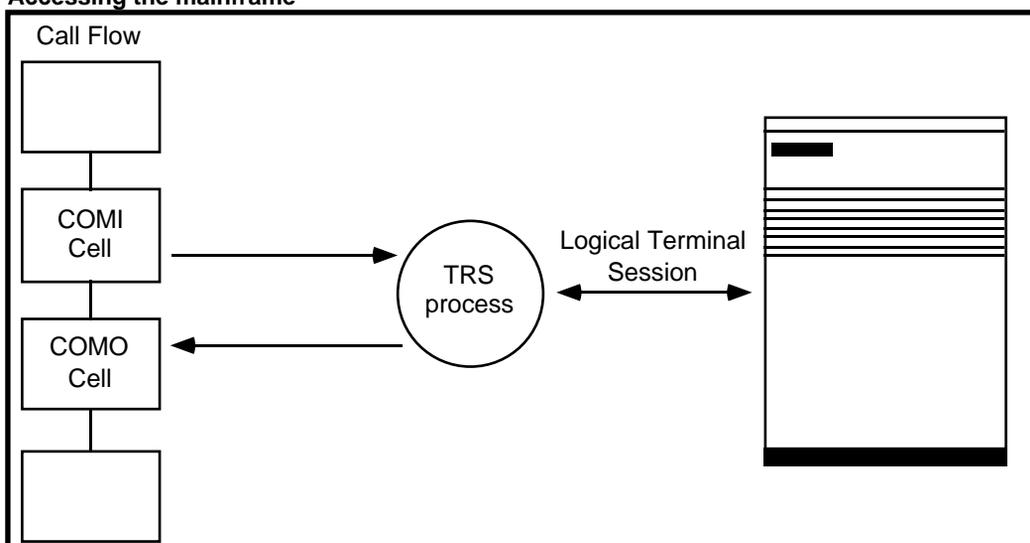


This chapter explains:

- how to code your applications to perform host transactions
- how to use the COMI, COMO, and COMA cells to communicate with the host computer

Using the COMI, COMO, and COMA cells to access the host computer

With Meridian IVR 2.0/I, the links between the Meridian IVR 2.0/I call flow and the TRS are the COM cells. The COMI cell sends input to the TRS process and identifies the action template file, the COMO cell receives output from the TRS process, and the COMA cell aborts a transaction in progress (usually used in the clean-up branch in case a caller hangs up before the transaction completes). Figure 4-2 illustrates this.

Figure 4-2
Activating the gateway from a COMI cell

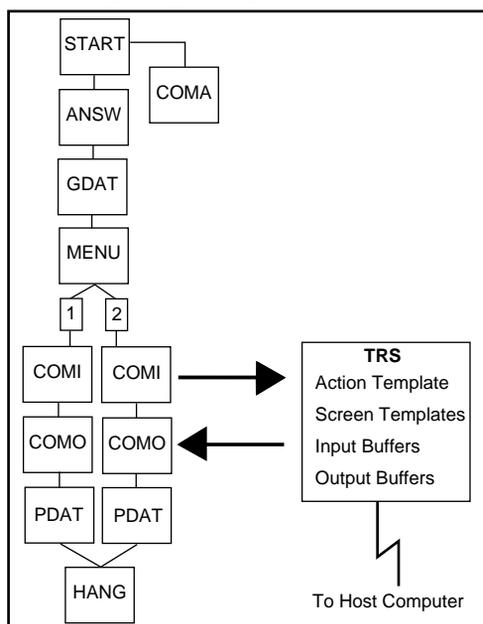

To develop an application that processes one or more terminal sessions, just start as if you were developing any other voice application:

- Determine the telephone interaction with the caller and create the corresponding Meridian IVR 2.0/I call flow.
- At the point in the call flow where you require interaction with the host computer, insert a COMI cell.

- Insert a COMO cell to receive the output from the TRS transaction.


You must always follow a COMI cell with a COMO cell, even if you do not require the return of any data.

The following sections show you how to code each of these cells for use with the same example transaction presented in Chapter 3.

Setting the COMI cell parameters

Figure 4-3 shows the parameter window for the COMI cell.

Figure 4-3
COMI cell parameter window

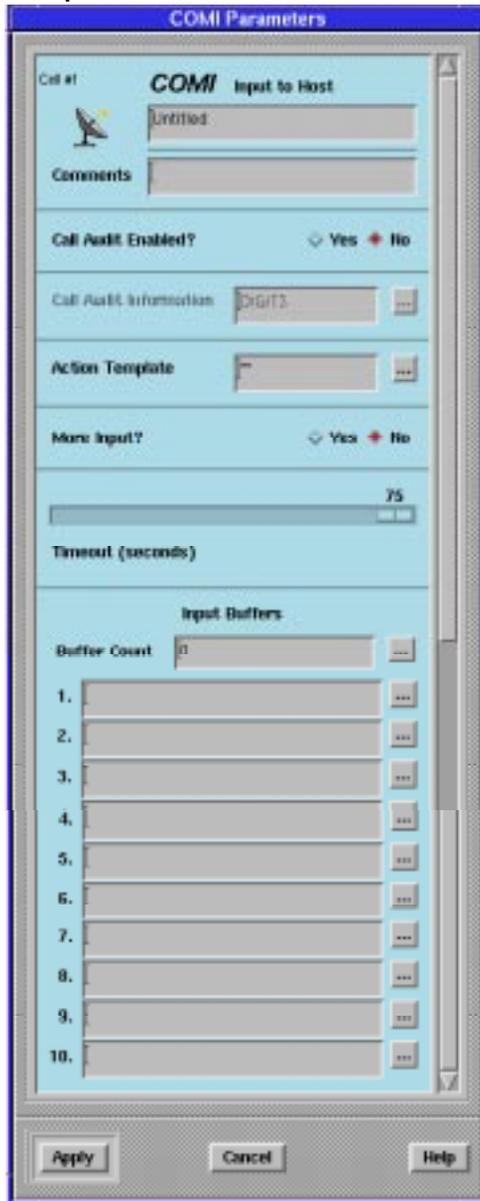

The following sections describe what you should enter in each area of the parameter window.

COMI cell name

In order to make the cell easy to identify, includes the name of the action template the cell calls out. The cell name shown in [Figure 4-3](#) is “start getbalance transaction.”

Call Audit Enabled

Determines if this cell logs the following information to the call audit statistics file (audit_stat.d):

- Application Name
- Cell Name
- Cell Number
- Date and Time of Cell Execution
- Contents of the Cell Comment field
- Contents of the Call Audit Information buffer

The default setting is No.

Call Audit Information

When you enable Call Auditing, the Call Auditing process logs the contents of this buffer to the audit_stat.d file. The default setting is DIGITS.

COMI action template

Enter the name of the action template, in quotes, and leave off the .act suffix. [Figure 4-3](#) shows “getbalance” as the entered name.

COMI cell more input

If you need to send more than 10 input buffers to the host computer, click the button in front of “Yes”; if you are sending 10 or less input buffers, click the button in front of “No.” If you specify “Yes,” place additional COMI cells on the drawing board until you have enough input buffers. Connect the Success branch of the first COMI cell to the Input branch of the following COMI cell. Connect the rest of the COMI cells in this fashion. The final COMI cell should have the “No” button selected for the “More Input?” parameter.

COMI cell timeout

Select the number of seconds you want the TRS process to wait for the transaction to complete by moving the slider under “Timeout”. There is an available range from 1 to 75 seconds. This indicates the maximum time for the COMI cell to start the transaction and send the necessary input buffers, and for the COMO cell to receive the output buffers. The TRS process rejects the transaction and sends back a timeout if the action is not performed within the time allotted.

Note: The application will take the timeout branch of the COMI cell if a timeout occurs.

COMI cell buffer count

You do not need to enter a value in this field as Meridian IVR 2.0/I automatically calculates the number of buffers when you click the “Apply” button.

COMI cell input buffers

Enter the names of the input buffers containing the information to pass to the TRS process. The input buffer shown in [Figure 4-3](#) is ACCOUNTNUMBER, without any quotes. In this example, you must program your application to place the customer’s account number in the ACCOUNTNUMBER buffer before the COMI cell is executed.

In this example, ACCOUNTNUMBER is a user-defined buffer; you can use any name for your applications, or you can use system buffers.

Note: You must enter the input buffers in the same order the host computer uses them.

If you need to use more than 10 input buffers in your application, make sure you select “Yes” for “More Input?”, then string COMI cells together until you have enough input buffers. Connect each additional COMI cell to the previous one’s “SUCCESS” branch.

Setting the COMO cell parameters

Once you have set the COMI cell to send information, code the COMO cell to receive information. You must place a COMO cell directly after the COMI cell to complete the transaction, even if the host computer is not sending any data to any output buffers. The TRS process sends verification that the transaction completed successfully or notification that there was an error in the COMO cell. [Figure 4-4](#) shows the parameter window for the COMO cell.

Figure 4-4
COMO cell parameter window

The image shows a dialog box titled "COMO Parameters". At the top, it says "Call ID" followed by "COMO" and "Output from Host". Below that is a text field containing "Receive Balance" with a mouse cursor over it. Underneath is a "Comments" field. The next section is "CALL ABLT ENABLED?" with radio buttons for "YES" (selected) and "NO". Below that is "Call ABLT Information" with a text field containing "DIGITS" and a button. The "Blocking?" section has radio buttons for "Yes" (selected) and "No". The "Output Buffers" section has a "Buffer Count" field with "0" and ten numbered rows (1-10) for buffer configuration. At the bottom are "Apply", "Cancel", and "Help" buttons.

The following sections describe what you should enter in each area of the parameter window.

COMO cell name

The cell name shown in [Figure 4-4](#) is “Receive Balance.” The name helps identify the function of the cell.

Call Audit Enabled

Determines if this cell logs the following information to the call audit statistics file (audit_stat.d):

- Application Name
- Cell Name
- Cell Number
- Date and Time of Cell Execution
- Contents of the Cell Comment field
- Contents of the Call Audit Information buffer

The default setting is No.

Call Audit Information

When you enable Call Auditing, the Call Auditing process logs the contents of this buffer to the audit_stat.d file. The default setting is DIGITS.

COMO cell blocking?

Activating blocking tells the COMO cell to wait for the transaction to complete before continuing to the next cell. The application will wait until the TRS interaction ends before it continues through the Meridian IVR 2.0/I application (following the “END OF DATA” or “MORE DATA” branch, only one of these cells should have a branch). If you select “No,” the COMO cell receives a status code from the TRS process. If the transaction is complete, the application follows the “END OF DATA” or “MORE DATA” branch (whichever one connects to another cell). If the transaction is not complete, the application follows the “NOT READY” branch. You could use this branch to play a prompt notifying the caller that the transaction is in progress, and then feed the call flow back into the COMO cell.

COMO cell buffer count

You do not need to enter a value in this field as Meridian IVR 2.0/I automatically calculates the number of buffers when you click on the “Apply” button.

COMO cell output buffers

Enter the name of the buffers that will accept the output from the host computer. [Figure 4-4](#) shows BALANCE (no quotes) as the only output buffer for this example.

Note: You must enter the output buffers in the same order they will be used by the TRS process.

If your application uses more than 10 output buffers, string COMO cells together until you have enough buffers. Connect the input branch of each subsequent COMO cells to the “MORE DATA” branch of the previous COMO cell.

COMO cell branches

As shown in [Figure 4-5](#), the COMO cell has several branches.

Figure 4-5
COMO cell

The screenshot shows a graphical user interface for configuring a COMO cell. At the top, it displays '12 COMO' and 'Output from Host'. Below this, there is a section for 'Receive Balance'. The interface includes several checkboxes for different branches: 'ERROR', 'TIMEOUT', and 'NOT READY'. At the bottom, there are two columns for 'END OF DATA' and 'MORE DATA', each with a checkbox.

12 COMO	
Output from Host	
Receive Balance	
<input type="checkbox"/>	ERROR
<input type="checkbox"/>	TIMEOUT
<input type="checkbox"/>	NOT READY
<input type="checkbox"/>	END OF DATA
<input type="checkbox"/>	MORE DATA

Table 4-1 describes each branch of the COMO cell.

Table 4-1
Branches of the COMO cell

Branch	Reason Taken
ERROR	Any problem with any part the host transaction will cause the application to take the error branch.
TIMEOUT	The transaction took more than its allowed time as specified in the COMI cell.
NOT READY	The transaction did not complete and Blocking was set to "No".
END OF DATA	The transaction successfully completed.
MORE DATA	The transaction requires additional output buffers.


For each COMO cell, use either the "END OF DATA" branch, or the "MORE DATA" branch, but not both. If you use the "MORE DATA" branch, the next cell must be another COMO cell. The last COMO cell should use the "END OF DATA" branch.

Setting the COMA cell parameters

Use a COMA cell in the clean-up branch of the START cell to deal with an error like a caller hanging up in the middle of a transaction. See [Figure 4-6](#).

If you selected manual mode in the application template, use the COMA cell to abort a transaction in progress and release the session (see Chapter 2).

Figure 4-6
COMA cell in the clean-up handler

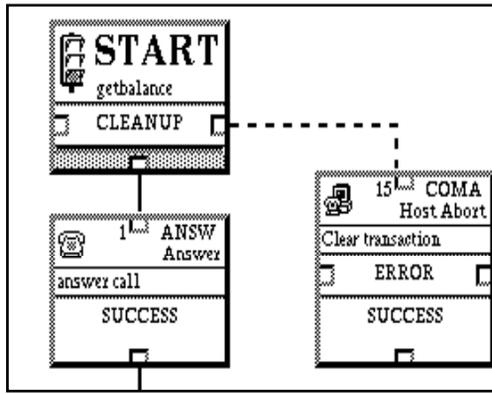

The COMA cell frees all memory and buffers associated with the COMI and COMO cells.


The COMA cell parameters window contains a cell name field, and a comments field. The COMA cell in [Figure 4-6](#) has “Clear transaction” as its cell name.

Sample application using the COMI, COMO, and COMA cells

[Figure 4-7](#) shows a sample Meridian IVR 2.0/I application that uses the COMI, COMO, and COMA cells to retrieve a customer’s account balance stored on a host computer. This example application uses the action and screen templates created in Chapter 3. A caller activates this example application by pressing “1” after hearing the prompt played by the MENU cell. A separate action template and its associated screen templates would need to be created to support menu choice 2.

To illustrate the logic of the call flow, these applications are shown as one page applications with no error branches. In reality, these applications would span several pages and would have all error branches connected appropriately.

Figure 4-7
Application accessing the TRS process from the COMI and COMO cells

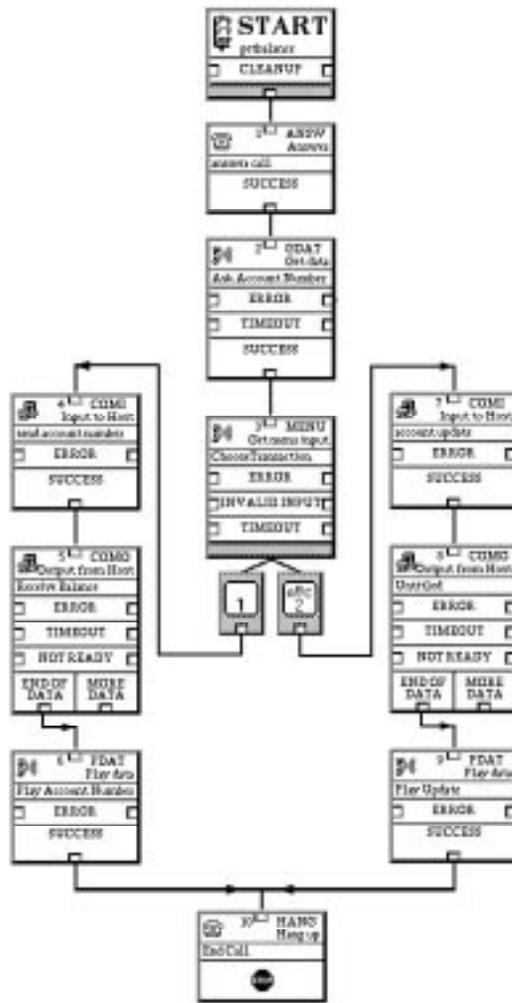

Prior to the execution of this application, the initial-action template is executed (when Meridian IVR 2.0/I is started on the application processor). Once a call from a customer is received, the Meridian IVR 2.0/I application performs these steps:


Table 4-2
Application cell functions for Figure 4-7

Cell Number	Description
Cell 1	The ANSW cell answers the incoming call.
Cell 2	The GDAT cell plays a prompt requesting the caller to enter an account number. The number entered is stored in the ACCOUNTNUMBER buffer.
Cell 3	The MENU cell plays a prompt instructing the caller to press 1 to get an account balance, or press 2 to get an account update.
Cell 4	When the caller presses "1" on the telephone, the COMI cell starts the transaction. The action template specified in the COMI cell parameter window is "getbalance" — the same template used in the example transaction described in Chapter 3. The COMI cell provides the contents of the ACCOUNTNUMBER buffer to the host computer application.
Cell 5	The COMO cell receives the customer's balance from the BALANCE buffer.
Cell 6	The contents of the BALANCE buffer is played to the user.
Cell 7-9	These cells support menu choice 2, which provides an account update in a similar manner.
Cell 10	The caller hangs up and the application ends.

If the caller hangs up before the transaction is completed, the COMA cell in the clean-up branch of the START cell clears the memory and buffers associated with the application.

Figure 4-8 shows how the COMI and COMO cell parameters relate to the screens defined on the host computer. This transaction uses an action template, getbalance, to call three screen templates — one to choose the Accounts Receivable menu, one to enter the account number, and one for the customer information screen. Each screen template lists the fields that will be accessed.

Figure 4-8
COMI/COMO cell parameters, TRS templates, and host screens

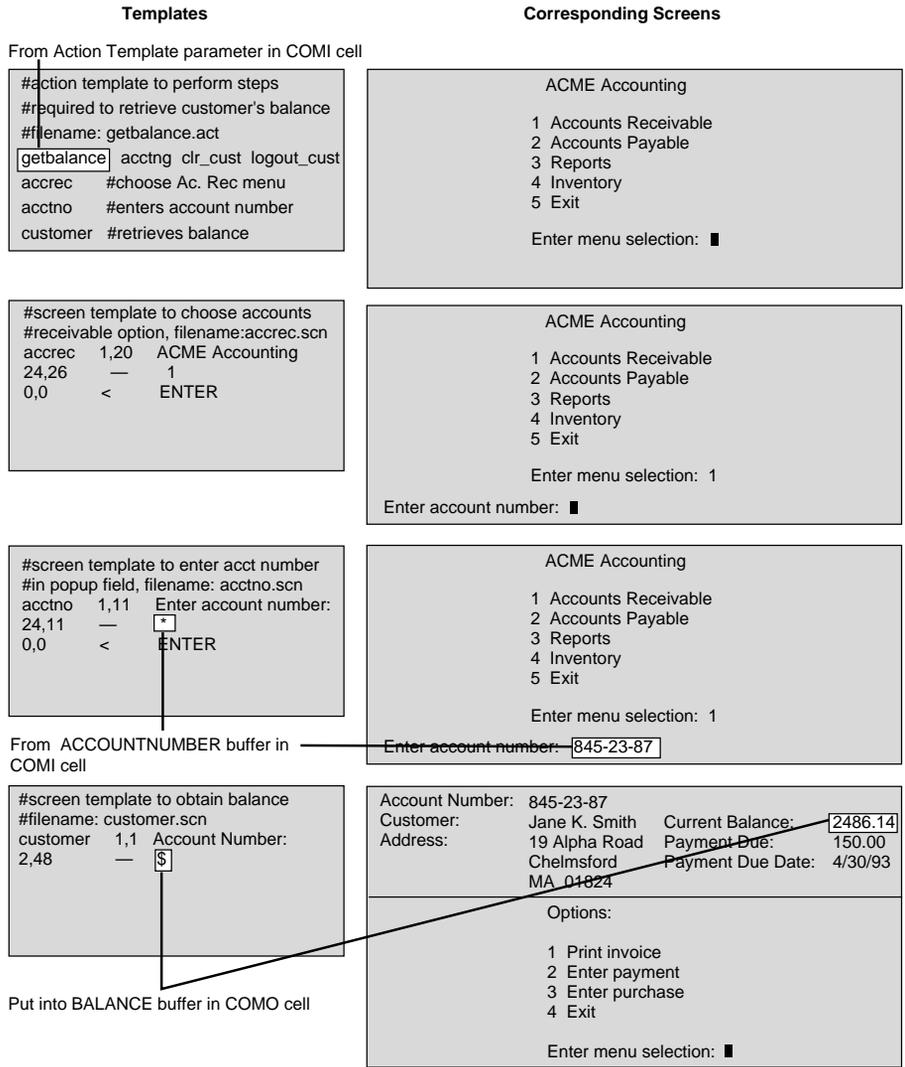

Appendix A: SCO

In the trs.conf file, set the last field to 5250.

Table 1 lists the default settings which may be used when defining users and sessions in Apertus's EXPRESS host connectivity package:

Table A-1
Default settings for EXPRESS

Group	sysadm
User	express
Terminal	Access Mode:Individual Printer Process:Shared

When defining Communication in EXPRESS, the settings for *Node*, *Link*, *Station*, and *Logical Unit* should be:

Node	The node name of your Application Processor
Link	SDLC
Station	Connection Type: Host Restart connection if it fails XID Format:Format 3

If a setting is not specifically addressed in these tables, then its default setting is acceptable. For further information on configuring Apertus/EXPRESS, refer to Apertus's documentation.

The following information should be contained in the /etc/rc2.d/S99express file:

```
if [ $1 = start ]
then
rm -f /u/express/db/cdmst
fi
su root -c "/u/express/bin/express_adm $1"
su root -c "/u/ivr/sys_files/vtekhst_adm $1"
```

Communication scripts

This section outlines and describes the different scripts available to control and manage communications startup.

The /u/ivr/sys_files/vtekhst_adm script automates the starting of the Apertus background processes and automates the enabling of the links and stations of a configuration during a reboot.

The script needs to be customized on site. An example of the script follows:

```
# Customizable option : location of shell
#
#! /bin/sh
#####
#
#
#
# Customizable option : location of express profile
#
. /u/express/.profile
#
# error message definitions
#
MESSAGE1="\nInvalid request usage: manager (start | stop)"
MESSAGE2="\nTimeout occurred. Necessary daemons not active after 5 minutes"
MESSAGE3="\nAll daemons now running, executing express start"
#
# check to see an action parameter (start or stop) was passed in
#
if [ $# -lt 1 ]
then
    echo $MESSAGE1
    exit 1
fi
#
# start the express background processes
#

express_adm start

#
# loop to verify all necessary daemons are running then start express
# in hidden mode
#
loopCount=0
retryCount=0
#
# hang out in a loop until all express daemons are running. This process
# will time out after 5 minutes
#
# Customizable option : Verify all processes below do execute on your system
```

A-4 SCO

```
#
while [ $loopCount -eq 0 ];do
(ps -fe | grep cdm | grep -v grep) &&
(ps -ef | grep agent | grep -v grep) &&
(ps -ef | grep executive | grep -v grep) &&
#(ps -ef | grep jobex | grep -v grep ) &&1
(ps -ef | grep watchdog | grep -v grep)

if [ $? -ne 1 ]
then
        echo $MESSAGE3
        break
else
        retryCount=`expr $retryCount + 1`
        if [ $retryCount -eq 12 ]
        then
                echo $MESSAGE2
                exit 2
        else
                sleep 5
        fi
fi
done
case "$1" in
'start' )
#
# Customizable option : Name of token ring link. Comment out if this is
# a serial connection
#
# stst << !
# start datalink trLink
#!
#
# Customizable option : Name of token ring station.
#
stst << !
    start connection SDLStation2
```

1. Not all processes execute on all platforms. For instance, jobex does not execute on the standard SCO installation. Therefore, remove comment notation (#) from this line.

2. Name of the station which needs to be started. This can be found by running the Express user interface.

```
!  
#  
# Customizable option : Name of express users  
#  
    express -u express -h1  
        ;;  
'stop' )  
    echo "STOP Session Managers"  
  
#  
# Customizable option : Name of express users  
#  
    express -x -u express  
#  
# Customizable option : Name of token ring link. Comment out if this is  
# a serial connection  
#  
stst << !  
    stop connection SDLCstation  
!  
#  
# Customizable option : Name of token ring station.  
#  
stst << !  
    stop datalink trLink  
!  
        ;;  
esac
```

1. List of the Express user that you want to have started.

Appendix B: Host connectivity

Host connectivity options provide an IVR application with the ability to interface with several types of host computers over a number of different topologies. Meridian IVR 2.0/I supports the following host communication environments:

- IBM 3270/SNA over SDLC
- IBM 3270/SNA over Token Ring
- IBM 5250/SNA over SDLC (also referred to as APPC or LU6.2)
- IBM 5250/SNA over Token Ring (also referred to as APPC or LU6.2)
- VT100

The IVR system emulates 3270 and 5250 through the use of software called Express from Apertus.


IBM 5250 emulation characteristics

Express emulates the IBM 5250 family of terminal devices to provide connectivity to mid-range systems such as the AS/400, and to other host systems that use 5250 communications. The IBM 5250 family of devices includes display stations that communicate with a host system through a cluster controller. 5250 emulation supports seven colors, with screen presentation spaces of 24 rows by 80 columns, or 27 rows by 132 columns and also supports extended highlighting features. The 5250 emulation emulates a 5394 Cluster Controller with 5251 Mod 2 terminals. The emulation uses 5250 passthrough and the 5250 terminal emulation uses APPC. Express uses LU 6.2 in support of 5250 emulation and CPI-C. APPC and LU6.2 are synonymous terms.

The 3270/5250 SNA/SDLC card

The Arnet SYNC/570 card is used for connectivity to the host using SNA/SDLC. The Arnet SYNC/570 is a high-performance expansion board which connects into an ISA expansion slot and contains two communication ports. Included with the Arnet SYNC/570 adapter are two cables (9-pin male to 25-pin male) for attaching to line 1 and 2 of the adapter. Also included is a loopback connector for diagnostics. The two ports of the SYNC/570 each have a high density DB-15 connector to connect any device with an EIA-232-D interface to the computer. The board operates at line speeds from 4800 baud Card to over 115K.


Figure B-1
ARNET SDLC card

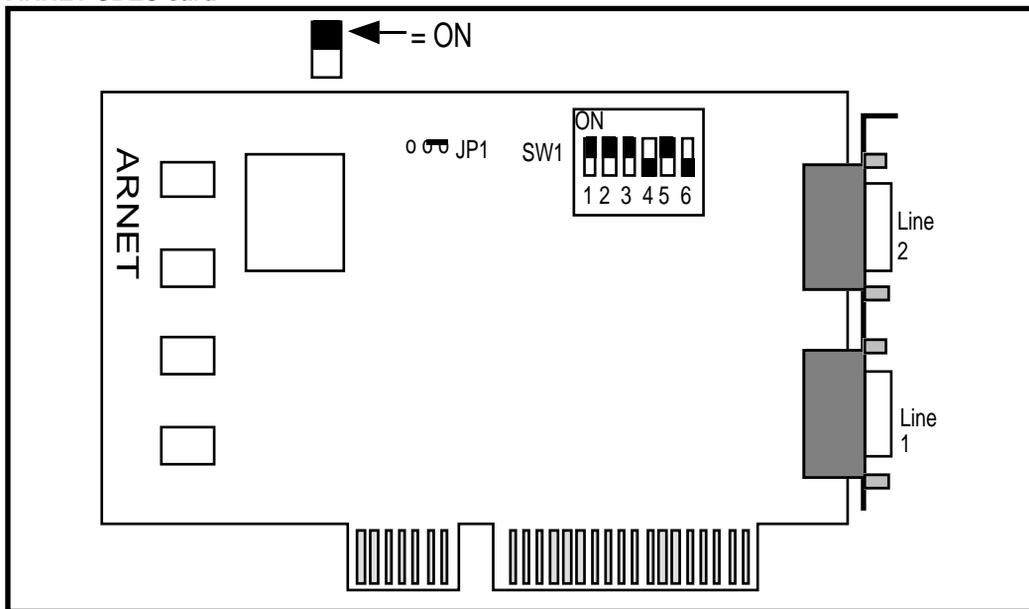

The 3270/5250 Token Ring card

The Madge Smart 16/4 AT Plus Ringnode card is used for connectivity to the host using Token Ring.


Figure B-2
Madge Smart 16/4 AT Plus Ringnode token ring host card

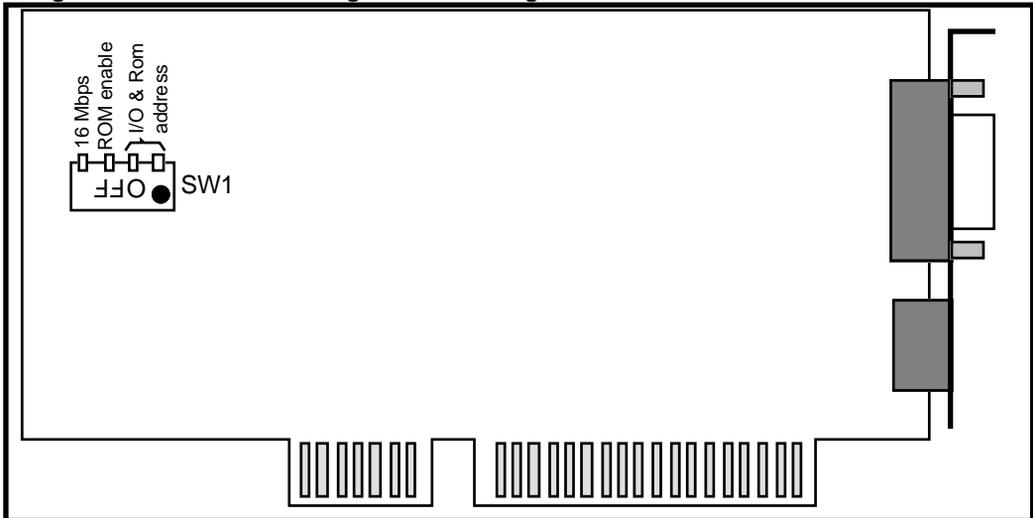

The LED indicators on the back of the card have the following indications:

LED	Function
Yellow	Indicates the NIC is inserted into the Token Ring.
Green	Indicates data is passing through the NIC.


Figure B-3
Token Ring pin arrangements

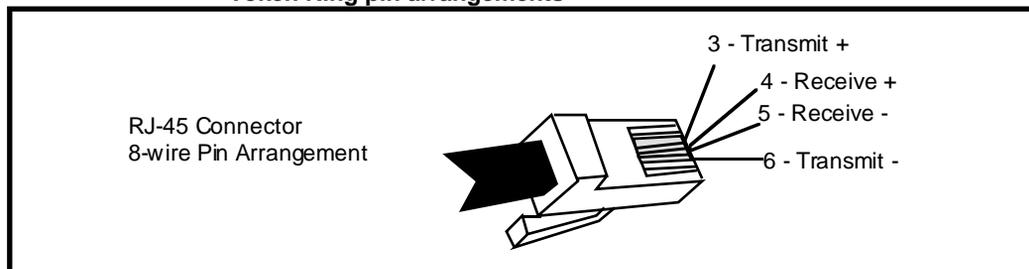

9-Pin connector pinouts

The 9-pin “D” subminiature STP cable pinouts on the Network Interface card consist of the following:

Figure B-4
Subminiature STP cable pinouts

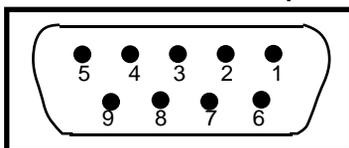

Pin	Cable	Signal
1	Red	Receive+
5	Black	Transmit-
6	Green	Receive-
9	Orange	Transmit+

Pins 2, 3, 4, 7, and 8 are unused. The connector shield grounds the chassis.

Configuring 5250 for SDLC host communications

The Express software pre-defines a user called express in the Express database. When configuring the hosts communications software, the root log in can be used.

- 1 Log into the AP as root.

- 2 Enter the root password at the prompt.
- 3 The `/etc/profile` file contains all the commands which are executed upon login for all non-root users.
- 4 To allow root to have all the environment variables set up which normal users will have, enter the following command:

```
./etc/profile
```

- 5 The Express software automatically starts at boot time and must be started before the configuration can be accomplished.
- 6 To verify that it has started, enter the following command:

```
express_adm check
```

The system should display

```
# express_adm check

(c) Copyright 1989,1992 Apertus Technologies Incorporated. All Rights Reserved.
Restricted Rights Legend: Use, duplication, or disclosure by the government is subject
to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical
Data and Computer Software Restricted Rights clause at DAFRS 252.227-7013 and/or the
Commercial Computer Software Restricted Rights clause at FAR 52.227-19(c). Apertus
Technologies Incorporated, 7275 Flying Cloud Drive, Eden Prairie, MN 55344 U.S.A.

agent running:
  root 502 1 0 10:15:08 ? 0:00 agent
executive running:
  root 498 1 0 10:15:05 ? 0:00 executive
watchdog running:
  root 504 1 0 10:15:08 ? 0:00 watchdog
cdmserver running:
  root 367 1 0 10:14:51 ? 0:07 cdmserver nortel:/u/express/db/cdmst
Checking EXPRESS database divisions ...
Checking EXPRESS clients ...
#
```

Four daemons should appear in the running state. If the information above does not display, then express is not running. The express software may be started with the following command:

```
express_adm start
```

- 7 Begin the Express configuration by entering the following command:

```
express -u express
```

If the error “express: not found” appears, issue the command in step 5 above (`./etc/profile`).

If the error

- Initializing display capabilities...
- Terminal type 'ansi' not defined for user 'express' in the
- EXPRESS database.DCINIT failed...EXPRESS terminating

then the terminal type is not set up for your log in session. The valid terminal types available for Express can be obtained with the following command:

ls_screens -u express

Set the terminal type to a valid terminal type using the following command :

TERM=vt220;export TERM

8 The system displays the following screen:

Initializing display capabilities...

Retrieving database information for express.....

```
-----EXPRESS Global Options-----  
                Welcome to EXPRESS  
This first time that you run EXPRESS, you are asked to select  
initial  
values for global parameters and options. You are also asked  
to  
characterize your planned usage of EXPRESS features. EXPRESS  
will then make available just those tasks and displays you  
need to  
utilize these selected features.  
You may change this information later through Set Global  
Options.
```

```
=====  
-  OK  -  
=====
```

- 9 Press <Enter> to display the following screen. This screen only appears the first time express is run.

```

-----EXPRESS Global Options-----
An EXPRESS domain is a single computer or a group of networked
computers on which EXPRESS is installed. EXPRESS provides
central, domain-wide operation and administration.
Please enter the following domain identification. This
information
is attached to configuration backups and communication traces.
It is also the default SNA Node identification.
      Domain Name: [                               ]
      Location:    [                               ]
                                     =====
                                     ~Continue~
                                     =====

```

- 10 The Domain Name and Location are not required for a stand-alone configuration (they are required for a network configuration), but since the information will appear in traces, enter a meaningful name such as the name of this company for the domain name and press <Enter>.

- 11 The following screen appears:

```

-----EXPRESS Desktop Features-----
Please select the features of the EXPRESS Integrated
Desktop that you plan to use.

Terminal Emulation  Other Services
[ ] 3270 Display    [ ] Remote Job Entry
[ ] 3270 Printing   [ ] CPI-C Transaction Programs
[*] 5250 Display

                                     =====
                                     ~Continue~  ~ Options...~  ~ Security...
                                     =====

```

- 12 Use the tab key or the mouse to place the cursor in the 5250 Display selection and press Space to place an asterisk in that selection.

Press <Enter> to proceed to the next screen.

The following screen appears:

```
-----EXPRESS Server Features-----  
Please select the features of the EXPRESS SNA Server  
that you plan to use.  
  
[*] LU 6.2 - Needed for CPI-C, 5250, and IP/LU6.2  
[ ] X.25 - Needed for QLLC, XLI, X.PAD, and IP/X.25  
[ ] IP Router - Needed for IP/LU6.2 and IP/X.25  
  
Please select the client types supported by the  
EXPRESS SNA Server.  
  
[*] EXPRESS  
[ ] Telnet 3270/5250  
[ ] Netware for SAA  
  
=====
```

```
- Continue -  
=====
```

- 13 Use the tab key or the mouse to place the cursor in the LU 6.2 selection and press <Space> to place an asterisk in that selection. Use the tab key or the mouse to place the cursor in the EXPRESS selection and press Space to place an asterisk in that selection also.

Press <Enter> to proceed to the next screen.

```
[ - ] File Edit Preferences Window Task Help  
-----EXPRESS Manager-----  
Personal  
Status 1. Control and Administration  
Menu: 2. Server Configuration  
<Esc><Ent 3. Desktop Configuration  
Cancel:  
<Ctrl>^  
Alt Key:
```

Notes:

- 1 If any of the parameters which initially displayed need to be changed, they can be found under the Set Global Options menu selection of the Preferences menu item.
- 2 The layout of the EXPRESS Manager screen contains the function of the keys to the left of the vertical line, three selections to the right of the vertical line, and menu item selections along the top. The function keys which display to the left of the vertical line will vary depending on which terminal is being emulated during this configuration. The meanings of the function keys in the example above are:
 - <Esc> then <Enter> = allow using the Menu
 - <Ctrl> and <^> = cancel from selection chosen
 - <Esc> then “q” = the <Alt key> (usually followed by another character)
 - that is, if the O of OK is highlighted, OK can be selected by doing an <Alt+O> which would be keystrokes <Esc> then q then O.
 - <Esc> then “!” = obtain the UNIX shell (type exit to return)

Verifying that Express recognizes the hardware

- 14 To verify that the Express software recognizes the communications adapter, perform the following steps:

Select Server Configuration by pressing the number 2.

The following screen appears:

```

-----Server Configuration-----
I.D.      Description                               Status
!        Define Communications
;        Define LU6.2
?        Define Users/Sessions
&        Define Hardware
/        Define Job Entry Stations

```

- 15 Select Define Hardware. The following screen appears:

```
[-] Profile Edit Display Preferences Task Help
-----Define
Hardware-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for
EXPRESS
<Esc><Ent System nortel Computer System nortel
Cancel: Adapter nortel.hpa0 HPA Adapter
<Ctrl>^ Port nortel.hpa0.0 HPA Port 0
Alt Key: Port nortel.hpa0.1 HPA Port 1
<Esc>q
ShellEsc:
<Esc>!
Task: &
Search:
Down
```

The screen should display the Adapter line indicating that the adapter has been recognized. If the Adapter lines do not appear, then check the hardware configuration using `express_admin` and/or check the settings on the adapter itself.

- 16 Select the Profile menu item and then choose Exit to return to the Express Manager window.
- 17 To complete the configuration of the Express software requires the completion of the following configurations:
 - a. Defining the Node
 - b. Defining the Link—there must be a link for each line to the host
 - c. Defining the Station
 - d. Defining the Remote LU and Mode
 - e. Defining the Symbolic Destination
 - f. Defining the 5250 Users/Sessions

Defining the node

- 18 From the Express Manager window, select Server Configuration by pressing the number 2.

The following screen appears:

```

-----Server Configuration-----
      I.D.      Description      Status
      !        Define Communications
      ;        Define LU6.2
      ?        Define Users/Sessions
      &        Define Hardware
      /        Define Job Entry Stations

```

19 Select Define Communications. The following screen appears:

```

-----Select Display-----
Please select the type of
Communications Profiles you wish to work with

<SNA>

-----
- Cancel -
-----

```

20 Ensure SNA is displayed and press <Enter>. The following screen appears:

```

-----Insert New SNA Node-----
Under Configuration Express
Name.....[ACME      ]
Description...[                ]

=====  -----
- OK -    - Cancel -
=====  -----

```

21 The Name and Description are copied from the Domain Name and Location of the initial screen which was completed. Although the Name is required and cannot contain spaces, it is only used to name this configuration. The description is not required, but it can be helpful to describe the type of configuration such as “5250 SDLC configuration”.

Enter a Name and Description and press <Enter>. The following screen appears.

```
-----SNA Node ACME-----
Network ID
  [          ]
Control Point          -   XID...   -
  [          ]
Process...[nortel.kernel  ]*      -   RTM...   -
=====
-  OK    -  -  Cancel  -          -  Alert Gen...-
=====
```

22 Enter the Network ID. This parameter is obtained from the customer and is usually in the VTAM gen on the mainframe called NETID. This parameter identifies the IVR system and is assigned by the mainframe.

Enter the Control Point. This parameter is obtained from the customer although it can be any value if the IVR system is talking to VTAM on the mainframe. Express requires this parameter be completed. This parameter identifies the IVR system and is assigned by the mainframe.

The Process parameter is only required if the express database is being shared among other Application processors. Leave the information in this field which appears here.

The RTM (Response Time Monitoring) is a feature which Netview on the host can use. There is normally nothing to change here.

The Alert feature is another item which can send messages to Netview on the host. There is normally nothing to change here.

Select XID and the following screen appears:

```

---SNA Node ACME - XID---
XID Format
( *) Format 3
( ) Format 0

XID Block...[E05 ]
XID ID.....[00000 ]

=====  -----
-   OK   -   - Cancel-
=====  -----

```

- 23 Ensure the XID Format is set to Format 3. Format 0 is an old format which is not normally used anymore unless the host is using old software.

The XID Block and XID ID together make up the XID. These parameters are obtained from the customer and normally the XID Block must be 056 for 5250 and the XID ID will probably be 00000.

Complete the fields and press <Enter>.

- 24 Place the cursor on OK and press <Enter>.

The following screen appears:

```

=====
-- NOTE --
                                     =====
                                     -   OK   -
                                     =====

The CPI-C Transaction Programs
Default LU Name has been set to
NETID.CP
=====

```

The above screen appears specifying that the LU Name has been set to what was entered in the Network ID and Control Point fields.

Press <Enter>. The following screen appears:

```
-----EXPRESS Tree Builder-
If you wish to insert another profile,
please select:

For SNA Node ACME:
  <New Link...>

For Configuration Express:
  <New SNA Node...>

  <End Insert>
```

Defining the link

25 Leave the cursor on New Link and press <Enter>. The following screen appears:

```
-----Insert New Link-----

Under SNA Node ACME

Type
( *) SDLC
( ) Channel
( ) Token Ring
( ) QLLC

Name.....[                ]
Description...[                ]

=====
-   OK   -   - Cancel -
=====
```

26 Make sure the asterisk is beside (*) SDLC (use the arrow keys to move to new selections under Type and Space bar to place the asterisk next to the correct selection).

Tab to the Name and enter a meaningful name (no spaces allowed) which describes this configuration. This name is only used by the Express database.

Tab to the Description and enter a meaningful description. This name is only used by the Express database.

Press <Enter> and the following screen appears:

```

-----SDLC Link
Trans5250-----

Node: ACME

Topology                                Role                                Mode...
(*) Switched                            ( ) Secondary
( ) Leased Point-to-Point                ( ) Primary                        Class...
( ) Leased Multipoint                    (*) Negotiable

Ports...[nortel.hpa.0.0] *              Physical
                                         Timers...
                                         TG Chars...

=====  -----
-   OK   -   - Cancel -
=====  -----

```

27 Select the correct Topology for this IVR System.

Switched is a dial-up link connecting two stations.

Leased Point-to-Point is a non-switched data link which directly connects to the host and the IVR system is the only station on the remote side.

Leased Multi-point is a non-switched data link which connects multiple secondary stations to a single host. that is, other 5250 terminals are on this line along with some sort of a splitter.

28 Select the correct Role for this IVR system.

Secondary—the local station is the secondary link station on this link.

Primary—the local station is the primary link station on this link.

Negotiable—the role of the local station will be negotiated at connect time. A leased multi-point line cannot be defined as negotiable.

29 Select the correct Port for this configuration. The software should automatically enter the “nodename.hpa0.0” item which signifies the first board and the first port, for example, nortel.hpa0.0; nortel.hpa0.1 would signify the second port of the HPA board. An entry of nortel.hpa0.0 1 tells Express that if link 0 does not work, automatically try port 1.

Select the Mode and the following screen appears:

```
-----SDLC Link Trans5250 - Mode-----  
  
Maximum Frame Size...[521  ]  
  
Sequencing  
(* ) Normal      (mod 8)  
( ) Extended (mod 128)  
  
Two Way Operation  
(* ) Alternate  
( ) Simultaneous [ ] REJ  
  
=====  -----  
-   OK   -      - Cancel -  
=====  -----
```

- 30 Select the Maximum Frame Size as specified by the host. Frame size specifies the maximum number of bytes in the I-field of an I-frame which may be transmitted or received on this data link. Standard sizes are 265 and 521, although the values may range from 0 to 32767.

Select the Sequencing as specified by the host. Sequencing specifies the type of SDLC sequencing used for this link. The local and remote link stations must agree on the value of this parameter; otherwise communication is not possible.

Normal sequencing allows a maximum of seven SDLC I-frames to be sent in a single poll sequence; this is the most common mode.

Extended sequencing allows a maximum of 127 I-frames to be sent.

Two Way Operation—specifies SDLC mode of operation. The local and remote link stations must agree on the value of this parameter; otherwise communication is not possible.

Alternate—each link station takes turns transmitting data. There is no simultaneous data transmission; this is the most common mode. This is like Half Duplex communications.

Simultaneous—both link stations may transmit frames simultaneously. This is like Full Duplex communications.

Press <Enter> to return to the previous screen.

Select Class and the following screen appears:

```
-----SDLC Link Trans5250 - Class-----
Class of Service...[          ]

=====  -----
-   OK   -   - Cancel -
=====  -----
```

- 31 Enter a Class of Service which is a name indicating the type of LU 6.2 conversations which should be carried on this link. When a conversation is allocated, the mode to be used might name a Class of Service. If there are multiple data links leading to the destination LU's node, Express will choose the data link which matches the Class of Service specified for the mode.

Press <Enter> to return to the previous screen.

Select Physical and the following screen appears:

```
-----SDLC Link Trans5250 - Physical-----

Bit Encoding   RTS Control   Idle
(*) NRZ        (*) Toggled   ( ) Flag
( ) NRZI       ( ) Constant  (*) Mark

=====  -----
-   OK   -   - Cancel -
=====  -----
```

- 32 Set the Bit Encoding, RTS Control and Idle parameters to the values as specified by the host. Toggled must be selected if the mainframe is configured for Half Duplex. The local and remote link stations must agree on these values, otherwise communication is not possible.

Press <Enter> after the parameters have been set. The previous screen appears.

Select Timers and the following screen appears:

```
----- SDLC Link ACME - Timers -----

Timers (in seconds, immediate, or forever)
XID Negotiation...[forever  ]*
Inactivity.....[forever  ]*
RR Poll.....[0.4      ]*
Response.....[3.0      ]*
```

```
DSR Wait.....[120.0    ]*
CTS Wait.....[3.0      ]*
CTS Down.....[0.5      ]*
DSR Down.....[0.5      ]*
```

Retries (value, none, or unlimited)

```
Response Limit...[5      ]*
```

[] Disconnect upon inactivity timeout

```
=====  -----
-   OK   -  - Cancel -
=====  -----
```

33 Ensure the XID Negotiation and Inactivity timers are set to forever.

Press <Enter> after the parameters have been set. The previous screen appears.

34 Select OK and press <Enter> to complete the Link Definition.

The following screen appears:

```
-----EXPRESS Tree Builder-----

If you wish to insert another profile,
please select:

For SDLC Link ACME:
  <New SDLC Station...>

For SNA Node ACME:
  <New Link...>

  <Up a Level>

  <End Insert>
```

35 Press <Enter> with the cursor on New SDLC Station. The following screen appears.

```
----- Insert New SDLC Station -----

Under SDLC Link
Name.....[ACME          ]
Description...[          ]

=====  -----
-   OK   -  - Cancel -
```

Defining the station

36 A station needs to be defined for every 254 sessions. In the Name field enter a meaningful name (no spaces allowed) which describes this configuration. This name is only used by the Express database.

Tab to the Description and enter a meaningful description. This name is only used by the Express database.

Press <Enter> and the following screen appears:

```

----- SDLC Station TR -----
Node: ACME
Link: ACME

Connection Type
( ) Host
(*) Peer-to-Peer

Secondary Station Address...[01 ]

Send XID                               Remote Node Name
Block...[E05 ]                         Network ID.....[APPN   ]
ID.....[00000 ]                         Control Point...[CPX   ]

[ ] Remote Node is Network Node

[*] Restart connection if it fails
=====  -----  -----
-   OK   -   - Cancel -   -   XID...   -
=====  -----  -----
\

```

Connection Type—be sure to change this to Peer-to-Peer for 5250.

Fill in the Secondary Station Address from the PU address on the customer host.

Fill in Send XID Block and ID from the customer host.

Fill in the Network ID and Control Point from the customer host.

Generally the Network ID is set to “APPN”.

Make sure an asterisk [*] is NOT next to Remote Node is Network Node.

37 Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For SDLC Link ACME:  
  <New SDLC Station...>  
  
  <Up a Level>  
  
  <End Insert>
```

38 Tab to End Insert and press <Enter>. The following screen appears:

```
[ - ] Profile Edit Display Preferences Task Help  
----- Define Communications - SNA -----  
Personal Type Name Description  
Status  
Menu: Config Express Default configuration for EXPRESS  
<Esc><Ent Node ACME TR loc test  
Cancel: Indep. LUs 6.2 LUs Using All Stations  
<Ctrl>^ LU ACME Control Point LU  
Alt Key: Link ACME 5250 SDLC  
<Esc>q Station TR 5250 station  
ShellEsc:  
Task: !  
Search:  
Down
```

39 Select Profile and then Exit from the menu. The following screen appears:

```
[ - ] File Edit Preferences Window Task Help  
-----EXPRESS Manager-----  
Personal  
Status 1. Control and Administration  
Menu: 2. Server Configuration  
<Esc><Ent 3. Desktop Configuration  
Cancel:  
<Ctrl>^
```

40 Select 2. Server Configuration and press <Enter>. The following screen appears:

```
-----Server Configuration-----  
I.D. Description Status  
! Define Communications  
; Define LU6.2  
? Define Users/Sessions
```

```

&      Define Hardware
/      Define Job Entry Stations

```

41 Select Define LU6.2. The following screen appears:

```

----- Select Display -----

Please select the type of
LU 6.2 Profiles you wish to work with

<Remote Logical Unit>
<Mode>

<5250/CPI-C Symbolic Destination>

-----
- Cancel -
-----

```

Defining the remote Logical Unit

42 Select Remote Logical Unit (LU). The following screen appears:

```

-----Insert New Remote LU-----

Under Configuration Express
Name.....[                ]
Description...[                ]

=====  -----
-   OK   -   - Cancel -
=====  -----

```

Fill in the Name and Description. These are only used by Express to identify this LU in the database.

43 Press <Enter> and the following screen appears:

```

----- Remote LU TR -----

Network ID.....[NETID   ]
LU Name.....[          ]
Remote Network ID.....[NETID ]
Remote Control Point...[CPX   ]
Uninterpreted Name....[          ]
IP Address.....[          ]
IP Idle Minutes.....[10    ]*
=====  -----

```

```
-   OK   -   - Cancel -  
=====  -----
```

The Network ID should default to the Node Network ID and the LU Name can be filled in with an arbitrary value.

Obtain the Remote Network ID and Remote Control Point from the customer information and fill in. The Remote Control Point must match the Remote Control Point in the Stations configuration.

Note: One of the most common problems is that the Remote Control Point does not match the remote control point in the Stations.

44 Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For Remote LU TRLU:  
  <New LU Pair...>  
  
For Configuration Express:  
  <New Remote LU...>  
  
  <End Insert>
```

45 Tab to End Insert and press <Enter>. The following screen appears:

```
[ - ] Profile Edit Display Preferences Task Help  
-----Define LU 6.2 - Remote Logical Units-----  
Personal Type Name Description  
Status  
Menu: Config Express Default configuration for EX  
<Esc><Ent Remote LU TRLU 5250 SDLC LU  
Cancel:  
<Ctrl>^  
Alt Key:  
<Esc>q
```

46 Rather than returning all the way back to the Express Manager window, the next screen can be obtained by selecting the Display pull down menu and then selecting Modes as shown below.

```
[ - ] Profile Edit Display Preferences Task Help  
-----De * Remote Logical Units-----  
Personal Type Modes  
Status (APPC Users)
```

```

Menu:                (LU Conversation Security)
<Esc><Ent           (CPI-C Transaction Programs)
Cancel:             5250/CPI-C Symbolic Destinations
<Ctrl>^           -----
Alt Key:           Select Display Level...
<Esc>q           (Display All)
ShellEsc:         -----
<Esc>!           Select Configuration...
Task: ;           -----
Search:
Down

```

47 The following screen appears:

```

[-] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - Remote Logical Units-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for EX
<Esc><Ent Mode blank BLANK (null) mode name
Cancel: Mode #BATCH Batch Capabilities Mode
<Ctrl>^ Mode #BATCHSC Secure Batch Capabilities Mode
Alt Key: Mode #INTER Interactive Capabilities Mode
<Esc>q Mode #INTERSC Secure Interactive Capabilities Mode
ShellEsc: Mode CPSVCMG CP Service Manager Mode
<Esc>! Mode IPMODE Mode for IP Router over Lu62
Task: ; Mode SNASVCMG SNA Service Manager Mode Search:
Down

```

48 The Mode listed as Blank or Null can be used for 5250 or a new Mode entry can be created. Place the cursor on the Blank Mode and press <Enter>. The following screen appears:

```

----- Mode blank -----
Class of Service...[TR123456 ]

Initial Session Limits
Maximum Total Sessions.....[64 ]
Minimum Contention Winners.....[16 ]
Minimum Contention Losers.....[16 ]
Contention Winner Auto Activation...[0 ]
Maximum Negotiated Sessions.....[64 ]

Session Outage Notification TP
[ ]

=====
- OK - - Cancel - - Parameters... -
=====

```

These parameters are important parameters. Obtain the correct information from the Host Administrator and fill them in on this screen. The values in the example above are generally the minimum values which should be set.

49 After completing the parameters on the Mode screen, press <Enter> to display the previous screen:

```
[ - ] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - Remote Logical Units-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for EX
<Esc><Ent Mode blank BLANK (null) mode name
Cancel: Mode #BATCH Batch Capabilities Mode
<Ctrl>^ Mode #BATCHSC Secure Batch Capabilities Mode
Alt Key: Mode #INTER Interactive Capabilities Mode
<Esc>q Mode #INTERSC Secure Interactive Capabilities Mode
ShellEsc: Mode CPSVCMG CP Service Manager Mode
<Esc>! Mode IPMODE Mode for IP Router over Lu62
Task: ; Mode SNASVCMG SNA Service Manager Mode Search:
Down
```

Defining the symbolic destination

50 Rather than returning all the way back to the Express Manager window, the next screen can be obtained by selecting the Display pull down menu and then selecting 5250/CPI-C Symbolic Destinations as shown below.

```
[ - ] Profile Edit Display Preferences Task Help
-----De * Remote Logical Units -----
Personal Type Modes
Status (APPC Users)
Menu: Configuration for EX (LU Conversation Security)
<Esc><Ent Remote (CPI-C Transaction Programs)
Cancel: 5250/CPI-C Symbolic Destinations
<Ctrl>^ -----
Alt Key: Select Display Level...
<Esc>q (Display All)
ShellEsc: -----
<Esc>! Select Configuration...
Task: ; -----
Search:
```

51 The following screen appears:

```
----- Insert New Symbolic Destination Information -----

Under Configuration Express

Name.....[ ]
Description...[ ]

===== -----
- OK - - Cancel -
===== -----
```

Fill in the Name and Description. These values are only used by the Express software.

52 Press <Enter> and the following screen appears:

```

----- Symbolic Destination Info TRSD -----
Partner LU...[                ]*
Mode.....[                ]*
Local LU....[                ]*

                                     -----
                                     - TP Names... -
                                     -----

=====  -----  -----
-   OK   -   - Cancel -   - Security... -
=====  -----  -----

```

Partner LU—press the down arrow to select the LU. It will be host ID.host CP name.

Mode—if the Blank or Null Mode was chosen, leave the this blank.

Local LU—press the down arrow to select the Local LU. It will be local ID.local CP name.

53 Press <Enter> and the following screen appears:

```

If you wish to insert another profile,
please select:

For Configuration Express:
  <New Symbolic Destination Information...>

  <End Insert>

Select End Insert and press <Enter>

```

54 The following screen appears:

```

[-] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - 5250/CPI-C Symbolic Destinations-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for EX
<Esc><Ent Symb. Dest TRSYM
Cancel:
<Ctrl>^
Alt Key:
<Esc>q

```

Defining the 5250 users/sessions

55 Return to the Express Manager window by selecting Profile and then Exit from the pull down menu. The following menu appears:

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
Personal
  Status          1. Control and Administration
Menu:             2. Server Configuration
  <Esc><Ent>      3. Desktop Configuration
Cancel:
  <Ctrl>^
Alt Key:
  <Esc>q
ShellEsc:
  <Esc>!
User:
```

56 Select Server Configuration. The following menu appears:

```
-----Server Configuration-----
I.D.   Description          Status
!      Define Communications
;      Define LU6.2
?      Define Users/Sessions
&      Define Hardware
/      Define Job Entry Stations
```

57 Select Define Users/Sessions. The following menu appears:

```
----- Select Display -----
Please select the type of
profiles you wish to work with

<Users>
<Terminal Emulation Services>

-----
- Cancel -
-----
```

58 Select Users. The following menu appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
  Personal Type           Name           Description
  Status
Menu:      All Users      All           Configuration: Express
<Esc><Ent  Group                sysadm       System Administrators Group
Cancel:    User           express      Default user of EXPRESS
  <Ctrl>^
Alt Key:
  <Esc>q
ShellEsc:
  <Esc>!
Task: ;
  Down

```

59 Move the cursor to highlight the User line which reads “Default user of EXPRESS”. From the pull down menu select Profile and then New. The following screen appears:

```

----- Insert New Session -----

Under User express

Session Type
( ) 3270 Display
( ) 3270 Printer
(*) 5250
( ) Local

ID.....[a ]
Description...[ ]

=====
-   OK   -   - Cancel -
=====
-----

```

Session Type - place an asterisk next to 5250.

ID—for the first session enter an “a”. Subsequent sessions will be “b”, “c”, etc. up to session ID “h” for the first user.

60 Press <Enter> and the following screen appears:

```
----- 5250 Session a -----  
  
Defined for User express  
  
[*] Displayable task  
  
Telnet Host / CPI-C Symbolic Destination  
  [TRSYM      ]*          -----  
                             - Devices... -  
Virtual Device Capabilities          -----  
  [*] Color Support          -----  
  [ ] 132x27 Support         - Sign On... -  
                             -----  
Language...[US              ]*          -----  
Long Name...[                ]          - Printing... -  
                             -----  
=====          -----  
-   OK   -   - Cancel -          - EHELLAPI... -  
=====          -----
```

Make sure NO auto sign-on is selected under the Sign On menu.

61 Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For User express  
  <New Session...>  
  
  <Up a Level>  
  
  <End Insert>
```

62 Continue selecting New Session and create session b, then c, etc., until eight sessions have been created. ONLY EIGHT SESSIONS SHOULD BE CREATED PER USER. More sessions will require another user.

When eight sessions have been created, select End Insert and the following screen appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
  Personal Type           Name           Description
  Status
Menu:      All Users      All           Configuration: Express
<Esc><Ent  Group                sysadm       System Administrators Group
Cancel:    User           express      Default user of EXPRESS
  <Ctrl>^   Session              a            session a
Alt Key:   Session              b            session b
  <Esc>q    Session              c            session c
ShellEsc:  Session              d            session d
  <Esc>!   Session              e            session e
Task: ;    Session              f            session f
  Down     Session              g            session g
           Session              h            session h

```

63 If more than eight sessions need to be configured, add a new user of “expressa” by performing the following steps:

- a. Place the cursor on the “Group” line.
- b. Select Profile from the menu.
- c. Select New from the Profile menu.

The following screen appears:

```

----- Group User sysadm -----

Insert New
  <Session>
  <User>

          -----
          - Cancel -
          -----

```

d. Place the cursor on User and press <Enter>. The following screen appears:

```
----- Insert New User -----  
  
Under User Group sysadm  
  
Name.....[                ]  
Full Name...[                ]  
  
=====  -----  
-   OK   -   - Cancel -  
=====  -----
```

e. Enter a name of expressa for the second user which will support the next eight sessions, expressb for the third user which will support the next eight sessions, etc.

Press <Enter>, the following screen appears:

```
----- User expressa -----  
  
Group: sysadm  
          Supervisory Tasks  
-----  
+ Control Communications & Diagnostics  
+ Display Log  
+ Display Trace  
+ Administer Configurations  
+ Administer Log  
+ Define Communications  
+ Define LU 6.2  
  Customize Messages  
+ Define Users/Sessions  
-----  
'+' defined for   -----  
  Group or All Users   - Session Support... -  
-----  
=====  -----  
-   OK   -   - Cancel -   - Password... -  
=====  -----
```

f. Press <Enter> to accept all the Supervisory Tasks. The following menu appears:

```

-----EXPRESS Tree Builder-----
If you wish to insert another profile,
please select:

For User expressa
  <New Session...>

For User Group sysadm:
  <New Session...>
  <New User...>

  <Up a Level>

  <End Insert>

```

g. With the cursor on New Session, press <Enter> to create a new session for the new express user.

```

----- Insert New Session -----
Under User expressa

Session Type
( ) 3270 Display
( ) 3270 Printer
(*) 5250
( ) Local

ID.....[a ]
Description...[ ]

=====
-   OK   -   - Cancel -
=====
-----

```

Session Type - place an asterisk next to 5250ID - for the first session of the second user enter an “i”. Subsequent sessions of the second user will be “j”, “k”, etc. up to session ID “p” for the second user. For the third user, use ID q, r, s, etc. Upper case letters may also be used.

h. Press <Enter> and the following screen appears:

```
----- 5250 Session a -----
Defined for User express

[*] Displayable task

Telnet Host / CPI-C Symbolic Destination
  [TRSYM    ]*
-----
Virtual Device Capabilities
  [*] Color Support
  [ ] 132x27 Support
-----
Language...[US          ]*
Long Name...[          ]
-----
=====
-   OK   -   Cancel -
=====
```

Make sure NO auto sign-on is selected under the Sign On menu.

i. Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----

If you wish to insert another profile,
please select:

For User expressa
  <New Session...>

  <Up a Level>

  <End Insert>
```

j. Continue selecting New Session and create session i, then j, etc., until eight sessions have been created. **ONLY EIGHT SESSIONS SHOULD BE CREATED PER USER.** More sessions will require another user.

When eight sessions have been created, select End Insert and the following screen appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
Personal Type Name Description
Status
Menu: All Users All Configuration: Express
<Esc><Ent Group sysadm System Administrators Group
Cancel: User express Default user of EXPRESS
<Ctrl>^ Session a session a
Alt Key: Session b session b
<Esc>q Session c session c
ShellEsc: Session d session d
<Esc>! Session e session e
Task: ; Session f session f
Down Session g session g
Session h session h
User expressa Expressa user
Session i session i
Session j session j

```

After the configuration is completed, exit the Express Manager by choosing Exit from the Profile menu.

Proceed to [“Testing 3270 and 5250 host communications” on page B-61](#).

Configuring 5250 for Token Ring host communications

The Express software pre-defines a user called express in the Express database. When configuring the hosts communications software, the root log in can be used.

- 1 Log into the AP as root.
- 2 Enter the root password at the prompt.
- 3 The `/etc/profile` file contains all the commands which are executed upon login for all non-root users.
- 4 To allow root to have all the environment variables set up which normal users will have, enter the following command:

```
./etc/profile
```

- 5 The Express software automatically starts at boot time and must be started before the configuration can be accomplished.

- 6 To verify that it has started, enter the following command:

express_adm check

```
The system should display
# express_adm check
(c) Copyright 1989,1992 Apertus Technologies Incorporated. All Rights
Reserved. Restricted Rights Legend: Use, duplication, or disclosure
by the government is subject to restrictions as set forth in
subparagraph (c)(1)(ii) of the Rights in Technical
Data and Computer Software Restricted Rights clause at DAFRS
252.227-7013 and/or the Commercial Computer Software Restricted
Rights clause at FAR 52.227-19(c). Apertus Technologies
Incorporated, 7275 Flying Cloud Drive, Eden Prairie, MN 55344 U.S.A.

agent running:
  root  502    1  0 10:15:08  ?           0:00 agent
executive running:
  root  498    1  0 10:15:05  ?           0:00 executive
watchdog running:
  root  504    1  0 10:15:08  ?           0:00 watchdog
cdmserver running:
  root  367    1  0 10:14:51  ?           0:07 cdmserver
nortel:/u/express/db/cdmst
Checking EXPRESS database divisions ...
Checking EXPRESS clients ...
#
```

Four daemons should appear in the running state. If the information above does not display, then express is not running. The express software may be started with the following command:

express_adm start

- 7 Begin the Express configuration by entering the following command:

express -u express

If the error “express: not found” appears, issue the command in step 5 above (. /etc/profile).

If the error:

```
Initializing display capabilities ... Terminal type 'ansi'
not defined for user 'express' in the EXPRESS
database.DCINIT failed...EXPRESS terminating
```

appears then the terminal type is not set up for your log in session. The valid terminal types available for Express can be obtained with the following command:

ls_screens -u express

Set the terminal type to a valid terminal type using the following command:

TERM=vt220;export TERM

- 8 The system displays the following screen:

```

Initializing display capabilities...
Retrieving database information for express.....

-----EXPRESS Global Options-----
                Welcome to EXPRESS
This first time that you run EXPRESS, you are asked to select initial
values for global parameters and options. You are also asked to
characterize your planned usage of EXPRESS features. EXPRESS
will then make available just those tasks and displays you need to
utilize these selected features.
You may change this information later through Set Global Options.
                =====
                - OK -
                =====

```

- 9 Press <Enter> to display the following screen. This screen only appears the first time express is run.

```

-----EXPRESS Global Options-----
An EXPRESS domain is a single computer or a group of networked
computers on which EXPRESS is installed. EXPRESS provides
central, domain-wide operation and administration.
Please enter the following domain identification. This
information
is attached to configuration backups and communication traces.
It is also the default SNA Node identification.
    Domain Name: [                                     ]
    Location:   [                                     ]
                =====
                ~Continue~
                =====

```

- 10 The Domain Name and Location are not required for a stand-alone configuration (they are required for a network configuration), but since the information will appear in traces, enter a meaningful name such as the name of this company for the domain name and press <Enter>.

- 11 The following screen appears:

```

-----EXPRESS Desktop Features-----

```

Please select the features of the EXPRESS Integrated Desktop that you plan to use.

```
Terminal Emulation   Other Services
[ ] 3270 Display     [ ] Remote Job Entry
[ ] 3270 Printing    [ ] CPI-C Transaction Programs
[*] 5250 Display
```

```
=====  -----  -----
-Continue- - Options...- -Security...
=====  -----  -----
```

- 12 Use the tab key or the mouse to place the cursor in the 5250 Display selection and press Space to place an asterisk in that selection.

Press <Enter> to proceed to the next screen.

The following screen appears:

```
-----EXPRESS Server Features-----
Please select the features of the EXPRESS SNA Server
that you plan to use.
```

```
[*] LU 6.2 - Needed for CPI-C, 5250, and IP/LU6.2
[ ] X.25 - Needed for QLLC, XLI, X.PAD, and IP/X.25
[ ] IP Router - Needed for IP/LU6.2 and IP/X.25
```

Please select the client types supported by the EXPRESS SNA Server.

```
[*] EXPRESS
[ ] Telnet 3270/5250
[ ] Netware for SAA
```

```
=====
- Continue -
=====
```

- 13 Use the tab key or the mouse to place the cursor in the LU 6.2 selection and press Space to place an asterisk in that selection. Use the tab key or the mouse to place the cursor in the EXPRESS selection and press Space to place an asterisk in that selection also.

Press <Enter> to proceed to the next screen.

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
```

```

Personal
Status      1. Control and Administration
Menu:       2. Server Configuration
<Esc><Ent>  3. Desktop Configuration
Cancel:
<Ctrl>^
Alt Key:

```

Notes:

- 1 If any of the parameters which initially displayed need to be changed, they can be found under the Set Global Options menu selection of the Preferences menu item.
- 2 The layout of the EXPRESS Manager screen contains the function of the keys to the left of the vertical line, three selections to the right of the vertical line, and menu item selections along the top. The function keys which display to the left of the vertical line will vary depending on which terminal is being emulated during this configuration. The meanings of the function keys in the example above are:
 - <Esc> then <Enter> = allow using the Menu
 - <Ctrl> and <^> = cancel from selection chosen
 - <Esc> then “q” = the <Alt key> (usually followed by another character)
 - that is, if the O of OK is highlighted, OK can be selected by doing a <Alt+O> which would be keystrokes <Esc> then q then O.
 - <Esc> then “!” = obtain the UNIX shell (type exit to return)

Verifying that Express recognizes the hardware

- 14 To verify that the Express software recognizes the communications adapter, perform the following steps:

Select Server Configuration by pressing the number 2

The following screen appears:

```

-----Server Configuration-----
      I.D.      Description      Status

```

```
!    Define Communications
;    Define LU6.2
?    Define Users/Sessions
&    Define Hardware
/    Define Job Entry Stations
```

15 Select Define Hardware. The following screen appears:

```
[-] Profile Edit Display Preferences Task Help
-----Define-----
Hardware-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for
EXPRESS
<Esc><Ent> System nortel Computer System nortel
Cancel: Adapter nortel.tr Token Ring Adapter
<Ctrl>^ Port nortel.tr Token Ring Port
Alt Key:
<Esc>q
ShellEsc:
<Esc>!
Task: &
Search:
Down
```

The screen should display the Adapter line indicating that the adapter has been recognized. If the Adapter lines do not appear, then check the hardware configuration using `express_adm admin` and/or check the settings on the adapter itself.

- 16 Select the Profile menu item and then choose Exit to return to the Express Manager window.
- 17 To complete the configuration of the Express software requires the completion of the following configurations:
 - a. Defining the Node
 - b. Defining the Link—there must be a link for each line to the host
 - c. Defining the Station
 - d. Defining the Remote LU and Mode

e. Defining the Symbolic Destination

f. Defining the 5250 sessions

Defining the node

18 From the Express Manager window, select Server Configuration by pressing the number 2.

The following screen appears:

```
-----Server Configuration-----
      I.D.      Description      Status
      !        Define Communications
      ;        Define LU6.2
      ?        Define Users/Sessions
      &        Define Hardware
      /        Define Job Entry Stations
```

19 Select Define Communications. The following screen appears:

```
-----Select Display-----
Please select the type of
Communications Profiles you wish to work with

<SNA>

-----
- Cancel -
-----
```

20 Ensure SNA is displayed and press <Enter>.

The following screen appears:

```
-----Insert New SNA Node-----
Under Configuration Express
Name.....[ACME      ]
Description...[                ]

=====  -----
-   OK   -  - Cancel -
=====  -----
```



```
XID Format
(*) Format 3
( ) Format 0
```

```
XID Block...[E05 ]
XID ID.....[00000 ]
```

```
=====  - - - - -
-   OK   -  - Cancel-
=====  - - - - -
```

- 23 Ensure the XID Format is set to Format 3. Format 0 is an old format which is not normally used anymore unless the host is using old software.

The XID Block and XID ID together make up the XID. These parameters are obtained from the customer and normally the XID Block must be 056 for 5250 and the XID ID will probably be 00000.

Complete the fields and press <Enter>.

- 24 Place the cursor on OK and press <Enter>. The following screen appears:

```
=====
-- NOTE --                               =====
                                           -   OK   -
                                           =====

The CPI-C Transaction Programs
Default LU Name has been set to
NETID.CP
=====
```

The above screen appears specifying that the LU Name has been set to what was entered in the Network ID and Control Point fields.

Press <Enter>. The following screen appears:

```
-----EXPRESS Tree Builder-----
If you wish to insert another profile,
please select:

For SNA Node ACME:
<New Link...>

For Configuration Express:
<New SNA Node...>

<End Insert>
```

Defining the link

- 25 Leave the cursor on New Link and press <Enter>. The following screen appears:

```
----- Token Ring Link TFNode -----  
  
Node: ACME  
  
Local MAC Address  
( ) Use Default  
(* ) Assign Address      [          ]  
  
Port  
  [nortel.tr      ]*      -----  
                          - Mode... -  
                          -----  
[ ] Connection Network Link -----  
                          - Class... -  
                          -----  
                          - Timers... -  
                          -----  
=====                   -----  
-   OK   -   - Cancel -   - TG Char... -  
=====                   -----
```

Local MAC Address—this is the 12-digit hexadecimal address which will be used when communicating with the host. “Use Default” will cause the system to obtain the unique MAC address which is burned into each LAN board. “Assign Address” will require the entering of the MAC address on this screen. It is recommended that “Assign Address” be chosen if a MAC address can be obtained from the customer. The advantage of assigning the address on this screen is that if the Madge card is ever replaced, the MAC address does not have to be changed.

Port is the name given to the Madge adapter port.

- 26 Select the correct Port for this configuration. The software should automatically enter the “nodename.tr” item which signifies the token ring board.

Select Class and the following screen appears:

```
-----Token Ring Link Trans5250 - Class-----
```

```
Class of Service...[          ]
```

```
=====  -----
-   OK   -   Cancel -
=====  -----
```

- 27 Enter a Class of Service which is a name indicating the type of LU 6.2 conversations which should be carried on this link. When a conversation is allocated, the mode to be used might name a Class of Service. If there are multiple data links leading to the destination LU's node, Express will choose the data link which matches the Class of Service specified for the mode.

Press <Enter> to return to the previous screen.

- 28 Select Timers and the following screen appears:

```
----- Token Ring Link TFNode - Timers -----
```

```
Timers (in seconds, immediate, or forever)
```

```
REJ.....[2.0      ]*
Remote Busy.....[10.0   ]*
Inactivity.....[forever ]*
XID Negotiation...[forever ]*
Response.....[2.0      ]*
Acknowledgement...[0.1    ]*
```

```
Retries (value, none, or unlimited)
```

```
XID Attempts.....[40      ]*
Response Limit...[30      ]*
```

```
=====  -----
-   OK   -   Cancel -
=====  -----
```

- 29 Ensure the XID Negotiation and Inactivity timers are set to forever.

Press <Enter> after the parameters have been set. The previous screen appears.

30 Select TG Char and the following screen appears:

```
----- Token Ring Link TFNode - TG Characteristics -----  
  
Security                               Propagation Delay  
(* ) Non Secure                       ( ) Minimum  
( ) Public Switched Network           (* ) Local Area Network  
( ) Underground Cable                 ( ) Telephone  
( ) Secure Conduit                    ( ) Packet Switched Network  
( ) Guarded Conduit                   ( ) Satellite  
( ) Encrypted                          ( ) Maximum  
( ) Guarded Radiation  
  
Ring Speed      Cost Per Connect Time...[128 ]   User Defined  
( ) 4 Mbps      Cost Per Byte.....[128 ]       1...[128 ]  
(* ) 16 Mbps    Cost Per Byte.....[128 ]       2...[128 ]  
                                     3...[128 ]  
  
===== - - - - -  
-   OK   -   - Cancel -  
===== - - - - -
```

Ensure the Ring Speed is set at the correct speed. Place the cursor on OK and press <Enter> to return to the previous screen.

31 Select OK and press <Enter> to complete the Link Definition.

The following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For Token Ring Link ACME:  
  <New Token Ring Station...>  
  
For SNA Node ACME:  
  <New Link...>  
  
  <Up a Level>  
  
  <End Insert>
```

- 32 Press <Enter> with the cursor on New SDLC Station. The following screen appears.

```

----- Insert New Token Ring Station -----

Under Token Ring Link
Name.....[ACME           ]
Description...[           ]

=====
-   OK   -   - Cancel -
=====

```

Defining the station

- 33 A station needs to be defined for every 254 sessions. In the Name field enter a meaningful name (no spaces allowed) which describes this configuration. This name is only used by the Express database.

Tab to the Description and enter a meaningful description. This name is only used by the Express database.

Press <Enter> and the following screen appears:

```

----- Token Ring Station Transtation -----

Node: ACME
Link: TFNode

Connection Type      Local  SAP Value....[04 ]
( ) Host             Remote SAP Value....[04 ]
(*) Peer-to-Peer     Local MAC Address....123456789ABC
                    Remote MAC Address...[           ]

Send XID             Remote Node Name
Block...[E05 ]      Network ID.....[APPN   ]
ID.....[00000 ]     Control Point...[           ]

[ ] Remote Node is Network Node
                    -----
                    -   XID...   -
                    -----
[*] Restart connection if it fails
                    -----
                    -   Priority... -
                    -----
=====
-   OK   -   - Cancel -
=====

```

- Connection Type—be sure to change this to Peer-to-Peer for 5250.
- Local and Remote SAP Value—obtain from the customer host.
- Local MAC Address—comes from what was entered for the Link.
- Remote MAC Address—obtain from the customer host.
- Fill in Send XID Block and ID from the customer host.
- Fill in the Network ID and Control Point from the customer host.

Generally the Network ID is set to “APPN”. Make sure an asterisk [*] is NOT next to Remote Node is Network Node.

Make sure an asterisk [*] is next to Restart connection if it fails.

34 Place the cursor on XID and press <Enter> to display the screen below:

```
----- Token Ring Station Transtation - XID -----  
  
XID Format      Role  
(* ) Format 3   ( ) Secondary  
( ) Format 0    ( ) Primary  
                (* ) Negotiable  
  
[ ] Verify Adjacent Node Identity  
  
=====      -----  
-   OK   -    - Cancel -  
=====      -----
```

Ensure the XID Format is set to Format 3. Format 0 is an old format which is not normally used anymore unless the host is using old software. Make sure Role is set to match what the customer host requires.

- Secondary—the local station is the secondary link station on this link.
- Primary—the local station is the primary link station on this link.
- Negotiable—the role of the local station will be negotiated at connect time.

Complete the fields and press <Enter> to return to the previous screen.

35 Place the cursor on OK and press <Enter>. The following screen appears:

```

-----EXPRESS Tree Builder-----

If you wish to insert another profile,
please select:

For Token Ring Station Transtation:
  <New Logical Unit...>

For Token Ring Link TFNode:
  <New Token Ring Station...>

  <Up a Level>

  <End Insert>

```

36 Tab to End Insert and press <Enter>. The following screen appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Communications - SNA -----
Personal Type Name Description
Status
Menu: Config Express Default configuration for EXPRESS
<Esc><Ent Node ACME TR loc test
Cancel: Indep. LUs 6.2 LUs Using All Stations
<Ctrl>^ LU ACME Control Point LU
Alt Key: Link ACME Trans Node
<Esc>q Station TR 5250 station
ShellEsc:
Task: !
Search:
Down

```

37 Select Profile and then Exit from the menu. The following screen appears:

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
Personal
  Status          1. Control and Administration
Menu:             2. Server Configuration
  <Esc><Ent       3. Desktop Configuration
Cancel:
  <Ctrl>^
Alt Key:
  <Esc>q
ShellEsc:
  <Esc>!
User:
```

38 Select 2. Server Configuration and press <Enter>. The following screen appears:

```
-----Server Configuration-----
I.D.   Description          Status
!      Define Communications
;      Define LU6.2
?      Define Users/Sessions
&      Define Hardware
/      Define Job Entry Stations
```

39 Select Define LU6.2. The following screen appears:

```
----- Select Display -----
Please select the type of
LU 6.2 Profiles you wish to work with

<Remote Logical Unit>
<Mode>

<5250/CPI-C Symbolic Destination>

-----
- Cancel -
-----
```

Defining the remote Logical Unit

40 Select Remote Logical Unit (LU). The following screen appears:

```
-----Insert New Remote LU-----

Under Configuration Express
Name.....[                ]
Description...[                ]

=====  -----
-   OK   -   - Cancel -
=====  -----
```

Fill in the Name and Description. These are only used by Express to identify this LU in the database.

41 Press <Enter> and the following screen appears:

```
----- Remote LU TR -----

Network ID.....[NETID    ]
LU Name.....[                ]
Remote Network ID.....[NETID  ]
Remote Control Point...[CPX    ]
Uninterpreted Name.....[                ]
IP Address.....[                ]
IP Idle Minutes.....[10     ]*

=====  -----
-   OK   -   - Cancel -
=====  -----
```

The Network ID should default to the Node Network ID and the LU Name can be filled in with an arbitrary value.

Obtain the Remote Network ID and Remote Control Point from the customer information and fill in. The Remote Control Point must match the Remote Control Point in the Stations configuration.

Note: One of the most common problems is that the Remote Control Point does not match the remote control point in the Stations.

42 Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For Remote LU TRLU:  
  <New LU Pair...>  
  
For Configuration Express:  
  <New Remote LU...>  
  
  <End Insert>
```

43 Tab to End Insert and press <Enter>. The following screen appears:

```
[ - ] Profile Edit Display Preferences Task Help  
-----Define LU 6.2 - Remote Logical Units-----  
Personal Type Name Description  
Status  
Menu: Config Express Default configuration for EX  
<Esc><Ent Remote LU TRLU 5250 LU  
Cancel:  
<Ctrl>^  
Alt Key:  
<Esc>q  
ShellEsc:  
<Esc>!  
Task: ;  
Search:  
Down
```

44 Rather than returning all the way back to the Express Manager window, the next screen can be obtained by selecting the Display pull down menu and then selecting Modes as shown in the following:

```
[ - ] Profile Edit Display Preferences Task Help  
-----De * Remote Logical Units -----  
Personal Type Modes  
Status (APPC Users)  
Menu: Configuration for EX (LU Conversation Security)  
<Esc><Ent Remote (CPI-C Transaction Programs)  
Cancel: 5250/CPI-C Symbolic Destinations  
<Ctrl>^ -----  
Alt Key: Select Display Level...  
<Esc>q (Display All)  
ShellEsc: -----  
<Esc>! Select Configuration...  
Task: ; -----  
Search:  
Down
```

45 The following screen appears:

```
[ - ] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - Remote Logical Units-----
  Personal Type      Name      Description
  Status
Menu:      Config      Express      Default configuration for EX
<Esc><Ent  Mode      blank      BLANK (null) mode name
Cancel:    Mode      #BATCH     Batch Capabilities Mode
<Ctrl>^   Mode      #BATCHSC   Secure Batch Capabilities Mode
Alt Key:   Mode      #INTER     Interactive Capabilities Mode
<Esc>q    Mode      #INTERSC   Secure Interactive Capabilities Mode
ShellEsc:  Mode      CPSVCMG    CP Service Manager Mode
<Esc>!    Mode      IPMODE     Mode for IP Router over Lu62
Task: ;    Mode      SNASVCMG   SNA Service Manager Mode Search:
Down
```

46 The Mode listed as Blank or Null can be used for 5250 or a new Mode entry can be created. Place the cursor on the Blank Mode and press <Enter>. The following screen appears:

```
----- Mode blank -----
Class of Service...[TR123456 ]

Initial Session Limits
  Maximum Total Sessions.....[64   ]
  Minimum Contention Winners.....[16  ]
  Minimum Contention Losers.....[16  ]
  Contention Winner Auto Activation...[0   ]
Maximum Negotiated Sessions.....[64   ]

Session Outage Notification TP
[                                     ]

=====  -----  -----
-   OK   -   - Cancel -   - Parameters... -
=====  -----  -----
```

The parameters are important parameters. Obtain the correct information from the Host Administrator and fill them in on this screen. The values in the example above are generally the minimum values which should be set.

47 After completing the parameters on the Mode screen, press <Enter> to display the previous screen:

```

[-] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - Remote Logical Units-----
Personal Type Name Description
Status
Menu: Config Express Default configuration for EX
<Esc><Ent Mode blank BLANK (null) mode name
Cancel: Mode #BATCH Batch Capabilities Mode
<Ctrl>^ Mode #BATCHSC Secure Batch Capabilities Mode
Alt Key: Mode #INTER Interactive Capabilities Mode
<Esc>q Mode #INTERSC Secure Interactive Capabilities Mode
ShellEsc: Mode CPSVCMG CP Service Manager Mode
<Esc>! Mode IPMODE Mode for IP Router over Lu62
Task: ; Mode SNASVCMG SNA Service Manager Mode Search:
Down
    
```

Defining the symbolic destination

48 Rather than returning all the way back to the Express Manager window, the next screen can be obtained by selecting the Display pull down menu and then selecting 5250/CPI-C Symbolic Destinations as shown below.

```

[-] Profile Edit Display Preferences Task Help
-----De * Remote Logical Units -----
Personal Type Modes
Status (APPC Users)
Menu: Configuration for EX (LU Conversation Security)
<Esc><Ent Remote (CPI-C Transaction Programs)
Cancel: 5250/CPI-C Symbolic Destinations
<Ctrl>^ -----
Alt Key: Select Display Level...
<Esc>q (Display All)
ShellEsc: -----
<Esc>! Select Configuration...
Task: ; -----
Search:
    
```

49 The following screen appears:

```

----- Insert New Symbolic Destination Information -----

Under Configuration Express

Name.....[ ]
Description...[ ]

===== -----
- OK - - Cancel -
===== -----
    
```

Fill in the Name and Description. These values are only used by the Express software.

50 Press <Enter> and the following screen appears:

```

----- Symbolic Destination Info TRSD -----
Partner LU...[                ]*
Mode.....[                ]*
Local LU.....[                ]*

                                     -----
                                     - TP Names... -
                                     -----

=====  -----  -----
-   OK   -   - Cancel -   - Security... -
=====  -----  -----

```

- Partner LU—press the down arrow to select the LU. It will be host ID.host CP name.
- Mode—if the Blank or Null Mode was chosen, leave the this blank.
- Local LU—press the down arrow to select the Local LU. It will be local ID.local CP name.

51 Press <Enter> and the following screen appears:

If you wish to insert another profile,
please select:

For Configuration Express:
<New Symbolic Destination Information...>

<End Insert>

Select End Insert and press <Enter>

52 The following screen appears:

```

[-] Profile Edit Display Preferences Task Help
-----Define LU 6.2 - 5250/CPI-C Symbolic Destinations-----
  Personal Type      Name      Description
  Status
Menu:      Config      Express      Default configuration for EX
<Esc><Ent Symb. Dest TRSYM
Cancel:
<Ctrl>^
Alt Key:
<Esc>q

```

Defining the 5250 users/sessions

- 53 Return to the Express Manager window by selecting Profile and then Exit from the pull down menu. The following menu appears:

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
Personal
Status          1. Control and Administration
Menu:           2. Server Configuration
<Esc><Ent>      3. Desktop Configuration
Cancel:
<Ctrl>^
Alt Key:
<Esc>q
ShellEsc:
<Esc>!
User:
```

- 54 Select Server Configuration. The following menu appears:

```
-----Server Configuration-----
I.D.   Description      Status
!      Define Communications
;      Define LU6.2
?      Define Users/Sessions
&      Define Hardware
/      Define Job Entry Stations
```

- 55 Select Define Users/Sessions. The following menu appears:

```
----- Select Display -----
Please select the type of
profiles you wish to work with

<Users>
<Terminal Emulation Services>

-----
- Cancel -
-----
```

56 Select Users. The following menu appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
  Personal Type           Name           Description
  Status
Menu:      All Users      All           Configuration: Express
<Esc><Ent  Group                sysadm       System Administrators Group
Cancel:    User           express      Default user of EXPRESS
  <Ctrl>^
Alt Key:
  <Esc>q
ShellEsc:
  <Esc>!
Task: ;
  Down

```

57 Move the cursor to highlight the User line which reads “Default user of EXPRESS”. From the pull-down menu select Profile and then New. The following screen appears:

```

----- Insert New Session -----

Under User express

Session Type
( ) 3270 Display
( ) 3270 Printer
(*) 5250
( ) Local

ID.....[a ]
Description...[ ]

=====
-   OK   -   Cancel -
=====

```

Session Type—place an asterisk next to 5250 ID—for the first session enter an “a”. Subsequent sessions will be “b”, “c”, etc. up to session ID “h” for the first user.

58 Press <Enter> and the following screen appears:

```
----- 5250 Session a -----  
  
Defined for User express  
  
[*] Displayable task  
  
Telnet Host / CPI-C Symbolic Destination  
  [TRSYM      ]*          -----  
                             - Devices... -  
Virtual Device Capabilities  
  [*] Color Support      -----  
  [ ] 132x27 Support     - Sign On... -  
                             -----  
Language...[US          ]* -----  
Long Name...[          ] - Printing... -  
                             -----  
===== - - - - -  
-   OK   - - Cancel - - EHELLAPI... -  
===== - - - - -
```

Make sure NO auto sign-on is selected under the Sign On menu.

59 Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For User express  
  <New Session...>  
  
  <Up a Level>  
  
  <End Insert>
```

60 Continue selecting New Session and create session b, then c, etc., until eight sessions have been created. **ONLY EIGHT SESSIONS SHOULD BE CREATED PER USER.** More sessions will require another user.

When eight sessions have been created, select End Insert and the following screen appears:

```

[-] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
  Personal Type           Name           Description
  Status
Menu:      All Users      All           Configuration: Express
<Esc><Ent  Group                sysadm       System Administrators Group
Cancel:    User           express      Default user of EXPRESS
  <Ctrl>^   Session              a            session a
Alt Key:   Session              b            session b
  <Esc>q    Session              c            session c
ShellEsc:  Session              d            session d
  <Esc>!   Session              e            session e
Task: ;    Session              f            session f
  Down     Session              g            session g
           Session              h            session h

```

61 If more than eight sessions need to be configured, add a new user of “expressa” by performing the following steps:

- a. Place the cursor on the “Group” line.
- b. Select Profile from the menu.
- c. Select New from the Profile menu.

The following screen appears:

```

----- Group User sysadm -----

Insert New
  <Session>
  <User>

          -----
          - Cancel -
          -----

```

d. Place the cursor on User and press <Enter>. The following screen appears:

```
----- Insert New User -----  
  
Under User Group sysadm  
  
Name.....[                ]  
Full Name...[                ]  
  
=====  -----  
-   OK   -   - Cancel -  
=====  -----
```

e. Enter a name of expressa for the second user which will support the next eight sessions, expressb for the third user which will support the next eight sessions, etc. Press <Enter>. The following screen appears:

```
----- User expressa -----  
  
Group: sysadm  
Supervisory Tasks  
-----  
+ Control Communications & Diagnostics  
+ Display Log  
+ Display Trace  
+ Administer Configurations  
+ Administer Log  
+ Define Communications  
+ Define LU 6.2  
  Customize Messages  
+ Define Users/Sessions  
-----  
'+' : defined for      -----  
  Group or All Users  - Session Support... -  
-----  
=====  -----  
-   OK   -   - Cancel -   - Password... -  
=====  -----
```

f. Press <Enter> to accept all the Supervisory Tasks. The following menu appears:

```

-----EXPRESS Tree Builder-----
If you wish to insert another profile,
please select:

For User expressa
  <New Session...>

For User Group sysadm:
  <New Session...>
  <New User...>

  <Up a Level>

  <End Insert>

```

g. With the cursor on New Session, press <Enter> to create a new session for the new express user.

```

----- Insert New Session -----
Under User expressa

Session Type
( ) 3270 Display
( ) 3270 Printer
(*) 5250
( ) Local

ID.....[a ]
Description...[ ]

=====  - - - - -
-   OK   -   - Cancel -
=====  - - - - -

```

Session Type—place an asterisk next to 5250 ID— for the first session of the second user enter an “i”. Subsequent sessions of the second user will be “j”, “k”, etc. up to session ID “p” for the second user. For the third user, use ID q, r, s, etc. Upper case letters may also be used.

h. Press <Enter> and the following screen appears:

```
----- 5250 Session a -----  
  
Defined for User express  
  
[*] Displayable task  
  
Telnet Host / CPI-C Symbolic Destination  
  [TRSYM      ]*          -----  
                          - Devices... -  
Virtual Device Capabilities  
  [*] Color Support      -----  
  [ ] 132x27 Support     - Sign On... -  
                          -----  
Language...[US          ]* -----  
Long Name...[          ] - Printing... -  
                          -----  
===== - - - - -  
-   OK   - - Cancel - - EHELLAPI... -  
===== - - - - -
```

Make sure NO auto sign-on is selected under the Sign On menu.

i. Press <Enter> and the following screen appears:

```
-----EXPRESS Tree Builder-----  
  
If you wish to insert another profile,  
please select:  
  
For User expressa  
  <New Session...>  
  
  <Up a Level>  
  
  <End Insert>
```

j. Continue selecting New Session and create session i, then j, etc., until eight sessions have been created. ONLY EIGHT SESSIONS SHOULD BE CREATED PER USER. More sessions will require another user.

When eight sessions have been created, select End Insert and the following screen appears:

```
[ - ] Profile Edit Display Preferences Task Help
----- Define Users/Sessions - Users -----
Personal Type Name Description
Status
Menu: All Users All Configuration: Express
<Esc><Ent Group sysadm System Administrators Group
Cancel: User express Default user of EXPRESS
<Ctrl>^ Session a session a
Alt Key: Session b session b
<Esc>q Session c session c
ShellEsc: Session d session d
<Esc>! Session e session e
Task: ; Session f session f
Down Session g session g
Session h session h
User expressa Expressa user
Session i session i
Session j session j
```

After the configuration is completed, exit the Express Manager by choosing Exit from the Profile menu.

Proceed to [“Testing 3270 and 5250 host communications”](#) on page B-61.

Testing 3270 and 5250 host communications

- 1 After the Express software is configured, issue the following commands to restart Express:

express_admin stop(stop the interface)

express_admin start(start the interface)

express_admin check(check that daemons are running)

express -u express(start Express)

The following menu appears:

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
Personal
Status 1. Interactive Sessions
Menu: 2. Control and Administration
<Esc><Ent 3. Server Configuration
Cancel: 4. Desktop Configuration
<Ctrl>^
Alt Key:
```

```
<Esc>q
ShellEsc:
<Esc>!
User:
```

2 Select Control and Administration. The following menu appears:

```
----- Control and Administration -----
      I.D.      Description                               Status
      @         Control Communications & Diagnostics
      $         Display Log
      *         Display Trace
      '         Administer Configurations
      -         Administer Log
```

3 Select Control Communications & Diagnostics. The following screen appears:

```
----- Select Display -----

Please select the type of
objects you wish to work with

<Link, Station>
<Interactive Session>
<LU 6.2 Session>

-----
- Cancel -
-----
```

4 Select Link, Station and the following screen appears:

```
[ - ] Control Edit Display Preferences Task Help
--- Control Communications & Diagnostics - Links, Stations ----
Personal Type      Name      Status      Description
Status
Menu:      Config      Express      Default configuration
<Esc><Ent> Node      ACME      Enabled      ACME
Cancel:      Indep. LUs      6.2 LUs Using All Stations
<Ctrl>^      LU      Nortel      Inactive      Control Point LU
Alt Key:      Link      ACME      Inactive      5250 SDLC
<Esc>q      Station      TR      Inactive      5250 station
ShellEsc:
<Esc>!
Task: @
Search:
Down
```

5 By selecting Activate from the Control pull-down menu and moving the cursor to each line, activate the following lines if they do not show Enabled:

- Node
- Control Point LU—ONLY FOR 5250—always configured by Express
- LU—Control Point LU—ONLY FOR 5250—always configured by Express
- Link
- Station

The following confirmation screen appears:

```

----- Confirm Activate -----
Activate SDLC Link ACME?

=====  -----
- Activate -  - Cancel -
=====  -----

```

The Control Point LU line only has to be activated for 5250. Activate the Node, the Link, and the Station.

6 Press <Enter> with the cursor on Activate. The screen will display “Operation in Progress” and finally change to “Successful completion”. Press <Enter> with the cursor on Close to close this window.

```

===== Activate SDLC Link ACME =====
Successful completion

-----
- Close -
-----

```

7 The Status should change to Enabled if a successful activation occurs. Continue changing the status on each line which is Inactive. If the Link becomes enabled, enable the station also. When the Station become enabled, this means a successful SNRM or SABME has been passed between the host and the IVR system.

If the Status does not change to Enabled, check the Express Log. The Express Log can be obtained by choosing Display Log from the following menu:

```
----- Control and Administration -----
      I.D.      Description      Status
      @        Control Communications & Diagnostics
      $        Display Log
      *        Display Trace
      '        Administer Configurations
      -        Administer Log
```

The Log solves most of the problems by providing information on where the problem is occurring.

Note: To modify an item in configuration requires that the item be Deactivated in the Control and Communications screen.

- 8 Once all the Status's have become Enabled, an interactive session can be displayed by first returning to the following menu:

```
[ - ] File Edit Preferences Window Task Help
-----EXPRESS Manager-----
Personal
Status      1. Interactive Sessions
Menu:       2. Control and Administration
<Esc><Ent>  3. Server Configuration
Cancel:     4. Desktop Configuration
<Ctrl>^
Alt Key:
<Esc>q
ShellEsc:
<Esc>!
User:
```

- 9 Select Interactive Sessions. The following menu appears listing all the Sessions which were configured:

```
----- Interactive Sessions -----
      I.D.      Description      Status
      a        session a
      b        session b
      c        session c
```

- 10 Place the cursor on the first session line and press <Enter>. The system attempts to bring up a terminal session from the host. A screen similar to the following should appear with a status line along the bottom:

```
[ - ] File Edit Preferences Window Task Help
----- Session a -----
```

```
INACTIVE a 2          COMM505          LTT=:00.0
          ^^
          |____Session status|____ Comm status
```

3270 Session Status messages and meanings can be found in Chapter 4 of the *Express Terminal Emulator User's Guide*.

5250 Session Status messages can include:

- X—System waiting
- Start—5250 session activation in progress (CPI-C allocation in progress)
- Active—5250 session activated

Communications Check Codes (for example, COMM505) meanings can be found in Appendix C of the *Express Terminal Emulator User's Guide*.

Glossary

5250

Protocol used for information transfer and presentation across the IBM product line.

3278

Class of IBM display terminals used with IBM hosts.

AID

Attention identifier; the key that interrupts the operation of the host to process the current terminal input.

Application

With respect to IVR, an application is a program that controls the activity on one or more telephone trunks connected to an Application Processor. With respect to a host computer, it is any type of program that carries out a task.

Application developer

A person who creates IVR applications.

Application processor

A computer or workstation running IVR.

Branch

A pathway between cells in an IVR application.

Call flow

A diagram of an application.

Caller

A person whose phone call is received or originated by an IVR application.

Cell

The basic element of an IVR application. Each cell performs an action—like playing a prompt to a caller. Each cell has a set of branches to other cells. After the cell performs its action, it determines which branch the application should follow to the next cell.

Channel

A telephone trunk within a cluster of APs.

COMA cell

IVR cell that cancels a transaction with a 5250 host.

COMI cell

IVR cell that sends input to a 5250 host via the TRS process.

COMO cell

IVR cell that receives output from a 5250 host via the TRS process.

Emulation

Imitating a computer or computer system with a combination of hardware and software. Allows programs written for one computer to be run on another.

Host

A networked computer that provides applications and services to other networked computers. In this guide, a host is an IBM computer that supports the 5250 communication protocol.

Prompt

A voice recording that helps lead a caller through an application.

Session

A connection to a host as defined in the trs.conf file, representing a terminal connection.

SNA

Systems Network Architecture. An IBM protocol that defines how IBM computers (and any other computer that uses the SNA protocol) transmit and receive data. This protocol is also used by many other computer hardware and software manufacturers.

System administrator

A person who is responsible for configuring, installing and running IVR applications, managing prompts, and running reports.

Templates

ASCII files used by the TRS process to manage the 5250 terminal session.

Transaction

The function performed by a set of action and screen template files when executed by TRS.

TRS

Terminal Resource Server. IVR process that manages the assignment of the available terminal resources on the application processor.

Meridian IVR

5250 Gateway Development Guide

Nortel
Customer Documentation
522 University Avenue, 14th Floor
Toronto, Ontario, Canada
M5G 1W7

© 1996 Northern Telecom
All rights reserved

Information is subject to change without notice. Northern Telecom reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant.

Publication number: 555-9001-318
Product release: 2.0/1
Document release: Standard 1.0
Date: February 1996

Printed in the United States of America

NORTEL
NORTHERN TELECOM