







# Motorola Moto G3 Teardown

Here comes with detailed steps to do Motorola Moto G3 whole teardown/disassembly.

Written By: Witrigs

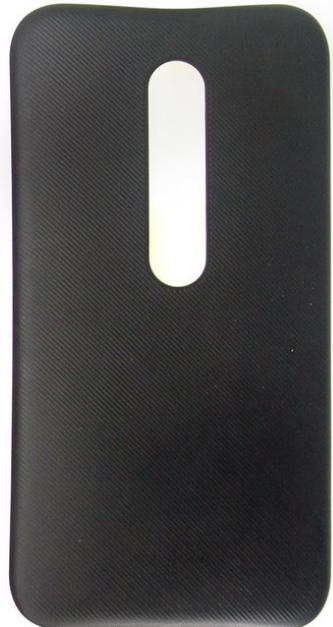

# INTRODUCTION

[video: <https://www.youtube.com/watch?v=4039WGldia0>]

## TOOLS:

- [Heat Gun](#) (1)
- [Suction Handle](#) (1)
- [Guitar Picks](#) (1)
- [T4 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Spudger](#) (1)

## Step 1 — Motorola Moto G3 Teardown



- Remove back cover.
- ⓘ Moto G3 plastic panel can be easily removed with the fingernails.

## Step 2




- Remove camera&flashlight metal cover. Use tweezers to cut strong adhesives underneath.

## Step 3



- Undo 3 screws by T4 Torx screwdriver.
- Take away plastic securing part.


## Step 4

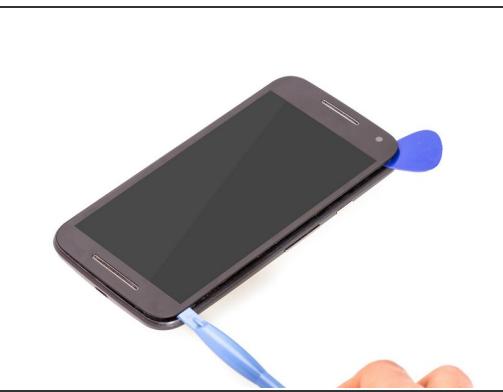

- Heat up the LCD screen for a while.
- Then with the help of suction cup, insert guitar picks to open a gap. Slide guitar picks or plastic opening tool to cut strong adhesives.

**⚠** There is LCD screen connector on the left side, so be careful to slide guitar picks.

## Step 5

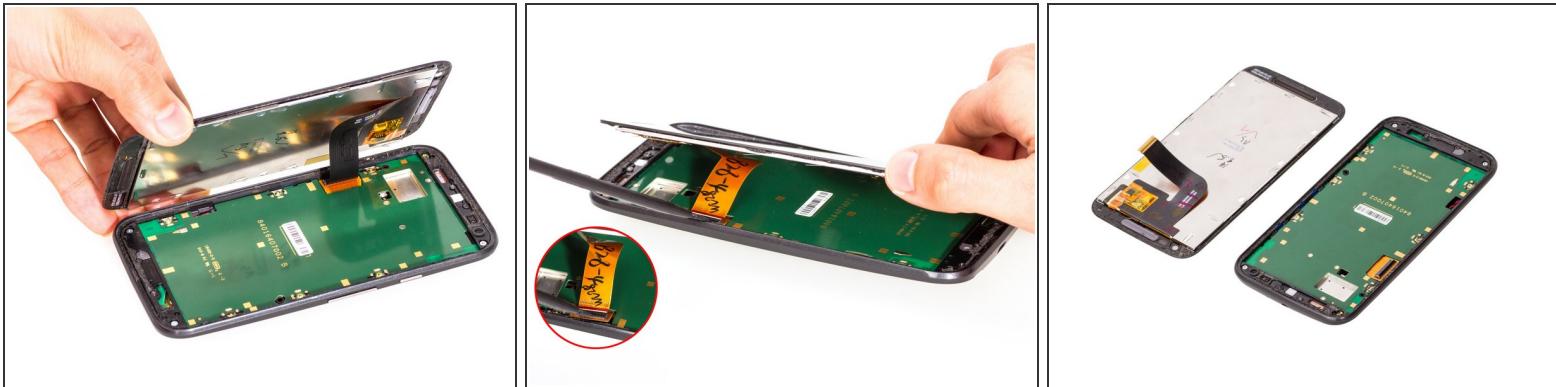

- Release LCD screen connector firstly.
- Remove LCD screen.


## Step 6



- Undo 14 screws by T4 Torx screwdriver
- Pry up motherboard assembly.


**⚠** Battery flex connector is connected with motherboard, so be careful to pry the assembly up.

## Step 7

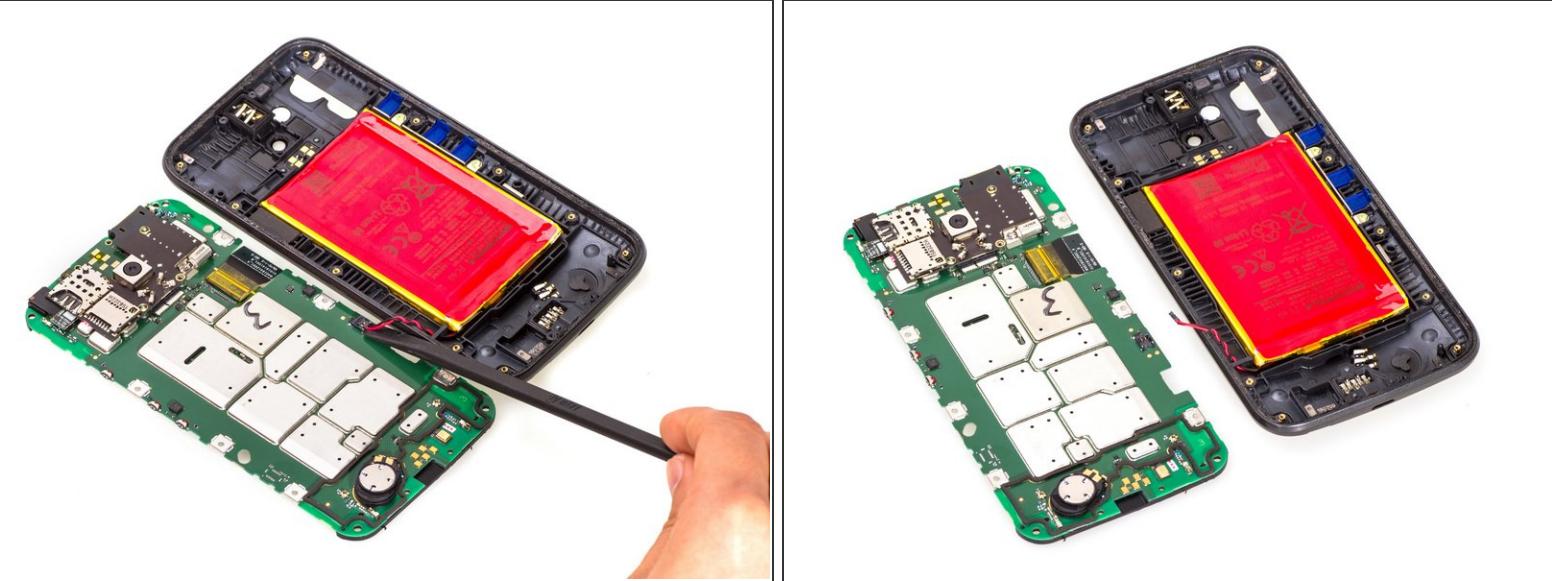


- Release battery flex connector.
- Separate motherboard assembly from back cover assembly.

## Step 8

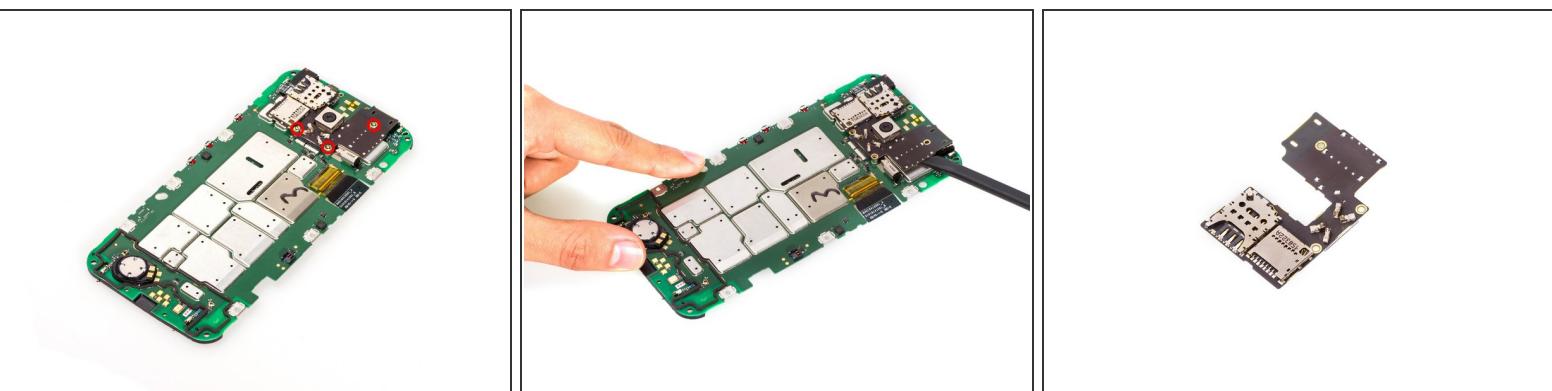


- Undo 3 screws here.
- Use spudger to cut adhesives and pry the SIM&SD card reader board, then remove it.

## Step 9

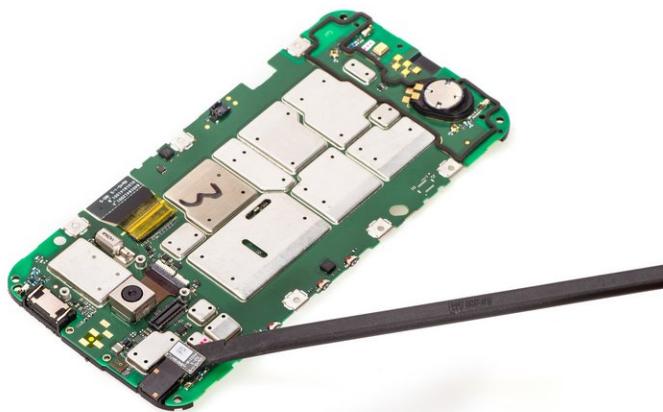


- Remove front-facing camera.

## Step 10

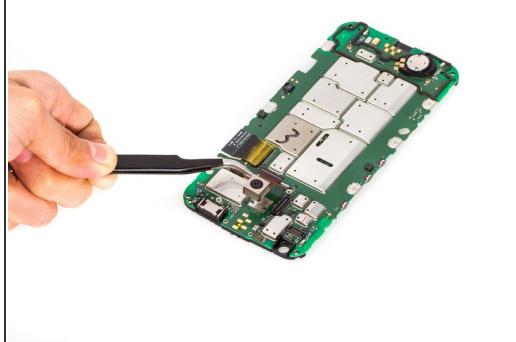


- Remove rear camera.

## Step 11

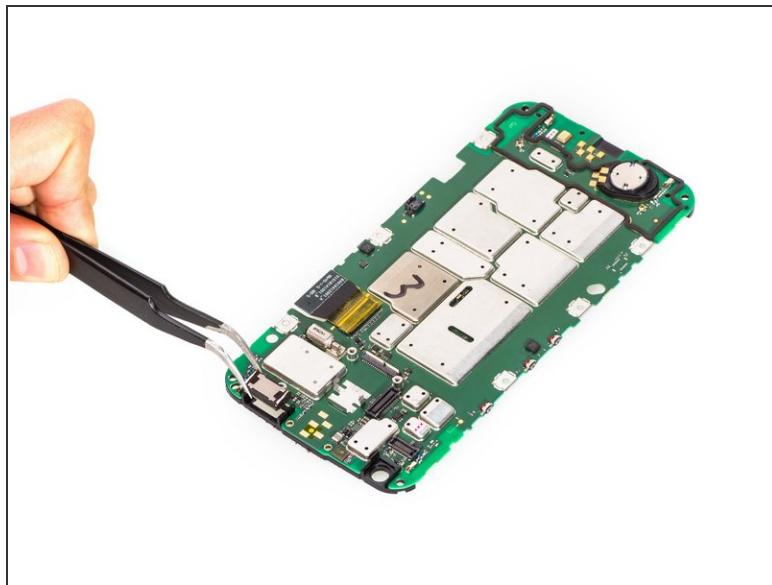

- Remove earpiece.

## Step 12

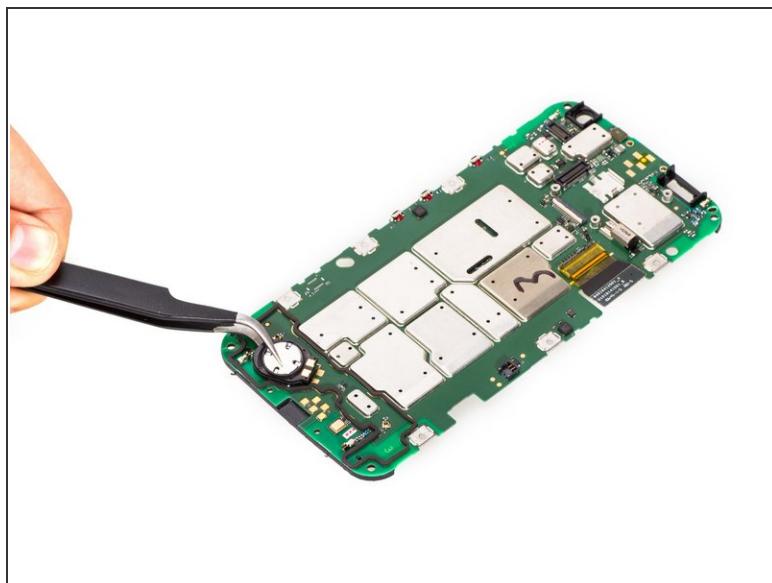

- Remove loudspeaker.

## Step 13



- Here is the motherboard.

## Step 14



- Use spudger to cut adhesive and pry the battery up.

## Step 15



- Take away headphone jack.

## Step 16



- Done