

PAPER WINDERS - 15 TYPE

LUBRICATION

1. GENERAL

1.01 This section gives the lubrication details for 15-type paper winders. This section together with the section covering the general lubrication procedures for teletypewriter apparatus provides complete information for lubricating these winders.

2. LUBRICATION DETAILS

2.01 Unless otherwise specified, one or two drops of oil at each of the places indicated will be sufficient. Use oil for lubrication at all places, except where the use of grease is specified.

2.02 Friction Drive Mechanism, Bearing Bracket Assembly, Motor Assembly (universal series motors only.) See Figure 1.

2.03 Synchronous or Induction Motors:

(1) Motor Bearings: The motor bearings are identified by red holes. Add 10 drops of oil to each bearing before starting motor. Relubricate every 1500 hours.

(2) Gear Reducer: The gear reducer, identified by a yellow hole, is packed at the factory with a soft grease. Relubricate with approximately 50 drops of oil every 1500 hours.

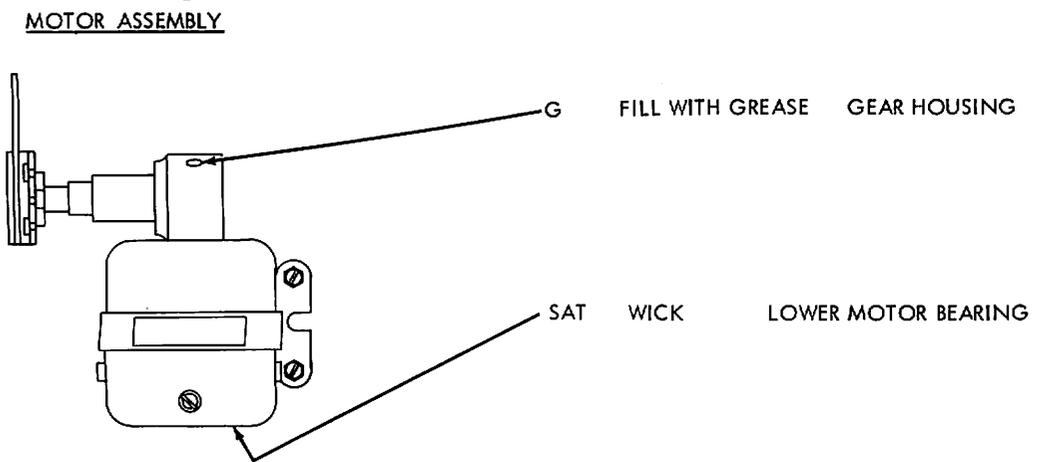
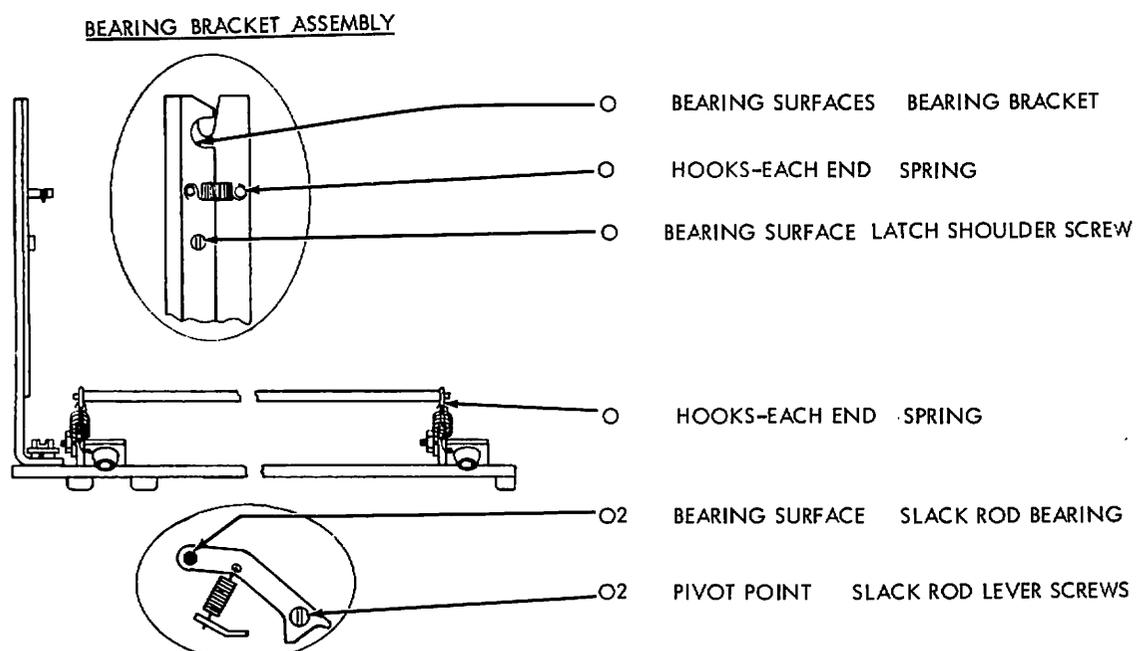
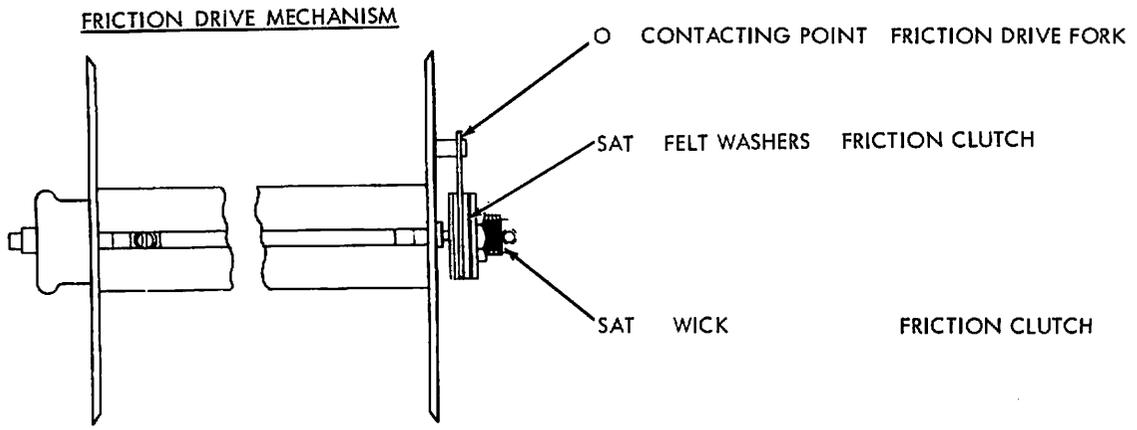


Figure 1