




Motorola V60s Logic Board Replacement

Written By: Eric Freeman

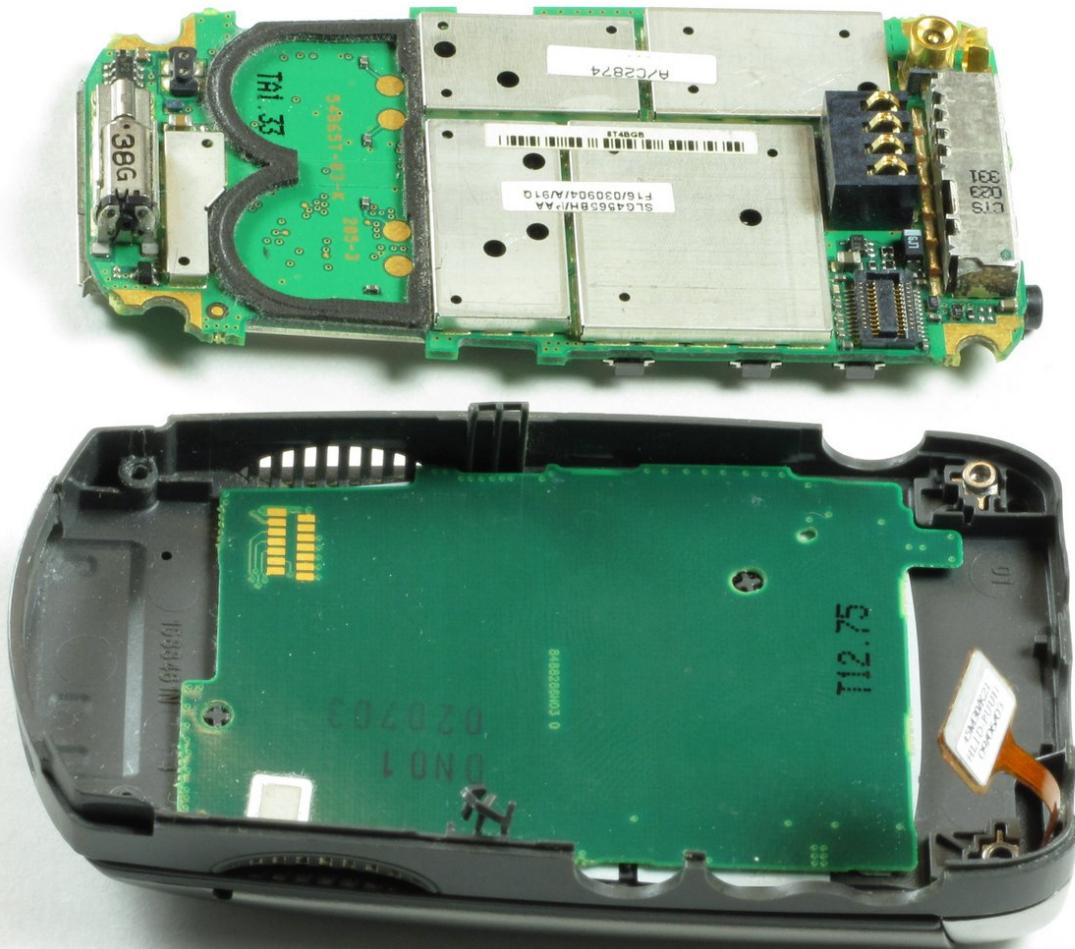

INTRODUCTION

This guide shows how to replace the logic board.

TOOLS:

- Spudger (1)
- T6 Torx Screwdriver (1)

PARTS:

- Motorola V60 Logic Board (1)

Step 1 — Battery




- Remove the battery cover by pushing down the release lever at the top of the phone while prying off the cover.
- Set the cover aside.

Step 2



- Remove the battery by grabbing it near the bottom and lifting out.

Step 3 — Logic Board

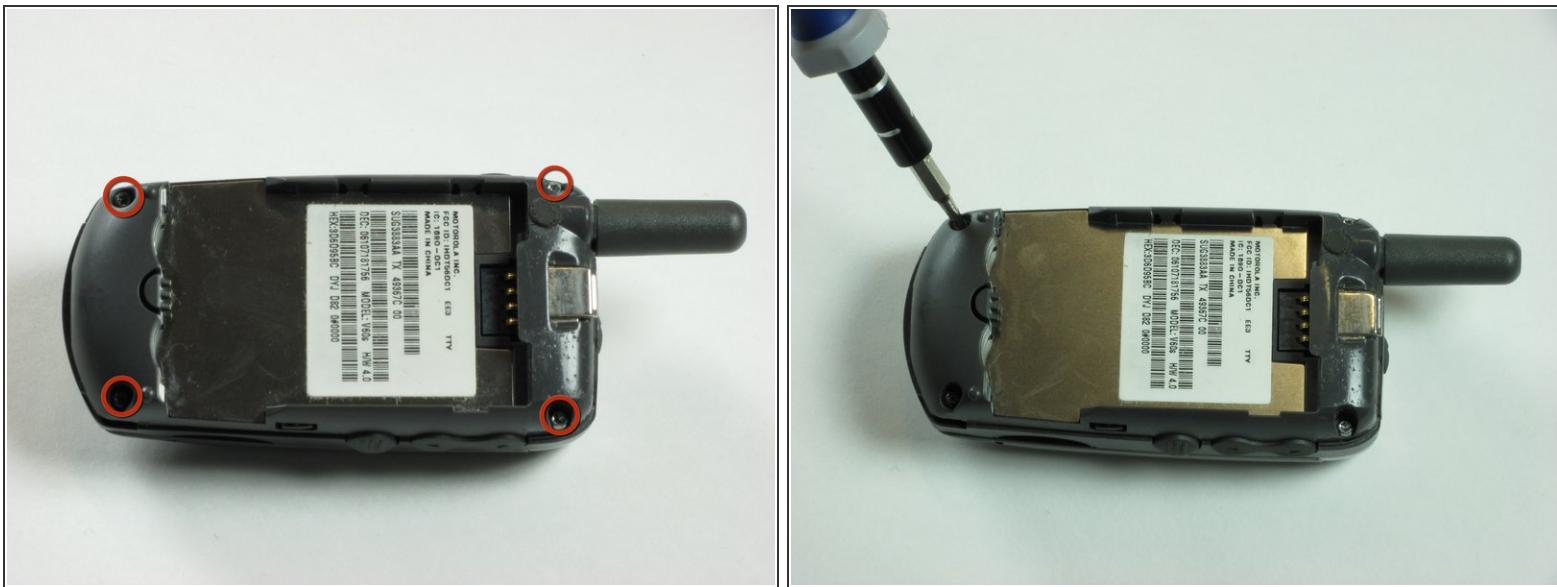


- Unscrew four corner screws with T6 screwdriver.
- Note: The two top screws are short and silver. The two bottom screws are black and long.

Step 4




- Use a spudger to gently pry off back chassis. Wedge the spudger in crevice between back panel and phone and lift.

Step 5

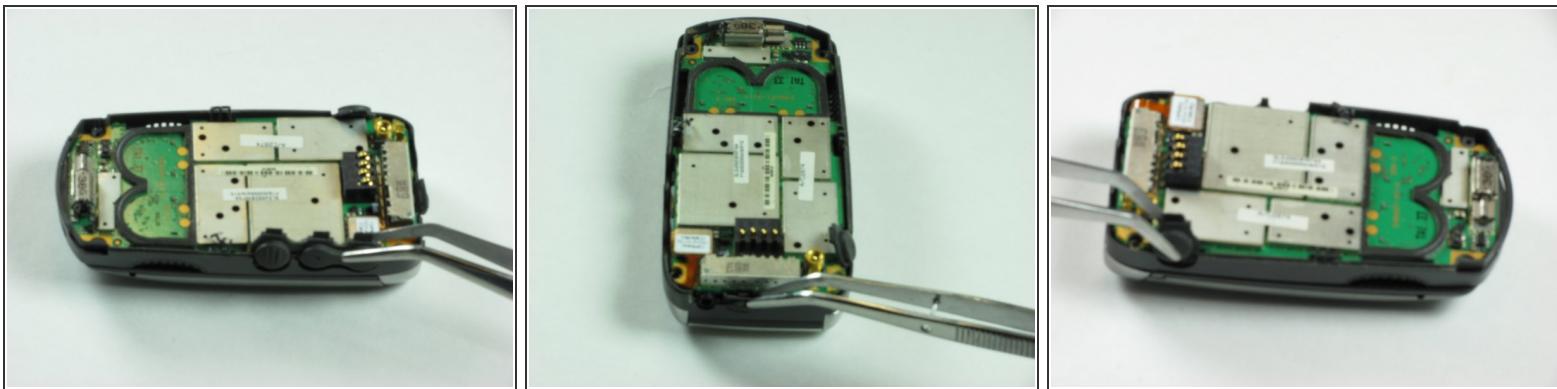


- Starting from left side of phone, remove side buttons and place aside.
- Note: There should be three buttons. One on each side, and the top.
- Return phone to starting orientation when done.

Step 6

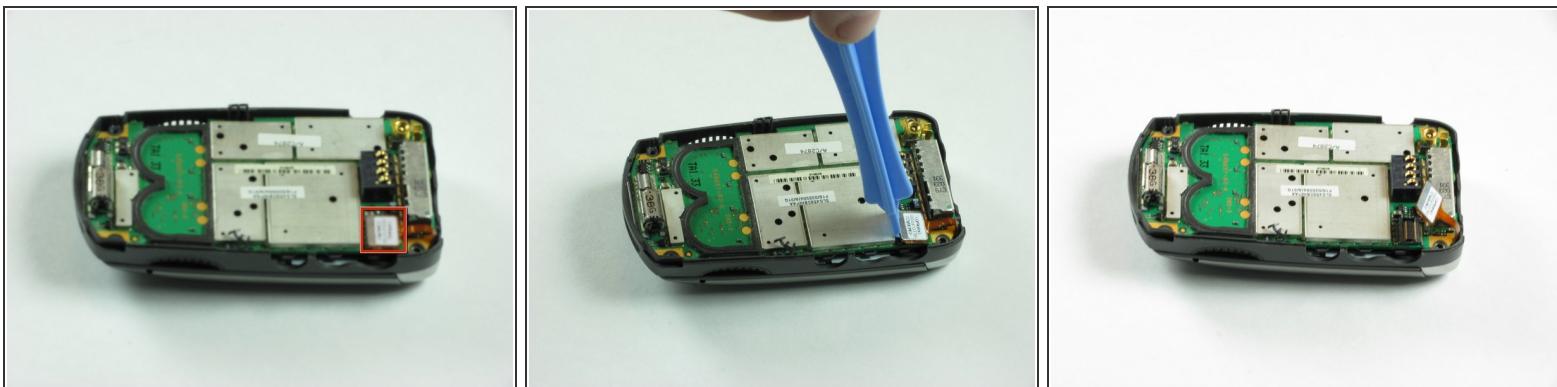

- Gently remove orange ribbon cable by prying up with spudger.

Step 7

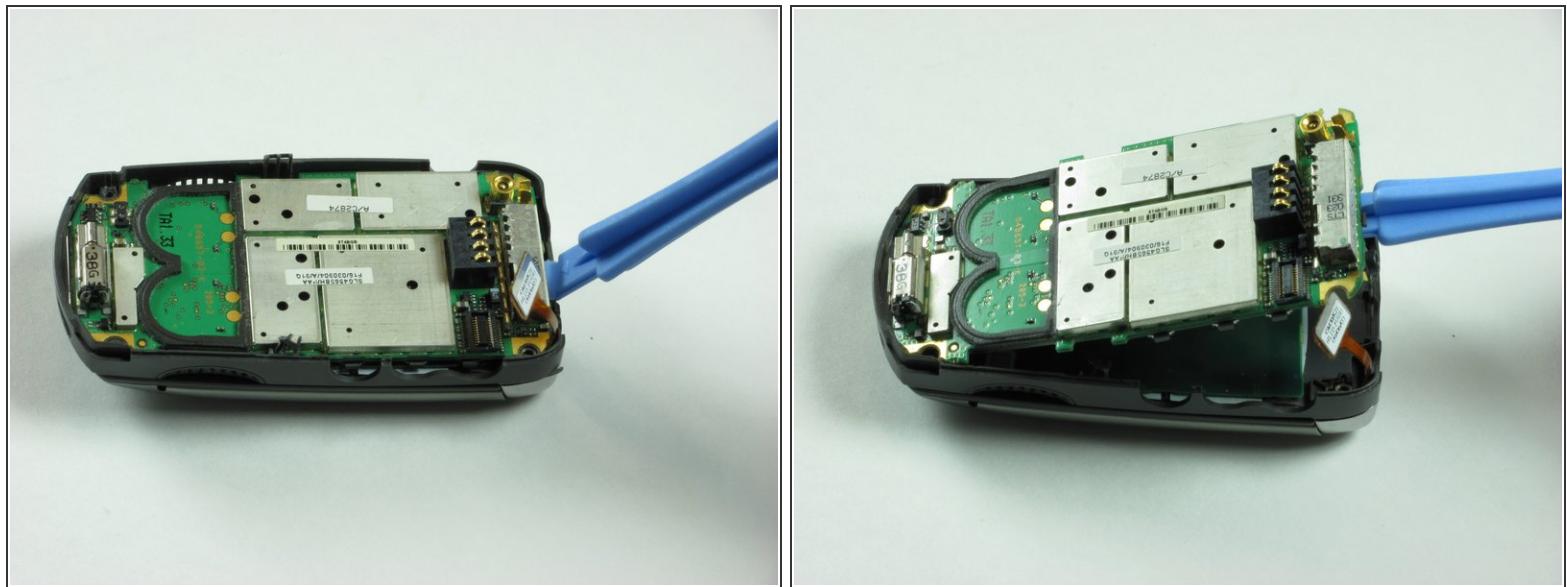

- Use a spudger to pry up logic board by wedging in between logic board and chassis and lifting.
- Note: Orange ribbon cable is fragile and can be broken.

To reassemble your device, follow these instructions in reverse order.