



Motorola W385 Top Logic Board Replacement

Written By: Javier Mendez



INTRODUCTION

This will show you how to disassemble the top logic board

TOOLS:

- [Spudger \(1\)](#)

Step 1 — Battery



- Using your finger, press down on the clip holding the back cover on.

Step 2



- Using the spudger or your finger, gently pull the battery out from the top.

Step 3 — Front Casing



- Remove the four rubber pieces from the face of the phone using the sharp end of the spudger.
- *(i)* The rubber pieces are held in with a mild adhesive.

Step 4



- Remove the four Torx-6 screws from underneath the rubber pieces.

Step 5



- Close the phone before proceeding.
- Using the flat end of the spudger, insert it under the plastic at the top left of the phone.
- Gently, although a small amount of force is required, use a twisting motion to pull the plastic casing away from the body of the phone.
- Continue to move around the phone counter clockwise until the casing is separated from the body.

i It is not unusual for it to pop off before making it back to the starting point.

Step 6




- If the casing has not popped off of the body, remove it carefully from the the phone.

Step 7 — Top Logic Board




- After completing Steps 3-6 in the casing repair guide, your phone should look like this.

Step 8

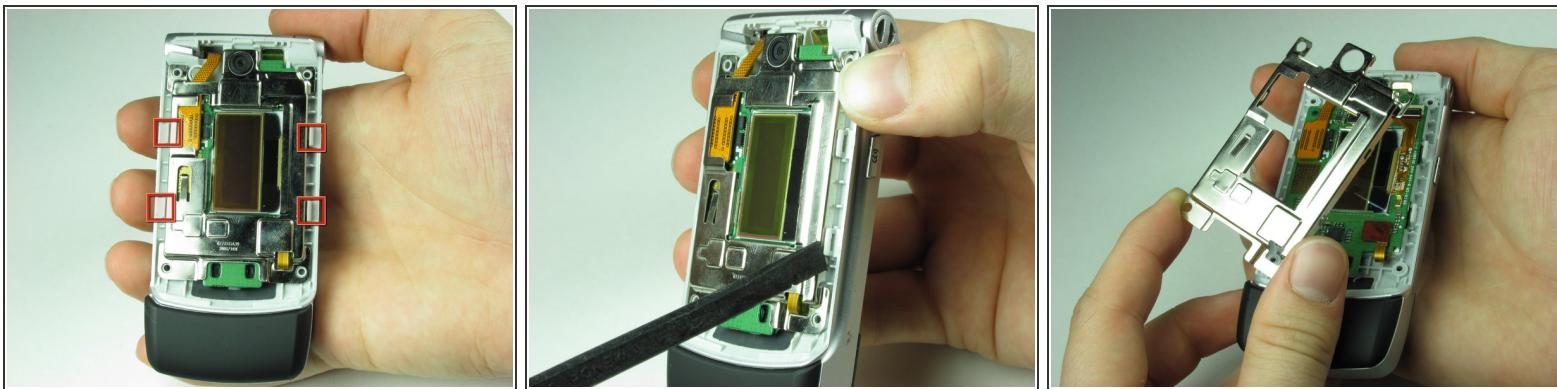

- Use the spudger to unhinge the four clips around the metal casing of the top logic board.
- Gently take off the metal casing of the logic board.

Step 9

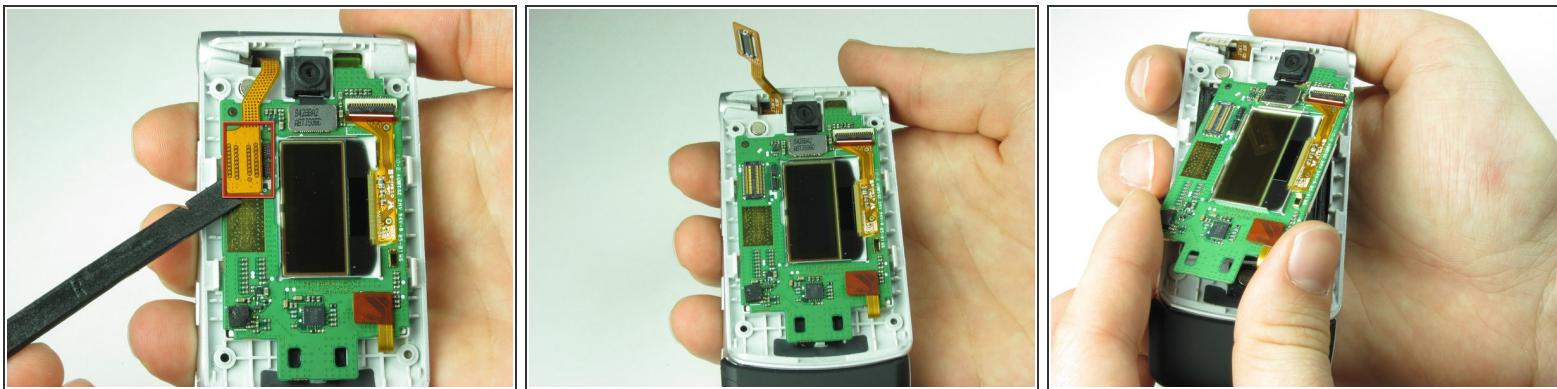

- Use spudger to gently disconnect the ribbon cable from phone.

⚠ Gently remove Logic Board making sure not to damage any other components.

To reassemble your device, follow these instructions in reverse order.