



Ninja Professional BL610 Circuit Board Replacement

This guide illustrates how the circuit board can be replaced in a Ninja Professional Blender if it no longer functions.

Written By: Rosniel Castro



This document was generated on 2019-11-04 12:41:42 PM (MST).

INTRODUCTION

Use this guide to replace the circuit board in your Ninja Professional BL610.

TOOLS:

- **Phillips #2 Screwdriver** (1)
- **Soldering Iron** (1)

Step 1 — Circuit Board




- Remove six screws (13mm long, 6mm head diameter) from bottom of the blender using a Phillips #2 screwdriver

Step 2



- Remove six screws (12mm long, 6mm head diameter) from component housing using Phillips #2 screwdriver.

Step 3

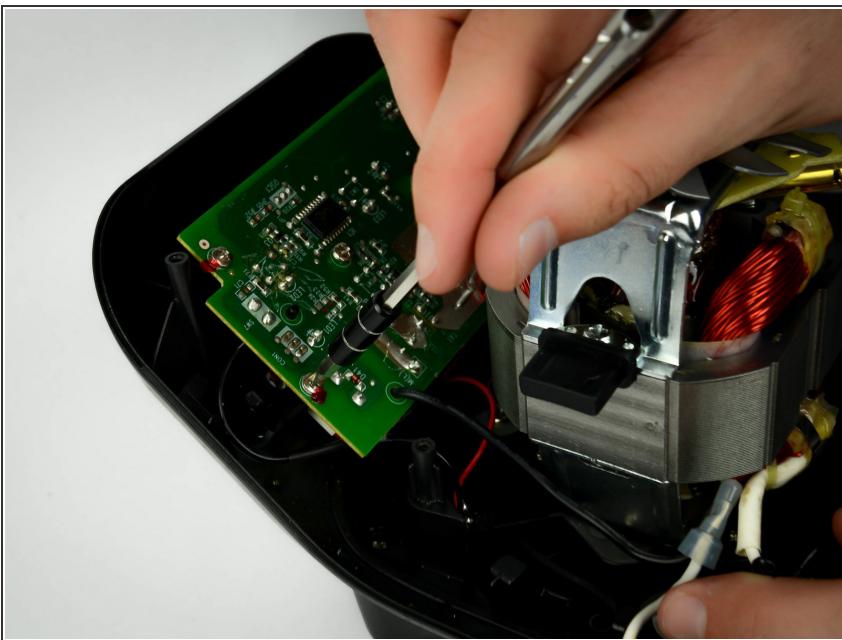


- Remove six screws (9mm long, 2mm head diameter) from component housing using Phillips #2 screwdriver

Step 4



- Locate the black and red wire that connect to the circuit. Locate where they are soldered on the back.

Step 5

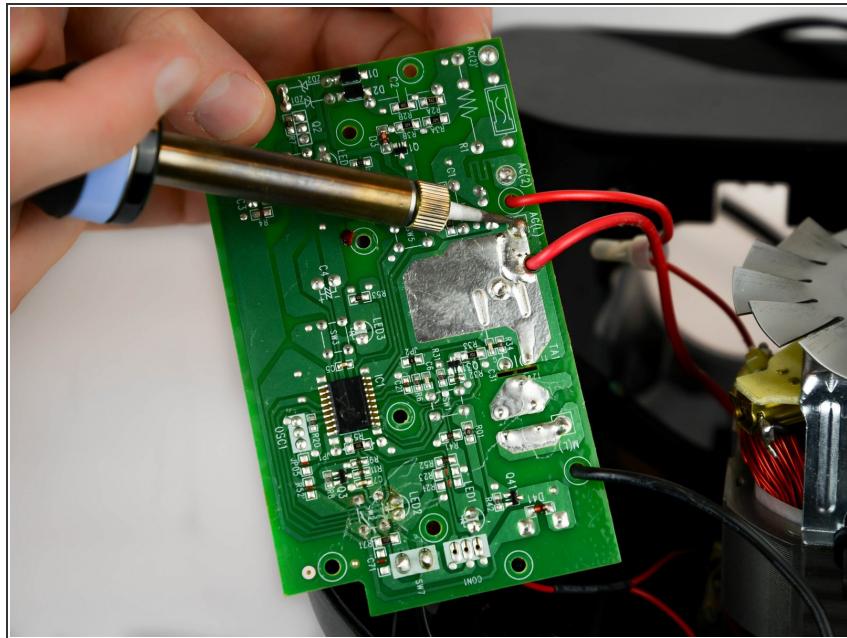

- Desolder both wires from the solder pads shown.

To reassemble your device, follow these instructions in reverse order.