

28 APPARATUS CABINETS

LUBRICATION

CONTENTS	PAGE
1. GENERAL . . . . .	1
2. LUBRICATION DETAILS . . . . .	2
A. Apparatus Cabinet Housing 28 Receive-Only (RO) Sets . . . . .	2
B. Apparatus Cabinet Housing Reperforator-Transmitter Sets . . . . .	3

1. GENERAL

1.01 This section contains the specific lubrication procedures for the 28 apparatus cabinets. This section and the section covering teletypewriter general lubrication provide the complete lubrication information for the cabinets.

1.02 The lubricants to be used and their method of application are those given in the general lubrication section. The lubrication symbols used in this section are the same as those in the general section. However, the symbols O2 and O4 are used in this section to specify that three or four drops of oil, respectively, are to be applied at the points indicated.


Note: In this section, reference to the use of Lubriplate on the cabinet slides pertains to the initial lubrication at the factory; thereafter, these surfaces should be relubricated with the grease recommended in the general lubrication section.

2. LUBRICATION DETAILS

A. Apparatus Cabinet Housing 28 Receive-only (RO) Sets

2.01 Latches, Keylevers, and Hinges

Note: Teletypewriter apparatus must be in the rearmost position before closing the cover.

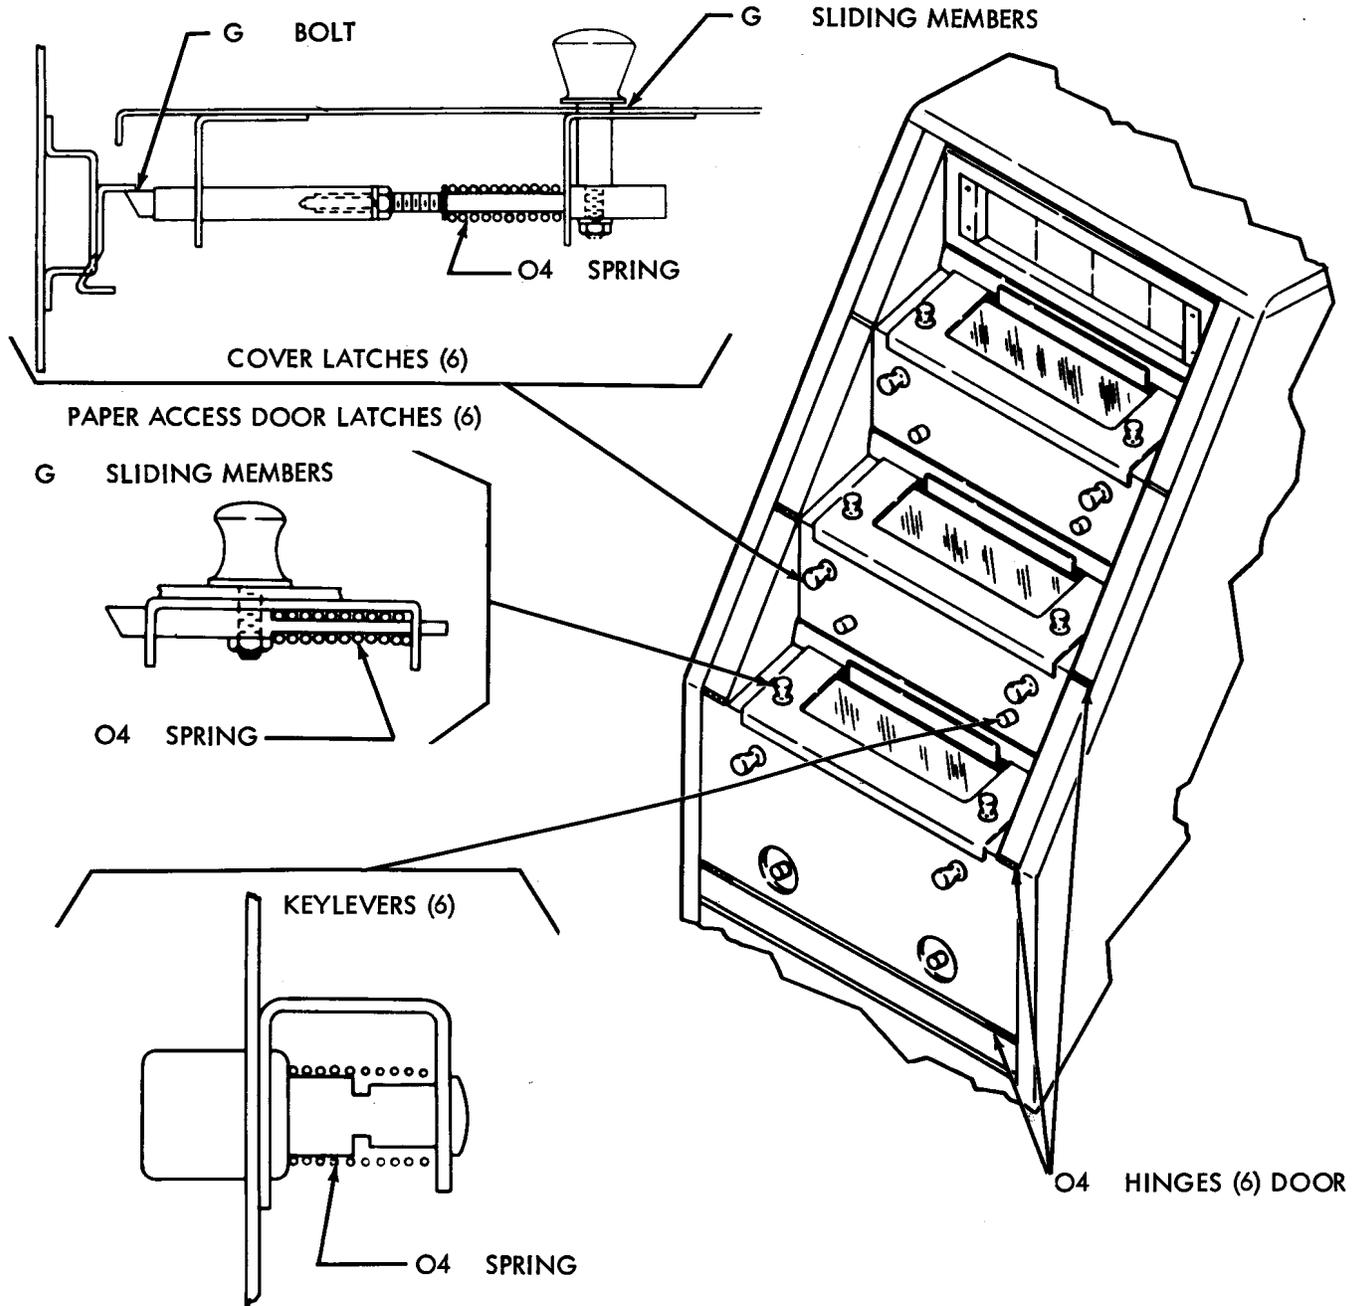

B. Apparatus Cabinet Housing Reperforator-Transmitter Sets

2.02 Hinges and Slides

