



Palm Zire 71 Motherboard/Screen Replacement

Written By: Jinxian Jiang



INTRODUCTION

This is a guide for disassembling the motherboard and the screen.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)

Step 1 — Back Cover



- Flip the phone over
- Slide the back cover upward to open

Step 2



- Use Torx T5 screwdriver to remove the top screws

Step 3



- Remove the back sticker
- Remove the bottom Philips #00 screws

Step 4



- Turn to the frontside
- Use the plastic opening tool to pry off the front panel

⚠ Slide the screen upward a little higher WITHOUT detaching the screen

Step 5




- Remove the bottom Philips #00 screws
- Remove the bracket
- Use the plastic opening tool to pry off the speaker

Step 6




- Slide the back cover off

Step 7 — Battery

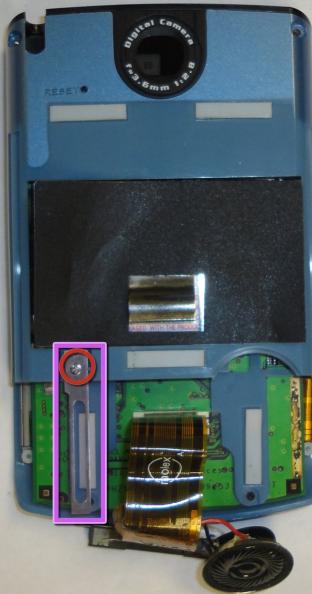


- Remove the Philips #00 screw
- Remove the silver metal piece

Step 8

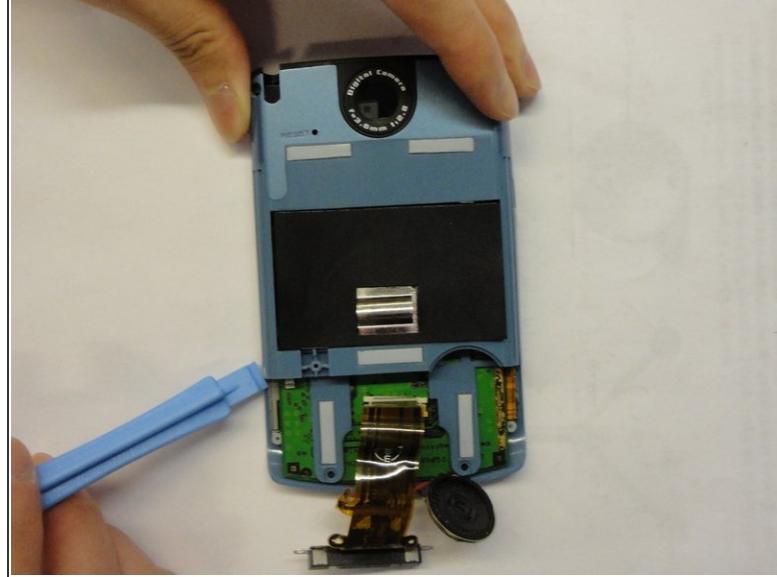

- Remove the Philips screws #00
- Remove the rear blue panel by prying both sides using the plastic opening tool

Step 9

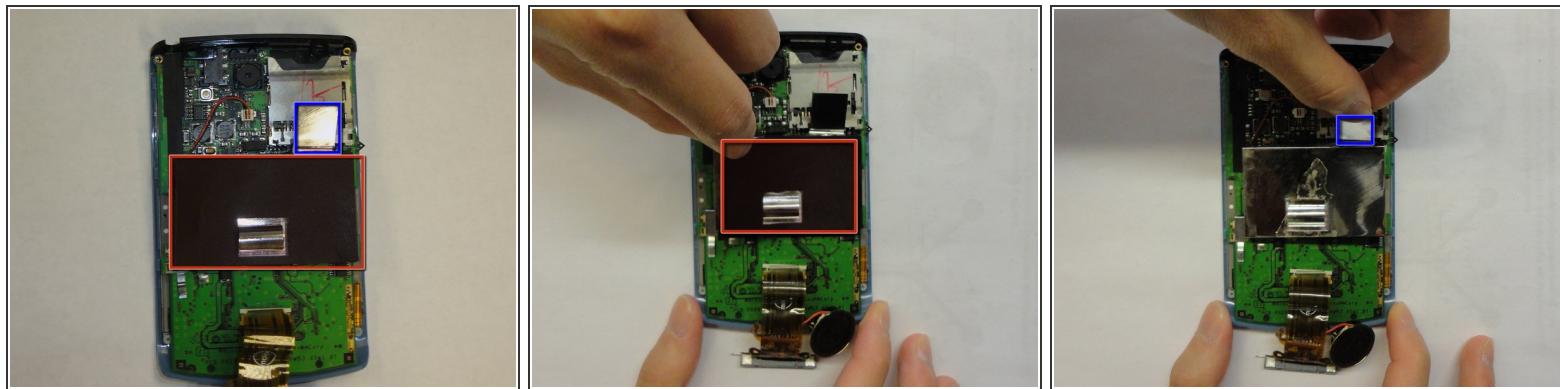


- Remove the black plastic sticker
- Pull the tap up to remove the metal cap

Step 10



- Remove the cable by pinching the sides and pulling
- Pry off the battery with the plastic opening tool
- Insert the new battery

Step 11 — Motherboard/Screen

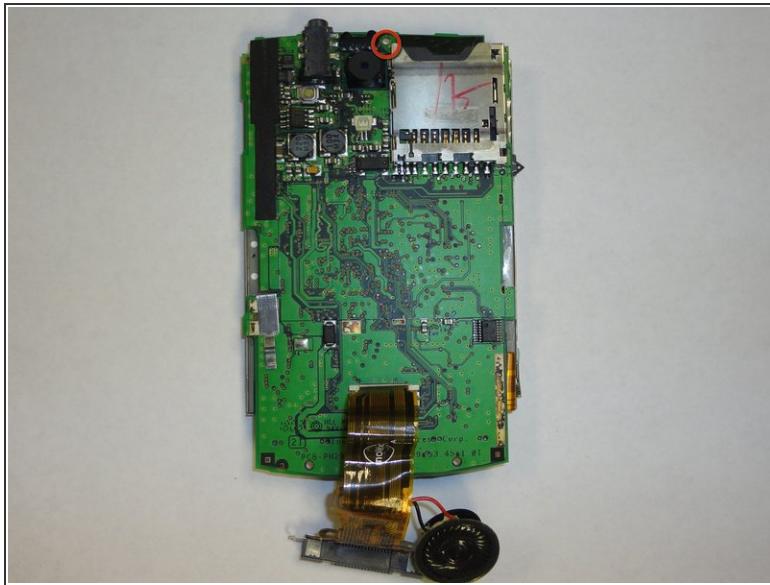

- Remove Philips screw #00
- Remove black plastic top part

Step 12



- Pull off the orange cable
- Now the screen and the motherboard can be separated
- Finished

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-10-22 03:30:25 PM (MST).

