



# Philips Sonicare 2 Series Circuit Board Replacement

This guide are steps for replacing the circuit board for the Philips Sonicare 2 Series.

Written By: Jonathan Jarvis



## INTRODUCTION

This guide will show you how to replace the circuit board for the Philips Sonicare 2 Series toothbrush. He is a link for a guide how to soldering which will be needed for this guide. [How To Solder and Desolder Connections](#)

### TOOLS:

- Precision Tweezers Set (1)
- iFixit Opening Tools (1)
- Metal Spudger (1)
- Flathead 3/32" or 2.5 mm Screwdriver (1)
- 64 Bit Driver Kit (1)

### PARTS:

- Philips Sonicare 2 Series Circuit Board (1)

## Step 1 — Philips Sonicare 2 Series Disassembly




- Remove brush on top of device.

## Step 2



- Remove the 12 mm T8 Torx screw from the bottom of the toothbrush. After removing the screw, pry off the base with a plastic opening tool.


## Step 3

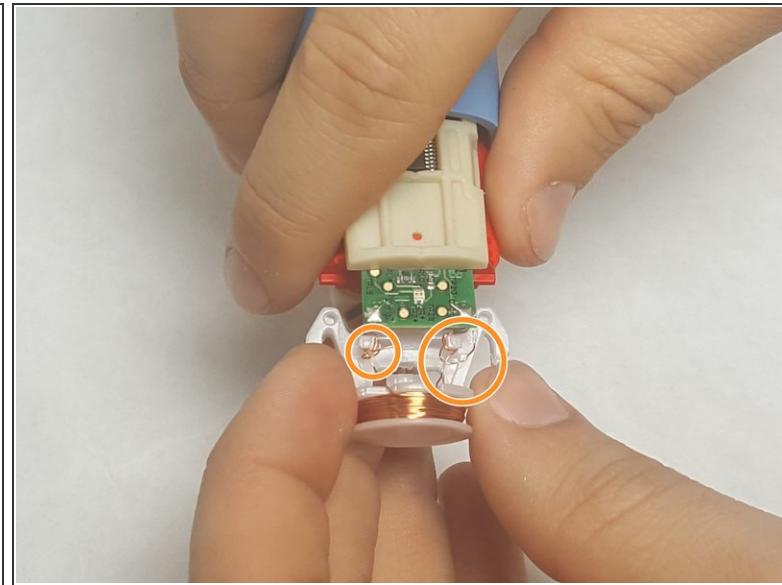

- Remove the internal electronic mechanism from the housing by prying the red clips shown in the figure. This removes the charging port.


**⚠** Be very careful not to damage the charging port during this step. Otherwise you will have to solder this part back to the device as shown in the second figure.

## Step 4

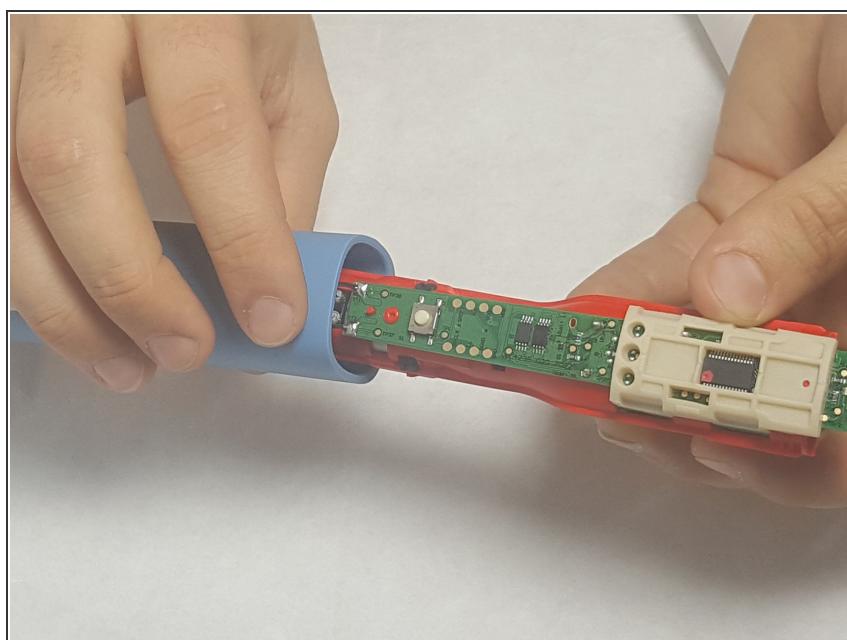


- Next you will be able to remove the internal electronic mechanism as shown in the figure.

## Step 5

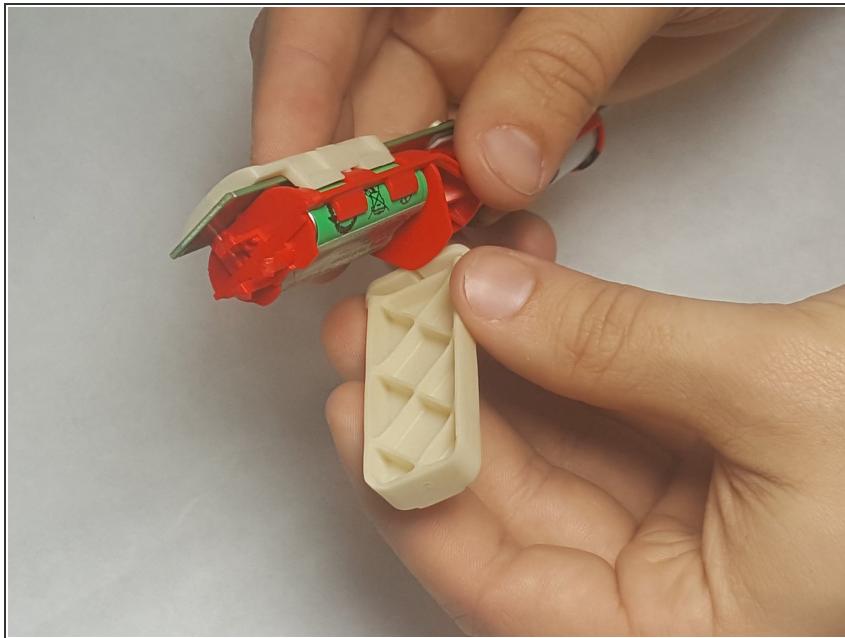

- Remove the white battery cover as shown in the figure.

## Step 6

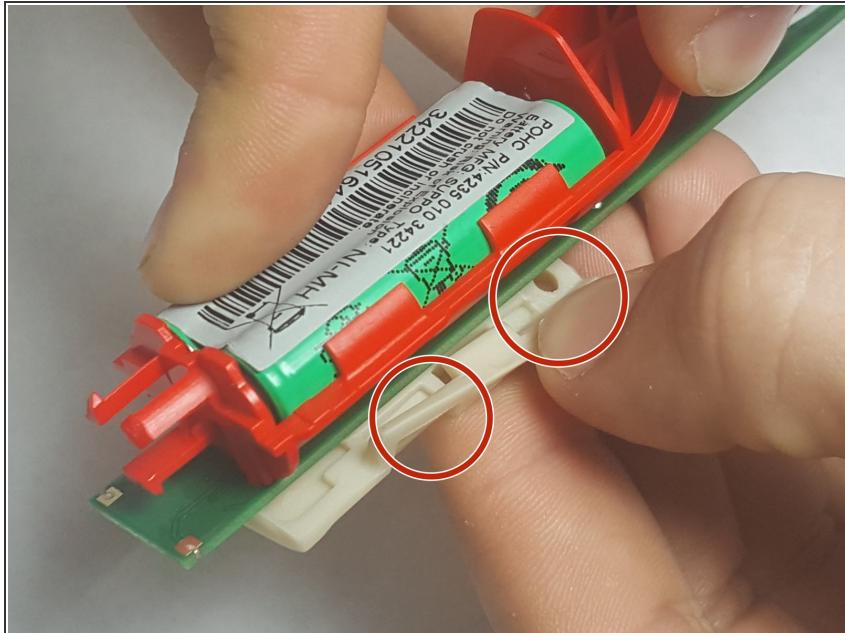


- Remove the white circuit board cover as shown. This cover will require you to pry off the piece from the grooves .

## Step 7 — Circuit Board




- Pry away the battery using an opening tool from the battery housing. This will break the circuit and avoid electric shock.

## Step 8

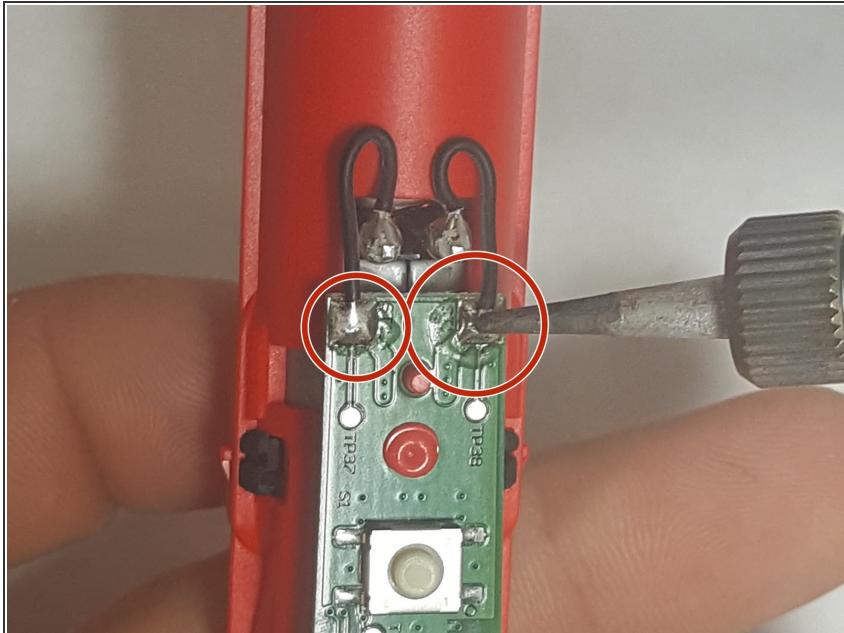

- [Desolder](#) the circuit board from the motor as shown.

## Step 9

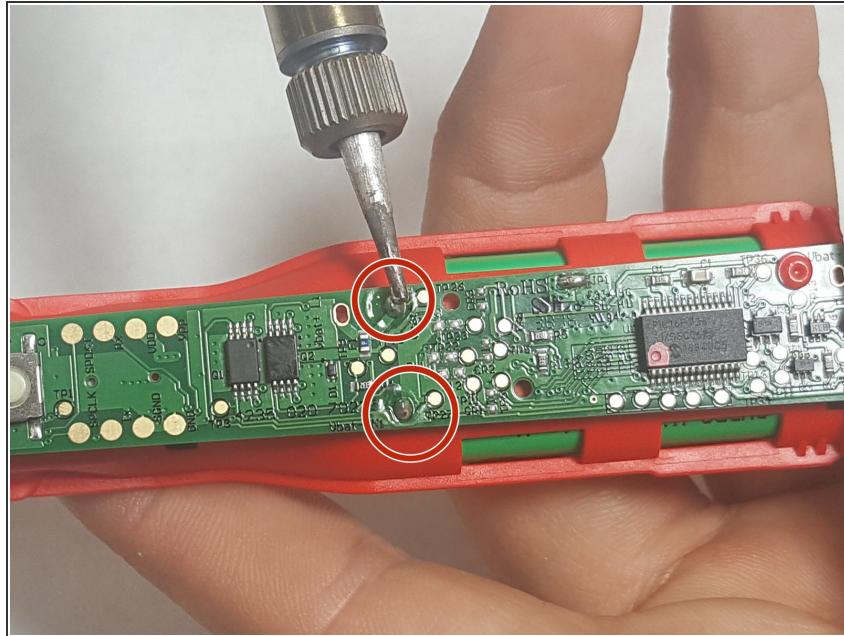

- Desolder the circuit board from the housing as shown to remove the board

To reassemble your device, follow these instructions in reverse order.