



Samsung Galaxy Note 10.1 2014 Motherboard Replacement

Use this guide to replace a nonfunctional motherboard in your Samsung Galaxy Note 10.1 2014 edition.

Written By: Joseph Rasico



This document was generated on 2019-10-06 10:08:06 PM (MST).

INTRODUCTION

This guide will teach how to replace the motherboard in your Samsung Galaxy 10.1 2014 edition.

TOOLS:

- [Black Nylon Spudger \(1\)](#)
- [Metal Spudger \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

PARTS:



- [Galaxy Note 10.1 \(2014, Wi-Fi\) Motherboard \(1\)](#)

Step 1 — Case





- Using the [nylon spudger](#) or [plastic opening tool](#) along the edges of the screen, separate the back case off of the device.
(i) If possible, consider using the black nylon spudger for a gentler separation.

Step 2 — Loudspeaker Modules

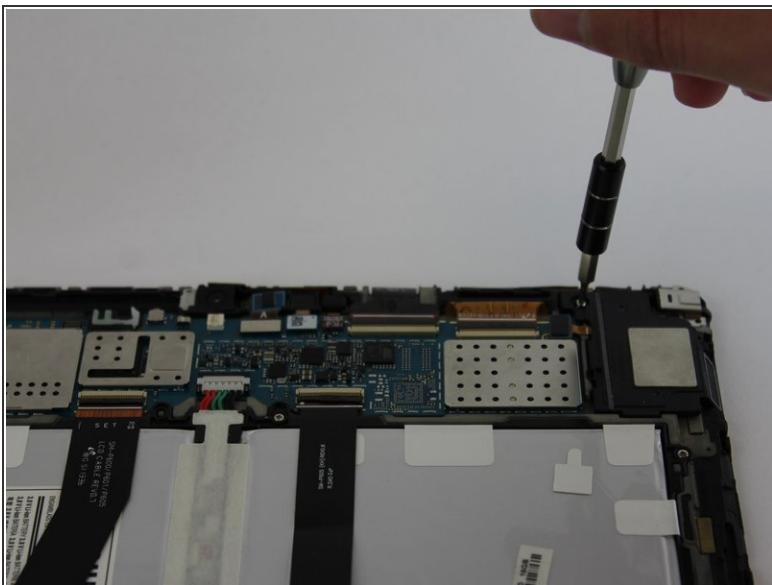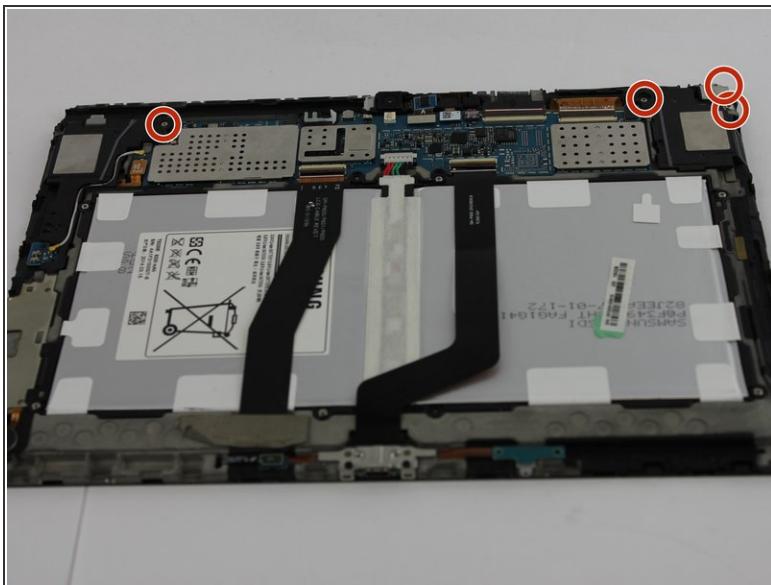


- Remove the three 3mm screws on the top right side of the device with the Phillips PH000 screw head.
- Remove the one 3mm screw on the top left side of the device with the same method.

Step 3 — loudspeaker - remove right speaker

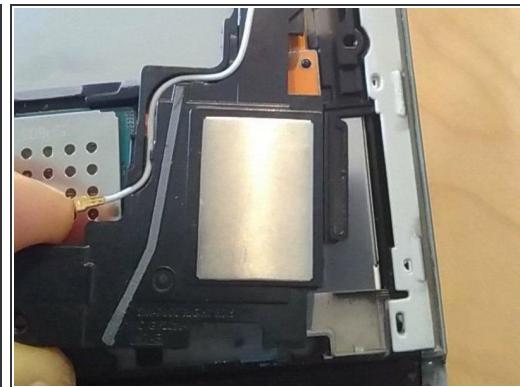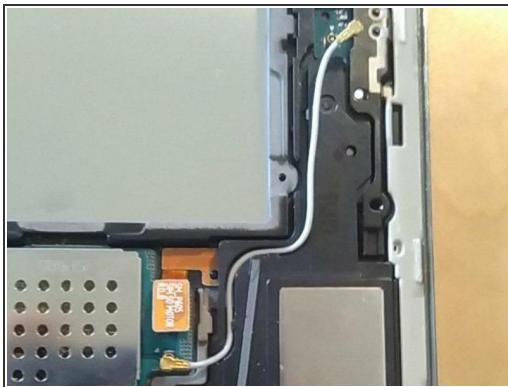


- Remove the gray rubber piece.
- Use a spudger or fingernail to disconnect the blue antenna cable from the motherboard.
- Remove the right speaker unit.

Step 4

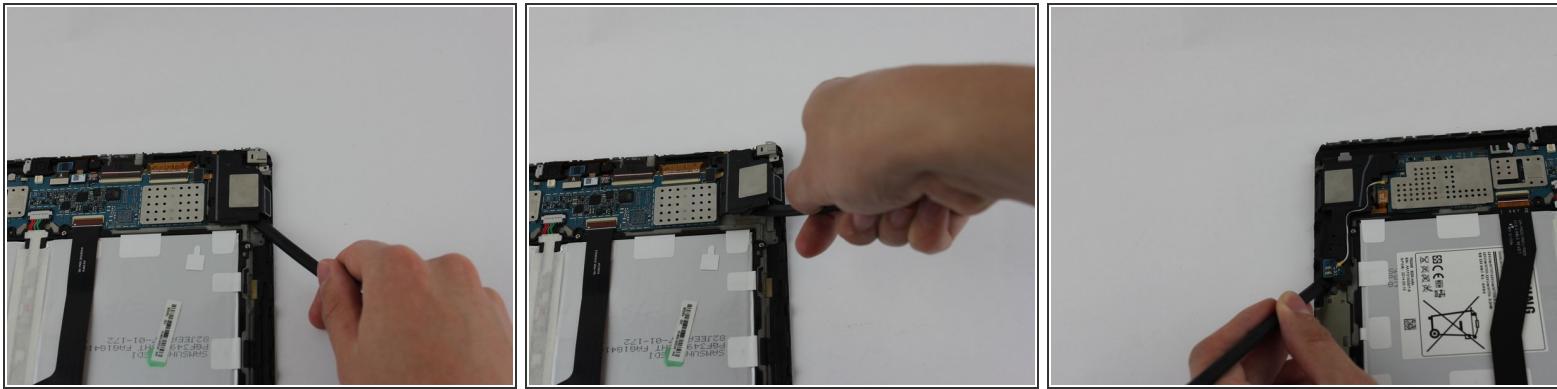

- Remove the loudspeaker modules located on the parts where the screws were removed by using the black nylon spudger.
- *(i)* They are the black pieces at the top left and right corners of the device that have metal squares on them in the middle.

Step 5 — Battery

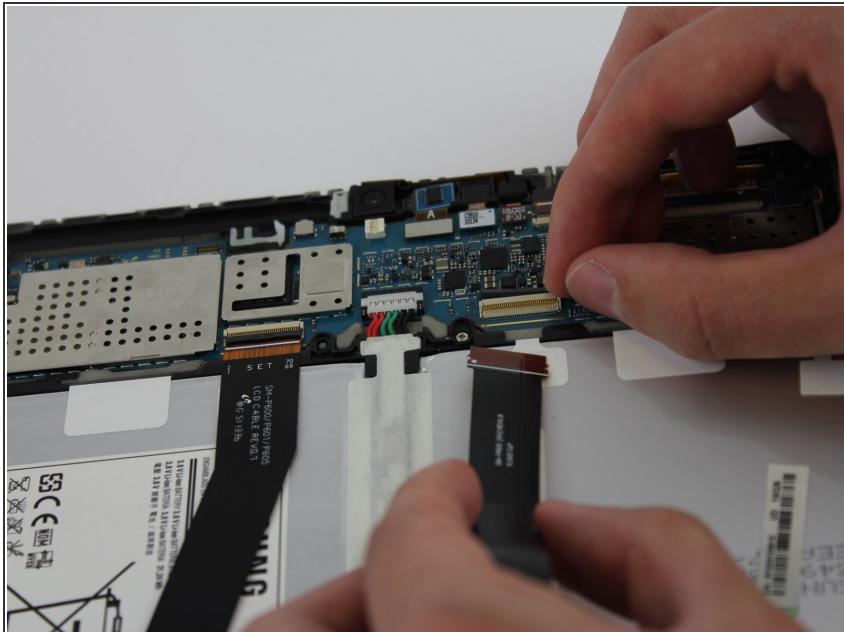


- Place your finger on the thin black bar at the end of the ribbon tape and flip each one up.
- Gently pull the ribbon tape on the battery away from the bar. Repeat this process for the second ribbon tape.

Step 6



- Remove the six 3mm screws around the battery with the [Phillips PH000 screwdriver](#).

Step 7

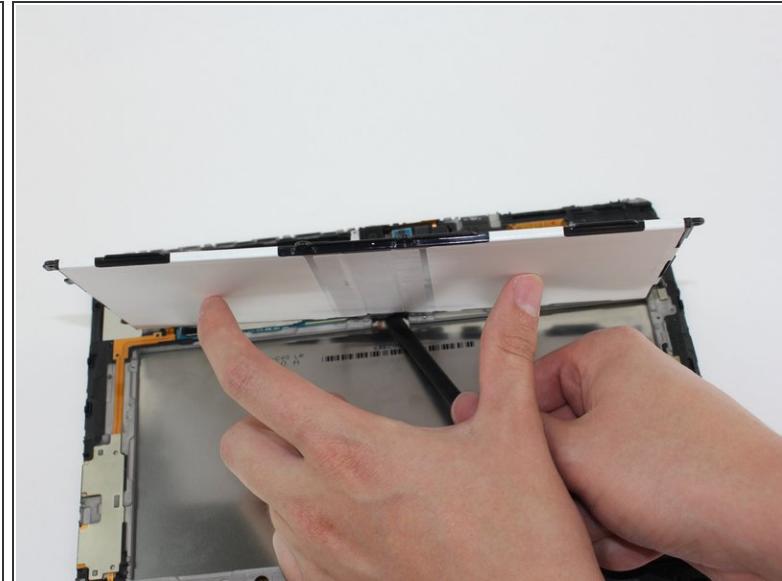

- Lift up the battery from the bottom and situate the [black nylon spudger](#) underneath the battery.
- Use the black nylon spudger to disconnect the multi-colored wires from the rest of the device.

Step 8 — Motherboard



- Disconnect all cables on the motherboard.
- *i* See our [connector guide](#) for help safely disconnecting various types of connectors.

Step 9



- Use the black nylon spudger to gently lift the motherboard away from the frame.
- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.