

37 TYPING UNIT COVER AND PAN

DESCRIPTION AND OPERATION

CONTENTS	PAGE
1. GENERAL . . . . .	1
2. DESCRIPTION . . . . .	1
TECHNICAL DATA . . . . .	3
A. Table Mount — Standard Platen . .	3 ←
B. Table Mount — Wide Platen . . . .	3 ←
C. Rack Mount . . . . .	3
D. Copylights . . . . .	3
3. OPERATION . . . . .	4
LATCHES . . . . .	4
PAPER EXIT . . . . .	4

provide access to the typing unit for replenishing the paper supply, adjusting print hammer pressure, changing the ribbon, cleaning type, and setting tabulation margins.

2.02 The printed copy can be easily read by the operator and standing observers, and emerges through an opening in the top of the cover under power of the typing unit line feed mechanism. A paper tearing edge, provided on the copy view window, facilitates page copy removal.

2.03 To facilitate maintenance, the cover is hinged to the pan and may be raised and extended over the interior components.

2.04 The features of the typing unit cover and pan are described in Figures 2 and 3.

1. GENERAL

1.01 This section provides description and operation information for the late design 37 typing unit cover and pan, for both standard and wide platen units, which has the front cover cut out for WECO 635R2 switches (Figure 1). This section is reissued to include the latest engineering changes and additions, indicated by marginal and/or bracketed arrows. Refer to Section 574-326-100 for description and operation information on early design units which have the front cover cut out for Licon 76-type switches.

1.02 The typing unit cover and pan encloses, protects and provides mounting and operating facilities for a keyboard unit and typing unit. In addition, the cover and pan reduce the level of noise emanating from the enclosed mechanisms.

2. DESCRIPTION

2.01 The typing unit cover and pan totally enclose a 37 typing unit and motor drive components. The two lids at the top of the cover



Figure 1 - Typing Unit Cover and Pan

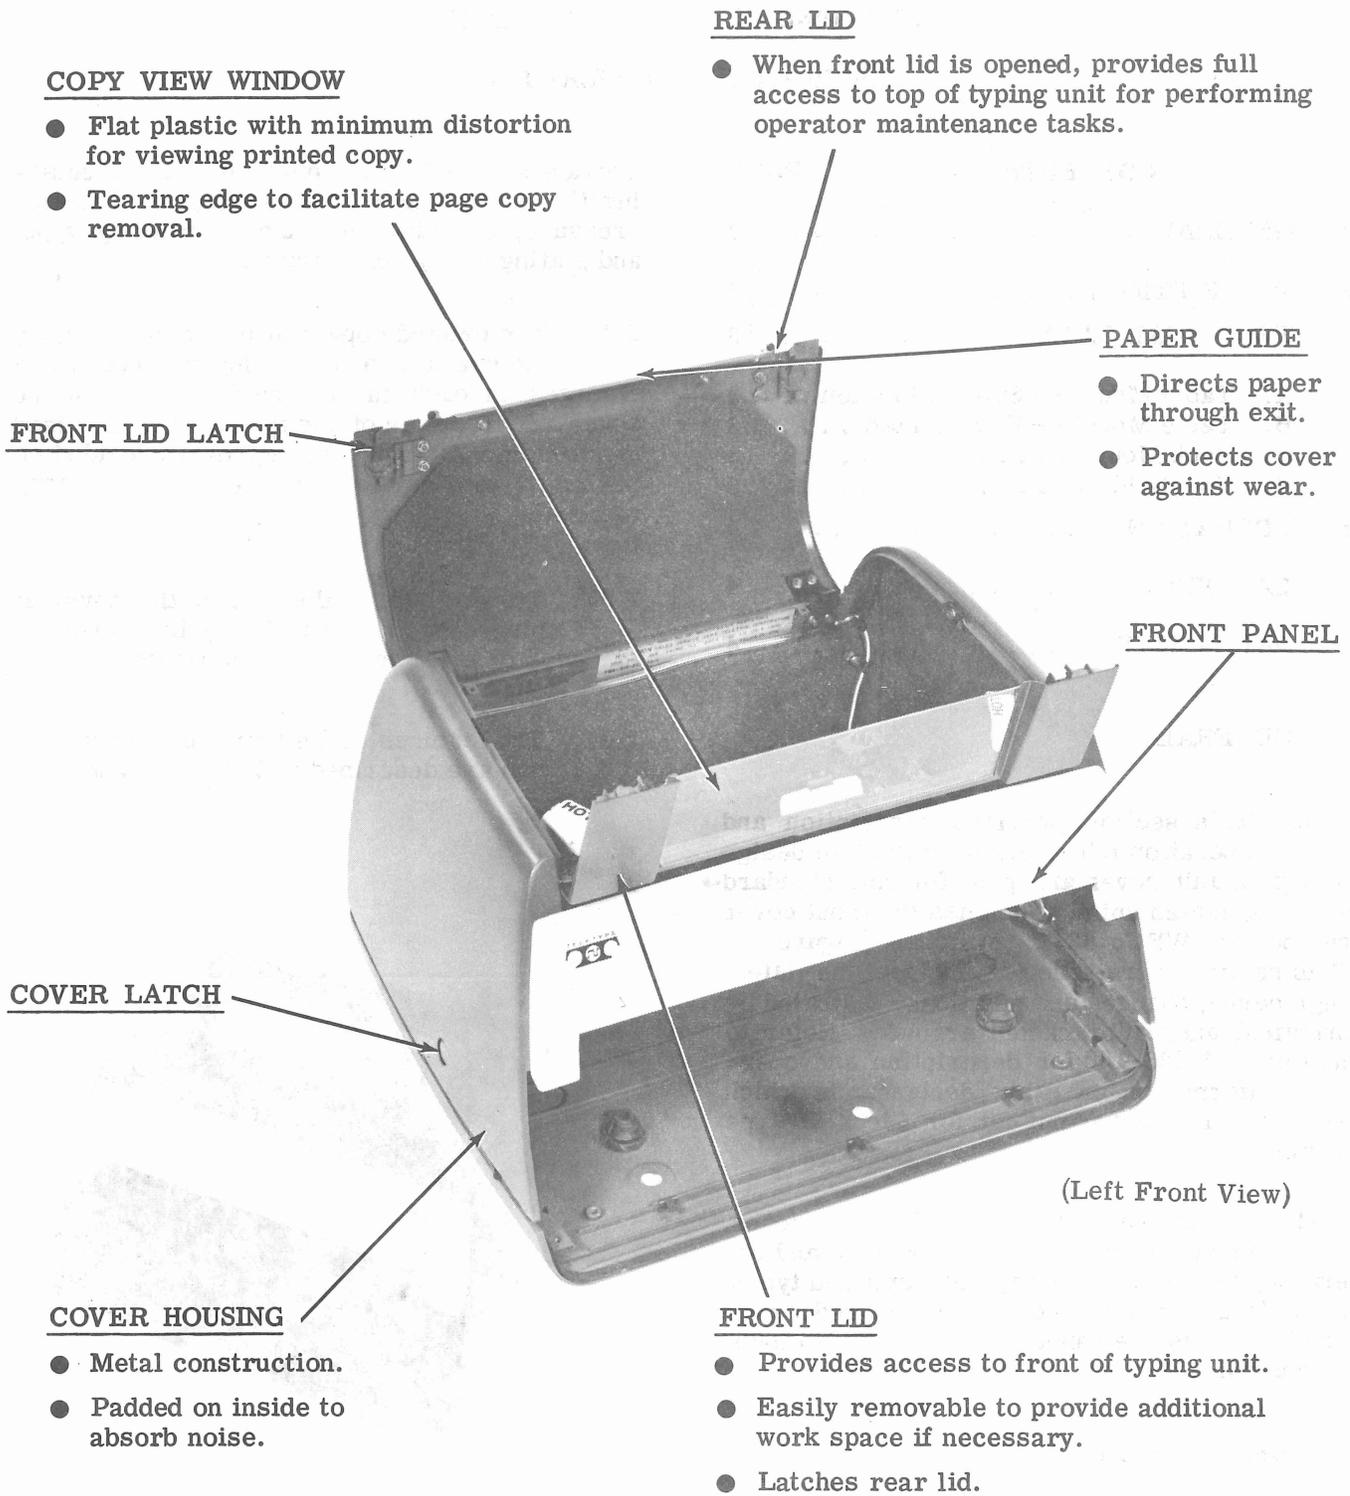


Figure 2 - Typing Unit Cover and Pan (Lids Open)

**TECHNICAL DATA**

**A. Table Mount — Standard Platen**

Weight . . . . . 12 pounds  
 Height . . . . . 11 inches  
 Width . . . . . 19-1/4 inches  
 Depth . . . . . 19-1/2 inches

**B. Table Mount — Wide Platen**

Weight . . . . . 26-1/2 pounds  
 Height . . . . . 11 inches  
 Width . . . . . 25 inches  
 Depth . . . . . 19-1/2 inches

**C. Rack Mount**

Weight . . . . . 12 pounds  
 Height . . . . . 11 inches  
 Width . . . . . 17-3/8 inches  
 Depth . . . . . 19-1/2 inches

**D. Copylights**

Two, 6-volt lamps

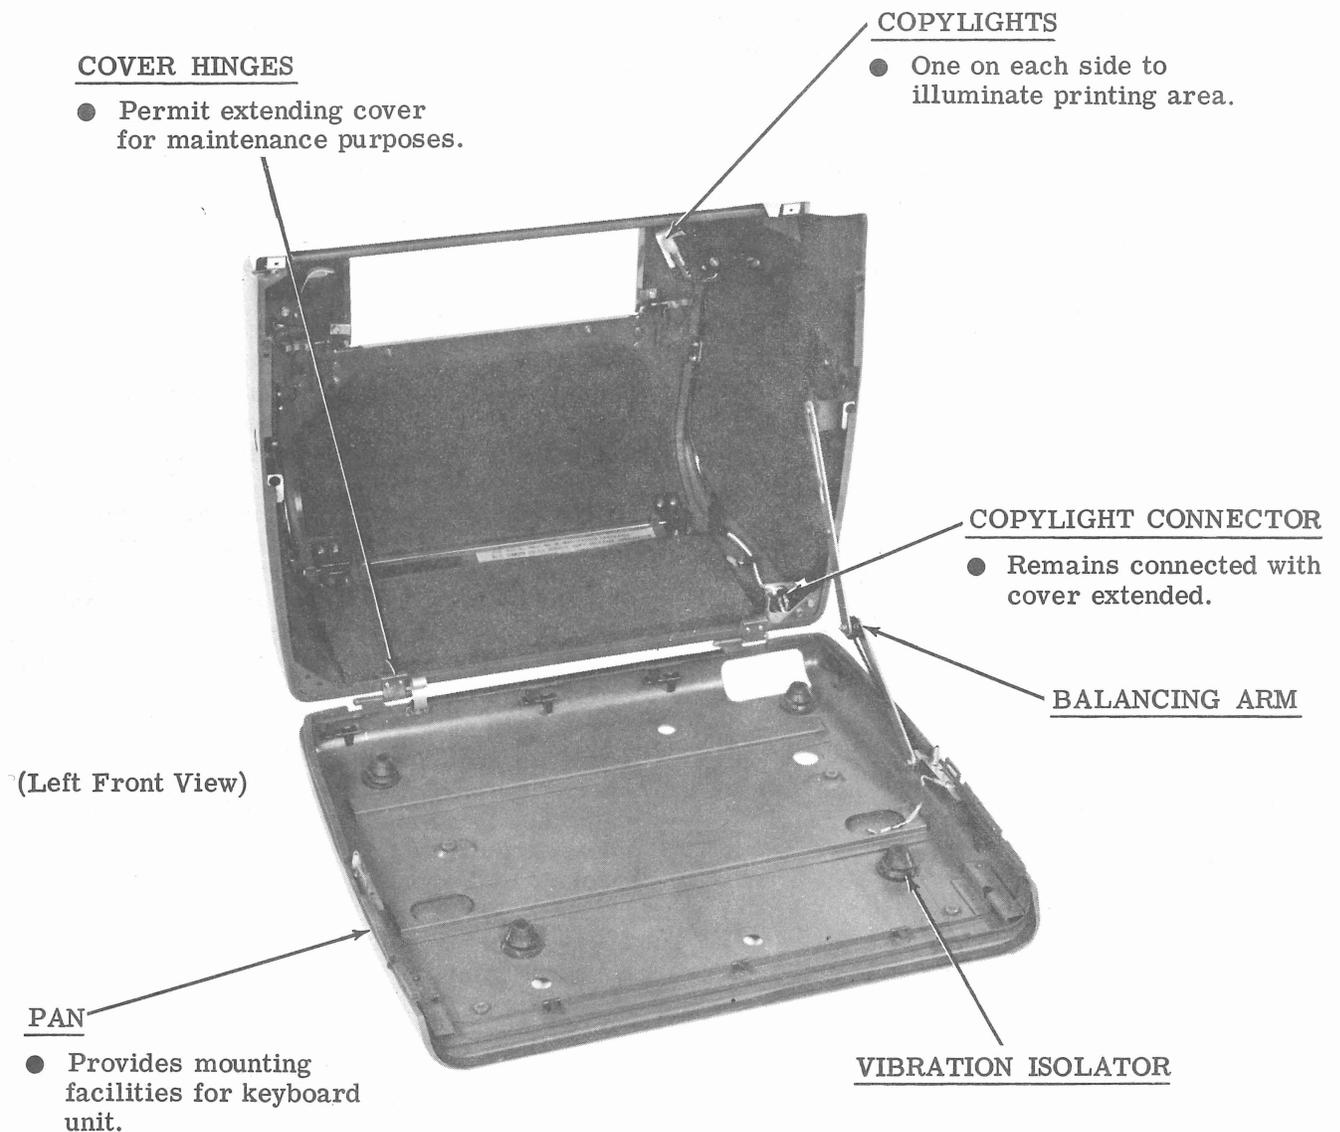


Figure 3 - Typing Unit Cover and Pan (Cover Opened)

3. OPERATION

LATCHES

3.01 The cover is hinged to the pan at the rear and secured on the left and right sides by two button-operated latches. Depressing both buttons unlatches the cover and permits raising it upward. The opened cover is held in position by a balancing arm.

3.02 Two button-operated latches secure the front and rear lids. Depressing the buttons inward unlatches the lids. To latch the

lids, close the rear lid first. Then close and latch the front lid.

PAPER EXIT

3.03 The paper guides, attached to the rear lid, directs the paper through the top opening in the cover. When expended paper is torn at the tearing edge, the free edge will fall against the guide. The free edge will then feed through the opening during subsequent line feed operations.