



Samsung TFT Color YP-T7J The Screen Replacement

This guide will display how to replace the screen of your MP3 player.

Written By: Jason Farr



 **TOOLS:**

- iFixit Opening Tools (1)
- Phillips #0 Screwdriver (1)

 **PARTS:**

- New 1.2" TFT Color LCD Screen (1)

Step 1 — The Back Cover



- Remove the 2 screws on the back cover using a Phillips head #0 screwdriver.

Step 2




- Remove the screw on each side of the device using a Phillips head screwdriver.

Step 3



- Using the plastic opening kit, place the prying end of the kit into the opening created by removing the screws.
- Gently pry open the back cover. Insert the plastic opening tool in between the cover joints.


Step 4 — The Battery

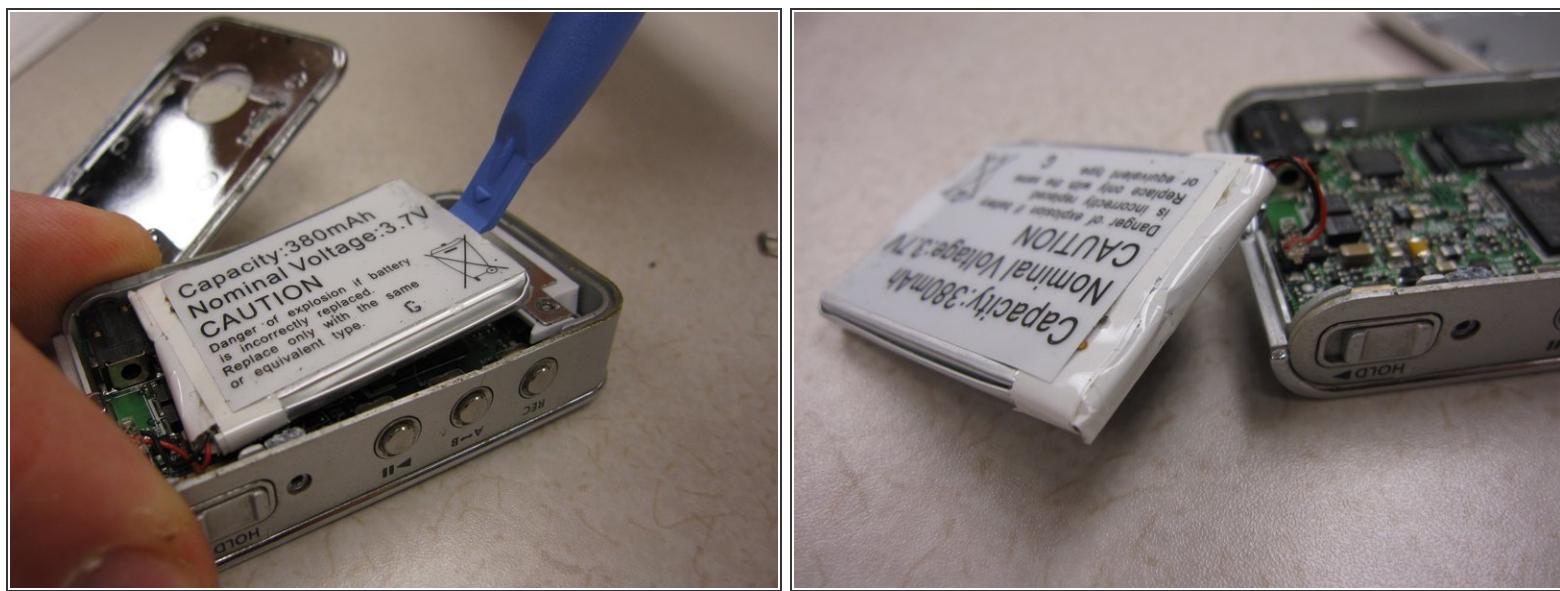

- Once the back cover has been removed the battery will be visible.
- Pry the battery from the device.

(i) NOTE: The battery should still be connected to the device

Step 5

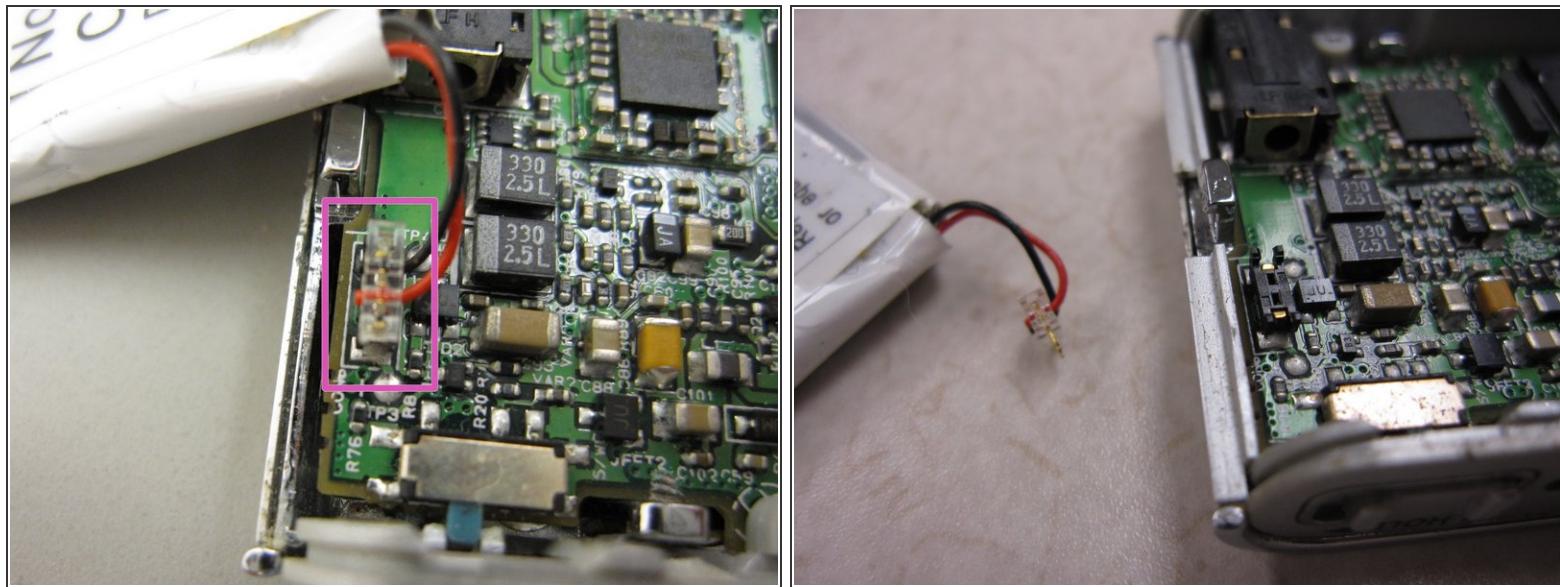


- Unplug the battery connecting cables.
- *(i)* NOTE: The battery now should be free from all connections to the device.

Step 6 — Disassembling Samsung TFT Color YP-T7J USB Connector Dock



- Once the battery has been removed you can see the motherboard.
- Unscrew 4 screws on the metal docket using a Phillips head screw driver.
- The USB connector can now be taken off of the device.

Step 7 — The Front Cover

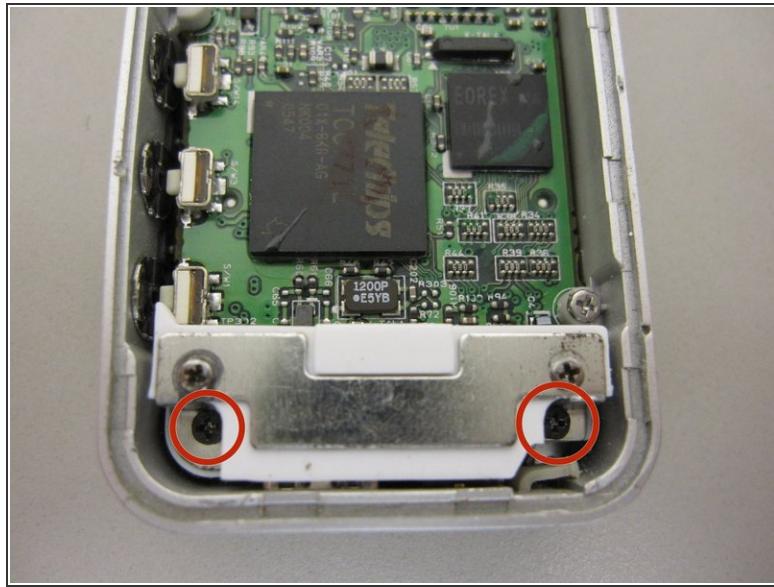


- Using the philips screwdriver, remove the two screws on the mother board.

Step 8




- Place the pry tool in-between the front cover and mother board.
- Gently separate the front cover.

Step 9

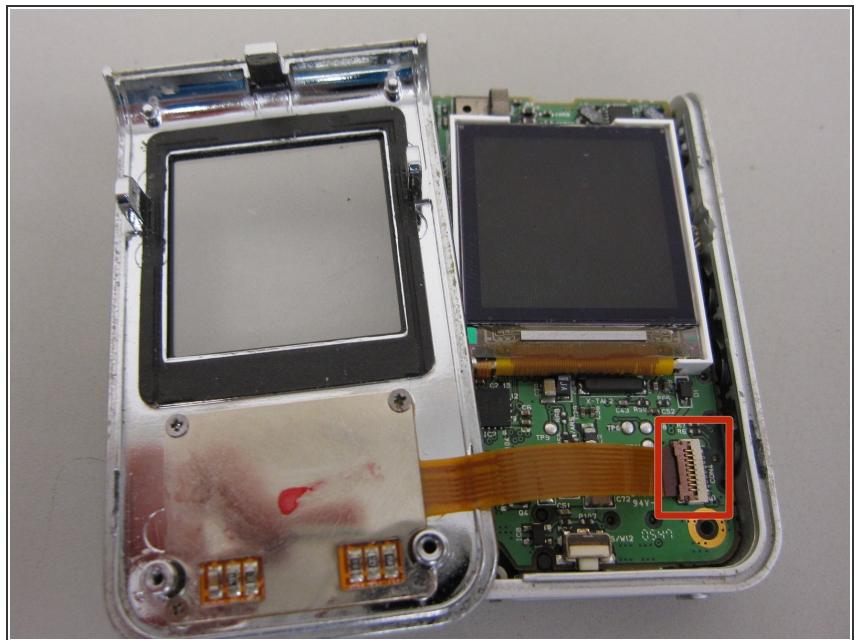

- After opening the front cover you will see an electric ribbon connecting the buttons to the mother board.


Step 10

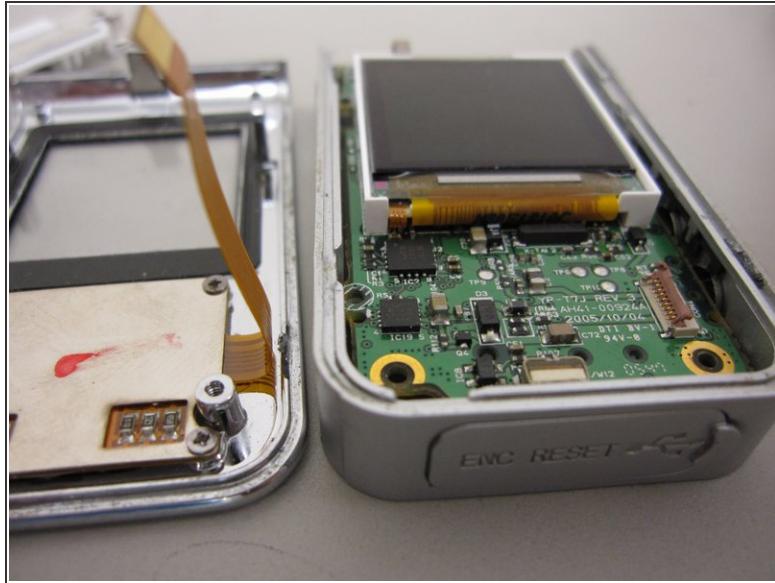

⚠ CAUTION: Do not rip the electric ribbon from the mother board.


- Carefully flip up the plastic lip that holds the electric ribbon to the board.

Step 11 — The Screen

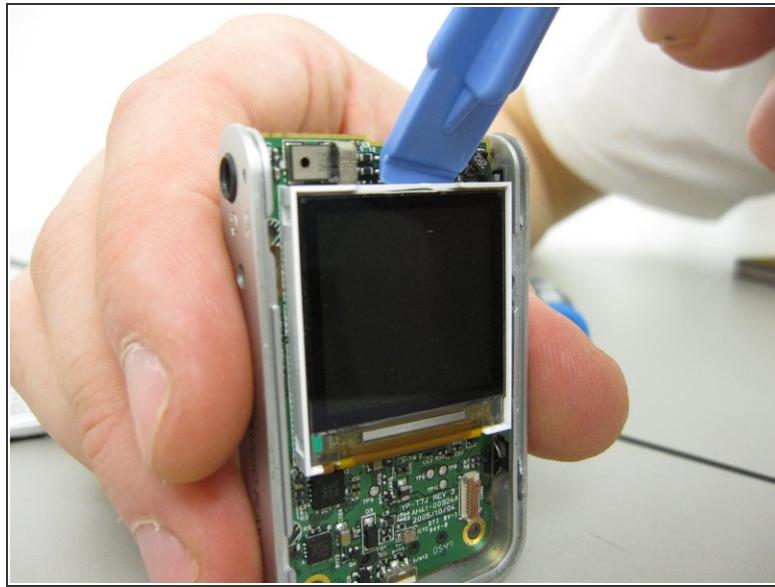



- Place the pry tool between the plastic housing around the LCD screen, and the mother board.
- Gently separate the screen housing from the mother board
- **CAUTION:** The screen is still attached to the mother board via another electric ribbon.

Step 12

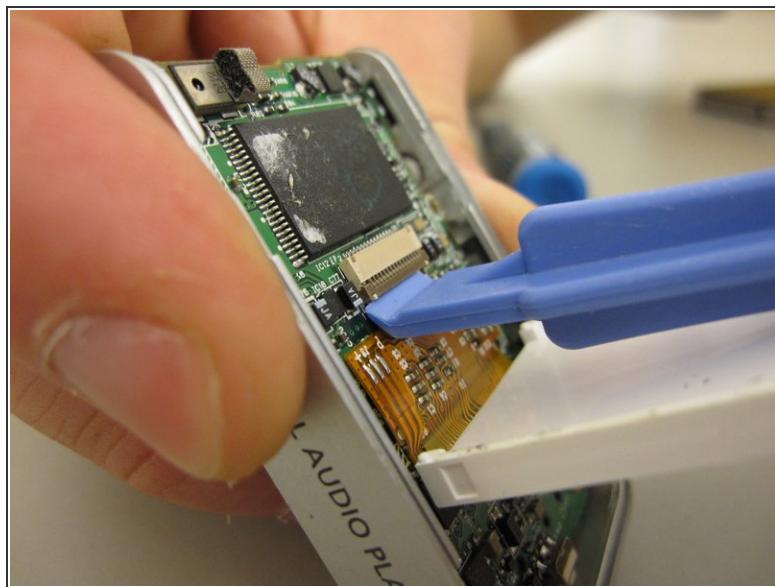

- Using a plastic pry tool to flip up the lip, which connects the electric ribbon to the mother board.

Step 13

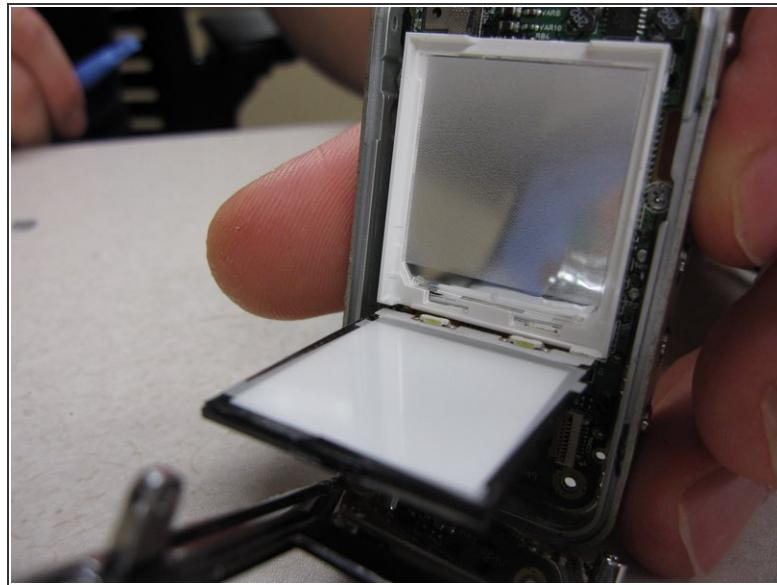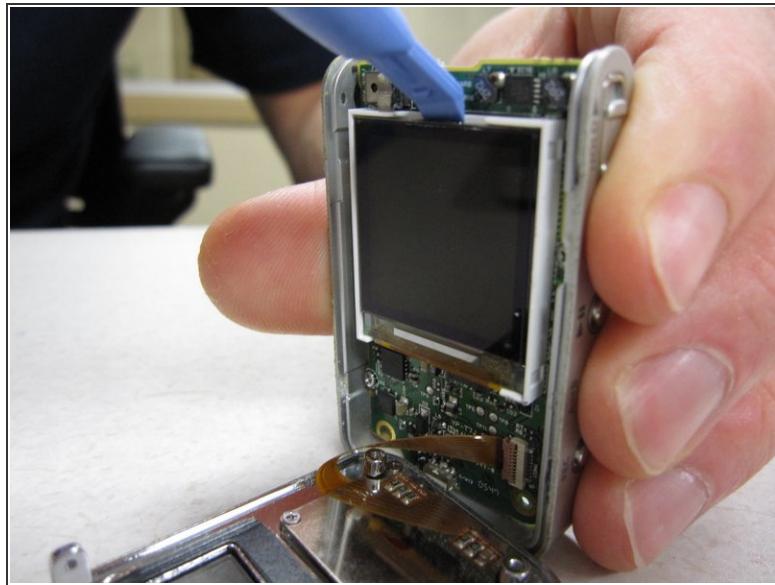

- Place the pry tool between the LCD screen and the white housing unit
- Gently separate the two.

Step 14



- Insert the new screen into the white unit.
- Connect the LCD screen to the mother board by inserting the electric ribbon into its port, and closing the lip.

To reassemble your device, follow these instructions in reverse order.