




# Sharp Aquos LC13B2UA Power Button Replacement

Written By: Robert Hobson

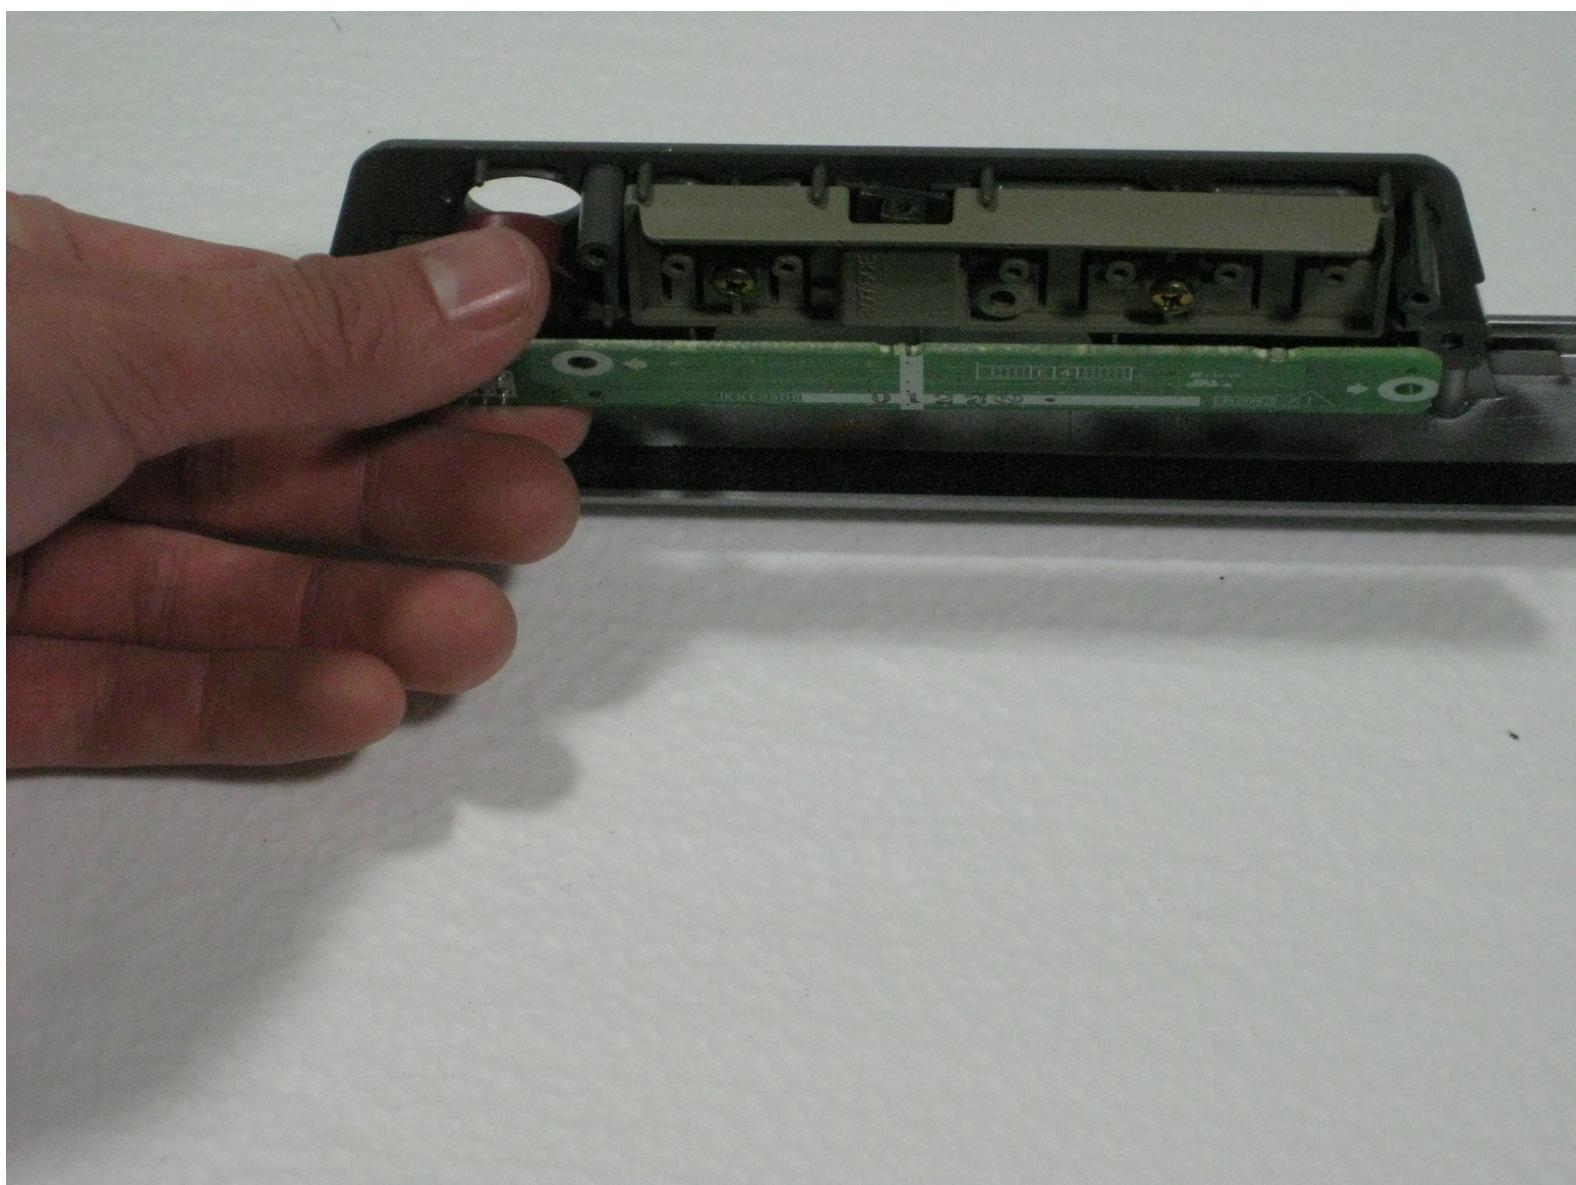

 **TOOLS:**

- **Phillips #2 Screwdriver** (1)
- **Phillips #00 Screwdriver** (1)

## Step 1 — Stand



- Place the TV face down on a flat smooth surface as to not scratch the screen.
- Using a Phillips #2 screwdriver remove the four 8mm screws attaching the stand to the TV.

## Step 2




- Lift the stand off the television.

## Step 3 — Back Case



- Remove the two back panels by prying them out with your hands.

## Step 4

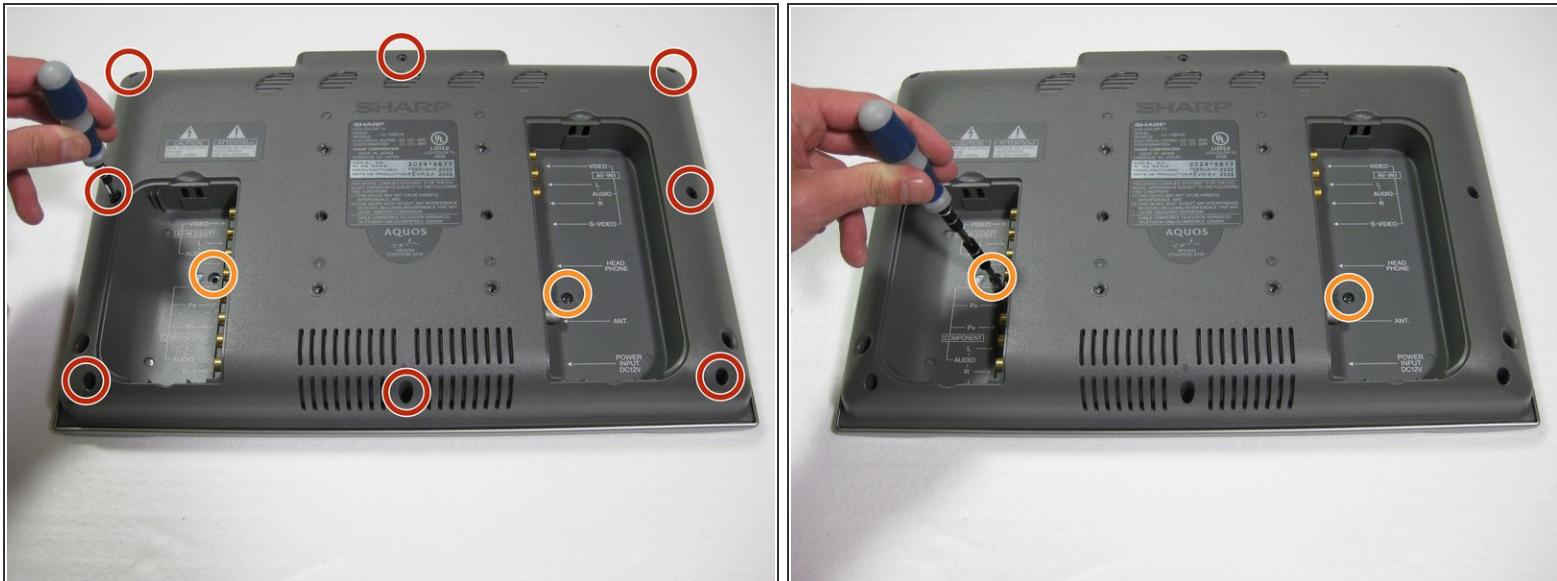


- Using a Phillips #2 screwdriver, remove the eight 6mm Phillips screws located around the edge.
- Using a Phillips #2 screwdriver, remove the two 6mm Phillips screws located near the inputs.

## Step 5



- Using your hands, gently lift and remove the back case of the television.



## Step 6 — Motherboard

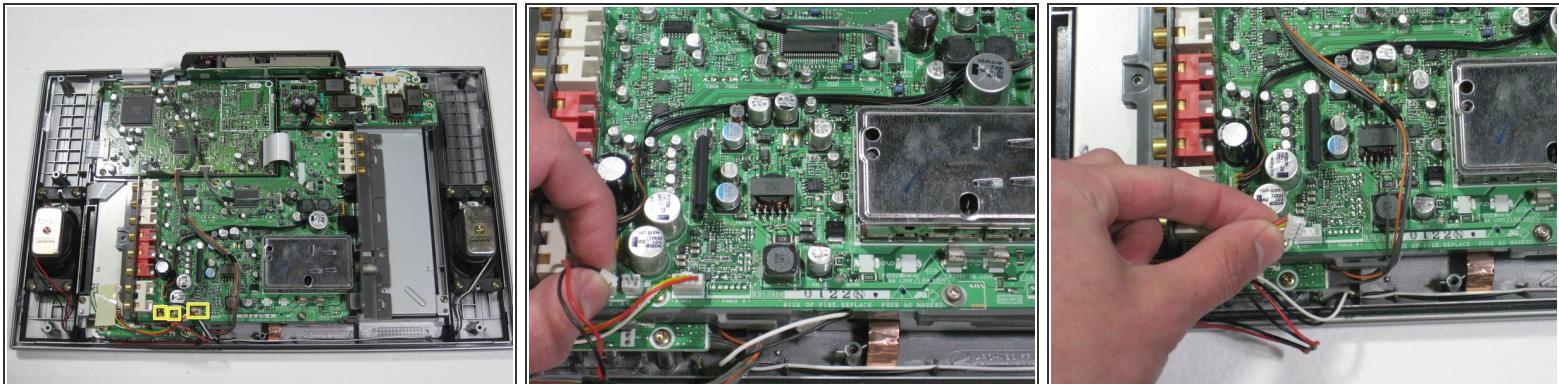

- Remove the two speaker cables and the connector from the circuit board by pinching the plastic connectors and firmly pulling up.



**⚠** Pull on the plastic part of the connector, even though it may seem easiest to pull on the wires.

## Step 7

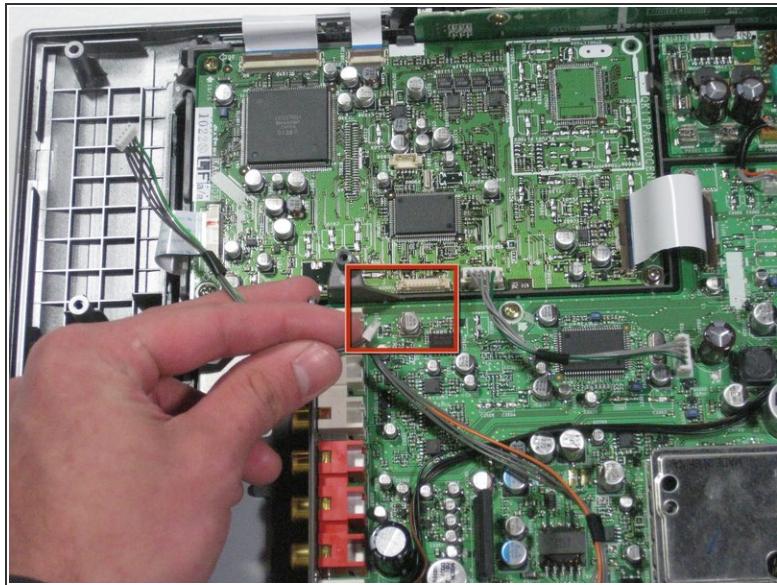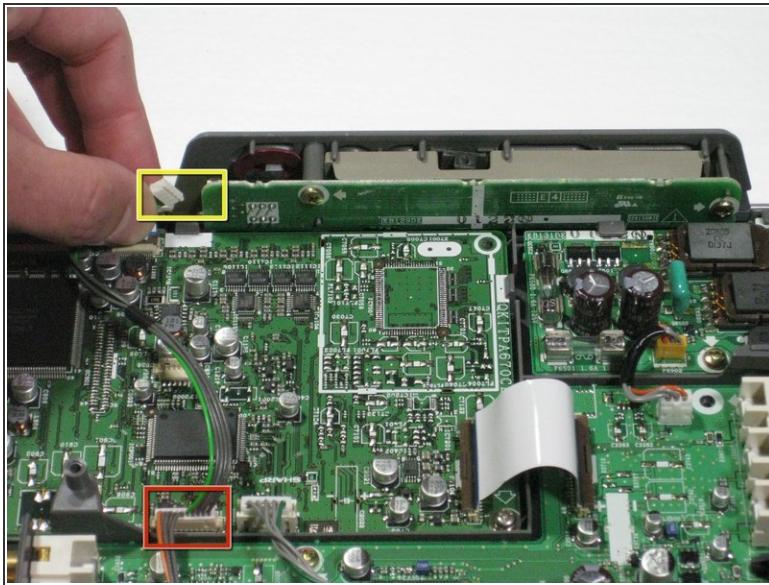

- Remove the green and gray power connector from the side of the buttons panel at the top of the television.
- Remove the green/gray to orange/gray connector from the center of the circuit board.

## Step 8

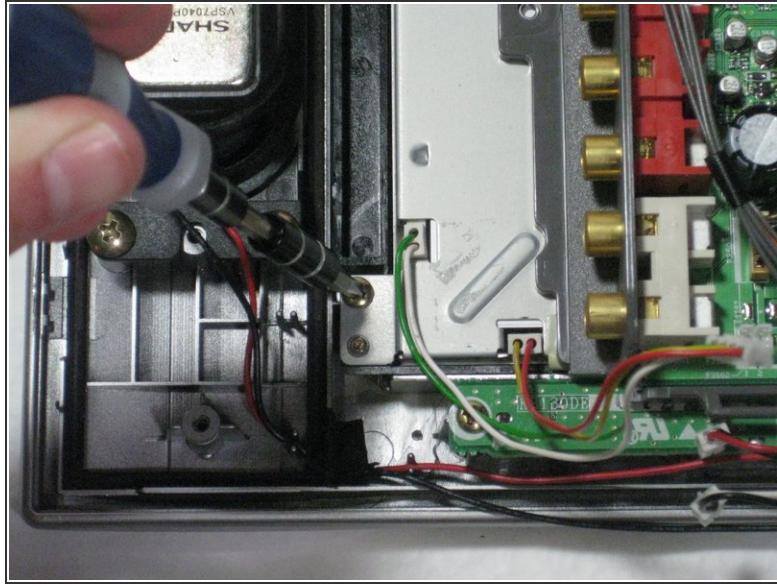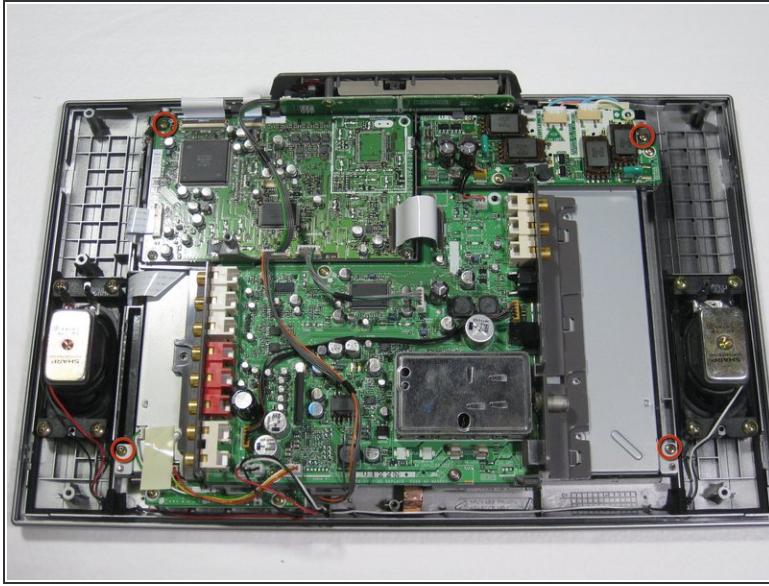


- Remove the four 5mm phillips screws attaching the LCD and circuit board to the front case.

## Step 9



- Lift the circuit board/LCD block from the case by lifting the near side of the circuit board and sliding it under the button frame.

## Step 10 — Power Button

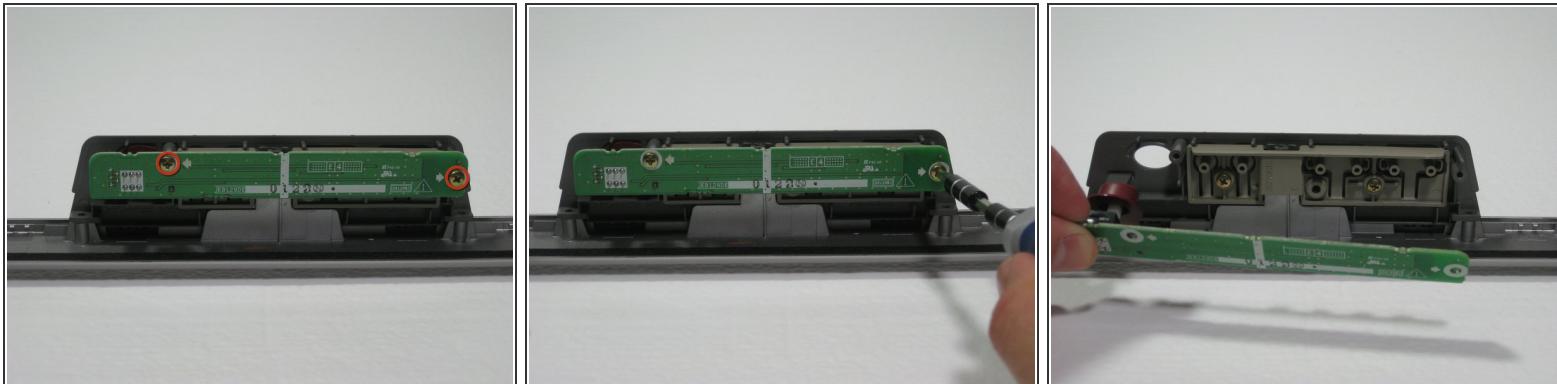

- Remove the two 6mm Phillips screws.
- Pull the board toward you, giving you access to the power button.

To reassemble your device, follow these instructions in reverse order.