



Trio Stealth Pro 9.7" Motherboard Replacement

A guide to replacing a Trio Stealth Pro 9.7" motherboard.

Written By: Edward Insogna



 **TOOLS:**


- [iFixit Opening Tools \(1\)](#)
- [Spudger \(1\)](#)

Step 1 — Motherboard




- Remove 2 black 4 cm Phillips screws on either side of the bottom of the device.

Step 2

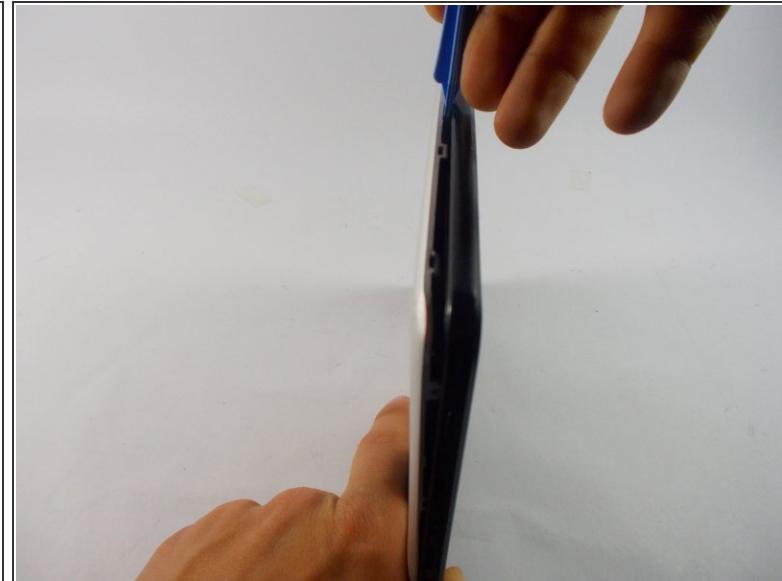


- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.

Step 3

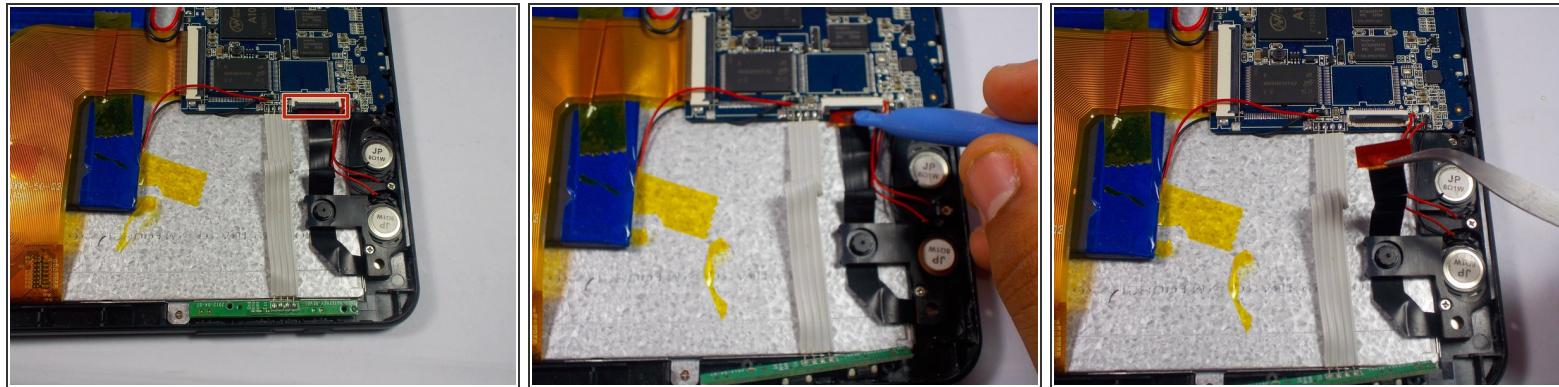


- Unclip camera flex cable
- Use plastic opening tool to lift open black clip where the flex cables are attached to the motherboard.
- Then gently pull out the flex cable with tweezers.

Step 4

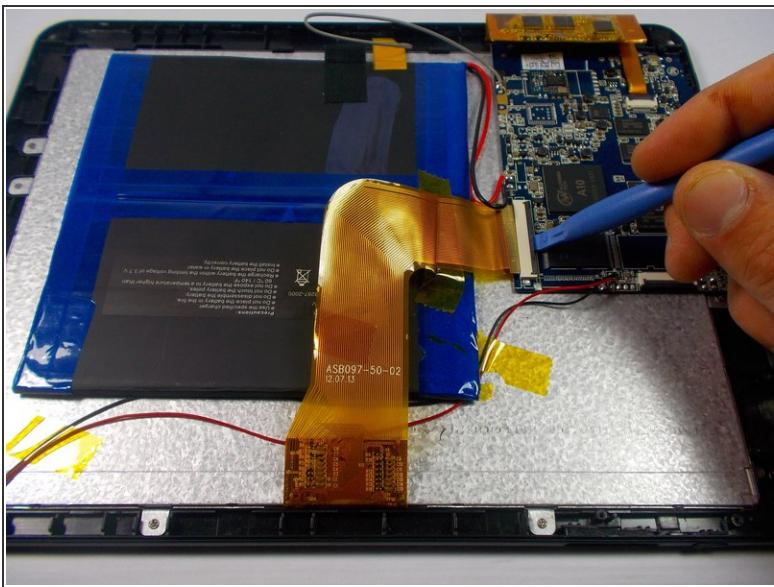

- Unclip large orange flex cable.
- Use plastic opening tool to lift open black clip where the flex cables are attached to the motherboard.
- Then gently pull out the flex cable with tweezers.

Step 5

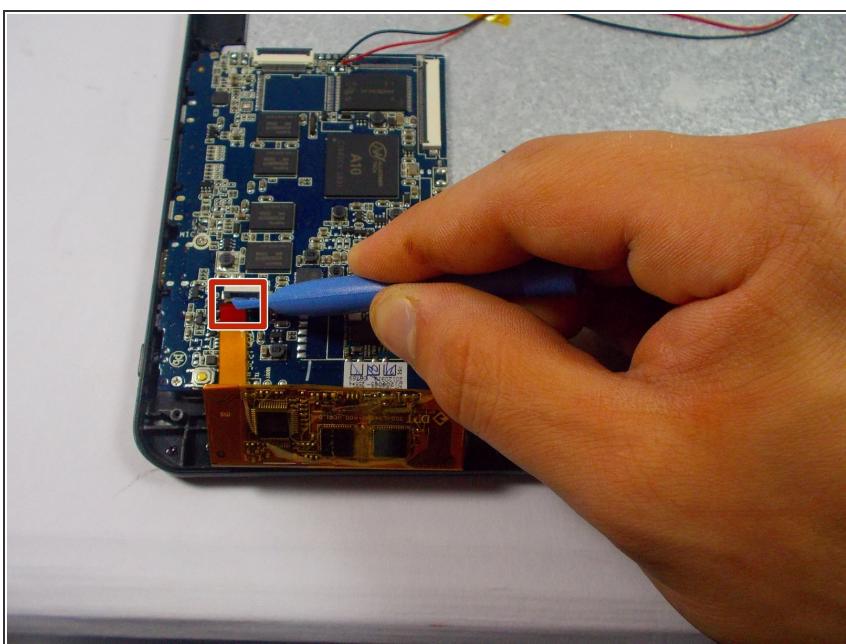


- Remove flex cable clip in top left area of motherboard.
- Use plastic opening tool to lift open black clip where the flex cables are attached to the motherboard. gently pull out the flex cable with tweezers.
- Then gently pull out the flex cable with tweezers.

Step 6




- Remove 4 silver 4 cm Philips screws holding down the motherboard.

Step 7

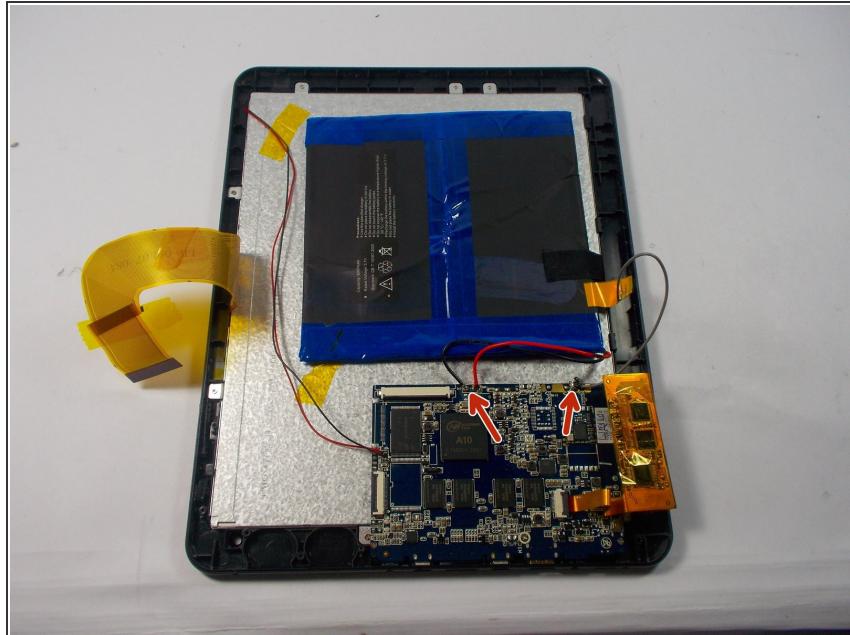


- Cut red black and gray wires attached to the bottom of the motherboard connecting to the battery.

Step 8

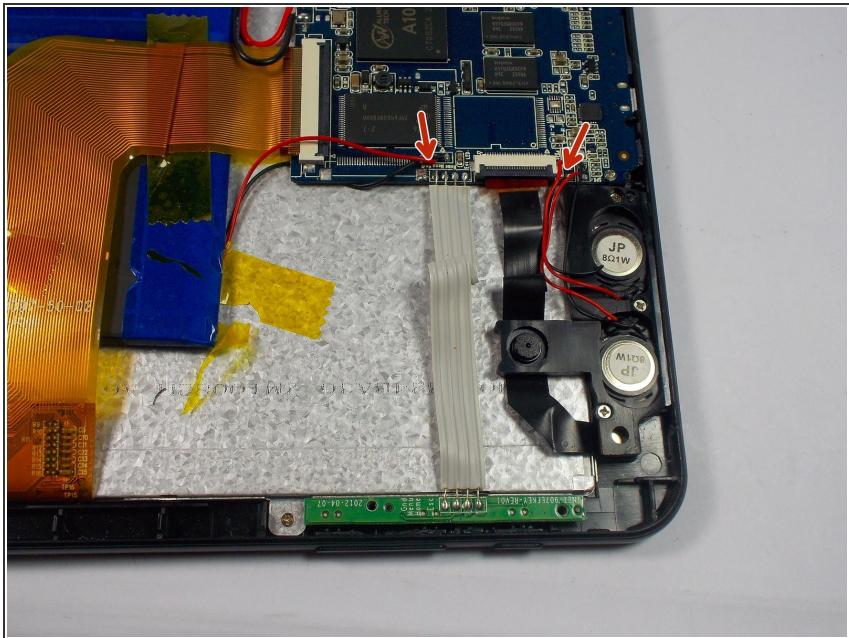

- Cut three red and three black wires attached to the right side of the motherboard.

Step 9

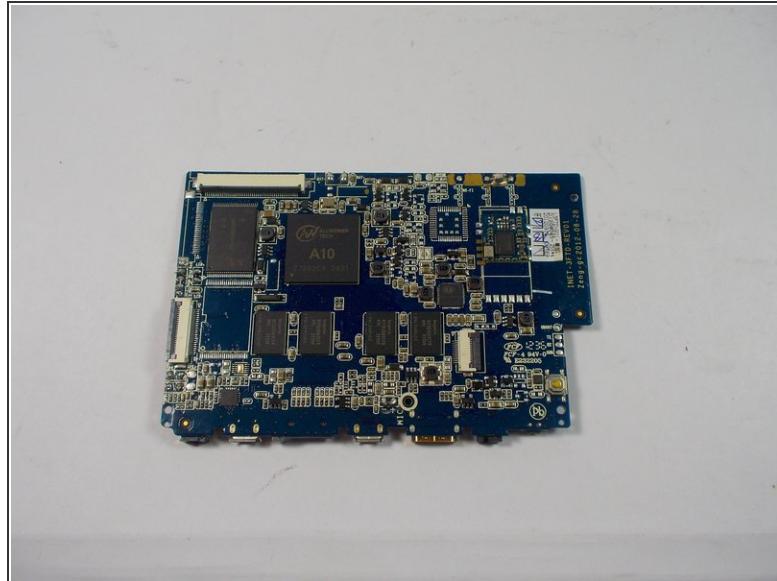

- Cut 4 wire cable attached to the right side of the motherboard.
- Remove motherboard.

To reassemble your device, follow these instructions in reverse order.