




Verizon Jetpack 4G LTE Mobile Hotspot

Screen Replacement

In this guide, the user will use the iFixit tools to replace the screen of the hotspot.

Written By: Analisa Caso

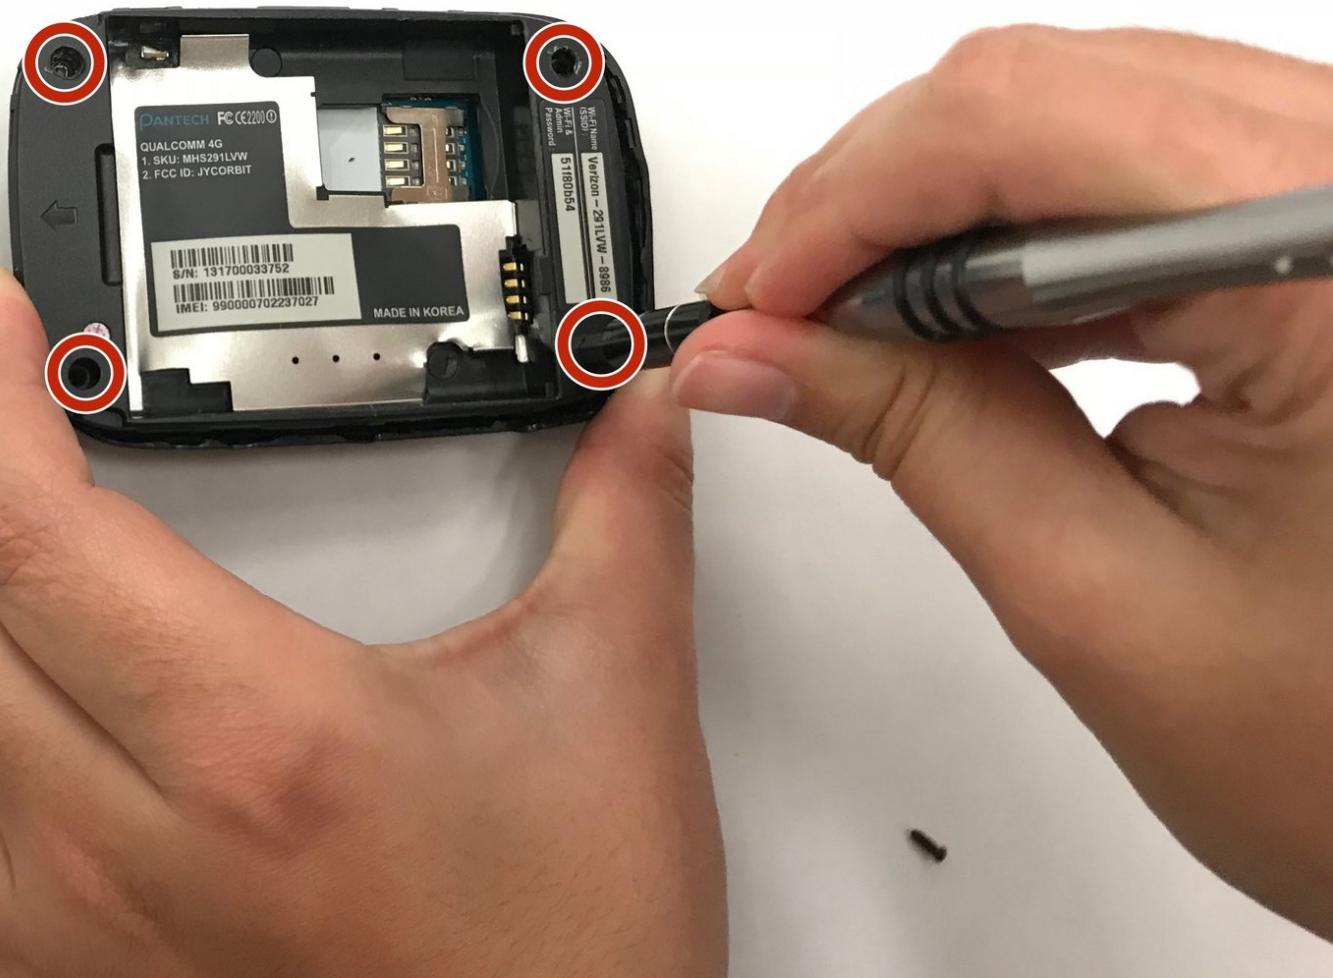

INTRODUCTION

The screen of the hotspot holds the basis to the device. Before you begin, be aware that it might take longer than you would expect. Be prepared to have the proper tools available such as the Phillips #000 screwdriver and metal spudger. Make sure the SIM Card and battery are removed before handling the screen. If you do not do that, it can cause an injury.

TOOLS:

- [Metal Spudger \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

Step 1 — Battery



- Hold the device with your non-dominant hand, looking at the back of the device, taking note of the small notch along the edge.

Step 2



- While holding the device with your non-dominant hand, use your dominant hand to gently pry the back casing off the device. The most effective way to do this is by gripping the small notch.
- If it doesn't come off, try using alternative grips that are the most comfortable for you. Try using your fingernails to pry up at the corner or around the edge of the backing. The case should come off easily.
- The back should be completely removed.

Step 3




- The battery should now be visible. Gently grasp the edges to lift it out of the device.
- *(i)* The device in picture no longer has a battery but a normal device will likely have a battery once opened.

Step 4 — SIM Card




- Now that the battery is out, the SIM Card should be visible. Simply grasp it and pull it out of the device.
- *(i)* The device in picture no longer has a SIM card but a normal device will likely have a SIM card once opened.

Step 5 — Screen

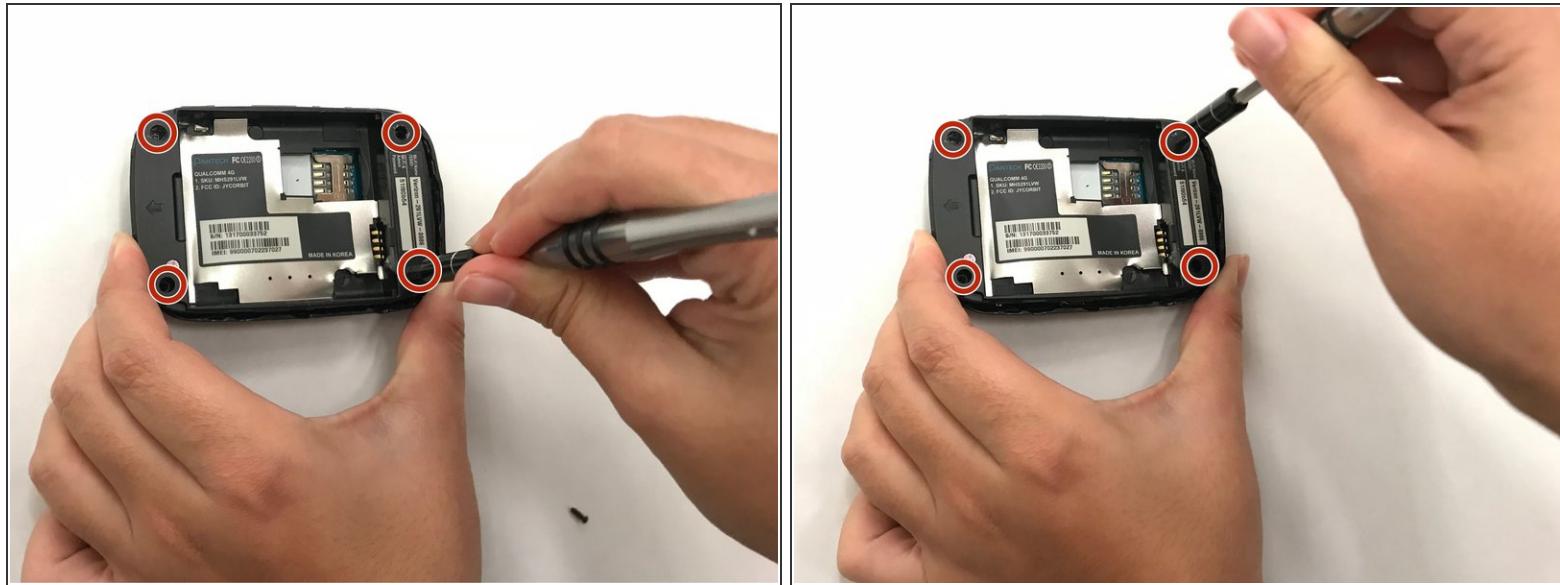


- Using a Phillips #000 screwdriver, remove the screws found on the four corners of the back of the device.
- The device pictured is extremely damaged. A normal device should not appear as bent and broken.
- The screws are very small and may require some patience to get a proper grip.

Step 6

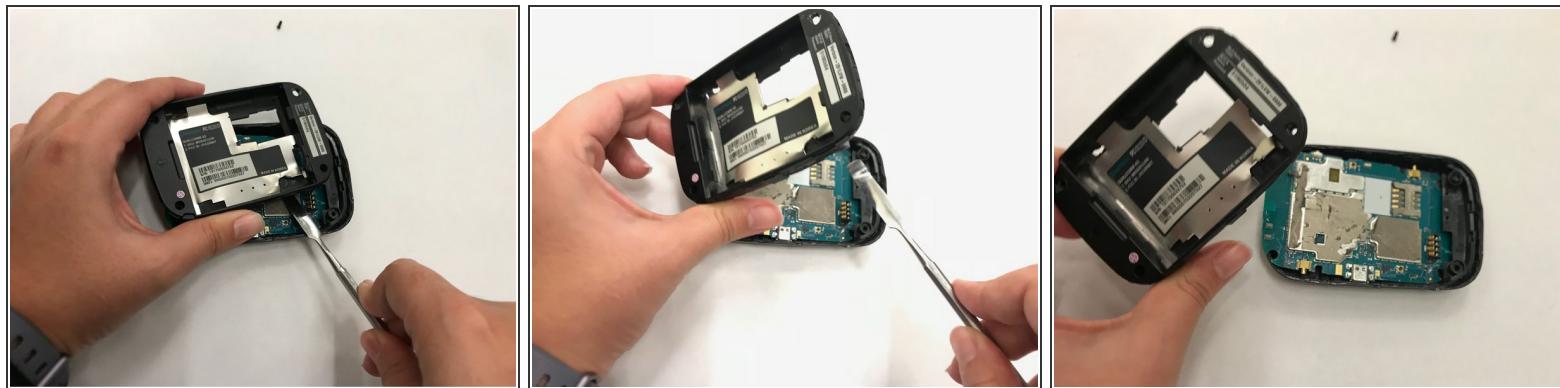


- Using the metal spudger, pry the plastic casing around the device.

Step 7

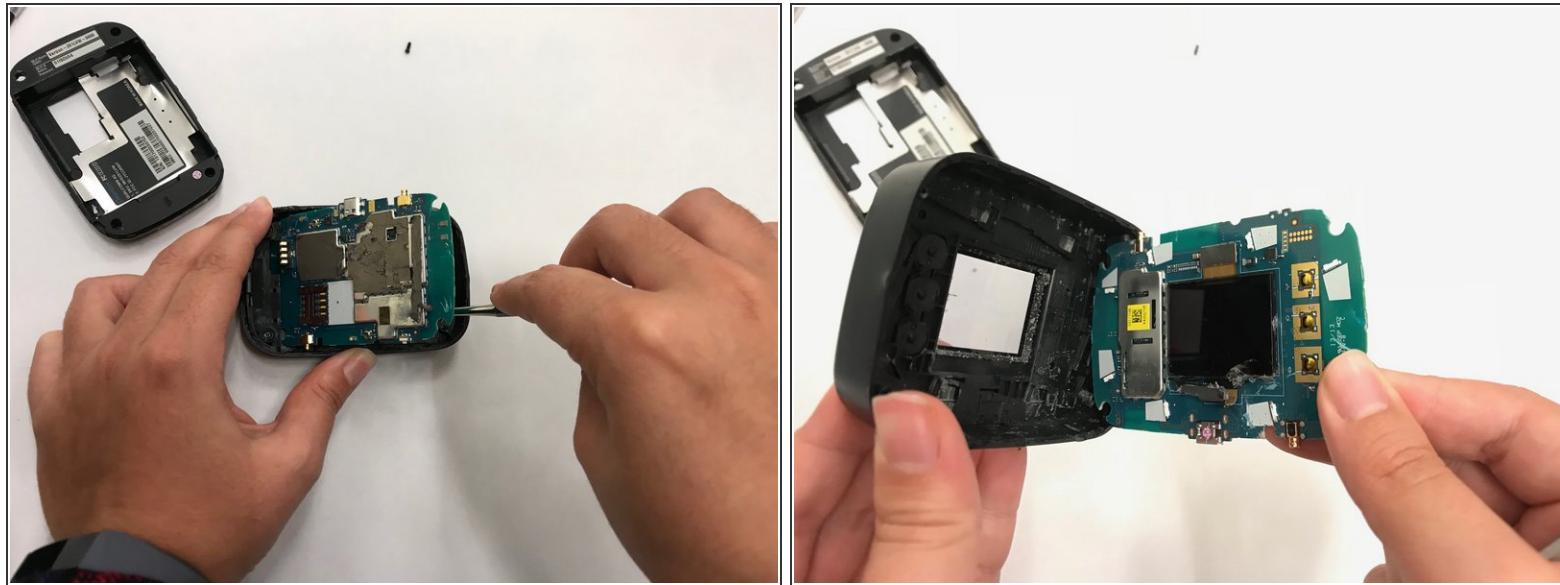

- Using the metal spudger, gently pull out the motherboard from the plastic casing.

Step 8

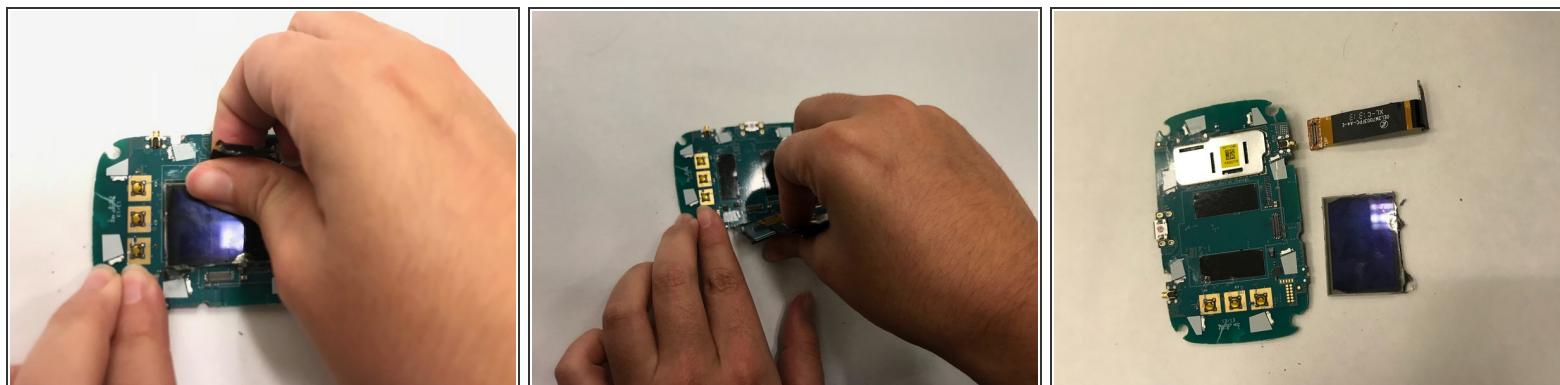

- Rotate the motherboard so that the screen is facing you.
- Gently pull up the orange tape to remove the screen.

To reassemble your device, follow these instructions in reverse order.