

**Lucent Technologies**  
Bell Labs Innovations



**INTUITY<sup>TM</sup> Messaging Solutions**  
**Release 4.0**  
**Alarm and Log Messages**

585-310-566  
Comcode 108096942  
Issue 2  
October 1997

## Notice

Every effort was made to ensure that the information in this book was complete and accurate at the time of printing. However, information is subject to change.

## Your Responsibility for Your System's Security

Toll fraud is the unauthorized use of your telecommunications system by an unauthorized party, for example, persons other than your company's employees, agents, subcontractors, or persons working on your company's behalf. Note that there may be a risk of toll fraud associated with your telecommunications system and, if toll fraud occurs, it can result in substantial additional charges for your telecommunications services.

You and your system manager are responsible for the security of your system, such as programming and configuring your equipment to prevent unauthorized use. The system manager is also responsible for reading all installation, instruction, and system administration documents provided with this product in order to fully understand the features that can introduce risk of toll fraud and the steps that can be taken to reduce that risk. Lucent Technologies does not warrant that this product is immune from or will prevent unauthorized use of common-carrier telecommunication services or facilities accessed through or connected to it. Lucent Technologies will not be responsible for any charges that result from such unauthorized use.

## Lucent Corporate Security

Whether or not immediate support is required, all toll fraud incidents involving Lucent products or services should be reported to Lucent Corporate Security at 1 800 821-8235. In addition to recording the incident, Lucent Corporate Security is available for consultation on security issues, investigation support, referral to law enforcement agencies, and educational programs.

## Lucent Technologies Fraud Intervention

If you *suspect that you are being victimized* by toll fraud and you need technical support or assistance, call the Lucent Technologies National Customer Care Center Toll Fraud Intervention Hotline at 1 800 643-2353.

## Federal Communications Commission Statement

**Part 15: Class A Statement.** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio-frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

**Part 68: Network Registration Number.** This equipment is registered with the FCC in accordance with Part 68 of the FCC Rules. It is identified by an FCC registration number.

**Part 68: Answer-Supervision Signaling.** Allowing this equipment to be operated in a manner that does not provide proper answer-supervision signaling is in violation of Part 68 Rules. This equipment returns answer-supervision signals to the public switched network when:

- Answered by the called station
- Answered by the attendant
- Routed to a recorded announcement that can be administered by the CPE user

This equipment returns answer-supervision signals on all DID calls forwarded back to the public switched telephone network. Permissible exceptions are:

- A call is unanswered
- A busy tone is received
- A reorder tone is received

## Canadian Department of Communications (DOC)

### Interference Information

This digital apparatus does not exceed the Class A limits for radio noise emissions set out in the radio interference regulations of the Canadian Department of Communications.

Le Présent Appareil Numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la class A prescrites dans le reglement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

## Trademarks

See the section titled "About This Book."

## Ordering Information

**Call:** Lucent Technologies Publications Center  
Voice 1 800 457-1235 International Voice 317 361-5353  
Fax 1 800 457-1764 International Fax 317 361-5355

**Write:** Lucent Technologies Publications Center  
P.O. Box 4100  
Crawfordsville, IN 47933

**Order:** Document No. 585-310-566  
Comcode 108096942  
Issue 2, October 1997

You can be placed on a standing order list for this and other documents you may need. Standing order will enable you to automatically receive updated versions of individual documents or document sets, billed to account information that you provide. For more information on standing orders, or to be put on a list to receive future issues of this document, contact the Lucent Technologies Publications Center.

## Warranty

Lucent Technologies provides a limited warranty on this product. Refer to the "Limited Use Software License Agreement" card provided with your package.

## European Union Declaration of Conformity

Lucent Technologies Business Communications Systems declares that the equipment specified in this document conforms to the referenced European Union (EU) Directives and Harmonized Standards listed below:

EMC Directive 89/336/EEC  
Low-Voltage Directive 73/23/EEC



The "CE" mark affixed to the equipment means that it conforms to the above directives.

## Comments

To comment on this document, return the comment card at the front of the document.

## Acknowledgment

This document was prepared by Product Documentation, Lucent Technologies, Columbus, OH.



Contents

|                                                                 |                            |
|-----------------------------------------------------------------|----------------------------|
| <a href="#">Contents</a>                                        | <a href="#">iii</a>        |
| <a href="#">About This Book</a>                                 | <a href="#">xxx</a>        |
| ■ <a href="#">Purpose</a>                                       | <a href="#">xxx</a>        |
| ■ <a href="#">Intended Audiences</a>                            | <a href="#">xxx</a>        |
| ■ <a href="#">Release History</a>                               | <a href="#">xxx</a>        |
| ■ <a href="#">How to Use This Book</a>                          | <a href="#">xxx</a>        |
| ■ <a href="#">Conventions Used in This Book</a>                 | <a href="#">xxx</a>        |
| <a href="#">Terminology</a>                                     | <a href="#">xxx</a>        |
| <a href="#">Keyboard and Telephone Keypad Representations</a>   | <a href="#">xxx</a>        |
| <a href="#">Screen Displays</a>                                 | <a href="#">xxx</a>        |
| <a href="#">Data Entry Conventions</a>                          | <a href="#">xxx</a>        |
| <a href="#">Safety and Security Alert Labels</a>                | <a href="#">xxx</a>        |
| ■ <a href="#">Trademarks and Service Marks</a>                  | <a href="#">xxx</a>        |
| ■ <a href="#">Related Resources</a>                             | <a href="#">xxx</a>        |
| <a href="#">Documentation</a>                                   | <a href="#">xxx</a>        |
| <a href="#">Training</a>                                        | <a href="#">xxx</a>        |
| <a href="#">Technical Assistance</a>                            | <a href="#">x</a>          |
| ■ <a href="#">How to Comment on This Book</a>                   | <a href="#">x</a>          |
| <b>1 <a href="#">Getting Started</a></b>                        | <b><a href="#">1-1</a></b> |
| ■ <a href="#">Overview</a>                                      | <a href="#">1-1</a>        |
| ■ <a href="#">Purpose</a>                                       | <a href="#">1-1</a>        |
| ■ <a href="#">When to Access Logs</a>                           | <a href="#">1-2</a>        |
| <a href="#">Checking the System Status Line</a>                 | <a href="#">1-2</a>        |
| <a href="#">Using the System Status Line</a>                    | <a href="#">1-3</a>        |
| ■ <a href="#">Activity Log</a>                                  | <a href="#">1-4</a>        |
| ■ <a href="#">Administrator's Log</a>                           | <a href="#">1-5</a>        |
| <a href="#">Access</a>                                          | <a href="#">1-5</a>        |
| <a href="#">Through the Lucent INTUITY System Menus</a>         | <a href="#">1-5</a>        |
| <a href="#">Through the INTUITY AUDIX Administration Screen</a> | <a href="#">1-7</a>        |
| <a href="#">Administrator's Log Display Selection Screen</a>    | <a href="#">1-7</a>        |

|                                                 |      |
|-------------------------------------------------|------|
| Administrator's Log Format                      | 1-8  |
| Date and Time                                   | 1-8  |
| Application Identifier                          | 1-9  |
| Event ID                                        | 1-9  |
| Count                                           | 1-10 |
| Message                                         | 1-10 |
| ■ Alarm Log                                     | 1-11 |
| Access                                          | 1-12 |
| Through the Lucent INTUITY System Menus         | 1-12 |
| Through the INTUITY AUDIX Administration Screen | 1-13 |
| Alarm Log Display Selection Screen              | 1-14 |
| Alarm Log Format                                | 1-15 |
| Application Identifier                          | 1-15 |
| Resource Type                                   | 1-15 |
| Location                                        | 1-18 |
| Alarm Level                                     | 1-18 |
| Major Alarms                                    | 1-19 |
| Minor Alarms                                    | 1-19 |
| Warning Alarms                                  | 1-19 |
| Alarm Level Display                             | 1-20 |
| Acknowledged                                    | 1-20 |
| Date/Time Alarmed                               | 1-20 |
| Date/Time Resolved                              | 1-21 |
| Resolve Reason                                  | 1-21 |
| Alarm Management                                | 1-22 |
| Access                                          | 1-22 |
| Alarm Management Window Fields                  | 1-23 |
| Product ID                                      | 1-23 |
| Alarm Destination                               | 1-23 |
| Alarm Origination                               | 1-24 |
| Alarm Level                                     | 1-24 |
| Alarm Suppression                               | 1-24 |
| Clear Alarm Notification                        | 1-24 |

|          |                                                        |                   |
|----------|--------------------------------------------------------|-------------------|
| <b>2</b> | <b><u>Administrator's Log Entries</u></b>              | <b><u>2-1</u></b> |
| ■        | <u>Overview</u>                                        | <u>2-1</u>        |
| ■        | <u>Purpose</u>                                         | <u>2-1</u>        |
| ■        | <u>How to Use this Chapter</u>                         | <u>2-2</u>        |
| ■        | <u>CA — Call Accounting System</u>                     | <u>2-3</u>        |
| ■        | <u>EL — Enhanced-List Application</u>                  | <u>2-4</u>        |
|          | <u>Event ID: ELA-badreca01 through ELA-badreca12</u>   | <u>2-4</u>        |
|          | <u>Event ID: ELA-lostlock01 through ELA-lostlock10</u> | <u>2-5</u>        |
|          | <u>Event ID: ELA-no_members</u>                        | <u>2-5</u>        |
|          | <u>Event ID: ELA-nestvioltn</u>                        | <u>2-5</u>        |
|          | <u>Event ID: ELA-loopvioltn</u>                        | <u>2-6</u>        |
|          | <u>Event ID: ELA-mboxlock01</u>                        | <u>2-6</u>        |
|          | <u>Event ID: ELA-chkrestrct</u>                        | <u>2-7</u>        |
|          | <u>Event ID: ELA-shadow07</u>                          | <u>2-7</u>        |
|          | <u>Event ID: ELA-delivts05</u>                         | <u>2-7</u>        |
| ■        | <u>ML — MERLIN LEGEND Integration</u>                  | <u>2-9</u>        |
|          | <u>Event ID: ML200</u>                                 | <u>2-9</u>        |
|          | <u>Event ID: ML201</u>                                 | <u>2-9</u>        |
| ■        | <u>MT — Maintenance</u>                                | <u>2-10</u>       |
|          | <u>Event ID: AOMADM00001</u>                           | <u>2-10</u>       |
|          | <u>Event ID: AOMADM00002</u>                           | <u>2-10</u>       |
|          | <u>Event ID: BKDONE</u>                                | <u>2-11</u>       |
|          | <u>Event ID: RSTDONE</u>                               | <u>2-11</u>       |
|          | <u>Event ID: UDTADM00000</u>                           | <u>2-11</u>       |
|          | <u>Event ID: UDTADM00001</u>                           | <u>2-11</u>       |
|          | <u>Event ID: UDTADM00002</u>                           | <u>2-12</u>       |
|          | <u>Event ID: UDTADM00003</u>                           | <u>2-12</u>       |
|          | <u>Event ID: UDTADM00004</u>                           | <u>2-12</u>       |
|          | <u>Event ID: UDTADM00005</u>                           | <u>2-12</u>       |
| ■        | <u>NW — Networking</u>                                 | <u>2-13</u>       |
|          | <u>Event ID: SWANENAME</u>                             | <u>2-13</u>       |
|          | <u>Event ID: SWANENAMEREM</u>                          | <u>2-13</u>       |
|          | <u>Event ID: SWANEPASS</u>                             | <u>2-14</u>       |
|          | <u>Event ID: SWANEPASSREM</u>                          | <u>2-14</u>       |

|                                           |                      |
|-------------------------------------------|----------------------|
| <a href="#">Event ID: SWANEPERM</a>       | <a href="#">2-14</a> |
| <a href="#">Event ID: SWANETHRESH</a>     | <a href="#">2-15</a> |
| <a href="#">Event ID: SWANEUPDABORT1</a>  | <a href="#">2-15</a> |
| <a href="#">Event ID: SWANEUPDABORT2</a>  | <a href="#">2-15</a> |
| <a href="#">Event ID: SWANEUPDPERM1</a>   | <a href="#">2-16</a> |
| <a href="#">Event ID: SWANEUPDPERM2</a>   | <a href="#">2-16</a> |
| <a href="#">Event ID: SWANEUPDPERM3</a>   | <a href="#">2-17</a> |
| <a href="#">Event ID: SWANEUPDPERM4</a>   | <a href="#">2-17</a> |
| <a href="#">Event ID: SWANEUPDREQD1</a>   | <a href="#">2-18</a> |
| <a href="#">Event ID: SWANEUPDREQD2</a>   | <a href="#">2-19</a> |
| <a href="#">Event ID: SWANEUPDREQD3</a>   | <a href="#">2-19</a> |
| <a href="#">Event ID: SWANEUPDSUB</a>     | <a href="#">2-20</a> |
| <a href="#">Event ID: SWANIUPDREQ</a>     | <a href="#">2-20</a> |
| <a href="#">Event ID: SWANIUPDSTAT1</a>   | <a href="#">2-20</a> |
| <a href="#">Event ID: SWANIUPDSTAT2</a>   | <a href="#">2-21</a> |
| <a href="#">Event ID: SWANIUPDSTAT3</a>   | <a href="#">2-21</a> |
| <a href="#">Event ID: SWANIUPDSTAT4</a>   | <a href="#">2-21</a> |
| <a href="#">Event ID: SWANIUPDSTAT5</a>   | <a href="#">2-22</a> |
| <a href="#">Event ID: SWANIUPDSUBCHG</a>  | <a href="#">2-22</a> |
| <a href="#">Event ID: SWNDINVLDEQP</a>    | <a href="#">2-23</a> |
| ■ <a href="#">SM – Station Manager</a>    | <a href="#">2-24</a> |
| <a href="#">Event ID: SM201</a>           | <a href="#">2-24</a> |
| ■ <a href="#">SW — Switch Integration</a> | <a href="#">2-25</a> |
| <a href="#">Event ID: DCIU008</a>         | <a href="#">2-25</a> |
| <a href="#">Event ID: DCIU009</a>         | <a href="#">2-25</a> |
| <a href="#">Event ID: DCIU010</a>         | <a href="#">2-26</a> |
| <a href="#">Event ID: DCIU011</a>         | <a href="#">2-26</a> |
| <a href="#">Event ID: IF110</a>           | <a href="#">2-26</a> |
| <a href="#">Event ID: IF120</a>           | <a href="#">2-26</a> |
| <a href="#">Event ID: IF130</a>           | <a href="#">2-27</a> |
| <a href="#">Event ID: SE120</a>           | <a href="#">2-27</a> |
| <a href="#">Event ID: SE130</a>           | <a href="#">2-27</a> |
| <a href="#">Event ID: SW160</a>           | <a href="#">2-27</a> |
| <a href="#">Event ID: TY160</a>           | <a href="#">2-27</a> |
| <a href="#">Event ID: IB100</a>           | <a href="#">2-28</a> |

|                        |      |
|------------------------|------|
| Event ID: IB110        | 2-28 |
| Event ID: VB508        | 2-28 |
| Event ID: VB513        | 2-28 |
| Event ID: VB515        | 2-29 |
| Event ID: VB516        | 2-29 |
| Event ID: VB517        | 2-29 |
| Event ID: WTR200       | 2-30 |
| ■ VM — Voice Messaging | 2-31 |
| Event ID: ADM_aabe     | 2-31 |
| Event ID: ADM_aanb     | 2-31 |
| Event ID: ADM_adm      | 2-31 |
| Event ID: ADM_amcb     | 2-32 |
| Event ID: ADM_amscl    | 2-32 |
| Event ID: ADM_amscl    | 2-32 |
| Event ID: ADM_amscl    | 2-32 |
| Event ID: ADM_amscl    | 2-33 |
| Event ID: ADM_amscl    | 2-33 |
| Event ID: ADM_amscl    | 2-34 |
| Event ID: ADM_amscl    | 2-34 |
| Event ID: ADM_amscl    | 2-34 |
| Event ID: ADM_amscl    | 2-35 |
| Event ID: ADM_amscl    | 2-35 |
| Event ID: ADM_amscl    | 2-36 |
| Event ID: ADM_amscl    | 2-36 |
| Event ID: ADM_amscl    | 2-37 |
| Event ID: ADM_amscl    | 2-37 |
| Event ID: ADM_amscl    | 2-38 |
| Event ID: ADM_amscl    | 2-38 |
| Event ID: ADM_amscl    | 2-39 |
| Event ID: ADM_amscl    | 2-39 |
| Event ID: ADM_amscl    | 2-39 |
| Event ID: ADM_amscl    | 2-40 |
| Event ID: ADM_amscl    | 2-40 |
| Event ID: ADM_amscl    | 2-40 |
| Event ID: ADM_amscl    | 2-41 |
| Event ID: ADM_amscl    | 2-41 |

|                                           |                             |
|-------------------------------------------|-----------------------------|
| <a href="#"><u>Event ID: ADM_attm</u></a> | <a href="#"><u>2-41</u></a> |
| <a href="#"><u>Event ID: ADM_attx</u></a> | <a href="#"><u>2-41</u></a> |
| <a href="#"><u>Event ID: ADM_attx</u></a> | <a href="#"><u>2-42</u></a> |
| <a href="#"><u>Event ID: ADM_bsxt</u></a> | <a href="#"><u>2-42</u></a> |
| <a href="#"><u>Event ID: ADM_bver</u></a> | <a href="#"><u>2-42</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-43</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-43</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-43</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-44</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-44</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-44</u></a> |
| <a href="#"><u>Event ID: ADM_cais</u></a> | <a href="#"><u>2-45</u></a> |
| <a href="#"><u>Event ID: ADM_cbnm</u></a> | <a href="#"><u>2-45</u></a> |
| <a href="#"><u>Event ID: ADM_cmt</u></a>  | <a href="#"><u>2-45</u></a> |
| <a href="#"><u>Event ID: ADM_cmwl</u></a> | <a href="#"><u>2-46</u></a> |
| <a href="#"><u>Event ID: ADM_cpas</u></a> | <a href="#"><u>2-46</u></a> |
| <a href="#"><u>Event ID: ADM_ctna</u></a> | <a href="#"><u>2-46</u></a> |
| <a href="#"><u>Event ID: ADM-dups</u></a> | <a href="#"><u>2-47</u></a> |
| <a href="#"><u>Event ID: ADM-dupt</u></a> | <a href="#"><u>2-47</u></a> |
| <a href="#"><u>Event ID: ADM_gpcf</u></a> | <a href="#"><u>2-47</u></a> |
| <a href="#"><u>Event ID: ADM_ilbm</u></a> | <a href="#"><u>2-48</u></a> |
| <a href="#"><u>Event ID: ADM_inva</u></a> | <a href="#"><u>2-48</u></a> |
| <a href="#"><u>Event ID: ADM_isum</u></a> | <a href="#"><u>2-48</u></a> |
| <a href="#"><u>Event ID: ADM_ifmb</u></a> | <a href="#"><u>2-49</u></a> |
| <a href="#"><u>Event ID: ADM_ifmb</u></a> | <a href="#"><u>2-49</u></a> |
| <a href="#"><u>Event ID: ADM_innr</u></a> | <a href="#"><u>2-49</u></a> |
| <a href="#"><u>Event ID: ADM_ipba</u></a> | <a href="#"><u>2-49</u></a> |
| <a href="#"><u>Event ID: ADM_ipba</u></a> | <a href="#"><u>2-50</u></a> |
| <a href="#"><u>Event ID: ADM_isos</u></a> | <a href="#"><u>2-50</u></a> |
| <a href="#"><u>Event ID: ADM_isxl</u></a> | <a href="#"><u>2-50</u></a> |
| <a href="#"><u>Event ID: ADM_mlf</u></a>  | <a href="#"><u>2-50</u></a> |
| <a href="#"><u>Event ID: ADM_mnod</u></a> | <a href="#"><u>2-51</u></a> |
| <a href="#"><u>Event ID: ADM_noci</u></a> | <a href="#"><u>2-51</u></a> |
| <a href="#"><u>Event ID: ADM_ncyc</u></a> | <a href="#"><u>2-52</u></a> |
| <a href="#"><u>Event ID: ADM_ndig</u></a> | <a href="#"><u>2-53</u></a> |



|                                           |                             |
|-------------------------------------------|-----------------------------|
| <a href="#"><u>Event ID: ADM_ndsd</u></a> | <a href="#"><u>2-53</u></a> |
| <a href="#"><u>Event ID: ADM_nloc</u></a> | <a href="#"><u>2-53</u></a> |
| <a href="#"><u>Event ID: ADM_nmtl</u></a> | <a href="#"><u>2-54</u></a> |
| <a href="#"><u>Event ID: ADM_nntr</u></a> | <a href="#"><u>2-54</u></a> |
| <a href="#"><u>Event ID: ADM_nrng</u></a> | <a href="#"><u>2-54</u></a> |
| <a href="#"><u>Event ID: ADM_nsmc</u></a> | <a href="#"><u>2-55</u></a> |
| <a href="#"><u>Event ID: ADM_pafd</u></a> | <a href="#"><u>2-55</u></a> |
| <a href="#"><u>Event ID: ADM_pewd</u></a> | <a href="#"><u>2-55</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-56</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-56</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-56</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-57</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-57</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-57</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-58</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-58</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-58</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-58</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-59</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-59</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-59</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-59</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-60</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-60</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-60</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-60</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-61</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-61</u></a> |
| <a href="#"><u>Event ID: ADM_pglt</u></a> | <a href="#"><u>2-61</u></a> |
| <a href="#"><u>Event ID: ADM_pmad</u></a> | <a href="#"><u>2-62</u></a> |
| <a href="#"><u>Event ID: ADM_rmtx</u></a> | <a href="#"><u>2-62</u></a> |
| <a href="#"><u>Event ID: ADM_rmtx</u></a> | <a href="#"><u>2-62</u></a> |
| <a href="#"><u>Event ID: ADM_rmax</u></a> | <a href="#"><u>2-62</u></a> |
| <a href="#"><u>Event ID: ADM_sext</u></a> | <a href="#"><u>2-63</u></a> |
| <a href="#"><u>Event ID: ADM_sext</u></a> | <a href="#"><u>2-63</u></a> |

|                                       |                      |
|---------------------------------------|----------------------|
| <a href="#">Event ID: ADM_spwd</a>    | <a href="#">2-63</a> |
| <a href="#">Event ID: ADM_traf</a>    | <a href="#">2-63</a> |
| <a href="#">Event ID: ADM_traf</a>    | <a href="#">2-63</a> |
| <a href="#">Event ID: ADM_tsrv</a>    | <a href="#">2-64</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-64</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-64</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-65</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-65</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-65</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-66</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-66</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-66</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-67</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-67</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-67</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-68</a> |
| <a href="#">Event ID: ADM_undm</a>    | <a href="#">2-68</a> |
| <a href="#">Event ID: ADM_unod</a>    | <a href="#">2-68</a> |
| <a href="#">Event ID: ADM_wrnrm</a>   | <a href="#">2-68</a> |
| <a href="#">Event ID: ADM_xfer</a>    | <a href="#">2-69</a> |
| ■ <a href="#">VP — Voice Platform</a> | <a href="#">2-70</a> |
| <a href="#">Event ID: FXMON003</a>    | <a href="#">2-70</a> |
| <a href="#">Event ID: CGEN020</a>     | <a href="#">2-70</a> |
| <a href="#">Event ID: INIT002</a>     | <a href="#">2-70</a> |
| <a href="#">Event ID: INIT003</a>     | <a href="#">2-70</a> |
| <a href="#">Event ID: INIT004</a>     | <a href="#">2-71</a> |
| <a href="#">Event ID: VCHK001</a>     | <a href="#">2-71</a> |

|          |                                                     |                            |
|----------|-----------------------------------------------------|----------------------------|
| <b>3</b> | <b><a href="#">Alarm Log Entries</a></b>            | <b><a href="#">3-1</a></b> |
| ■        | <a href="#">Overview</a>                            | <a href="#">3-1</a>        |
| ■        | <a href="#">Purpose</a>                             | <a href="#">3-1</a>        |
| ■        | <a href="#">How to Use this Chapter</a>             | <a href="#">3-2</a>        |
| ■        | <a href="#">CA – Call Accounting System Alarms</a>  | <a href="#">3-3</a>        |
| ■        | <a href="#">EL–Enhanced-List Application Alarms</a> | <a href="#">3-4</a>        |
|          | <a href="#">DELIVTS Resource Type</a>               | <a href="#">3-4</a>        |
|          | <a href="#">Alarm Code: 1</a>                       | <a href="#">3-4</a>        |

|                                                         |                      |
|---------------------------------------------------------|----------------------|
| <a href="#">Event ID: ELA-delivts01</a>                 | <a href="#">3-4</a>  |
| <a href="#">Alarm Code: 2</a>                           | <a href="#">3-4</a>  |
| <a href="#">Event ID: ELA-delivts02</a>                 | <a href="#">3-4</a>  |
| <a href="#">Alarm Code: 3</a>                           | <a href="#">3-5</a>  |
| <a href="#">Event ID: ELA-delivts03</a>                 | <a href="#">3-5</a>  |
| <a href="#">Alarm Code: 4</a>                           | <a href="#">3-5</a>  |
| <a href="#">Event ID: ELA-delivts04</a>                 | <a href="#">3-5</a>  |
| <a href="#">REGISTRY Resource Type</a>                  | <a href="#">3-6</a>  |
| <a href="#">Alarm Code: 1</a>                           | <a href="#">3-6</a>  |
| <a href="#">Event ID: ELA-registry01</a>                | <a href="#">3-6</a>  |
| <a href="#">Alarm Code: 2</a>                           | <a href="#">3-6</a>  |
| <a href="#">Event ID: ELA-registry02</a>                | <a href="#">3-6</a>  |
| <a href="#">SHADOW Resource Type</a>                    | <a href="#">3-7</a>  |
| <a href="#">Alarm Code: 1</a>                           | <a href="#">3-7</a>  |
| <a href="#">Event ID: ELA-shadow01</a>                  | <a href="#">3-7</a>  |
| <a href="#">Alarm Code: 2</a>                           | <a href="#">3-7</a>  |
| <a href="#">Event ID: ELA-shadow02</a>                  | <a href="#">3-7</a>  |
| <a href="#">Alarm Code: 3</a>                           | <a href="#">3-8</a>  |
| <a href="#">Event ID: ELA-shadow03</a>                  | <a href="#">3-8</a>  |
| <a href="#">Alarm Code: 4</a>                           | <a href="#">3-8</a>  |
| <a href="#">Event ID: ELA-shadow04</a>                  | <a href="#">3-8</a>  |
| <a href="#">Alarm Code: 5</a>                           | <a href="#">3-9</a>  |
| <a href="#">Event ID: ELA-shadow05</a>                  | <a href="#">3-9</a>  |
| <a href="#">Alarm Code: 6</a>                           | <a href="#">3-9</a>  |
| <a href="#">Event ID: ELA-shadow06</a>                  | <a href="#">3-9</a>  |
| ■ <a href="#">LF– Lucent INTUITY Lodging FAX Alarms</a> | <a href="#">3-11</a> |
| <a href="#">SOFTWARE Resource Type</a>                  | <a href="#">3-11</a> |
| <a href="#">Alarm Code: 1</a>                           | <a href="#">3-11</a> |
| <a href="#">Event ID: LFAX00</a>                        | <a href="#">3-11</a> |
| <a href="#">Alarm Code: 4</a>                           | <a href="#">3-11</a> |
| <a href="#">Event ID: LFAX05</a>                        | <a href="#">3-11</a> |
| <a href="#">Alarm Code: 7</a>                           | <a href="#">3-11</a> |
| <a href="#">Event ID: LFAX01</a>                        | <a href="#">3-11</a> |
| <a href="#">Alarm Code: 9</a>                           | <a href="#">3-12</a> |
| <a href="#">Event ID: LFAX02</a>                        | <a href="#">3-12</a> |

|                                      |      |
|--------------------------------------|------|
| Alarm Code: 10                       | 3-12 |
| Event ID: LFAX06                     | 3-12 |
| Alarm Code: 10                       | 3-12 |
| Event ID: LFAX08                     | 3-12 |
| ■ LG – Lucent INTUITY Lodging Alarms | 3-13 |
| SOFTWARE Resource Type               | 3-13 |
| Alarm Code: 1                        | 3-13 |
| Event ID: LGADM00                    | 3-13 |
| Alarm Code: 1                        | 3-13 |
| Event ID: LGDIP00                    | 3-13 |
| Alarm Code: 1                        | 3-13 |
| Event ID: LGMSTR00                   | 3-13 |
| Alarm Code: 1                        | 3-14 |
| Event ID: LGRPT00                    | 3-14 |
| Alarm Code: 1                        | 3-14 |
| Event ID: PIM00                      | 3-14 |
| Alarm Code: 1                        | 3-14 |
| Event ID: PIM01                      | 3-14 |
| Alarm Code: 1                        | 3-15 |
| Event ID: PIM03                      | 3-15 |
| Alarm Code: 1                        | 3-15 |
| Event ID: PIM05                      | 3-15 |
| Alarm Code: 2                        | 3-15 |
| Event ID: LGDIP01                    | 3-15 |
| Alarm Code: 2                        | 3-16 |
| Event ID: PMS17                      | 3-16 |
| Alarm Code: 3                        | 3-16 |
| Event ID: LGDIP02                    | 3-16 |
| Alarm Code: 3                        | 3-16 |
| Event ID: PMS18                      | 3-16 |
| Alarm Code: 3                        | 3-17 |
| Event ID: PMS28                      | 3-17 |
| Alarm Code: 3                        | 3-17 |
| Event ID: PMS45                      | 3-17 |
| Alarm Code: 4                        | 3-17 |

|                                           |                             |
|-------------------------------------------|-----------------------------|
| <a href="#"><u>Event ID: LGADM01</u></a>  | <a href="#"><u>3-17</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Event ID: LGDIP04</u></a>  | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Event ID: LGMSTR01</u></a> | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Event ID: LGRPT01</u></a>  | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Event ID: PMS23</u></a>    | <a href="#"><u>3-18</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Event ID: PMS26</u></a>    | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Event ID: PMS32</u></a>    | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Alarm Code: 4</u></a>      | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Event ID: PIM04</u></a>    | <a href="#"><u>3-19</u></a> |
| <a href="#"><u>Alarm Code: 7</u></a>      | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Event ID: LGMSTR02</u></a> | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Alarm Code: 7</u></a>      | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Event ID: PMS19</u></a>    | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Alarm Code: 7</u></a>      | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Event ID: PMS21</u></a>    | <a href="#"><u>3-20</u></a> |
| <a href="#"><u>Alarm Code: 7</u></a>      | <a href="#"><u>3-21</u></a> |
| <a href="#"><u>Event ID: PIM06</u></a>    | <a href="#"><u>3-21</u></a> |
| <a href="#"><u>Alarm Code: 11</u></a>     | <a href="#"><u>3-21</u></a> |
| <a href="#"><u>Event ID: PMS01</u></a>    | <a href="#"><u>3-21</u></a> |
| <a href="#"><u>Alarm Code: 11</u></a>     | <a href="#"><u>3-22</u></a> |
| <a href="#"><u>Event ID: PMS02</u></a>    | <a href="#"><u>3-22</u></a> |
| <a href="#"><u>Alarm Code: 11</u></a>     | <a href="#"><u>3-23</u></a> |
| <a href="#"><u>Event ID: PMS04</u></a>    | <a href="#"><u>3-23</u></a> |
| <a href="#"><u>Alarm Code: 11</u></a>     | <a href="#"><u>3-24</u></a> |
| <a href="#"><u>Event ID: PMS05</u></a>    | <a href="#"><u>3-24</u></a> |
| <a href="#"><u>Alarm Code: 11</u></a>     | <a href="#"><u>3-25</u></a> |
| <a href="#"><u>Event ID: PMS06</u></a>    | <a href="#"><u>3-25</u></a> |
| <a href="#"><u>Alarm Code: 12</u></a>     | <a href="#"><u>3-26</u></a> |
| <a href="#"><u>Event ID: PMS08</u></a>    | <a href="#"><u>3-26</u></a> |

|                                        |                             |
|----------------------------------------|-----------------------------|
| <a href="#"><u>Alarm Code: 13</u></a>  | <a href="#"><u>3-26</u></a> |
| <a href="#"><u>Event ID: PMS10</u></a> | <a href="#"><u>3-26</u></a> |
| <a href="#"><u>Alarm Code: 13</u></a>  | <a href="#"><u>3-26</u></a> |
| <a href="#"><u>Event ID: PMS11</u></a> | <a href="#"><u>3-26</u></a> |
| <a href="#"><u>Alarm Code: 13</u></a>  | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Event ID: PMS38</u></a> | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Alarm Code: 14</u></a>  | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Event ID: PMS14</u></a> | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Event ID: PMS03</u></a> | <a href="#"><u>3-27</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-28</u></a> |
| <a href="#"><u>Event ID: PMS09</u></a> | <a href="#"><u>3-28</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Event ID: PMS15</u></a> | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Event ID: PMS16</u></a> | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Event ID: PMS27</u></a> | <a href="#"><u>3-29</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Event ID: PMS29</u></a> | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Event ID: PMS30</u></a> | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Event ID: PMS31</u></a> | <a href="#"><u>3-30</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Event ID: PMS33</u></a> | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Event ID: PMS35</u></a> | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Alarm Code: 15</u></a>  | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Event ID: PMS39</u></a> | <a href="#"><u>3-31</u></a> |
| <a href="#"><u>Alarm Code: 16</u></a>  | <a href="#"><u>3-32</u></a> |
| <a href="#"><u>Event ID: PMS20</u></a> | <a href="#"><u>3-32</u></a> |
| <a href="#"><u>Alarm Code: 16</u></a>  | <a href="#"><u>3-32</u></a> |
| <a href="#"><u>Event ID: PMS22</u></a> | <a href="#"><u>3-32</u></a> |
| <a href="#"><u>Alarm Code: 16</u></a>  | <a href="#"><u>3-32</u></a> |

|                                           |             |
|-------------------------------------------|-------------|
| <u>Event ID: PMS24</u>                    | <u>3-32</u> |
| <u>Alarm Code: 16</u>                     | <u>3-33</u> |
| <u>Event ID: PMS25</u>                    | <u>3-33</u> |
| ■ <u>MT – Maintenance Platform Alarms</u> | <u>3-34</u> |
| <u>ALARM_ORIG Resource Type</u>           | <u>3-34</u> |
| <u>Alarm Code: 0</u>                      | <u>3-34</u> |
| <u>Event ID: ALARM00001, ALARM00002</u>   | <u>3-34</u> |
| <u>Alarm Code: 1</u>                      | <u>3-34</u> |
| <u>Event ID: ALARM00003</u>               | <u>3-34</u> |
| <u>BACKUP Resource Type</u>               | <u>3-35</u> |
| <u>Alarm Code: 1, 2</u>                   | <u>3-35</u> |
| <u>Event ID: BKRST024, BKRST025</u>       | <u>3-35</u> |
| <u>DISK Resource Type</u>                 | <u>3-35</u> |
| <u>Alarm Code: 0</u>                      | <u>3-35</u> |
| <u>Event ID: FSY001</u>                   | <u>3-35</u> |
| <u>MIRROR Resource Type</u>               | <u>3-36</u> |
| <u>Alarm Code: 0</u>                      | <u>3-36</u> |
| <u>Event ID: FSY002</u>                   | <u>3-36</u> |
| <u>Alarm Code: 1</u>                      | <u>3-36</u> |
| <u>Event ID: FSY003</u>                   | <u>3-36</u> |
| <u>RESTORE Resource Type</u>              | <u>3-36</u> |
| <u>Alarm Code: 1</u>                      | <u>3-36</u> |
| <u>Event ID: BKRST026</u>                 | <u>3-36</u> |
| <u>TAPE_DRIVE Resource Type</u>           | <u>3-37</u> |
| <u>Alarm Code: 1</u>                      | <u>3-37</u> |
| <u>Event ID: BKRST021</u>                 | <u>3-37</u> |
| <u>Alarm Code: 2</u>                      | <u>3-37</u> |
| <u>Event ID: BKRST022</u>                 | <u>3-37</u> |
| <u>UNIX Resource Type</u>                 | <u>3-38</u> |
| <u>Alarm Code: 0</u>                      | <u>3-38</u> |
| <u>Event ID: FSY004</u>                   | <u>3-38</u> |
| <u>Alarm Code: 1</u>                      | <u>3-38</u> |
| <u>Event ID: FSY005</u>                   | <u>3-38</u> |
| <u>Alarm Code: 2</u>                      | <u>3-38</u> |
| <u>Event ID: FSY006</u>                   | <u>3-38</u> |

|                          |      |
|--------------------------|------|
| Alarm Code: 3            | 3-39 |
| Event ID: FSY007         | 3-39 |
| Alarm Code: 4            | 3-39 |
| Event ID: FSY008         | 3-39 |
| Alarm Code: 5            | 3-39 |
| Event ID: FSY009         | 3-39 |
| Alarm Code: 6            | 3-40 |
| Event ID: FSY010         | 3-40 |
| Alarm Code: 7            | 3-40 |
| Event ID: FSY011         | 3-40 |
| ■ NW – Networking Alarms | 3-41 |
| SOFTWARE Resource Type   | 3-41 |
| Alarm Code: 0000         | 3-41 |
| Event ID: SWIPROCDEAD    | 3-41 |
| Alarm Code: 0001         | 3-41 |
| Event ID: SWNONSTD       | 3-41 |
| Alarm Code: 0002         | 3-41 |
| Event ID: SWCOREDUMP     | 3-41 |
| Alarm Code: 0003         | 3-42 |
| Event ID: SWINITFAIL     | 3-42 |
| Alarm Code: 0004         | 3-42 |
| Event ID: SWNWVMDBSYNC   | 3-42 |
| Alarm Code: 0005         | 3-42 |
| Event ID: SWANECONN      | 3-42 |
| Alarm Code: 0006         | 3-44 |
| Event ID: SWXMQFILL      | 3-44 |
| Alarm Code: 1000         | 3-45 |
| Event ID: SWNDSTARTFAIL  | 3-45 |
| Alarm Code: 1001         | 3-46 |
| Event ID: SWNDOPENFAIL   | 3-46 |
| Alarm Code: 1002         | 3-46 |
| Event ID: SWNDINTERR     | 3-46 |
| Alarm Code: 1003         | 3-46 |
| Event ID: SWAUDDBERR     | 3-46 |
| Alarm Code: 1004         | 3-46 |



|                                                  |                      |
|--------------------------------------------------|----------------------|
| <a href="#">Event ID: SWNDDBERR</a>              | <a href="#">3-46</a> |
| <a href="#">NETWK_BD Resource Type</a>           | <a href="#">3-47</a> |
| <a href="#">Alarm Code: 2000</a>                 | <a href="#">3-47</a> |
| <a href="#">Event ID: HWANEACCX</a>              | <a href="#">3-47</a> |
| <a href="#">NETWK_CHAN Resource Type</a>         | <a href="#">3-47</a> |
| <a href="#">Alarm Code: 2001</a>                 | <a href="#">3-47</a> |
| <a href="#">Event ID: HWANEACCXC</a>             | <a href="#">3-47</a> |
| ■ <a href="#">SW – Switch Integration Alarms</a> | <a href="#">3-48</a> |
| <a href="#">DCIU_LINK Resource Type</a>          | <a href="#">3-48</a> |
| <a href="#">Alarm Code: 0</a>                    | <a href="#">3-48</a> |
| <a href="#">Event ID: DCIU001</a>                | <a href="#">3-48</a> |
| <a href="#">Alarm Code: 1</a>                    | <a href="#">3-49</a> |
| <a href="#">Event ID: DCIU002</a>                | <a href="#">3-49</a> |
| <a href="#">Alarm Code: 2</a>                    | <a href="#">3-50</a> |
| <a href="#">Event ID: DCIU004</a>                | <a href="#">3-50</a> |
| <a href="#">Alarm Code: 3</a>                    | <a href="#">3-50</a> |
| <a href="#">Event ID: DCIU006</a>                | <a href="#">3-50</a> |
| <a href="#">Alarm Code: 4</a>                    | <a href="#">3-50</a> |
| <a href="#">Event ID: DCIU003</a>                | <a href="#">3-50</a> |
| <a href="#">Alarm Code: 5</a>                    | <a href="#">3-51</a> |
| <a href="#">Event ID: DCIU012</a>                | <a href="#">3-51</a> |
| <a href="#">GPSC_BOARD Resource Type</a>         | <a href="#">3-51</a> |
| <a href="#">Alarm Code: 0</a>                    | <a href="#">3-51</a> |
| <a href="#">Event ID: DCIU005</a>                | <a href="#">3-51</a> |
| <a href="#">SOFTWARE Resource Type</a>           | <a href="#">3-51</a> |
| <a href="#">Alarm Code: 000</a>                  | <a href="#">3-51</a> |
| <a href="#">Event ID: ML000</a>                  | <a href="#">3-51</a> |
| <a href="#">Alarm Code: 001</a>                  | <a href="#">3-52</a> |
| <a href="#">Event ID: ML001</a>                  | <a href="#">3-52</a> |
| <a href="#">Alarm Code: 002</a>                  | <a href="#">3-52</a> |
| <a href="#">Event ID: ML002</a>                  | <a href="#">3-52</a> |
| <a href="#">Alarm Code: 003</a>                  | <a href="#">3-52</a> |
| <a href="#">Event ID: ML003</a>                  | <a href="#">3-52</a> |
| <a href="#">Alarm Code: 004</a>                  | <a href="#">3-53</a> |
| <a href="#">Event ID: ML004</a>                  | <a href="#">3-53</a> |

|                   |      |
|-------------------|------|
| Alarm Code: 005   | 3-53 |
| Event ID: ML005   | 3-53 |
| Alarm Code: 007   | 3-53 |
| Event ID: ML007   | 3-53 |
| Alarm Code: 008   | 3-54 |
| Event ID: ML008   | 3-54 |
| Alarm Code: 009   | 3-54 |
| Event ID: ML009   | 3-54 |
| Alarm Code: 010   | 3-54 |
| Event ID: ML010   | 3-54 |
| Alarm Code: 011   | 3-55 |
| Event ID: ML011   | 3-55 |
| Alarm Code: 012   | 3-55 |
| Event ID: ML012   | 3-55 |
| Alarm Code: 013   | 3-56 |
| Event ID: ML013   | 3-56 |
| SW Resource Type  | 3-56 |
| Alarm Code: 1     | 3-56 |
| Event ID: SMDI001 | 3-56 |
| Alarm Code: 1     | 3-56 |
| Event ID: SMDI002 | 3-56 |
| Alarm Code: 1     | 3-57 |
| Event ID: SMDI003 | 3-57 |
| Alarm Code: 1     | 3-57 |
| Event ID: SMDI004 | 3-57 |
| Alarm Code: 1     | 3-57 |
| Event ID: SW200   | 3-57 |
| Alarm Code: 1     | 3-58 |
| Event ID: VB518   | 3-58 |
| Alarm Code: 1     | 3-58 |
| Event ID: VB529   | 3-58 |
| Alarm Code: 1     | 3-58 |
| Event ID: VB531   | 3-58 |
| Alarm Code: 1     | 3-59 |
| Event ID: WTR003  | 3-59 |

|                       |      |
|-----------------------|------|
| Alarm Code: 11        | 3-59 |
| Event ID: WTR000      | 3-59 |
| Alarm Code: 11        | 3-59 |
| Event ID: WTR001      | 3-59 |
| Alarm Code: 11        | 3-59 |
| Event ID: WTR002      | 3-59 |
| Alarm Code: 12        | 3-60 |
| Event ID: WTR004      | 3-60 |
| Alarm Code: 12        | 3-60 |
| Event ID: WTR005      | 3-60 |
| Alarm Code: 12        | 3-60 |
| Event ID: WTR006      | 3-60 |
| Alarm Code: 111       | 3-61 |
| Event ID: RDR000      | 3-61 |
| Alarm Code: 111       | 3-61 |
| Event ID: RDR001      | 3-61 |
| Alarm Code: 111       | 3-62 |
| Event ID: RDR002      | 3-62 |
| SWIN Resource Type    | 3-62 |
| Alarm Code: 0         | 3-62 |
| Event ID: SW140       | 3-62 |
| Alarm Code: 0         | 3-62 |
| Event ID: SW240       | 3-62 |
| Alarm Code: 0         | 3-63 |
| Event ID: SW250       | 3-63 |
| Alarm Code: 0         | 3-63 |
| Event ID: SW260       | 3-63 |
| Alarm Code: 1         | 3-63 |
| Event ID: SW200       | 3-63 |
| SWIN_IF Resource Type | 3-64 |
| Alarm Code: 0         | 3-64 |
| Event ID: IF100       | 3-64 |
| SWINDIP Resource Type | 3-64 |
| Alarm Code: 1         | 3-64 |
| Event ID: SE140       | 3-64 |

|                                              |      |
|----------------------------------------------|------|
| <u>Alarm Code: 2</u>                         | 3-64 |
| <u>Event ID: SE150</u>                       | 3-64 |
| <u>SWIN SERIAL Resource Type</u>             | 3-65 |
| <u>Alarm Code: 1</u>                         | 3-65 |
| <u>Event ID: TY100</u>                       | 3-65 |
| <u>VBPC_BOARD Resource Type</u>              | 3-65 |
| <u>Alarm Code: 1</u>                         | 3-65 |
| <u>Event ID: VB500</u>                       | 3-65 |
| <u>Alarm Code: 1</u>                         | 3-66 |
| <u>Event ID: VB502</u>                       | 3-66 |
| <u>Alarm Code: 1</u>                         | 3-66 |
| <u>Event ID: VB503</u>                       | 3-66 |
| <u>Alarm Code: 1</u>                         | 3-66 |
| <u>Event ID: VB511</u>                       | 3-66 |
| <u>Alarm Code: 1</u>                         | 3-67 |
| <u>Event ID: VB527</u>                       | 3-67 |
| <u>Alarm Code: 1</u>                         | 3-67 |
| <u>Event ID: VB532</u>                       | 3-67 |
| <u>Alarm Code: 1</u>                         | 3-67 |
| <u>Event ID: VB533</u>                       | 3-67 |
| <u>VBPC_CARR Resource Type</u>               | 3-68 |
| <u>Alarm Code: 1</u>                         | 3-68 |
| <u>Event ID: VB506</u>                       | 3-68 |
| <u>WRITER Resource Type</u>                  | 3-68 |
| <u>Alarm Code: 1</u>                         | 3-68 |
| <u>Event ID: TY110</u>                       | 3-68 |
| ■ <u>VM – INTUITY AUDIX Messaging Alarms</u> | 3-69 |
| <u>ALARM_ORIG Resource Type</u>              | 3-69 |
| <u>Alarm Code: 0</u>                         | 3-69 |
| <u>Event ID: ALARM_ORIG0000</u>              | 3-69 |
| <u>ANNC Resource Type</u>                    | 3-69 |
| <u>Alarm Code: 4</u>                         | 3-69 |
| <u>Event ID: ANNC004</u>                     | 3-69 |
| <u>AUD_BKUP Resource Type</u>                | 3-70 |
| <u>Alarm Code: 0</u>                         | 3-70 |

|                                                 |      |
|-------------------------------------------------|------|
| <u>Event ID: AUD_BKUP0</u>                      | 3-70 |
| <u>AUDIT Resource Type</u>                      | 3-70 |
| <u>Alarm Code: 0</u>                            | 3-70 |
| <u>Event ID: AUDIT0000</u>                      | 3-70 |
| <u>Alarm Code: 1</u>                            | 3-70 |
| <u>Event ID: AUDIT0001</u>                      | 3-70 |
| <u>Alarm Code: 100</u>                          | 3-71 |
| <u>Event ID: AUDIT0100</u>                      | 3-71 |
| <u>Alarm Code: 101</u>                          | 3-71 |
| <u>Event ID: AUDIT0101</u>                      | 3-71 |
| <u>Alarm Code: 102</u>                          | 3-71 |
| <u>Event ID: AUDIT0102</u>                      | 3-71 |
| <u>Alarm Code: 103</u>                          | 3-71 |
| <u>Event ID: AUDIT0103</u>                      | 3-71 |
| <u>AUDIX_FS Resource Type</u>                   | 3-72 |
| <u>Alarm Code: 0</u>                            | 3-72 |
| <u>Event ID: AUDIX_FS0000</u>                   | 3-72 |
| <u>Alarm Code: 1</u>                            | 3-72 |
| <u>Event ID: AUDIX_FS0001</u>                   | 3-72 |
| <u>Alarm Code: 2</u>                            | 3-73 |
| <u>Event ID: AUDIX_FS0002</u>                   | 3-73 |
| <u>Alarm Code: 3</u>                            | 3-74 |
| <u>Event ID: AUDIX_FS0003</u>                   | 3-74 |
| <u>Alarm Code: 4</u>                            | 3-74 |
| <u>Event ID: AUDIX_FS0004</u>                   | 3-74 |
| <u>Alarm Code: 5</u>                            | 3-75 |
| <u>Event ID: AUDIX_FS0005</u>                   | 3-75 |
| <u>Alarm Code: 6</u>                            | 3-75 |
| <u>Event ID: AUDIX_FS0006</u>                   | 3-75 |
| <u>Alarm Code: 7</u>                            | 3-75 |
| <u>Event ID: AUDIX_FS0007</u>                   | 3-75 |
| <u>AUD_RESTOR Resource Type</u>                 | 3-76 |
| <u>Alarm Code: 0</u>                            | 3-76 |
| <u>Event ID: AUD_RESTORE1, AUD_RESTORE23-76</u> |      |
| <u>FAXAP Resource Type</u>                      | 3-76 |

|                                                       |      |
|-------------------------------------------------------|------|
| Alarm Code: 0                                         | 3-76 |
| Event ID: FAXAP000                                    | 3-76 |
| LANINTF Resource Type                                 | 3-76 |
| Alarm Code: 0                                         | 3-76 |
| Event ID: AMAPI0026, LANINTF0000                      | 3-76 |
| Alarm Code: 1                                         | 3-77 |
| Event ID: AMAPI0279, LANINTF0001                      | 3-77 |
| RPCTEST Resource Type                                 | 3-77 |
| Alarm Code: 001                                       | 3-77 |
| Event ID: RPCTEST001                                  | 3-77 |
| SERVER Resource Type                                  | 3-77 |
| Alarm Code: 900                                       | 3-77 |
| Event ID: SERVER0900                                  | 3-77 |
| Alarm Code: 901                                       | 3-78 |
| Event ID: SERVER0901                                  | 3-78 |
| SOFTWARE Resource Type                                | 3-78 |
| Alarm Code: 0, 1, 2                                   | 3-78 |
| Event ID: SOFTWARE0000, SOFTWARE0001,<br>SOFTWARE0002 | 3-78 |
| Alarm Code: 100                                       | 3-78 |
| Event ID: SOFTWARE0100                                | 3-78 |
| Alarm Code: 101                                       | 3-79 |
| Event ID: SOFTWARE0101                                | 3-79 |
| Alarm Code: 201                                       | 3-79 |
| Event ID: SOFTWARE0201                                | 3-79 |
| Alarm Code: 202                                       | 3-79 |
| Event ID: SOFTWARE0202                                | 3-79 |
| Alarm Code: 203                                       | 3-80 |
| Event ID: SOFTWARE0203, SOFTWARE02023-80              |      |
| Alarm Code: 204                                       | 3-80 |
| Event ID: SOFTWARE0204, SOFTWARE02023-80              |      |
| Alarm Code: 601                                       | 3-80 |
| Event ID: SOFTWARE0601                                | 3-80 |
| Alarm Code: 602                                       | 3-81 |
| Event ID: SOFTWARE0102, SOFTWARE06023-81              |      |
| Alarm Code: 6000                                      | 3-81 |

|                                        |                      |
|----------------------------------------|----------------------|
| <a href="#">Event ID: SOFTWARE6000</a> | <a href="#">3-81</a> |
| <a href="#">Alarm Code: 6001</a>       | <a href="#">3-81</a> |
| <a href="#">Event ID: SOFTWARE6001</a> | <a href="#">3-81</a> |
| <a href="#">Alarm Code: 6600</a>       | <a href="#">3-82</a> |
| <a href="#">Event ID: SOFTWARE6600</a> | <a href="#">3-82</a> |
| <a href="#">Alarm Code: 6603</a>       | <a href="#">3-82</a> |
| <a href="#">Event ID: SOFTWARE6603</a> | <a href="#">3-82</a> |
| <a href="#">Alarm Code: 6604</a>       | <a href="#">3-83</a> |
| <a href="#">Event ID: SOFTWARE6604</a> | <a href="#">3-83</a> |
| <a href="#">Alarm Code: 6605</a>       | <a href="#">3-83</a> |
| <a href="#">Event ID: SOFTWARE6605</a> | <a href="#">3-83</a> |
| <a href="#">Alarm Code: 6606</a>       | <a href="#">3-84</a> |
| <a href="#">Event ID: SOFTWARE6606</a> | <a href="#">3-84</a> |
| <a href="#">Alarm Code: 6607</a>       | <a href="#">3-84</a> |
| <a href="#">Event ID: SOFTWARE6607</a> | <a href="#">3-84</a> |
| <a href="#">Alarm Code: 6608</a>       | <a href="#">3-84</a> |
| <a href="#">Event ID: SOFTWARE6608</a> | <a href="#">3-84</a> |
| <a href="#">Alarm Code: 6609</a>       | <a href="#">3-85</a> |
| <a href="#">Event ID: SOFTWARE6609</a> | <a href="#">3-85</a> |
| <a href="#">Alarm Code: 6610</a>       | <a href="#">3-85</a> |
| <a href="#">Event ID: SOFTWARE6610</a> | <a href="#">3-85</a> |
| <a href="#">Alarm Code: 6611</a>       | <a href="#">3-85</a> |
| <a href="#">Event ID: SOFTWARE6611</a> | <a href="#">3-85</a> |
| <a href="#">Alarm Code: 6612</a>       | <a href="#">3-86</a> |
| <a href="#">Event ID: SOFTWARE6612</a> | <a href="#">3-86</a> |
| <a href="#">Alarm Code: 6613</a>       | <a href="#">3-86</a> |
| <a href="#">Event ID: SOFTWARE6613</a> | <a href="#">3-86</a> |
| <a href="#">Alarm Code: 6614</a>       | <a href="#">3-86</a> |
| <a href="#">Event ID: SOFTWARE6614</a> | <a href="#">3-86</a> |
| <a href="#">Alarm Code: 7701</a>       | <a href="#">3-87</a> |
| <a href="#">Event ID: SOFTWARE7701</a> | <a href="#">3-87</a> |
| <a href="#">Alarm Code: 7702</a>       | <a href="#">3-87</a> |
| <a href="#">Event ID: SOFTWARE7702</a> | <a href="#">3-87</a> |
| <a href="#">Alarm Code: 7703</a>       | <a href="#">3-87</a> |
| <a href="#">Event ID: SOFTWARE7703</a> | <a href="#">3-87</a> |

|                                        |                      |
|----------------------------------------|----------------------|
| <a href="#">Alarm Code: 7704</a>       | <a href="#">3-88</a> |
| <a href="#">Event ID: SOFTWARE7704</a> | <a href="#">3-88</a> |
| <a href="#">Alarm Code: 7705</a>       | <a href="#">3-88</a> |
| <a href="#">Event ID: SOFTWARE7705</a> | <a href="#">3-88</a> |
| <a href="#">Alarm Code: 7706</a>       | <a href="#">3-88</a> |
| <a href="#">Event ID: SOFTWARE7706</a> | <a href="#">3-88</a> |
| <a href="#">Alarm Code: 7707</a>       | <a href="#">3-89</a> |
| <a href="#">Event ID: SOFTWARE7707</a> | <a href="#">3-89</a> |
| <a href="#">Alarm Code: 7708</a>       | <a href="#">3-89</a> |
| <a href="#">Event ID: SOFTWARE7708</a> | <a href="#">3-89</a> |
| <a href="#">Alarm Code: 7709</a>       | <a href="#">3-89</a> |
| <a href="#">Event ID: SOFTWARE7709</a> | <a href="#">3-89</a> |
| <a href="#">Alarm Code: 7710</a>       | <a href="#">3-90</a> |
| <a href="#">Event ID: SOFTWARE7710</a> | <a href="#">3-90</a> |
| <a href="#">Alarm Code: 7712</a>       | <a href="#">3-90</a> |
| <a href="#">Event ID: SOFTWARE7712</a> | <a href="#">3-90</a> |
| <a href="#">Alarm Code: 7713</a>       | <a href="#">3-90</a> |
| <a href="#">Event ID: SOFTWARE7713</a> | <a href="#">3-90</a> |
| <a href="#">Alarm Code: 7714</a>       | <a href="#">3-91</a> |
| <a href="#">Event ID: SOFTWARE7714</a> | <a href="#">3-91</a> |
| <a href="#">Alarm Code: 7715</a>       | <a href="#">3-91</a> |
| <a href="#">Event ID: SOFTWARE7715</a> | <a href="#">3-91</a> |
| <a href="#">Alarm Code: 7716</a>       | <a href="#">3-91</a> |
| <a href="#">Event ID: SOFTWARE7716</a> | <a href="#">3-91</a> |
| <a href="#">Alarm Code: 7717</a>       | <a href="#">3-92</a> |
| <a href="#">Event ID: SOFTWARE7717</a> | <a href="#">3-92</a> |
| <a href="#">VMDIRS Resource Type</a>   | <a href="#">3-92</a> |
| <a href="#">Alarm Code: 0</a>          | <a href="#">3-92</a> |
| <a href="#">Event ID: VMDIRS_0</a>     | <a href="#">3-92</a> |
| <a href="#">VM_PT Resource Type</a>    | <a href="#">3-92</a> |
| <a href="#">Alarm Code: 3</a>          | <a href="#">3-92</a> |
| <a href="#">Event ID: VM_PT0003</a>    | <a href="#">3-92</a> |
| <a href="#">Alarm Code: 4</a>          | <a href="#">3-93</a> |
| <a href="#">Event ID: VM_PT0004</a>    | <a href="#">3-93</a> |
| <a href="#">Alarm Code: 5</a>          | <a href="#">3-93</a> |



|                                              |                      |
|----------------------------------------------|----------------------|
| <a href="#">Event ID: VM_PT0005</a>          | <a href="#">3-93</a> |
| ■ <a href="#">VP – Voice Platform Alarms</a> | <a href="#">3-94</a> |
| <a href="#">CGEN Resource Type</a>           | <a href="#">3-94</a> |
| <a href="#">Alarm Code: 1</a>                | <a href="#">3-94</a> |
| <a href="#">Event ID: CGEN001</a>            | <a href="#">3-94</a> |
| <a href="#">Alarm Code: 2</a>                | <a href="#">3-94</a> |
| <a href="#">Event ID: CGEN002</a>            | <a href="#">3-94</a> |
| <a href="#">Alarm Code: 3</a>                | <a href="#">3-95</a> |
| <a href="#">Event ID: CGEN003</a>            | <a href="#">3-95</a> |
| <a href="#">Alarm Code: 4</a>                | <a href="#">3-95</a> |
| <a href="#">Event ID: CGEN004</a>            | <a href="#">3-95</a> |
| <a href="#">Alarm Code: 5</a>                | <a href="#">3-95</a> |
| <a href="#">Event ID: CGEN005</a>            | <a href="#">3-95</a> |
| <a href="#">Alarm Code: 6</a>                | <a href="#">3-96</a> |
| <a href="#">Event ID: CGEN006</a>            | <a href="#">3-96</a> |
| <a href="#">Alarm Code: 7</a>                | <a href="#">3-96</a> |
| <a href="#">Event ID: CGEN007</a>            | <a href="#">3-96</a> |
| <a href="#">Alarm Code: 8</a>                | <a href="#">3-96</a> |
| <a href="#">Event ID: CGEN008</a>            | <a href="#">3-96</a> |
| <a href="#">Alarm Code: 11</a>               | <a href="#">3-97</a> |
| <a href="#">Event ID: CGEN011</a>            | <a href="#">3-97</a> |
| <a href="#">Alarm Code: 12</a>               | <a href="#">3-97</a> |
| <a href="#">Event ID: CGEN012</a>            | <a href="#">3-97</a> |
| <a href="#">Alarm Code: 13</a>               | <a href="#">3-97</a> |
| <a href="#">Event ID: CGEN013</a>            | <a href="#">3-97</a> |
| <a href="#">Alarm Code: 14</a>               | <a href="#">3-98</a> |
| <a href="#">Event ID: CGEN014</a>            | <a href="#">3-98</a> |
| <a href="#">Alarm Code: 17</a>               | <a href="#">3-98</a> |
| <a href="#">Event ID: CGEN017</a>            | <a href="#">3-98</a> |
| <a href="#">Alarm Code: 18</a>               | <a href="#">3-98</a> |
| <a href="#">Event ID: CGEN018</a>            | <a href="#">3-98</a> |
| <a href="#">Alarm Code: 21</a>               | <a href="#">3-99</a> |
| <a href="#">Event ID: CGEN021</a>            | <a href="#">3-99</a> |
| <a href="#">Alarm Code: 22</a>               | <a href="#">3-99</a> |
| <a href="#">Event ID: CGEN022</a>            | <a href="#">3-99</a> |

|                                         |                       |
|-----------------------------------------|-----------------------|
| <a href="#">Alarm Code: 24</a>          | <a href="#">3-99</a>  |
| <a href="#">Event ID: M_CGEN024</a>     | <a href="#">3-99</a>  |
| <a href="#">Alarm Code: 25</a>          | <a href="#">3-100</a> |
| <a href="#">Event ID: CGEN025</a>       | <a href="#">3-100</a> |
| <a href="#">Alarm Code: 27</a>          | <a href="#">3-100</a> |
| <a href="#">Event ID: CGEN027</a>       | <a href="#">3-100</a> |
| <a href="#">Alarm Code: 28</a>          | <a href="#">3-100</a> |
| <a href="#">Event ID: CGEN028</a>       | <a href="#">3-100</a> |
| <a href="#">Alarm Code: 31</a>          | <a href="#">3-101</a> |
| <a href="#">Event ID: CGEN031</a>       | <a href="#">3-101</a> |
| <a href="#">Alarm Code: 34</a>          | <a href="#">3-101</a> |
| <a href="#">Event ID: CGEN034</a>       | <a href="#">3-101</a> |
| <a href="#">Alarm Code: 37</a>          | <a href="#">3-101</a> |
| <a href="#">Event ID: CGEN037</a>       | <a href="#">3-101</a> |
| <a href="#">Alarm Code: 38</a>          | <a href="#">3-102</a> |
| <a href="#">Event ID: CGEN038</a>       | <a href="#">3-102</a> |
| <a href="#">Alarm Code: 39</a>          | <a href="#">3-102</a> |
| <a href="#">Event ID: CGEN039</a>       | <a href="#">3-102</a> |
| <a href="#">CHRIN Resource Type</a>     | <a href="#">3-102</a> |
| <a href="#">Alarm Code: 1</a>           | <a href="#">3-102</a> |
| <a href="#">Event ID: CHRIN001</a>      | <a href="#">3-102</a> |
| <a href="#">CRON Resource Type</a>      | <a href="#">3-103</a> |
| <a href="#">Alarm Code: 2</a>           | <a href="#">3-103</a> |
| <a href="#">Event ID: CRON002</a>       | <a href="#">3-103</a> |
| <a href="#">DSKMG System Messages</a>   | <a href="#">3-103</a> |
| <a href="#">Alarm Code: 1</a>           | <a href="#">3-103</a> |
| <a href="#">Event ID: DSKMG001</a>      | <a href="#">3-103</a> |
| <a href="#">Alarm Code: 2</a>           | <a href="#">3-103</a> |
| <a href="#">Event ID: DSKMG002</a>      | <a href="#">3-103</a> |
| <a href="#">FXAUDOANM Resource Type</a> | <a href="#">3-104</a> |
| <a href="#">Alarm Code: 17</a>          | <a href="#">3-104</a> |
| <a href="#">Event ID: FXAUD017</a>      | <a href="#">3-104</a> |
| <a href="#">FXMONOAMN Resource Type</a> | <a href="#">3-104</a> |
| <a href="#">Alarm Code: 02</a>          | <a href="#">3-104</a> |
| <a href="#">Event ID: FXMON002</a>      | <a href="#">3-104</a> |

|                         |       |
|-------------------------|-------|
| Alarm Code: 10          | 3-104 |
| Event ID: FXMON010      | 3-104 |
| Alarm Code: 11          | 3-105 |
| Event ID: FXMON011      | 3-105 |
| Alarm Code: 12          | 3-105 |
| Event ID: FXMON012      | 3-105 |
| Alarm Code: 13          | 3-105 |
| Event ID: FXMON013      | 3-105 |
| Alarm Code: 14          | 3-106 |
| Event ID: FXMON014      | 3-106 |
| Alarm Code: 16          | 3-106 |
| Event ID: FXMON016      | 3-106 |
| Alarm Code: 20          | 3-106 |
| Event ID: FXMON020      | 3-106 |
| FXNSFOANM Resource Type | 3-107 |
| Alarm Code: 1           | 3-107 |
| Event ID: FXNSF01       | 3-107 |
| Alarm Code: 2           | 3-107 |
| Event ID: FXNSF02       | 3-107 |
| Alarm Code: 3           | 3-107 |
| Event ID: FXNSF03       | 3-107 |
| Alarm Code: 4           | 3-108 |
| Event ID: FXNSF04       | 3-108 |
| INIT Resource Type      | 3-108 |
| Alarm Code: 1           | 3-108 |
| Event ID: INIT001       | 3-108 |
| Alarm Code: 5           | 3-108 |
| Event ID: INIT005       | 3-108 |
| Alarm Code: 6           | 3-109 |
| Event ID: INIT006       | 3-109 |
| Alarm Code: 9           | 3-109 |
| Event ID: INIT009       | 3-109 |
| MTC Resource Type       | 3-109 |
| Alarm Code: 1           | 3-109 |
| Event ID: MTC001        | 3-109 |

|                                 |       |
|---------------------------------|-------|
| <u>Alarm Code: 6</u>            | 3-110 |
| <u>Event ID: MTC006</u>         | 3-110 |
| <u>Alarm Code: 7</u>            | 3-110 |
| <u>Event ID: MTC007</u>         | 3-110 |
| <u>Alarm Code: 10</u>           | 3-110 |
| <u>Event ID: MTC010</u>         | 3-110 |
| <u>Alarm Code: 13</u>           | 3-111 |
| <u>Event ID: MTC013</u>         | 3-111 |
| <u>SF_VXMDI Resource Type</u>   | 3-111 |
| <u>Alarm Code: 2</u>            | 3-111 |
| <u>Event ID: VXMDI002</u>       | 3-111 |
| <u>Alarm Code: 3</u>            | 3-111 |
| <u>Event ID: VXMDI003</u>       | 3-111 |
| <u>Alarm Code: 4</u>            | 3-112 |
| <u>Event ID: VXMDI004</u>       | 3-112 |
| <u>Alarm Code: 5</u>            | 3-112 |
| <u>Event ID: VXMDI005</u>       | 3-112 |
| <u>SOFTWARE Resource Type</u>   | 3-112 |
| <u>Alarm Code: 4</u>            | 3-112 |
| <u>Event ID: SPDM002</u>        | 3-112 |
| <u>Alarm Code: 4</u>            | 3-113 |
| <u>Event ID: SPDM003</u>        | 3-113 |
| <u>Alarm Code: 4</u>            | 3-113 |
| <u>Event ID: SPDM005</u>        | 3-113 |
| <u>Alarm Code: 4</u>            | 3-113 |
| <u>Event ID: SPDM006</u>        | 3-113 |
| <u>Alarm Code: 15</u>           | 3-114 |
| <u>Event ID: SPDM007</u>        | 3-114 |
| <u>SPDSKMGR Events Messages</u> | 3-114 |
| <u>Alarm Code: 2</u>            | 3-114 |
| <u>Event ID: VCHK002</u>        | 3-114 |
| <u>SPEECH_FS Resource Type</u>  | 3-115 |
| <u>Alarm Code: 1</u>            | 3-115 |
| <u>Event ID: SPDM001</u>        | 3-115 |
| <u>THR Resource Type</u>        | 3-115 |

|                           |              |
|---------------------------|--------------|
| <u>Alarm Code: 2</u>      | 3-115        |
| <u>Event ID: THR002</u>   | 3-115        |
| <u>Alarm Code: 3</u>      | 3-116        |
| <u>Event ID: THR003</u>   | 3-116        |
| <u>Alarm Code: 4</u>      | 3-116        |
| <u>Event ID: THR004</u>   | 3-116        |
| <u>TRIP Resource Type</u> | 3-116        |
| <u>Alarm Code: 1</u>      | 3-116        |
| <u>Event ID: TRIP001</u>  | 3-116        |
| <u>Alarm Code: 3</u>      | 3-117        |
| <u>Event ID: TRIP003</u>  | 3-117        |
| <u>Alarm Code: 4</u>      | 3-117        |
| <u>Event ID: TRIP004</u>  | 3-117        |
| <u>Alarm Code: 5</u>      | 3-118        |
| <u>Event ID: TRIP005</u>  | 3-118        |
| <u>UNIX Resource Type</u> | 3-119        |
| <u>Alarm Code: 2</u>      | 3-119        |
| <u>Event ID: UNIX002</u>  | 3-119        |
| <u>Alarm Code: 3</u>      | 3-119        |
| <u>Event ID: UNIX003</u>  | 3-119        |
| <u>Alarm Code: 4</u>      | <b>3-119</b> |
| <u>Event ID: UNIX004</u>  | 3-119        |
| <u>VROP Resource Type</u> | 3-120        |
| <u>Alarm Code: 2</u>      | 3-120        |
| <u>Event ID: VROP002</u>  | 3-120        |
| <u>Alarm Code: 4</u>      | 3-120        |
| <u>Event ID: VROP004</u>  | 3-120        |
| <u>Alarm Code: 5</u>      | 3-120        |
| <u>Event ID: VROP005</u>  | 3-120        |
| <u>Alarm Code: 6</u>      | 3-121        |
| <u>Event ID: VROP006</u>  | 3-121        |
| <u>Alarm Code: 7</u>      | 3-121        |
| <u>Event ID: VROP007</u>  | 3-121        |
| <u>Alarm Code: 10</u>     | 3-121        |
| <u>Event ID: VROP010</u>  | 3-121        |

|                                 |              |
|---------------------------------|--------------|
| <u>Alarm Code: 11</u>           | <u>3-122</u> |
| <u>Event ID: VROP011</u>        | <u>3-122</u> |
| <u>Alarm Code: 12</u>           | <u>3-122</u> |
| <u>Event ID: VROP12</u>         | <u>3-122</u> |
| <u>Alarm Code: 14</u>           | <u>3-122</u> |
| <u>Event ID: VROP014</u>        | <u>3-122</u> |
| <u>Alarm Code: 15</u>           | <u>3-123</u> |
| <u>Event ID: VROP15</u>         | <u>3-123</u> |
| <u>Alarm Code: 18</u>           | <u>3-123</u> |
| <u>Event ID: VROP18</u>         | <u>3-123</u> |
| <u>Alarm Code: 19</u>           | <u>3-123</u> |
| <u>Event ID: VROP19</u>         | <u>3-123</u> |
| <u>Alarm Code: 22</u>           | <u>3-124</u> |
| <u>Event ID: VROP22</u>         | <u>3-124</u> |
| <u>VOICE_PORT Resource Type</u> | <u>3-124</u> |
| <u>Alarm Code: 1</u>            | <u>3-124</u> |
| <u>Event ID: TR001</u>          | <u>3-124</u> |
| <u>Alarm Code: 2</u>            | <u>3-124</u> |
| <u>Event ID: TR002</u>          | <u>3-124</u> |

|                           |             |
|---------------------------|-------------|
| <u>GL</u> <u>Glossary</u> | <u>GL-1</u> |
| <u>IN</u> <u>Index</u>    | <u>IN-1</u> |

# About This Book

---

## Purpose

---

This book, Lucent™ *INTUITY™ Messaging Solutions Release 4 Alarm and Log Messages*, Issue 2, 585-310-566, contains log access information and descriptions of the messages contained in the logs.

## Intended Audiences

---

System administrators are the primary audience for this book; remote maintenance center personnel are the secondary audience.

## Release History

---

This is the second release of this book. This issue includes new material developed for the 4.3 release and the addition of the Lucent INTUITY Lodging and the Enhanced-List Application.

## How to Use This Book

---

Use [Chapter 1](#), “Getting Started”, to learn how to access the different types of logs. Use the remaining chapters to identify messages recorded in these logs.

## Conventions Used in This Book

---

This section describes the conventions used in this book.

### Terminology

---

- The words “subscriber” and “user” are interchangeable terms that describe a person administered on the Lucent INTUITY system. The word “user” is the preferred term in the text; however, “subscriber” appears on most of the screens and is the command word you must type at the command line, for example, **change subscriber “Jane Doe”**.
- The word “type” means to press the key or sequence of keys specified. For example, an instruction to type the letter “y” is shown as

Type **y** to continue.

- The word “enter” means to type a value and then press . For example, an instruction to type the letter “y” and press  is shown as

Enter **y** to continue.

- The word “select” means to move the cursor to the desired menu item and then press . For example, an instruction to move the cursor to the Start Test option on the Network Loop-Around Test screen and then press  is shown as

Select Start Test.

- The Lucent INTUITY system displays *windows*, *screens*, and *menus*. Windows show and request system information (Figure 1 and Figure 2, respectively). Screens request that you enter a command at the enter command: prompt (Figure 3). Input is either a value or other specific information you must input through a field (Figure 2) or a command you must enter from the enter command: prompt (Figure 3). “Menus” (Figure 4) present options from which you can choose to view another menu, or a screen or window.



| Diagnose Voice Equipment |       |        |                 |              |       |       |      |
|--------------------------|-------|--------|-----------------|--------------|-------|-------|------|
| CHN                      | CD.PT | STATE  | STATE-CHNG-TIME | SERVICE-NAME | PHONE | GROUP | TYPE |
| 0                        | 0.0   | Manoos | Nou 23 09:57:15 | -            | 1111  | -     | IVC6 |
| 1                        | 0.1   | Manoos | Nou 23 09:57:18 | -            | 2011  | -     | IVC6 |
| 2                        | 0.2   | Manoos | Nou 23 09:57:20 | -            | 2012  | -     | IVC6 |
| 3                        | 0.3   | Manoos | Nou 23 10:10:49 | -            | 2014  | -     | IVC6 |
| 4                        | 0.4   | Manoos | Nou 23 10:10:52 | -            | 2018  | -     | IVC6 |
| 5                        | 0.5   | Manoos | Nou 23 10:10:54 | -            | 2020  | -     | IVC6 |

Figure 1. Example of a Lucent INTUITY Window

| Local Machine Administration     |                                      |
|----------------------------------|--------------------------------------|
| Local Machine Name: <u>local</u> | Connection Type: <u>RS-232 ASYNC</u> |
| Dial Str: _____                  |                                      |
| Data Rate: <u>9600</u>           | Password: <u>**PASSWD**</u>          |
| Channel: <u>1</u>                |                                      |

Figure 2. Example of a Lucent INTUITY Window

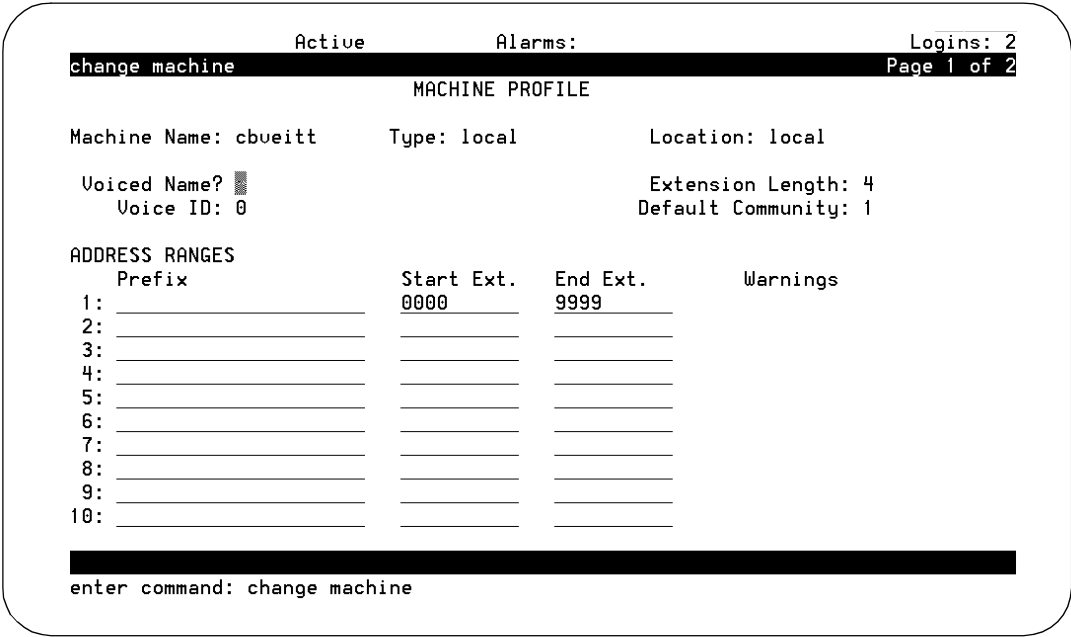


Figure 3. Example of a Lucent INTUITY Screen with a Command Line



Figure 4. Example of a Lucent INTUITY Menu


## Keyboard and Telephone Keypad Representations

---


- Keys that you press on your *terminal or PC keyboard* are represented as rounded boxes. For example, an instruction to press the enter key is shown as

Press .

- Two keys that you press at the same time on your *terminal or PC keyboard* (that is, you press and hold down the first key and then press the second key) are represented as a series inside a rounded box. For example, an instruction to press and hold  while typing the letter “d” is shown as

Press .

- A combination keystroke is a series of keystrokes that combines the two key functions described above plus a third key, that is, you press and hold down the first key, then press the second key, then release those keys and press a third key. A combination keystroke is represented as an equation. For example, an instruction to press and hold  while typing the letter “d” and then typing the number “1” is shown as

Press  .

- Function keys on your terminal, PC, or system screens, also known as *soft keys*, are represented as rounded boxes followed by the function or value of that key enclosed in parentheses. For example, an instruction to press function key 3 is shown as

Press  (Save).

- Keys that you press on your *telephone keypad* are represented as square boxes. For example, an instruction to press the first key on your telephone keypad is shown as

Press  to record a message.

## Screen Displays

---

- Values, system messages, field names, and prompts that appear on the screen are shown in typewriter-style `Courier` type, as shown in the following examples:

Example 1:


Enter the number of ports to be dedicated to outbound traffic in the  
Maximum Simultaneous Ports: field.

Example 2:

The system displays the message Alarm Form Update was  
successful.

- The sequence of menu options that you must select to display a specific screen or submenu is shown as follows:

Start at the INTUITY Main menu and select

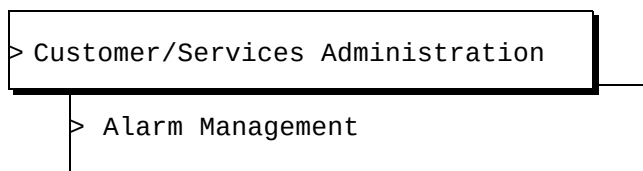

In this example, you access the Main Menu and select the line item Customer/Service Administration. From the Customer/Service Administration menu that the system then displays, you select the line item Alarm Management.

- Screens shown in this book are examples only. The screens you see on your machine will be similar, but not exactly the same in all cases.

## Data Entry Conventions

---

- Commands and text you type in or enter appear in **bold type**, as in the following examples:

Example 1:

Enter **change-switch-time-zone** at the enter command: prompt.

Example 2:

Type **high** or **low** in the Speed: field.

- Command variables are shown in *bold italic* type when they are part of what you must type in and *regular italic* type when they are not, for example:

Enter **ch ma** *machine\_name*, where *machine\_name* is the name of the call delivery machine you just created.

## Safety and Security Alert Labels

---

This book uses the following symbols to call your attention to potential problems that could cause personal injury, damage to equipment, loss of data, service interruptions, or breaches of toll fraud security:



### **CAUTION:**

*Indicates the presence of a hazard that if not avoided can or will cause minor personal injury or property damage, including loss of data.*



### **WARNING:**

*Indicates the presence of a hazard that if not avoided can cause death or severe personal injury.*



### **DANGER:**

*Indicates the presence of a hazard that if not avoided will cause death or severe personal injury.*



### **SECURITY ALERT:**

*Indicates the presence of a toll fraud security hazard. Toll fraud is the unauthorized use of a telecommunications system by an unauthorized party.*

## Trademarks and Service Marks

---

The following trademarked products are mentioned in the various books in the Lucent INTUITY document set:

- 5ESS is a registered trademark of Lucent Technologies.
- AT is a trademark of Hayes Microcomputer Products, Inc.
- AUDIX is a registered trademark of Lucent Technologies.
- cc:Mail is a registered trademark of cc:Mail, a subsidiary of Lotus Development Corporation.
- COMSPHERE is a registered trademark of Lucent Technologies Paradyne Corp.
- CONVERSANT Voice Information System is a registered trademark of Lucent Technologies.
- DEFINITY is a registered trademark of Lucent Technologies.
- DMS-100 is a trademark of Northern Telecom Limited.
- Dterm is a trademark of NEC Telephones, Inc.

- Equinox is a trademark of Equinox Systems, Inc.
- INTUITY is a trademark of Lucent Technologies.
- Lotus Notes is a registered trademark of Lotus Development Corporation.
- Lucent is a trademark of Lucent Technologies.
- MEGAPORT is a trademark of Equinox Systems, Inc.
- MEGAPLEX is a trademark of Equinox Systems, Inc.
- Meridian is a trademark of Northern Telecom Limited.
- MERLIN LEGEND is a registered trademark of Lucent Technologies.
- Microcom Networking Protocol is a registered trademark of Microcom, Inc.
- Microsoft is a registered trademark of Microsoft Corporation.
- MS is a registered trademark of Microsoft Corporation.
- MS-DOS is a registered trademark of Microsoft Corporation.
- Mitel is a trademark of Mitel Corporation.
- Motorola is a registered trademark of Motorola Inc.
- NEAX is a trademark of NEC Telephone, Inc.
- NEC is a registered trademark of NEC Telephone, Inc.
- Netware is a registered trademark of Novell, Inc.
- Netware Loadable Module is a registered trademark of Novell, Inc.
- Northern Telecom is a registered trademark of Northern Telecom Limited.
- Novell is a registered trademark of Novell, Inc.
- Paradyne is a registered trademark of Lucent Technologies.
- Phillips is a registered trademark of Phillips Screw Company.
- Rolm is a registered trademark of International Business Machines.
- Siemens is a registered trademark of Siemens Aktiengesellschaft.
- SL-1 is a trademark of Northern Telecom Limited.
- softFAX is a registered trademark of VOXEM, Inc.
- SUPERSET is a trademark of Mitel Corporation.
- SX-100 is a trademark of Mitel Corporation.
- SX-200 is a trademark of Mitel Corporation.
- SX-2000 is a trademark of Mitel Corporation.
- Telephony OneStop is a trademark of Lotus Development Corporation.
- TMI is a trademark of Texas Micro Systems, Inc.
- UNIX is a registered trademark of UNIX Systems Laboratories, Inc.

- VB-PC is a trademark of Voice Technologies Group, Inc.
- Voice Bridge is a registered trademark of Voice Technologies Group, Inc.
- VOXEM is a registered trademark of VOXEM, Inc.
- VT100 is a trademark of Digital Equipment Corporation.
- Windows is a trademark of Microsoft Corporation.

## **Related Resources**

---

This section describes additional documentation and training available for you to learn more about the Lucent INTUITY product.

### **Documentation**

---

The following books contain information and instructions needed for some of the repair procedures:

- *Lucent INTUITY Messaging Solutions Release 4 MAP/5P Maintenance*, 585-310-186, for common system procedures.
- *Lucent INTUITY Messaging Solutions Release 4 MAP/40 and MAP/40s Maintenance*, 585-310-171, for common system procedures.
- *Lucent INTUITY Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174, for common system procedures.
- *Lucent INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for administration information.
- *Lucent INTUITY Lodging Administration*, 585-310-577, for networking administration information.
- *Lucent INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for networking administration information.
- *AMIS Analog Networking*, 585-300-512, for AMIS networking administration information.

For information about security and toll fraud issues, refer to *GBCS Products Security Handbook*, 555-025-600. See the inside front cover for information about how to order Lucent INTUITY documentation.

### **Training**

---

For more information on Lucent INTUITY training, call the BCS Education and Training Center at one of the following numbers:

- Lucent Technologies customers and all others in the United States and Canada: (800) 255-8988

- Customers in other locations should contact their sales representative for information
- Organizations within Lucent Technologies: (904) 636-3261

## **Technical Assistance**

---

The following resources are available for technical assistance with Lucent Technologies products and services:

- Within the United States
  - For systems integrated with a MERLIN LEGEND switch, call 1-800-628-2888.
  - For systems integrated with any other switch, call 1-800-242-2121.
- Within Canada
  - For all systems, call 1-800-242-1234.
- Within any other country
  - For all systems, call your local distributor.

## **How to Comment on This Book**

---

We are interested in your suggestions for improving this book. Please complete and return the reader comment card that is located behind the title page.

If the reader comment card has been removed, send your comments to:

Lucent Technologies  
Product Documentation  
Room 22-2H15  
11900 North Pecos Street  
Denver, Colorado 80234

You may also fax your comments to the attention of the Lucent INTUITY writing team at (303) 538-1741.

Please be sure to mention the name and order number of this book:

*Lucent INTUITY Messaging Solutions Release 4 Alarm and Log Messages*  
Issue 2  
585-310-566



# Getting Started

# 1

---

## Overview

The Lucent™ INTUITY™ system provides the following logs for the system administrator (sa) and the voice mail administrator (vm) login IDs:

- Activity log: Contains a list of the INTUITY AUDIX® Voice Messaging mailbox-related events such as logins and message creation/receipt/deletion. This log is useful for responding to subscriber-reported problems.
- Administrator's log: Contains informational messages which may or may not require some action by the system administrator. These messages may simply log an informational message such as a successful nightly backup or they may alert the system administrator to a potential trouble condition such as low disk space.
- Alarm log: Contains alarm information about major, minor, and warning alarms that signal a service-affecting or potentially service-affecting problem. Major and minor alarms generally require remote maintenance center intervention; the customer is responsible for resolving all warning alarms.

This chapter describes how to access each type of log and how the log displays information. The remaining chapters in this book present the specific entries in the Administrator's and Alarm logs.

---

## Purpose

This chapter serves as an introduction to logs and log entries. It presents instructions for accessing three types of logs to display their messages.

## When to Access Logs


Procedures located in other books about the system will instruct you when to access the different logs. You may also need to access the logs based upon the system's behavior, subscriber complaints, or an indicator on the INTUITY AUDIX System Status Line.

**NOTE:**  
The Lodging administration screens do not show a status line. For Lodging, access the logs once a day. If you have the INTUITY AUDIX application and do not monitor the System Status Line, look in the Administrator's and Alarm Logs several times a day.

## Checking the System Status Line


To access the INTUITY AUDIX screen:

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)).

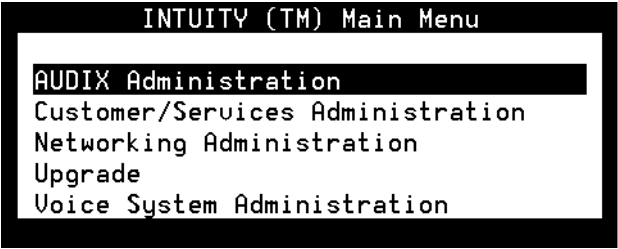

**Figure 1-1. Lucent INTUITY Main Menu**

2. Select AUDIX Administration.  
The system displays the INTUITY AUDIX administration screen ([Figure 1-2](#)).

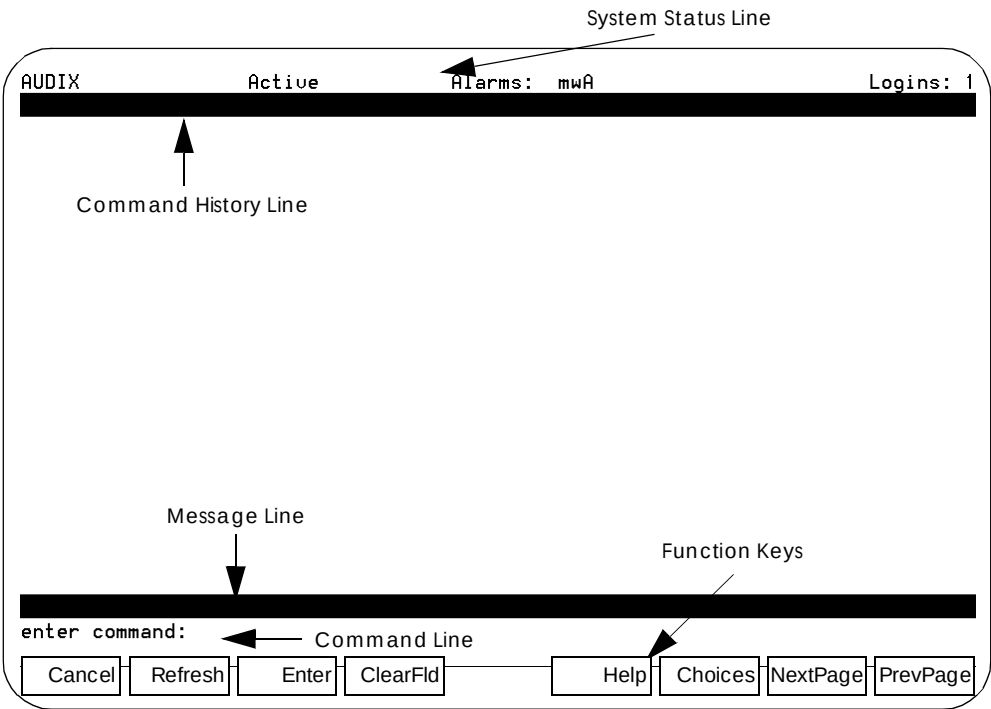

**Figure 1-2. AUDIX Administration Screen Layout (Blank Screen)**

3. Check the Alarms field:. This field is located at the center top of the INTUITY AUDIX screen in the System Status Line.

**Using the System Status Line**

The system uses the following abbreviations in the System Status Line:

- M: major alarm
- m: minor alarm
- w: warning alarm
- A: new or unviewed entries in the Administrator's Log
- none: no alarms or unviewed log entries

**NOTE:**  
The word “active” in the System Status Line refers to the status of the voice mail software, and not to alarm status. “Active” in this field indicates that the AUDIX software is functioning. “Inactive” indicates that the system may not be forwarding or receiving messages.

If you see M, m, or w, look in the Alarm Log for the alarm. You may have more than 1 on the system. If you see A, look in the Administrator's Log.

The system will change the status line for alarms when the alarm is resolved. After you view the Administrator's Log, the system clears the A from the System Status Line, even if you do not correct any reported problems.

## Activity Log

---

The Activity Log is a list of the INTUITY AUDIX subscriber actions. It is helpful in diagnosing subscriber-reported problems because it shows exactly what activities a subscriber performed up to the point where the problem occurred. The subscriber activities include:

- Message receipt
- Subscriber login
- Message status change from new to old
- Message waiting indicator (MWI) turned on or off

Be sure to check the Alarm and Administrator's Logs for alarms and administrator's messages requiring action when a subscriber complains.

For a complete description of this log and its contents, see *Lucent INTUITY Messaging Solutions Release 4 Administration*, 585-310-564.

To access the Activity Log using the sa login:

### NOTE:

The voice mai (vm) login will go directly to the INTUITY AUDIX administration screen. If you are using the vm login, go to [Step 2](#).

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select AUDIX Administration.

The system displays the INTUITY AUDIX Administration screen ([Figure 1-2](#)).

2. Enter **display activity-log extension** where extension is the 3- to 10-digit extension for the local subscriber.

# Administrator's Log

The system records informational messages in the Administrator's Log. These messages may log information such as the completion of a successful nightly backup or a condition that could lead to system or feature failure. Depending on the message, you may have to perform some action to correct a problem on the system. The Administrator's Log is accessible to the sa and vm logins.

The Administrator's Log can hold up to 1000 entries. When the maximum limit is reached, the system overwrites the oldest entries with new entries, maintaining a count of 1000. From this log, the system can display a maximum of 500 lines of data on multiple windows. The system allows you to choose the information that you want to display.

Information in the Administrator's Log is saved, even if the system is rebooted. Only the remote maintenance center can clear the log.

This section describes the format, fields, and display options for the Administrator's Log. Listings of Administrator's Log entries with explanations are covered in [Chapter 2, "Administrator's Log Entries"](#).


## Access

The sa (system administrator) login can access the Administrator's Log through the Lucent INTUITY system menus or the INTUITY AUDIX Administration screen. The vm (voice mail) login can only access the log through the INTUITY AUDIX screens.

## Through the Lucent INTUITY System Menus

To access the Administrator's Log using the default display options:

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select

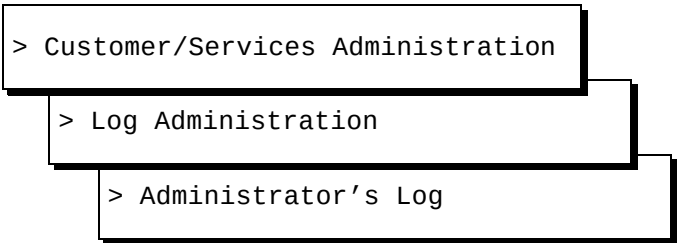

The system displays the Administrator's Log Display Selection screen ([Figure 1-3](#)).

Administrator's Log Display Selection

Administrator's Log

The following options control which entries will be displayed.

Start Date: 9 /28/95

Time: 8:57:57

Application: \_\_\_\_\_

Event ID: \_\_\_\_\_

Search String:  
\_\_\_\_\_  
\_\_\_\_\_

Figure 1-3. Administrator's Log Display Selection Screen

2. Press **F3** (Save) to use the default display options. See [“Administrator's Log Display Selection Screen”](#) below for information about display options.
- The system displays the Administrator's Log ([Figure 1-4](#)).

| ADMINISTRATOR'S LOG |          |     |          |     |         |                                               |
|---------------------|----------|-----|----------|-----|---------|-----------------------------------------------|
| ADMINISTRATOR'S LOG |          |     |          |     |         |                                               |
| Date                | Time     | App | Event ID | Cnt | Message |                                               |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 0 New card recognized. (Dip-switch setting 0) |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 1 New card recognized. (Dip-switch setting 1) |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 2 New card recognized. (Dip-switch setting 2) |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 3 New card recognized. (Dip-switch setting 3) |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 4 New card recognized. (Dip-switch setting 4) |
| 09/05/93            | 16:05:27 | UP  | INIT003  | 1   | TR CA   | 5 New card recognized. (Dip-                  |

Figure 1-4. Administrator's Log

## Through the INTUITY AUDIX Administration Screen

To access the Administrator's Log through the INTUITY AUDIX Administration screen:

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select



The system displays the INTUITY AUDIX Administration screen ([Figure 1-2](#)).

2. Enter **display administrator's-log** in the command line.
3. Press **(F3)** (Save) to use the default display options. See ["Administrator's Log Display Selection Screen"](#) below for information about other display options.

The system displays the Administrator's Log ([Figure 1-4](#)).

### Administrator's Log Display Selection Screen

Before displaying the Administrator's Log, the system presents the Administrator's Log Display Selection screen ([Figure 1-3](#)). This screen allows you to choose what to display. The selection criteria on the Administrator's Log Display Selection screen corresponds to the fields in the Administrator's Log. The Administrator's Log can display only those entries that meet the selected criteria. For example, to see the entries for INTUITY AUDIX Messaging, enter **VM** in the Application: field and the Administrator's Log will display only the VM entries ([Figure 1-3](#)). Leaving this field blank will cause the system to display administrator's messages from all applications.

The first time the Administrator's Log Display Selection screen is used, all fields are blank. Subsequent uses of this screen by the same login (even after restarts and reboots) show the date and time the screen was last used in the Start Date: and Time: fields; all other fields are blank. You may change the Start Date and Time fields and provide information for any other fields.

[Table 1-1](#) lists the display selection options and their corresponding Administrator's Log field.

**Table 1-1. Display Selection Option and Administrator's Log Field**

| Display Selection Option | Administrator's Log Field |
|--------------------------|---------------------------|
| Start Date               | Date                      |
| Start Time               | Time                      |
| Application              | App                       |
| Event ID                 | Event ID                  |
| Search String            | Message                   |

**Administrator's Log Format**

Each Administrator's Log entry may occupy up to three lines on the display. Each entry is described in terms of the six fields in the log. Each field description in this section includes a list of possible values and Administrator's Log display options ([Figure 1-4](#)).

You can use any combination of selection criteria in the Administrator's Log Display Selection screen. You do not need to fill in all of the fields.

**Date and Time**

This field displays the date and time when the entry was logged.

The Date and Time fields are important in correlating the approximate time of a system activity with actual messages in the system. The Date and Time fields allow you to look at only those log entries that occurred after a certain date and time. The default for these fields is the date and time the window was last used.

The Date and Time fields display any valid date (month, day, year) and time (hour, minute, second) in the following MM/DD/YY HH:MM:SS, for example, 10/12/97 14:17:39. Time is shown according to the 24-hour clock standard: 00:00:00 is midnight and 23:00:00 is 11:00 pm.

To limit the display to a particular period, enter a Start Date in the MM/DD/YY format. Valid entries are 1 through 12 for the month, 1 through 31 for the day, and 0 through 99 for the year. Any year value below 70 is assumed to be in the 21st century. The Start Date field must have a valid entry before you can access the Time field.

To limit the display to a particular time, enter Time in an hour-minute-second triplet in the HH:MM:SS format. Valid entries are 0 through 23 for the hour, 0 through 59 for the minute, and 0 through 59 for the second.



## Application Identifier

The application identifier, a 2-letter abbreviation, represents the part of the Lucent INTUITY system that generated the message. The App field of the Administrator's Log Display Selection screen allows you to display only those entries with a particular application identifier. For example, to see only the entries related to networking, type **NW** in the App field. [Table 1-2](#) shows the application identifiers that could appear in the Administrator's Log.

 **NOTE:**  
The application identifier must be typed in capital letters.

**Table 1-2. Application Identifier: Possible Values**

| Abbreviation | Application                               |
|--------------|-------------------------------------------|
| CA           | Lucent INTUITY Call Accounting System     |
| EL           | Enhanced List Application                 |
| LF           | Lucent INTUITY Lodging FAX Messaging      |
| LG           | Lucent INTUITY Lodging                    |
| ML           | MERLIN LEGEND® switch integration package |
| VP           | Voice Platform                            |
| VM           | INTUITY AUDIX Voice Messaging             |
| SW           | Switch Integration Package                |
| MT           | Maintenance                               |
| NW           | INTUITY AUDIX Digital Networking          |

## Event ID

The Event ID uniquely identifies an Administrator's Log entry within a particular application, such as INTUITY AUDIX (VM). Because they are unique within an application, Event IDs take a variety of forms. They can be made up of 14 alphanumeric characters, usually with some letters to indicate the reporting resource. The resource identifier can be followed by a series of numbers to identify the message within that resource. Examples of Event IDs are ADM\_cais, BKDONE, or INIT003.

The Event ID field of the Administrator's Log Display Selection screen allows you to display only those log entries with a particular Event ID. For example, if you need to confirm that last night's unattended backup was successful, enter **BKDONE** in the Event ID field.

The Event ID field is case-sensitive. Therefore, ADM\_cais is not the same as ADM\_CAIS.

## Count

The Count field displays the number of times a message has been sent to the Administrator's Log within one minute. The first time a message is sent to the Administrator's Log, it is logged as a full entry. Each subsequent occurrence of the same message, within one minute, increases the number in the Count field by 1. The Date and Time fields show the date and time of the initial entry.



### NOTE:

The messages must be exactly the same and continuous to increment the Count field. If a different message occurs within the minute, the count is stopped. Additional messages start a new entry to begin the count again.

The Count field can contain any number between 1 and 999. You cannot use the Count field to display log information.

## Message

The Message field contains a brief explanation of the Administrator's Log entry in one line of text. The Search String field on the Administrator's Log Display Selection screen allows you to display only those entries whose Message fields contain the word or words entered into the Search String field. You can enter up to 78 characters. The string typed must match the Message field of the entry *exactly* including upper and lower case letters.

The comparison between the Search String and the Message field is left-anchored. This means that if **Some text** is entered as the Search String it will match messages with **Some text here** but not **There is Some text here** in the Message field.

## Alarm Log

---

The Alarm Log is the starting point for troubleshooting the system. The contents of the Alarm Log represent all of the significant problems that the system has detected and been unable to repair automatically.

The Alarm Log holds both active alarms and resolved alarms. Active alarms reflect the current problems in the system. Resolved alarms are alarms that have been corrected either through automatic system action, a repair procedure from [Chapter 3, "Alarm Log Entries"](#), or remote maintenance center intervention. When an active alarm is corrected, its status is changed from active to resolved. Active alarms and resolved alarms can not be displayed at the same time.

### NOTE:

This book documents only active alarms.

All active alarms are resolved when the UNIX system is rebooted. Resolved messages are recorded in the Alarm Log. The system saves the Alarm Log after the reboot. If the system is still experiencing problems after the reboot, alarms are regenerated appropriately.

The Alarm Log can hold up to 1000 active and 1000 resolved alarms. When the maximum limit is reached for active alarms, no new entries in the log are permitted until existing alarms are resolved. When the maximum limit is reached for resolved alarms, the system overwrites the oldest entries with new entries. Only the remote maintenance center can clear the Alarm Log.

### NOTE:

Even though the Alarm Log can hold up to 1000 active and 1000 resolved alarm entries, only 500 lines worth of alarm data on multiple windows can be displayed at one time. Therefore, use the display selection criteria carefully to choose the appropriate Alarm Log information.

If the default settings are used, the most severe alarms (major) will be displayed first in the log.

This section describes the format, fields, and display options for the Alarm Log. Listings of alarms and their associated errors and repair steps are covered in [Chapter 3, "Alarm Log Entries"](#). Unless specified by the maintenance contract, customers are responsible for resolving warning-level alarms. The maintenance contract will also specify the level of alarm that is sent to the remote maintenance center if the feature is available in your location.


## Access

The sa (system administrator) login can access the Alarm Log through the Lucent INTUITY system menus or the INTUITY AUDIX Administration screen. The vm (voice mail) login can only access the Alarm Log through the INTUITY AUDIX screen.

### Through the Lucent INTUITY System Menus

To access the Alarm Log through the Lucent INTUITY system menus:

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select

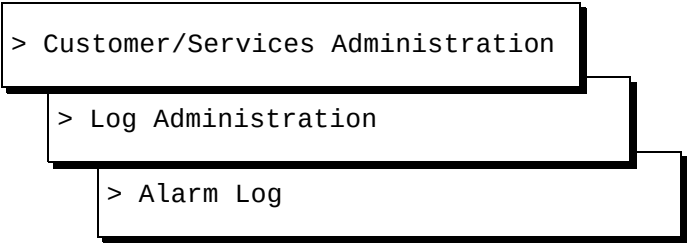

The system displays the Alarm Log Display Selection screen ([Figure 1-5](#)).

Alarm Log Display Selection

Alarm Log

The following options control which alarms will be displayed.

Alarm Type: A

Alarm Level:  
Major? Y                      Minor? Y                      Warning? Y

Start Date: 09/05/95                      Time:   :                        Application:

Resource Type:                                 Location:                               Alarm Code:

**Figure 1-5. Alarm Display Selection Window**

2. Press **F3** (Save) to display the Alarm Log using the default display options. See [“Alarm Log Display Selection Screen”](#) below for information about other display options.

The system displays the Alarm Log screen ([Figure 1-6](#)).

| Alarm Log |            |            |       |     |     |                |           |         |
|-----------|------------|------------|-------|-----|-----|----------------|-----------|---------|
| Alarm Log |            |            |       |     |     |                |           |         |
| App       | Resource   | Location   | Alarm | Alm | Ack | Date/Time      | Date/Time | Resolve |
|           | Type       |            | Code  | Lvl |     | Alarmed        | Resolved  | Reason  |
| MT        | DISK       | sc         | 0     | MAJ | N   | 11/10/93 19:20 |           |         |
| MT        | MIRROR     | N/A -- --- | 0     | MAJ | N   | 11/10/93 21:50 |           |         |
| UP        | SOFTWARE   |            | 4     | MIN | N   | 11/10/93 16:37 |           |         |
| SW        | DCIU_LINK  |            | 202   | MIN | N   | 11/10/93 16:37 |           |         |
| UM        | SOFTWARE   |            | 602   | MIN | N   | 11/10/93 16:38 |           |         |
| UM        | SOFTWARE   |            | 601   | MIN | N   | 11/10/93 16:38 |           |         |
| UP        | VOICE_PORT | TR CH 5    | 1     | MIN | N   | 11/10/93 20:20 |           |         |
| NW        | MSG_XMIT   |            | 1500  | WRN | N   | 11/10/93 16:39 |           |         |

Figure 1-6. Alarm Log Screen

Through the INTUITY AUDIX Administration Screen

To access the Alarm Log through the INTUITY AUDIX Administration screen:

- 1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select

> AUDIX Administration

The system displays the AUDIX Administration screen ([Figure 1-2](#)).

- 2. Enter **display alarms**
- 3. Press **F3** (Save) to display the Alarm Log using the default display options. See [“Alarm Log Display Selection Screen”](#) below for information on other display options.

The system displays the Alarm Log screen ([Figure 1-6](#)).

## Alarm Log Display Selection Screen

When you ask the system to display the Alarm Log, the system presents the Alarm Log Display Selection screen (Figure 1-5). This screen allows you to choose what to display. The selection criteria on the Alarm Log Display Selection screen corresponds to the fields in the Alarm Log.

Pressing **F3** (Save) tells the system to display the Alarm Log using the displayed options. However, only those entries that meet certain criteria, for example a particular severity, will be displayed.

The first time you access the Alarm Log Display Selection screen after a restart or reboot, all the fields are blank. Subsequent uses of this screen by the same login show the options selected last time the window was used.

[Table 1-3](#) shows the available display selection options available.

**Table 1-3. Display Selection Option and Alarm Log Field**

| Display Selection Option | Alarm Log Fields                               |
|--------------------------|------------------------------------------------|
| Alarm Type               | Alarms displayed are either active or resolved |
| Major                    | Alm Lvl                                        |
| Minor                    | Alm Lvl                                        |
| Warning                  | Alm Lvl                                        |
| Start Date & Time        | Date/Time Alarmed<br>Date/Time Resolved        |
| Application              | Application                                    |
| Resource Type            | Resource Type                                  |
| Location                 | Location                                       |
| Alarm Code               | Alarm Code                                     |

You can view *either* a list of active alarms *or* a list of resolved alarms, but not both simultaneously. Enter either an **A** (for active) or an **R** (for resolved) in the Alarm Type field of the Alarm Log Display Selection screen. The default is **A**.

The most severe alarms (by alarm level) are displayed first in the log. Within alarm level, entries in the log are always displayed in chronological order, oldest first. To see the most recent entries to the log, press **END** on the keyboard or scroll through the entries with the arrow keys.

## Alarm Log Format

Each alarm occupies a single line in the display. Each entry is described in terms of eight fields in the log ([Figure 1-6](#)). Each field description in this section includes a list of possible values and Alarm Log display selections.

### Application Identifier

The application identifier represents the portion of the Lucent INTUITY system that generated the message.

[Table 1-4](#) shows the application identifiers that could appear in the Administrator's Log.

**Table 1-4. Application Identifier: Possible Values**

| Abbreviation | Application                              |
|--------------|------------------------------------------|
| CA           | Lucent INTUITY Call Accounting System    |
| EL           | Enhanced List Application                |
| LF           | Lucent INTUITY Lodging FAX Messaging     |
| LG           | Lucent INTUITY Lodging                   |
| ML           | MERLIN LEGEND switch integration package |
| VP           | Voice Platform                           |
| VM           | INTUITY AUDIX Voice Messaging            |
| SW           | Switch Integration Package               |
| MT           | Maintenance                              |
| NW           | INTUITY AUDIX Digital Networking         |

### Resource Type

The Lucent INTUITY system groups its alarms by resource types. For example, NETWK\_BD is the resource type for problems that occur with the networking circuit card.

The Resource Type field is an important field for two reasons.

- It groups the alarms into general categories which helps narrow the problem during troubleshooting.
- It is the link from the alarm description in the Alarm Log to the alarm's repair steps in this document.

Possible values for the Resource Type field are listed in [Table 1-5](#).

Table 1-5. Alarmed Resource Type: Possible Values

| Resource Type | Description                                       | Application Code |
|---------------|---------------------------------------------------|------------------|
| ALARM_ORIG    | Alarm generation                                  | MT               |
| ANNC          | INTUITY AUDIX messaging announcement sets         | VM               |
| AUD_BKUP      | INTUITY AUDIX messaging backup                    | VM               |
| AUDIT         | INTUITY AUDIX messaging database audits           | VM               |
| AUD_RESTORE   | INTUITY AUDIX messaging restore                   | VM               |
| AUDIX_FS      | Disk space and files used to store voice messages | VM               |
| BACKUP        | Attended and unattended backups                   | MT               |
| CGEN          | General messages                                  | VP               |
| CHRIN         | CHARINIT process messages                         | VP               |
| DCIU_LINK     | DCIU switch integration link                      | SW               |
| DISK          | Hard disks                                        | MT               |
| DSKMG         | Disk Manager                                      | VM               |
| FAXAP         | Lucent INTUITY FAX Messaging application          | VM               |
| FAXMONOANM    | Lucent INTUITY FAX Messaging errors               | VP               |
| FAXNSFOANM    | Lucent INTUITY FAX Messaging errors               | VP               |
| GPSC_BOARD    | DCIU switch integration board (GPSC-AT/E)         | SW               |
| INIT          | Initialization                                    | VP               |
| LANINTF       | LAN interface                                     | VM               |
| MIRROR        | Mirroring of data                                 | MT               |
| MTC           | Maintenance                                       | VP               |
| NETWK_BD      | Digital networking circuit card (ACCX)            | NW               |
| NETWK_CHAN    | Digital networking circuit card channels          | NW               |
| RESTORE       | Restoring information from tape/floppy            | MT               |
| SERVER        | Trusted Server Software                           | VM               |
| SF_VXMDI      | Lucent INTUITY FAX Messaging errors               | VP               |
| SMDI_LINK     | SMDI switch integration link                      | SW               |



Table 1-5. Alarmed Resource Type: Possible Values

| Resource Type | Description                                                          | Application Code                       |
|---------------|----------------------------------------------------------------------|----------------------------------------|
| SOFTWARE      | Software-related errors                                              | LF<br>LG<br>ML<br>NW<br>SW<br>VM<br>VP |
| SPDSKMGR      | Speech disk manager                                                  | VP                                     |
| SPEECH_FS     | Disk space for speech filesystems                                    | VP                                     |
| SW            | Switch integration                                                   | SW                                     |
| TAPE_DRIVE    | Magnetic tape drive                                                  | MT                                     |
| THR           | Threshold levels                                                     | VP                                     |
| TRIP          | Tip/Ring interface process                                           | VP                                     |
| UNIX          | UNIX operating system                                                | MT                                     |
| VM_PT         | INTUITY AUDIX Voice Messaging software that controls the voice ports | VM                                     |
| VOICE_PORT    | Physical voice ports on the tip/ring circuit cards                   | VP                                     |
| VROP          | Voice coding and playback                                            | VP                                     |

The Resource Type field of the Alarm Log Display Selection screen ([Figure 1-5](#)) allows you to display only those alarms with a particular alarmed resource type. For example, to see only the alarms related to performing backups, type **BACKUP** in the Resource Type field.

 **NOTE:**  
The Resource Type field is case-sensitive. Therefore, the entry “BACKUP” is different from “backup”.

Location

The Location field helps you locate the hardware which is causing the alarm. The Location field is divided into three parts.

- Equipment name
- Equipment type
- Equipment number

This field may be blank when no additional data is available.

[Table 1-6](#) shows the hardware components that have Location field values.

 **NOTE:**  
This field is blank if the alarm is not hardware related.

Table 1-6. Location: Possible Values

| Location | Equipment Name | Equipment Type                                                                        | Equipment Number                                                         |
|----------|----------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| NB       | ACCX           | <ul style="list-style-type: none"><li>■ ca (card) or</li><li>■ ch (channel)</li></ul> | <ul style="list-style-type: none"><li>■ 1 - 3</li><li>■ 1 - 12</li></ul> |
| TR       | IVC6           | <ul style="list-style-type: none"><li>■ ca (card) or</li><li>■ ch (channel)</li></ul> | <ul style="list-style-type: none"><li>■ 0 -10</li><li>■ 0 - 63</li></ul> |

The Location field of the Alarm Log Display Selection screen ([Figure 1-5](#)) allows you to display only those alarms for a particular piece of hardware in a location. For example, to see only the alarms related to the IVC6 card #3, type **TR ca 2** in the Location field.

Alarm Level

Three alarm levels indicate the severity of an alarm:

- Major
- Minor
- Warning

Alarm Level is an important qualifier because it classifies problems within the Lucent INTUITY system so that the most severe can be worked first. In most cases, the alarm level also draws the line between the responsibility of the system administrator (warning alarms) and the responsibility of the Lucent Technologies remote maintenance center (major and minor alarms). [Table 1-7](#) summarizes the alarm levels and their descriptions.

Table 1-7. Alarm Level: Possible Values

| Level | Description                                                                                                                                                            |
|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAJ   | System, major feature, or major function is likely out of service<br><br>> 25% of a given resource is out of service<br><br>Repairable by Lucent Technologies services |
| MIN   | Service affecting<br><br>< 25% of a given resource is out of service<br><br>Repairable by Lucent Technologies services                                                 |
| WRN   | Service affecting<br><br>Repairable by customer                                                                                                                        |

Major Alarms

Major alarms indicate problems that may affect key system components. For example, if more than 25% of the voice ports are out of service, a major alarm is raised. Major alarms unresolved after 5 minutes are sent automatically to a Lucent Technologies remote maintenance center by the Lucent INTUITY system if there is a maintenance service contract and alarm origination is active (see [“Alarm Management”](#) below). Remote service personnel perform remote maintenance on the system to correct major alarms.

Minor Alarms

Minor alarms indicate problems that are not critical to system operation but that could affect full service. For example, if the nightly unattended backup of system data fails, a minor alarm is raised. If unresolved after five minutes, minor alarms are sent automatically to a Lucent Technologies remote maintenance center by the Lucent INTUITY system if there is a maintenance service contract and alarm origination is active (see the [“Alarm Management”](#) section of this chapter). Remote service personnel perform remote maintenance on the machine to correct minor alarms.

Warning Alarms

Warning alarms indicate problems that could potentially affect system service if not resolved. For example, if the system detects abnormal breaks during speech playback, a warning alarm is raised. Warning alarms are not sent to a Lucent Technologies remote maintenance center. Warning alarms must be corrected by the system administrator using the repair steps detailed in [Chapter 3, “Alarm Log Entries”](#).

## Alarm Level Display

The Major?, Minor?, and Warning? fields of the Alarm Log Display Selection screen ([Figure 1-5](#)) allow you to display only those alarms with a particular alarm level. For example, to see only the major alarms, type **y** in the Major? field, **n** in Minor? field, and **n** in the Warning? field.

By default, Major?, Minor? and Warning? fields are set to **y**. Using the default settings, the alarms are displayed in the log by severity: major alarms first, minor alarms second, and warning alarms third.

## Acknowledged

The Ack? field indicates if the alarm has been reported to and received by a Lucent Technologies remote services center.

If unresolved after five minutes, active major and minor alarms are reported to a Lucent Technologies remote services center if there is a maintenance service contract and alarm origination is active (see the ["Alarm Management"](#) section of this chapter). The Ack? field will display a Y if the alarm has been reported to and received by a Lucent Technologies remote services center. The Ack? field will display a N if the alarm has either not been reported to or has not been received by a Lucent Technologies remote maintenance center.

A major or minor alarm may show an N if a significant number of higher priority alarms exist and, therefore, have already been sent to the Lucent Technologies remote maintenance center. The Lucent INTUITY system also has a predefined list of resources. If the Lucent INTUITY system must make a choice between alarms to send to the remote maintenance center, it uses this list to determine those of top priority. For example, hard disk alarms rate above voice port alarms. Because warning alarms are the responsibility of the Lucent INTUITY system administrator, they always show an N in the Ack? field.

The Ack? field is important because it lets the system administrator know if the Lucent Technologies remote maintenance center has received notification of the alarms on the system.

The user cannot select Alarm Log entries based on this field.

## Date/Time Alarmed

The Date/Time Alarmed field displays the date and time that the alarm was raised.

The Date/Time Alarmed field is important in correlating the approximate time of symptoms, reported by subscribers and callers, with actual alarms in the system. This field also indicates how long the system may have been experiencing problems.

The Date and Time fields display any valid date (month, day, year) and time (hour, minute) in the format MM/DD/YY HH:MM, for example: 10/12/97 14:21. Time is shown on the 24-hour clock standard; 0:00 is midnight and 23:00 is 11:00 pm.

If the problem can be pinpointed to an approximate time period, it may be desirable to narrow the scope of possible causes by using the Start Date and Time display selection fields ([Figure 1-5](#)).

The Start Date and Time fields allows you to look at only those log entries which occurred after a certain date and time. The default for these fields is the date and time the window was last used. To limit the display to a particular period, enter a Start Date in the MM/DD/YY format. Valid entries in this field are 1 through 12 for the month, 1 through 31 for the day, and 0 through 99 for the year. Any year value below 70 is assumed to be in the 21st century. Enter Time in an hour-minute pair in the HH:MM format. Valid entries for this field are 0 through 23 for the hour and 0 through 59 for the minute. Start Date must have a valid entry before Time can be used.

If the system is displaying the active alarms (**A** in the Alarm Type field), Start Date and Time uses the Date/Time Alarmed field to select log entries.

## Date/Time Resolved

The Date/Time Resolved field displays the date and time that the alarm was resolved. This field is blank when active alarms are displayed. The default for these fields is the date and time the screen was last used.

The Date/Time Resolved field is important in correlating the approximate time of repair procedures with the actual resolution of alarms in the system. This field also indicates how long the system experienced the problem.

Date/Time Resolved displays any valid date (month, day, year) and time (hour, minute, second) in the format MM/DD/YY HH:MM, for example: 05/26/95 14:21. Time is shown on the 24-hour clock standard; 0:00 is midnight and 23:00 is 11:00 pm. If the system is displaying the resolved alarms (**R** in the Alarm Type field), Start Date and Time uses the Date/Time Resolved field to select log entries.

## Resolve Reason

The Resolve Reason field shows the cause of the alarm resolution. This field is blank when active alarms are displayed.

The Resolve Reason field is important in correlating a repair procedure with the actual resolution of alarms in the system. [Table 1-8](#) shows the possible values for the Resolve Reason field.

**Table 1-8. Resolve Reason: Possible Values**

| Reason | Description                                                                                                                                                        |
|--------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAINT  | The alarm was resolved by maintenance action. The resource recovered. For example, a diagnostic run against the alarmed resource passes.                           |
| MANUAL | The alarm was resolved by manual action. For example, a voice channel is taken out of service (MANOOS state).                                                      |
| RESTRT | The application was restarted or the system was rebooted. All active alarms are resolved.                                                                          |
| REMOVE | The alarm was resolved by physically or administratively removing the resource with the problem. For example, a voice card was physically removed from the system. |

The user cannot select Alarm Log entries based on this field.

**Alarm Management**


The Alarm Management window contains 6 fields that determine how the Lucent INTUITY system responds to alarms. The sa and vm logins can view the information on this window, but cannot change it.

All of the information on the Alarm Management window was entered by Lucent Technologies factory personnel before the system was shipped or by a technician during installation according to the terms of the Lucent Technologies maintenance contract.

**Access**

To access the Alarm Management screen using the default display options:

1. Start at the Lucent INTUITY main menu ([Figure 1-1](#)) and select

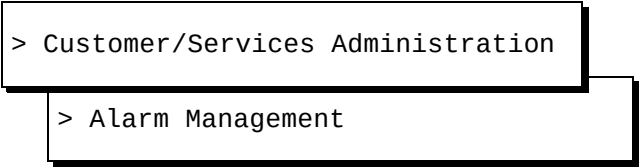

The system displays the Alarm Management window ([Figure 1-7](#)).

| Alarm Management         |              |
|--------------------------|--------------|
| Product ID               | 2999999999   |
| Alarm Destination        | 916148606427 |
| Alarm Origination        | ACTIVE       |
| Alarm Level              | MINOR        |
| Alarm Suppression        | ACTIVE       |
| Clear Alarm Notification | ACTIVE       |

Figure 1-7. Alarm Management Window

Alarm Management Window Fields

The following parameters control alarm management for the Lucent INTUITY system.

Product ID

The Product ID is a 10-digit number used to identify the system when talking with the Lucent Technologies remote maintenance center. There is no default for this field.

Alarm Destination

The Lucent INTUITY system is designed to notify a Lucent Technologies remote maintenance center whenever there are alarms that have been active for more than five minutes. The Alarm Destination field is the telephone number that the computer dials and transmits alarms to. The proper telephone number was entered during installation of the Lucent INTUITY system. Telephone numbers are displayed in this field as a string of digits without special characters except for the following.

- Equal sign (=) to wait for dial tone
- Dash (-) to pause for 2 seconds

For example:

9=1-6148605555

The above string tells the computer to dial 9, wait for dial tone, dial 1, wait 2 seconds, then dial 6148605555.

There is no default for this field.

## Alarm Origination

When Alarm Origination is active, the system notifies the remote maintenance center (designated by a telephone number in the Alarm Destination field) of alarms on this Lucent INTUITY system. The default for the Alarm Origination field is Active.



### NOTE:

This feature is not available in all locations.

## Alarm Level

The severity of the alarms sent to the remote maintenance center is identified in the Alarm Level field. If the Alarm Level is Major, then all alarms with a severity level of major are sent. If the Alarm Level is Minor, then all alarms with a severity level of major and minor are sent. The default for the Alarm Level field is Minor.

Alarms are sent to the remote center if they remain unresolved after 5 minutes. Up to 4 different alarms can be sent to the remote maintenance center in a single transmission. If the system has more than 4 active alarms at the designated alarm level, the system determines which alarms are sent first based on impacts to the system as a whole.

## Alarm Suppression

When the Alarm Suppression field is active, no alarms are sent to the remote maintenance center. It is used primarily during hardware repair procedures to prevent the system from calling out alarms while the technician is on site. The default for the Alarm Suppression field is Inactive.

## Clear Alarm Notification

When the UNIX system is rebooted, all active alarms are resolved. If the Clear Alarm Notification field is Active, an entry indicating that all alarms were cleared is sent to the designated remote maintenance center. The default for the Clear Alarm Notification field is Active.



# Administrator's Log Entries

# 2

---

## Overview

This chapter uses two parts Administrator's Log messages to identify the entries:

- Application Identifier — a two-letter code that indicates the software module affected by the alarm
- Event ID — a series of letters or letters and numbers that identifies the condition

Each entry for Administrator's Log messages includes a description and either a repair procedure or a notice that none is needed.

---

## Purpose

The purpose of this chapter is to describe the administrative messages and any associated repair procedures.

## How to Use this Chapter

---

To locate an Administrator's Log message in this chapter:

1. Locate the section for the appropriate application identifier.

Entries are organized alphabetically by the Application Identifier:

- [CA — Call Accounting System](#)
- [EL — Enhanced-List Application](#)
- [ML — MERLIN LEGEND Integration](#)
- [MT — Maintenance](#)
- [NW — Networking](#)
- [SM — Station Manager](#)
- [SW — Switch Integration](#)
- [VM — Voice Messaging](#)
- [VP — Voice Platform](#)

2. Scan the Event IDs at the top of each entry in this chapter to locate the log information. Within each application identifier section, entries are organized alphabetically by Event ID.

Variables in the message field are shown in pointed brackets, such as <channel number>. The words inside the brackets describe the type of information in the actual log entry. In the <channel number> field, a number like 23 may appear, representing the 24th voice channel. These variables are often used in the repair procedure to locate the problem.

### NOTE:

Even though the Administrator's Log can hold up to 1000 entries, you can display only 500 lines worth of data at one time. Use the display selection criteria to choose the log information that you want to see. See [Chapter 1, "Administrator's Log"](#) in [Chapter 1, "Getting Started"](#).

## **CA — Call Accounting System**

---

See Lucent™ *INTUITY™ Call Accounting System User Guide*, 585-310-728, for the Administrator's Log messages and repair procedures pertaining to the INTUITY Call Accounting System.

## EL — Enhanced-List Application

---

The following Administrator's Log messages and repair procedures apply to the Enhanced-List Application software.

### Event ID: ELA-badreca01 through ELA-badreca12

**Description:** Bad record deleted from E-List registry. Check for missing lists <extension>.

ELA detected a corrupt record and took the following action:

- If the message displays an extension, ELA deleted its record.
- If the message does not display an extension, ELA could not determine the extension of the corrupt record and deletes the record.

### Repair Procedure:

Use one of the following repair procedures:

- Go to the Administer Enhanced-Lists window and note any lists that may be missing.  
  
Use **F4** (New E-List) to re-enter each missing Enhanced List, one at a time. If ELA reports that an AUDIX® mailbox already exists for a given extension, and the reported data match those of the missing list, answer "y" to confirm the change of the existing mailbox into an enhanced-list mailbox.
- Restore data from the most recent backup of system data. See "Common System Procedures" in Chapter 3 in your maintenance book for instructions about restoring data. If you would prefer to have assistance with this restore, contact your remote maintenance center.

## Event ID: ELA-lostlock01 through ELA-lostlock10

**Description:** Messages to an enhanced list could not be delivered because someone was logged into the shadow mailbox.

### Repair Procedure:

No one should ever be logged into the shadow mailbox. However, if someone is, change the password for the shadow mailbox as follows:

1. Enter **ch su *extension*** for the enhanced-list mailbox.
2. At the Subscriber screen, enter a new password in the Password: field.
3. Press **Ⓕ** (Enter) to save the password.

## Event ID: ELA-no\_members

**Description:** ELA received a message for delivery to an Enhanced List, but the enhanced list did not contain any members. In such a case, ELA will delete the message.

### Repair Procedure:

The Enhanced List may need to have members added or perhaps the enhanced list is no longer necessary. Go to the Administer Enhanced-Lists window and do one of the following:

- Highlight the list and use **Ⓔ** (Open E-List) to enter members into the Enhanced List.
- Use **Ⓕ** (Delete E-List) to delete the Enhanced Lists.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more detailed procedures.

## Event ID: ELA-nestvioltn

**Description:** An enhanced list contains more than 20 nested lists.  
  
For example, enhanced list 1 contains enhanced list 2 as one of its members. Inside enhanced list 2 is Enhanced List 3. Enhanced list 3 contains yet another enhanced list as one of its members, and so on.

### Repair Procedure:

Evaluate list membership hierarchy and delete unnecessary nesting so that ELA can handle delivery of the message. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for procedures.

## Event ID: ELA-loopvioltn

**Description:** There are two enhanced lists that refer to each other. For example, enhanced list 1 contains enhanced list 2 as a member, and enhanced list 2 contains enhanced list 1 as a member.

### Repair Procedure:

Go to the Administer Enhanced-Lists window.

1. Use **[F5]** (Open E-List) to open one of the indicated Enhanced Lists.
2. Search for the extension of the other Enhanced List.
3. Use **[F7]** (Delete E-List) to delete the Enhanced List.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more detailed procedures.

## Event ID: ELA-mboxlock01

**Description:** An enhanced-list mailbox does not have trusted server access.

### Repair Procedure:

1. Enter **ch cos ELA\_Class\_of\_Service\_Name/Number**
2. Verify that the Trusted Server Access? field is set to **y**
3. Enter **ch su Enhanced\_List\_mailbox\_extension**
4. Verify the Class of Service field is the appropriate cos.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more detailed procedures.

## Event ID: ELA-chkrestrct

**Description:** A message was found in the shadow mailbox.

### Repair Procedure:

1. Enter **ch sys se**
2. Verify that the shadow mailbox belongs to a community that cannot receive messages.



### NOTE:

The sending restrictions must be identical on all machines in the INTUITY AUDIX network. Check the sending restrictions on all machines.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more detailed procedures.

## Event ID: ELA-shadow07

**Description:** Shadow mailbox space gridlock caused no ELA service for longer than the specified number of hours.

### Repair Procedure:

See the procedure for SHADOW Resource Type Alarm Code 6.

## Event ID: ELA-delivts05

**Description:** <Number> minutes with session resources unavailable for delivery trusted server.

The trusted server that delivers ELA messages cannot access the INTUITY AUDIX application. The message shows the amount of elapsed time (in 30 minute increments) since ELA stopped providing service.

When the time elapsed exceeds the value in the Minutes of Inactivity Before Alarm: field on the Trusted-Server Profile screen, AUDIX generates a minor alarm (Event ID: SERVER0900, resource type SERVER, alarm code 900.)

### Repair Procedure:

1. Enter **change system-parameters imapi-options**
2. Is the value in the Simultaneous Sessions Available for Trusted Server Access: field at least 2?
  - If yes, go to Step 3.
  - If no, change the value.
3. Determine if the AUDIX server is so overloaded that it has no resources available for ELA. Some questions to ask are:
  - How many trusted servers are on the network?
  - What are their activity cycles?



## **ML — MERLIN LEGEND Integration**

---

The following Administrator's Log messages and repair procedures apply to the MERLIN LEGEND® switch integration package:

### **Event ID: ML200**

**Description:** The system experienced a failure attempting to log into channel.

**Repair Procedure:**

None. This message is informational. Once the message is received, the Lucent INTUITY system recognizes that the channel is working.

### **Event ID: ML201**

**Description:** The system experienced a failure attempting to log out channel.

**Repair Procedure:**

None. This message is informational. Once the message is received, the Lucent INTUITY system automatically checks to see if the channel is working.

## MT — Maintenance

---

The following Administrator's Log messages and repair procedures apply to the maintenance portion of the Lucent INTUITY system:

### Event ID: AOMADM00001

- Description:**
- One of the following messages is generated when a corresponding change is made to the Alarm Management screen:
- Alarm Destination on Alarm Management Form changed to <phone number>
  - Alarm Origination State on Alarm Management Form changed to ACTIVE
  - Alarm Origination State on Alarm Management Form changed to INACTIVE
  - Alarm Origination Level on Alarm Management Form changed to MAJOR
  - Alarm Origination Level on Alarm Management Form changed to MINOR
  - Clear Alarm Notification on Alarm Management Form changed to ACTIVE
  - Clear Alarm Notification on Alarm Management Form changed to INACTIVE

**Repair Procedure:**

None. These messages are informational. The associated screen may not be changed with the sa (system administrator) or vm (voice mail) logins.

### Event ID: AOMADM00002

**Description:**

The system generates this message when attempts to contact the remote maintenance center have failed three times. When the remote maintenance center telephone line is busy, it is counted as a failure.

**Repair Procedure:**

If this message is reoccurring, access the Alarm Log and enter **MT** in the Application field and **ALARM\_ORIG** in the Resource Type of the Alarm Log Display Selection screen. If MT ALARM\_ORIG 1 is active, perform the corresponding repair procedure for this alarm.

If the alarm is not active, check connections on modem. If the problem persists, contact the remote maintenance center.

**Event ID: BKDONE**

**Description:** The system completed the backup process. The system logs this message whenever an attended or unattended backup completes successfully.

**Repair Procedure:**  
None. This message is informational. See “Common System Procedures” in Chapter 3 in your maintenance book for more information about date and time.

**Event ID: RSTDONE**

**Description:** The system completed a restore successfully. The system logs this message is logged for any successful restore.

**Repair Procedure:**  
None. This message is informational. See “Common System Procedures” in Chapter 3 in your maintenance book for more information about date and time.

**Event ID: UDTADM00000**

**Description:** A date or time change passed. The system logs this message whenever the date and time are successfully changed.

**Repair Procedure:**  
None. This message is informational. See “Common System Procedures” in Chapter 3 in your maintenance book for more information about date and time.

**Event ID: UDTADM00001**

**Description:** A date or time change failed. The system logs this message whenever the Lucent INTUITY system is unable to save date and time changes. If you entered an incorrect value while changing date and time, an error is displayed on the UNIX Management screen when you press **F3** (Save). The system gives you the opportunity to correct the entry and logs this message.

**Repair Procedure:**  
None. This message is informational. See “Common System Procedures” in Chapter 3 in your maintenance book for more information about date and time.

## Event ID: UDTADM00002

**Description:** Stop and Start cron passed. The system executes a stop and start of the cron process whenever you change the date and time.

**Repair Procedure:**

None. This message is informational.

## Event ID: UDTADM00003

**Description:** Stop and Start cron failed. If for some reason the system is unable to stop and start cron, the system displays an error on the UNIX Management screen when you press the **F3** (Save) key and logs this message.

**Repair Procedure:**

None. This is not a serious error, and you should try to change the date and time again later. See "Common System Procedures" in Chapter 3 in your maintenance book for more information about date and time.

## Event ID: UDTADM00004

**Description:** A timezone change passed. The system logs this message whenever date and time are successfully changed.

**Repair Procedure:**

None. This message is informational. See "Common System Procedures" in Chapter 3 in your maintenance book for more information about date and time.

## Event ID: UDTADM00005

**Description:** A timezone change failed. The system logs this message whenever it is unable to save date and time changes. If you enter an incorrect value while changing date and time, the system displays an error when you press **F3** (Save) and logs this message.

**Repair Procedure:**

None. This message is informational. See "Common System Procedures" in Chapter 3 in your maintenance book for more information about date and time.

## NW — Networking

---

The following Administrator's Log messages and repair procedures apply to INTUITY AUDIX Digital Networking:

### Event ID: SWANENAME

- Description:** Connect to machine <machine\_name> aborted - invalid machine name.
- The local machine attempted to communicate with the remote machine, <machine\_name>. However, there was a problem when the machines exchanged names. There are two possible causes:
- The local machine's name is not in the remote machine's database.
  - The local machine expected the name of the remote machine to be <machine\_name>, but the remote machine was named differently.

### Repair Procedure:

Either:

- On the remote machine, add an entry for the local machine using the networking Remote Machine Administration windows.
- On the local machine, correct the phone number and connection information for the remote machine using the networking Remote Machine Administration windows.

See *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

### Event ID: SWANENAMEREM

- Description:** Rejected login from remote machine <machine\_name> - unknown machine name.
- The remote machine, <machine\_name>, attempted to communicate with the local machine. However, the remote machine's name is not in the local machine's database.

### Repair Procedure:

On the local machine, add an entry for the remote machine using the networking Remote Machine Administration windows.

See *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEPASS

**Description:** Connect to machine <machine\_name> aborted - invalid password.

The local machine attempted to communicate with the remote machine, <machine\_name>. However, the local machine did not know the correct password for the remote machine.

### Repair Procedure:

On the local machine, enter the correct password for the remote machine using the networking Remote Machine Administration windows.

See *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEPASSREM

**Description:** Rejected login from remote machine <machine\_name> - invalid password.

The remote machine, <machine\_name>, attempted to communicate with the local machine. However, the remote machine did not know the correct password for the local machine.

### Repair Procedure:

On the remote machine, enter the correct password for the local machine using the networking Remote Machine Administration windows.

See *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEPERM

**Description:** Connect to machine <machine\_name> aborted - permission denied.

A low level protocol error has occurred between the local and the remote which did not permit the machines to connect. The connection will be rescheduled for later.

### Repair Procedure:

None. This message is informational. See *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANETHRESH

**Description:** Message transmission threshold reached for machine <machine\_name>

The local machine has repeatedly tried to send a networked message to the remote machine, <machine\_name>, without success.

### Repair Procedure:

Use the Diagnostics window to run a connection test to the remote machine to verify that the link to the remote machine is up.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDABORT1

**Description:** Update aborted from errors. Transmissions temporarily disabled to <machine\_name>

A full update was in progress with the remote machine, <machine\_name>, when an error occurred which caused the update to be aborted. Transmissions to the remote machine will be temporarily disabled. However, the system will attempt transmission later.

### Repair Procedure:

None. This message is informational. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDABORT2

**Description:** Unable to perform requested full update to <machine\_name>. Updates temporarily disabled.

The local machine was unable to perform a full update to the remote machine, <machine\_name>, due to errors.

### Repair Procedure:

None. This message is informational. The nightly networking database audit will automatically remedy the problem. The system will attempt the update again, after the audit.

## Event ID: SWANEUPDPERM1

**Description:** Full update denied because of permissions from <machine\_name>

The local machine attempted to get a full subscriber update from remote machine, <machine\_name>. However, the remote machine's permissions did not allow this.

### Repair Procedure:

1. If you want the local machine to get updates from the remote machine, ask the remote machine's system administrator to do the following on the remote machine.
2. Log in to the Lucent INTUITY system as sa.
3. Select AUDIX Administration from the Lucent INTUITY main menu.
4. Enter **change machine** on the command line.
5. Verify that the Updates Out field (second page of this screen) is set to **y**.
6. Press **F1** (Cancel).
7. Enter **change machine local-machine-name**
8. Verify that Updates Out field (second page of this screen) is set to **y** If it is not, change the entry to y.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDPERM2

**Description:** No permissions for requested full update to <machine\_name>

A full update was requested by the remote machine, <machine\_name>, from the local machine. However, the local machine's permissions do not allow this.

### Repair Procedure:

If you want to send updates to the remote machine from the local machine, do the following on the local machine.

1. Log in to the Lucent INTUITY system as sa.
2. Select AUDIX Administration from the Lucent INTUITY main menu.
3. Enter **change machine** on the command line.
4. Verify that the Updates Out field (second page of this screen) is set to **y** If it is not, change the entry to y.



5. Press **F1** (Cancel).
6. Enter **change machine** *machine\_name* (from the log).
7. Verify that Updates Out field (second page of this screen) is set to **y** If it is not, change the entry to y.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDPERM3

**Description:** Remote subscriber update from <machine\_name> denied.

The local machine received a subscriber update from the remote machine, <machine\_name>. However, the permissions on the local machine do not allow incoming updates from the remote machine.

### Repair Procedure:

If you want the local machine to receive updates from the remote machine, do the following on the local machine.

1. Log in to the Lucent INTUITY system as sa.
2. Select AUDIX Administration from the Lucent INTUITY main menu.
3. Enter **change machine** on the command line.
4. Verify that the Updates In field (second page of this screen) is set to **y** If it is not, change the entry to y.
5. Press **F1** (Cancel).
6. Enter **change machine** *machine\_name* (from the log).
7. Verify that Updates In field (second page of this screen) is set to **y** If it is not, change the entry to y.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDPERM4

**Description:** Full update requested but remote update permissions disabled.

A full update was requested on the local machine. However, the permissions on the local machine do not allow full updates.

### Repair Procedure:

If you want to receive full updates on the local machine, do the following on the local machine.

1. Log in to the Lucent INTUITY system as sa.
2. Select AUDIX Administration from the Lucent INTUITY main menu.
3. Enter **change machine** on the command line.
4. Verify that the Updates In field (second page of this screen) is set to **y** If it is not, change the entry to y.
5. Press **[F1]** (Cancel).
6. Enter **change machine remote-machine-name**
7. Verify that Updates In field (second page of this screen) is set to **y** If it is not, change the entry to y.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDREQD1

**Description:** Local update discrepancies require full update from <machine\_name>

The local machine has detected subscriber discrepancies while sending a message to the remote machine, <machine\_name>, which require a full update from the remote machine to the local machine. That is, the local machine's version of the remote machine's data is out of date. Therefore, the local machine needs to be updated with the remote machine's current data.

### Repair Procedure:

None. This message is informational. The local machine will request the update automatically. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDREQD2

**Description:** Remote update discrepancies require full update from <machine\_name>

The local machine has detected subscriber discrepancies on the remote machine while sending a message to the remote machine, <machine\_name>, which require a full update from the remote machine to the local machine. That is, the local machine's version of the remote machine's data is out of date. Therefore, the local machine needs to be updated with the remote machine's current data.

### Repair Procedure:

None. This message is informational. The local machine will request the update automatically. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDREQD3

**Description:** Update discrepancies require full update to <machine\_name>

The local machine has detected subscriber discrepancies while receiving a message from the remote machine, <machine\_name>, which require a full update to the remote machine from the local machine. The remote machine's version of the local machine's data is out of date. Therefore, the remote machine needs to be updated with the local machine's current data.

### Repair Procedure:

None. This message is informational. The local machine will perform the update automatically. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANEUPDSUB

**Description:** Cannot add remote subscriber <subscriber\_name>/<extension\_no> - too many subscribers

The local machine has reached the limit on the number of remote subscribers while adding the subscriber, <subscriber\_name>, with extension, <extension\_no>.

### Repair Procedure:

To increase the limit on the number of remote subscribers:

1. Log in to the Lucent INTUITY system as vm, sa, or craft.
2. Select AUDIX Administration from the Lucent INTUITY main menu.
3. Enter **change system-parameters limits** at the command line.
4. Increase the number in the Administered Remote field (administered remote subscribers).
5. Press **␣** (Enter).

## Event ID: SWANIUPDREQ

**Description:** A full update has been requested by <machine\_name>

The remote machine, <machine\_name>, has requested a full subscriber update from the local machine due to discrepancies.

### Repair Procedure:

None. This message is informational. The local machine will perform the update automatically. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANIUPDSTAT1

**Description:** Starting full update from <machine\_name>

The local machine has started to receive a full subscriber update from the remote machine, <machine\_name>.

### Repair Procedure:

None. This message is informational. The update takes place automatically. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: SWANIUPDSTAT2

Description:

Full update (not including names) completed successfully from <machine\_name>

A full subscriber update (not including names) completed successfully from the remote machine, <machine\_name>, to the local machine.

Repair Procedure:

None. This message is informational. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: SWANIUPDSTAT3

Description:

Full update (not including names) completed successfully to <machine\_name>

A full subscriber update (not including names) completed successfully to the remote machine, <machine\_name>, from the local machine.

Repair Procedure:

None. This message is informational. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: SWANIUPDSTAT4

Description:

Full update completed - names received successfully from <machine\_name>

A full subscriber update (including names) completed successfully from the remote machine, <machine\_name>, to the local machine.

Repair Procedure:

None. This message is informational. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANIUPDSTAT5

**Description:** Full update completed - no names needed from  
<machine\_name>

A full subscriber update completed successfully to the remote machine, <machine\_name>, from the local machine.

### Repair Procedure:

None. This message is informational. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWANIUPDSUBCHG

**Description:** Subscriber <subscriber\_name>, ext <extension\_number> on machine <machine\_name> changed to verified due to name conflict.

The local machine received a subscriber update from the remote machine, <machine\_name>. However, the remote subscriber indicated by <subscriber\_name> and <extension\_number> was not administered on the local machine because the subscriber's name or touch-tone equivalent of the name is the same as another existing local or remote administered subscriber.

### Repair Procedure:

On the local machine: Change the name of the local subscriber (or remote administered subscriber) that is already administered to something unique.

Or, contact the administrator of the remote machine to request that the name of the remote subscriber be changed on the remote machine to something unique.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: SWNDINVLDEQP

**Description:** Invalid networking ports equipage, excess ports have been unequipped.

The Networking Module has detected that more ports are equipped in the Networking Database than are allowed by the purchased feature options. This message may appear after a restore.

### Repair Procedure:

None. This message is informational. The extra ports have been unequipped so that the number of equipped networking ports matches the feature option screen. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## SM – Station Manager

---

The following Administrator's Log message and repair procedure applies to station manger resource:

### Event ID: SM201

**Description:** Subscriber <extension number> switch id <number> not found.

The system was not able to locate the indicated user.

### Repair Procedure:

Administer the subscriber for the correct switch number with **change subscriber <extension number>**

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.



## SW — Switch Integration

---

The following Administrator's Log messages and repair procedures apply to the switch integration portion of the Lucent INTUITY system:

### Event ID: DCIU008

**Description:** The system received an invalid switch number <switch number>.

**Repair Procedure:**

1. Log in to the Lucent INTUITY system as sa.
2. Select Switch Administration from the Lucent INTUITY main menu.
3. Verify that the Host Switch Number is correct. See your Lucent INTUITY switch integration book for instructions.
4. Verify that the Host Switch Number matches administration on the switch.
5. Call the Lucent INTUITY system main number to verify that a call can be successfully placed.

### Event ID: DCIU009

**Description:** The system received an incorrect AUDIX number <number> from switch <switch number>.

**Repair Procedure:**

1. Log in to the Lucent INTUITY system as sa.
2. Select Switch Administration from the Lucent INTUITY main menu.
3. Verify that the AUDIX Number is correct. See your Lucent INTUITY switch integration book for instructions.
4. Verify that the AUDIX Number matches administration on the switch.

Event ID: DCIU010

**Description:** The system received the switch port <number> but expected <number> for channel <number>.

**Repair Procedure:**

1. Log in to the Lucent INTUITY system as sa.
2. Select Switch Administration from the Lucent INTUITY main menu.
3. Verify that the Switch Port number is correct. See your Lucent INTUITY switch integration book for instructions.
4. Verify that the Switch Port number matches administration on the switch.

Event ID: DCIU011

**Description:** The local port does not agree with the logical channel. The system received local port <number> but expected <number> for channel <number>.

**Repair Procedure:**

1. Log in to the Lucent INTUITY system as sa.
2. Select Switch Administration from the Lucent INTUITY main menu.
3. Verify that the Logical Channel number is correct. See your Lucent INTUITY switch integration book for instructions.
4. Verify that the Logical Channel number matches administration on the switch.

Event ID: IF110

**Description:** The process received a bad switch id from another process.

**Repair Procedure:**

None. This is an informational message.

Event ID: IF120

**Description:** The system failed to get a valid device to update the message waiting indicator for a particular extension.

**Repair Procedure:**

None. This is an informational message.

## Event ID: IF130

**Description:** The switch integration process received a bad extension number.

**Repair Procedure:**

None. This is an informational message.

## Event ID: SE120

**Description:** The switch integration software received a message from the platform software that the named port is operational.

**Repair Procedure:**

None. This is an informational message.

## Event ID: SE130

**Description:** The switch integration software received a message from the platform software that a port is not operational.

**Repair Procedure:**

None. This is an informational message.

## Event ID: SW160

**Description:** The initialization of the translation tables failed.

**Repair Procedure:**

None. This is an informational message.

## Event ID: TY160

**Description:** None of the serial ports is operating.

**Repair Procedure:**

None. This is an informational message.

## Event ID: IB100

**Description:** A switch integration process was unable to log the channel when it got a port in-service message.

**Repair Procedure:**

None. This is an informational message.

## Event ID: IB110

**Description:** A switch integration process received an invalid channel number.

**Repair Procedure:**

None. This is an informational message.

## Event ID: VB508

**Description:** The VB-PC interface process software is unable to use the attendant translation tables.

**Repair Procedure:**

Check the attendant translation tables and verify that they are correct. See your Lucent INTUITY switch integration book for instructions.

If the attendant translation tables contain correct information, contact your remote maintenance center.

## Event ID: VB513

**Description:** The switch integration process was unable to do a message-waiting indicator update on the listed extension number through the listed VB-PC port.

**Repair Procedure:**

Check the class of service (COS) setting on your switch for the extension listed in the message. Verify that the extension has all of the necessary privileges. If the extension is administered correctly on the switch and this condition persists, contact your remote maintenance center.

## Event ID: VB515

**Description:** The VB-PC software is unable to translate the attendant extension to the automated attendant extension number. The attendant translation tables may not be in use for this installation or they may not have been administered.

### Repair Procedure:

Check the attendant translation tables and verify that they are correct. See your Lucent INTUITY switch integration book for instructions.

If the attendant translation tables contain correct information, contact your remote maintenance center.

## Event ID: VB516

**Description:** The system cannot use the attendant translations because the attendant translation tables could not be initialized.

### Repair Procedure:

Check the attendant translation tables and verify that they are correct. See your Lucent INTUITY switch integration book for instructions.

If the attendant translation tables contain correct information, contact your remote maintenance center.

## Event ID: VB517

**Description:** The system failed to translate an extension on the switch to its AUDIX extension number.

### Repair Procedure:

Check the Dial Plan Translation window and verify that the entry in the INTUITY Prefix field is correct. See your Lucent INTUITY switch integration book for instructions.

## Event ID: WTR200

**Description:** No SMDI link device is assigned.

### Repair Procedure:

1. Start at the Lucent INTUITY main menu and select

```
> Switch Interface Administration
```

```
> Switch Link Administration
```

2. Press **F2** (Choices) to view the valid serial port names.
3. Select the serial port to be used for the switch link connection.
4. Press **F3** (Save) to change the screen.
5. Stop the voice system.
6. Start at the Lucent INTUITY main menu and select

```
> Customer/Services Administration
```

```
> System Management
```

```
> System Control
```

```
>Stop Voice System
```

7. When the voice system has stopped, select Start Voice System from the System Control menu to restart the voice system.

## VM — Voice Messaging

---

The following Administrator's Log messages and repair procedures apply to INTUITY AUDIX Voice Messaging and AMIS Analog Networking:

### Event ID: ADM\_aabe

**Description:** Invalid attendant, sub=<att-name> ext=<att-extension>

**Repair Procedure:**

Administer the attendant: change button assignment to a valid extension.  
Use **change subscriber att-extension**

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

### Event ID: ADM\_aanb

**Description:** No buttons for attendant, sub=<att-name>  
ext=<att-extension>

**Repair Procedure:**

Assign buttons or delete the unneeded attendant. Use **change subscriber att-extension** or **remove subscriber att-extension**

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

### Event ID: ADM\_adm

**Description:** The guest password is less than the minimum required length.

**Repair Procedure:**

Change the guest password. Use **change system-parameters features**  
The system shows the minimum length for the password in the field next to the System Guest Password field.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_amcb

**Description:** <callback number> changed from <old name> to <new name>

### Repair Procedure:

None. This message is an informational message. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_amsd

**Description:** AMIS machine <name> reference to blank <callback number> changed

### Repair Procedure:

None. This is an informational message. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_annc

**Description:** <class number> bad login announcement reset to system

The system is using the default login announcement for the indicated class of service (COS). The system can use optional sets if the Multilingual feature is active.

### Repair Procedure:

Verify the administration of the indicated COS. Use **change cos number** Change the Login Announcement Set field if it is incorrect. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.



Event ID: ADM\_annc

**Description:** <class number> bad primary announcement reset to system

The system is using the default primary announcement for the indicated class of service (COS). The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Verify the administration of the indicated CO. Use **change cos number** Change the Call Answer Primary Announcement Set field if it is incorrect. You can use any of the optional languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annc

**Description:** <class number> bad secondary announcement reset to system

The system is using the default call answer secondary announcement set for the indicated class of service (COS). Optional sets may only be used if the Multilingual feature is active.

**Repair Procedure:**

Verify the administration of the indicated COS. Use **change cos number** Change the Call Answer Secondary Announcement Set field if it is incorrect. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annc

**Description:** Unpopulated login <ann name> for <cos number>

The specified class of service (COS) does not have an assigned login announcement set. The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Administer the indicated COS. Use **change cos number** Assign an announcement set to the Login Announcement Set field. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annc

**Description:** Unpopulated login <ann name> for <extension name>

The specified extension does not have an assigned login announcement set. The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Administer the indicated extension. Use **change subscriber extension number** Assign an announcement set to the Login Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annc

**Description:** Unpopulated primary <ann name> for <cos number>

The specified class of service (COS) does not have an assigned call answer primary announcement set. The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Administer the indicated COS. Use **change cos number** Assign an announcement set to the Call Answer Primary Announcement Set field. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annnc

**Description:** Unpopulated primary <ann name> for <extension name>

The specified extension does not have an assigned call answer primary announcement set. The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Administer the indicated extension. Use **change subscriber extension number** Assign an announcement set to the Call Answer Primary Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use the **list annnc-sets** command. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

Event ID: ADM\_annnc

**Description:** Unpopulated secondary <ann name> for <cos number>

The specified class of service (COS) does not have an assigned call answer secondary announcement set. The system can use optional sets only if the Multilingual feature is active.

**Repair Procedure:**

Administer the indicated COS. Use **change cos number** Assign an announcement set to the Call Answer Secondary Announcement Set field. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Unpopulated secondary <ann name> for <extension name>

The specified extension does not have an assigned call answer secondary announcement set. The system can use optional sets only if the Multilingual feature is active.

### Repair Procedure:

Administer the indicated extension. Use **change subscriber extension number** Assign an announcement set to the Call Answer Primary Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Bad login annnc set for <name> reset to system. The login announcement for the specified subscriber was not found in system data and the system is using the system default.

### Repair Procedure:

Verify that the subscriber's login announcement exists or that an existing login number is being used.

Administer the indicated extension. Use **change subscriber extension number** Assign an announcement set to the Login Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Bad login annnc set for <cos number> reset to system

The system is using the default primary announcement for the indicated class of service (COS). The system can use optional sets only if the Multilingual feature is active.

### Repair Procedure:

Verify the administration of the indicated COS. Use **change cos number** Change the Login Announcement Set field if it is incorrect. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Bad primary annnc set for <name> reset to system

The system is using the default call answer primary announcement set for the indicated subscriber. The system can use optional sets only if the Multilingual feature is active.

### Repair Procedure:

Administer the indicated extension. Use **change subscriber name** Assign an announcement set to the Call Answer Primary Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Bad primary annnc set for <cos number> reset to system

The system is using the default call answer primary announcement set for the indicated class of service (COS). The system can use optional sets only if the Multilingual feature is active.

### Repair Procedure:

Verify the administration of the indicated. Use **change cos number** Change the Call Answer Primary Announcement Set field if it is incorrect. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annnc

**Description:** Bad secondary annnc set for <name> reset to system

The system is using the default call answer secondary announcement set for the indicated subscriber. The system can use optional sets only if the Multilingual feature is active.

### Repair Procedure:

Administer the indicated extension. Use **change subscriber name** Assign an announcement set to the Call Answer Secondary Announcement Set field under the Subscriber Class of Service Parameters on Page 2. You can use any languages installed on the system. To verify the announcement sets available, use **list annnc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_annc

**Description:** Bad secondary annc set for <cos number> reset to system

The system is using the default call answer secondary announcement set for the indicated class of service (COS). Optional sets may only be used if the Multilingual feature is active.

### Repair Procedure:

Verify the administration of the indicated COS. Use **change cos number** Change the Call Answer Secondary Announcement Set field if it is incorrect. You can use any languages installed on the system. To verify the announcement sets available, use **list annc-sets** See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.

## Event ID: ADM\_apib

**Description:** Attempt to break in to voice mailbox owned by <name>, <name> from API

### Repair Procedure:

This message indicates a possible attempt at toll fraud. You may wish to strengthen the security parameters for the indicated mailbox, by lowering the number of attempts before lockout occurs. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_atpg

**Description:** Attendant <extension> does not have a personal greeting recorded.

### Repair Procedure:

Record the attendant menu.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attm

**Description:** Auto Attendant calls itself, <att-extension>

**Repair Procedure:**

Use **change subscriber att-extension** to change the auto attendant time-out button extension to something other than the attendant's extension.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attm

**Description:** Menu choice <button> (ext. <extension1>) for attendant <extension2> is invalid

**Repair Procedure:**

Use **change subscriber extension** for extension 2 to remove this menu choice or use **add subscriber extension** for extension 1, and make a mailbox for extension1.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attm

**Description:** Default menu choice (ext. <extension1>) for attendant <extension2> is invalid.

**Repair Procedure:**

Use **change subscriber extension** for extension2 to remove this menu choice, or use **add subscriber extension** for extension1 to make a mailbox for extension1.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.



Event ID: ADM\_attm

**Description:** Menu choice <button> (ext. <extension1>) for attendant <extension2> - no permission

**Repair Procedure:**

Use **change subscriber extension** for extension 2 to enter **call-answer** or **guest-greeting** in the treatment column for button (extension1).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attm

**Description:** Default menu choice (ext. <extension1>) for attendant <extension2> - no permission

**Repair Procedure:**

Use **change subscriber extension** for extension2 to enter **call-answer** or **guest-greeting** in the treatment column for button (extension1).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attm

**Description:** Attendant <att-extension> choice has invalid treatment <type>

**Repair Procedure:**

Use **change subscriber att-extension** to reenter the treatment of type in the treatment column.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_attx

**Description:** Transfer not allowed and attendant <attendant extension> allows transfer

**Repair Procedure:**

Use **change system-parameters features** to enter values in the Call Transfer Out of AUDIX fields (second page of screen).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_attx

**Description:** Transfer not active and attendant <attendant extension> uses transfer

### Repair Procedure:

Use **change system-parameters features** to enter values in the Call Transfer Out of AUDIX fields (second page of screen).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_bsxt

**Description:** Call answer, non-subscriber <owner's extension>

Someone without an INTUITY AUDIX mailbox either has coverage to the INTUITY AUDIX system or is invoking Call Forwarding (a switch feature) to the Lucent INTUITY system. Each time a call comes to a Lucent INTUITY port for this person, the port cannot take another call until the caller hangs up.

### Repair Procedure:

Do one of the following:

- Use **add subscriber owner's extension** to assign the person an INTUITY AUDIX mailbox.
- On the switch, remove the INTUITY system from the person's coverage path.
- Inform the person that they should not use Call Forwarding to the Lucent INTUITY system.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_bver

**Description:** Invalid AMIS version from remote system.

AMIS messages could not be transmitted to or from a remote machine because a different protocol was used.

### Repair Procedure:

Contact the remote AMIS system administrator and attempt to resolve any version or protocol differences.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_cais

Description:

Non-subscriber <invalid subscriber extension>, default treatment.

The default treatment is in use for the system. The Lucent INTUITY system has directed the call for a non-subscriber extension to an operator or administrator, depending upon the system's administration.

Repair Procedure:

None. This message is informational. If you want to change the call answer treatment, contact your remote maintenance center.

Event ID: ADM\_cais

Description:

Non-subscriber <invalid subscriber extension, transferring to <new-extension>.

A call for a non-subscriber extension has been routed to a valid, remote maintenance-center administered subscriber extension.

Repair Procedure:

None. This message is informational. If you want to change the call answer treatment, contact your remote maintenance center.

Event ID: ADM\_cais

Description:

Transfer to <new-extension> - invalid extension.

The system attempted to transfer the call for a non-subscriber extension to an operator or administrator, and the transfer failed because the operator or administrator extension number was invalid.

Repair Procedure:

Contact your remote maintenance center to verify or re-administer the destination extension.

Event ID: ADM\_cais

Description:

Non-subscriber <invalid subscriber extension>, letting it ring.  
  
The system received a call for an invalid subscriber extension and is not answering the call, according to the administration on the system.

Repair Procedure:

None. This message is informational. If you want to change the call answer treatment, contact your remote maintenance center.

Event ID: ADM\_cais

Description:

Non-subscriber <invalid subscriber extension>, going to <new-extension>'s mbox.  
  
The system forwarded a call for a non-subscriber extension to a valid subscriber's mailbox for call-answer treatment. The caller can leave a message in the valid subscriber's mailbox.

Repair Procedure:

None. This is an informational message.

Event ID: ADM\_cais

Description:

Call answer to <new-extension> invalid extension.  
  
The system attempted to forward a call for a non-subscriber extension to a valid subscriber's mailbox. However, the extension administered for the system is invalid.

Repair Procedure:

Contact your remote maintenance center to re-administer the destination extension.

## Event ID: ADM\_cais

**Description:** Call answer to <new-extension> - no permission.

The system forwarded a call for a non-subscriber extension to a valid subscriber mailbox that does not have call-answer permissions set.

### Repair Procedure:

Administer the destination mailbox for call-answer permissions. Use **change extension**

## Event ID: ADM\_cbnm

**Description:** The local number is missing from callback number

### Repair Procedure:

Use **change system-parameters analog-network** to enter a value in the Local Number field under CALLBACK NUMBER. See *AMIS Analog Networking*, 585-300-512, for more information.

## Event ID: ADM\_cmtty

**Description:** Network machine <machine-name> has illegal community ID. Automatically set to 1 (default)

### Repair Procedure:

Use **change machine *machine-name*** to set the machine's Default Community field.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information on network machines. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information on community ids.

## Event ID: ADM\_cmw1

**Description:** Corrupt message waiting light, extension <extension>

This message indicates a disagreement between the Lucent INTUITY system and the switch about a subscriber's message waiting indicator. This message could be caused by a race condition.

### Repair Procedure:

1. Check the last results of the Platform User Database Audit to see if any discrepancies occurred in last night's audit.
2. If the subscriber continues to experience the problem, contact the remote maintenance center.

## Event ID: ADM\_cpas

**Description:** Copying of announcement sets was interrupted by a shutdown.

Announcement set annnc-set\_1 was being copied to announcement set annnc-set\_2 but was interrupted by a shutdown.

### Repair Procedure:

Use **copy annnc-set** to attempt the copy operation again.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_ctna

**Description:** Covering extension assigned while Call Transfer Out of the INTUITY AUDIX system is not active.

### Repair Procedure:

1. Use **change system-parameters features** to enter values in the Call Transfer Out of AUDIX fields (second page of screen).
2. Use **change subscriber name or extension** to re-administer the covering extension field.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM-dups

**Description:** <subscriber name> administered as extension <extension number> on machine <machine name>

### Repair Procedure:

Use **change subscriber *name or extension***

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM-dupt

**Description:** <subscriber name> is a duplicate touch tone name for <called extension> on machine <machine name>

### Repair Procedure:

Use **change subscriber *name or extension*** to change the name of the person who owns one of the mailboxes.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_gpcf

**Description:** Guest password conflict: <name> <extension>

### Repair Procedure:

Change guest password. Use **change system-parameters features** The minimum length for the password is shown in the field next to the System Guest Password field. Inform people that use the guest password of the change.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_ilbm

**Description:** Loopback message from <callback\_number>, cannot reply. Someone sent a message to the AMIS loopback test mailbox, but the Lucent INTUITY system was unable to reply to the <callback\_number> shown in the message.

**Repair Procedure:**

Use **change system-parameters analog-network** to verify that AMIS Analog Networking Outgoing is set to y and that there is a proper value in the AMIS Prefix field. You may also want to check with the remote system administrator.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_inva

**Description:** Invalid AMIS analog dial string <dial string>

**Repair Procedure:**

1. Start at the Lucent INTUITY main menu and select

```
> Networking Administration
> Remote Machine Administration
> AMIS Analog Machine Administration
```

2. Verify that the proper value exists in the Dial Str field.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_isum

**Description:** Invalid digit in AMIS sum string.

**Repair Procedure:**

Contact the remote maintenance center.



## Event ID: ADM\_lfmb

**Description:** Full mailbox for <extension>

### Repair Procedure:

If this happens frequently, talk with the subscriber. The mailbox may simply need to be cleaned out more often. If a larger mailbox is needed, use **change subscriber name or extension** to increase the mailbox size on the second page of the screen.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_lfmb

**Description:** The broadcast mailbox is full.

### Repair Procedure:

If you have a broadcast message to deliver, log into the broadcast mailbox, delete one of the old messages, and then send the new message.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_innr

**Description:** Name not recorded for <name> <extension>

### Repair Procedure:

Record a name for the subscriber specified in the log message.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_lpba

**Description:** Break-in attempt into mailbox at ext <owner's extension> from ext <originating\_extension>

### Repair Procedure:

This message could be an indication of toll fraud. Use the Activity Log to examine the events of the mailbox.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_lpba

**Description:** Break-in attempt into mailbox at ext <owner's extension> from outside call

### Repair Procedure:

This message could be an indication of toll fraud. Use the Activity Log to examine the events of the mailbox.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_Isos

**Description:** The system is out of space.

### Repair Procedure:

1. Use **display system-parameters thresholds** to verify the amount the space being used by messages.
2. Access the Alarm Log to see if any warning alarms related to speech storage space exist and follow their repair procedures.

## Event ID: ADM\_Isxl

**Description:** Mixed local subscriber extension lengths.

### Repair Procedure:

1. Use **list extensions** to identify the differing lengths.
2. Use **change subscriber extension** to correct the database.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_mlfg

**Description:** Multiple personal greetings are turned on or off.

### Repair Procedure:

None. This is an informational message.

## Event ID: ADM\_mnod

**Description:** Multiple nodes for AMIS address <address>.

### Repair Procedure:

1. Use **list address-ranges** to identify which address ranges are overlapping.
2. Use **change machine *machine-name*** to re-administer the address ranges.

See *AMIS Analog Networking*, 585-300-512, for more information.

## Event ID: ADM\_noci

**Description:** No transmission cycle intersection with outcalling for node:  
<node number> name: <node name>

This message concerns AMIS Analog Networking which uses the outcalling cycles to transmit messages. In this case, the cycles for the given node do not intersect with the outcalling cycles.

### Repair Procedure:

1. One or both cycles must be changed for AMIS messages to be sent. Use **change system-parameters outcalling**

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

2. Start at the Lucent INTUITY main menu and select

```
> Networking Administration
```

```
> Remote Machine Administration
```

```
> AMIS Analog Machine Administration
```

3. Verify that the Message Transmission schedule intersects with the outcalling cycles.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_ncyc

**Description:** Network machine <machine-name> has no transmission cycles

**Repair Procedure:**

For AMIS analog machines, administer transmission cycles by doing the following:

1. Start at the Lucent INTUITY main menu and select

```
> Networking Administration
> Remote Machine Administration
> AMIS Analog Machine Administration
```

2. Verify that the Message Transmission schedule intersects with the outcalling cycles.

See *AMIS Analog Networking*, 585-300-512, for more information.

For digital networking machines, administer transmission cycles by doing the following:

1. Start at the Lucent INTUITY main menu and select

```
> Networking Administration
> Remote Machine Administration
> Digital Network Machine Administration
```

2. Verify that the Message Transmission schedule exists.

See *Lucent INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: ADM\_ndig

**Description:** Network machine <machine-name> has illegal extension size

**Repair Procedure:**

Use **change machine** *machine-name* to re-administer the machine's extension size.

See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: ADM\_ndsd

**Description:** Remote subscribers are deleted

**Repair Procedure:**


None. This message is an informational message. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: ADM\_nloc

**Description:** A local node record is missing. The system inserted the default instead.

**Repair Procedure:**

1. Start at the Lucent INTUITY main menu and select

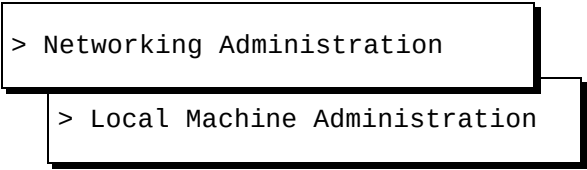

2. Administer the local machine.
  3. Use the **change machine** command in the INTUITY AUDIX administration screens to continue administering the local machine.
- See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: ADM\_nmtl

**Description:** Message transmission limit reached for machine  
<machine\_name>

**Repair Procedure:**

- 1. Consider enlarging the range of times that AMIS messages are sent. Change the outcalling cycles, AMIS cycles, or both. Use **change system-parameters outcalling** to change the outcalling cycles.
- 2. Start at the Lucent INTUITY main menu and select

```
> Networking Administration
> Remote Machine Administration
> AMIS Analog Machine Administration
```

- 3. Increase the Message Transmission time periods.  
See *AMIS Analog Networking*, 585-300-512, for more information on AMIS message transmission times. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information on outcalling schedules.

Event ID: ADM\_nntr

**Description:** Send to nonadministered remote node. Set field to y for machine <remote machine-name>

**Repair Procedure:**

Use **change machine remote machine-name** to set the Send to Non Administered Recipients field to y.  
See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

Event ID: ADM\_nrng

**Description:** Network machine <machine-name> has no address ranges

**Repair Procedure:**

Use **change machine machine-name** to administer the address ranges.  
See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

## Event ID: ADM\_nsmb

**Description:** No voice space available to add new mailboxes.

### Repair Procedure:

1. Use **display system-parameters thresholds** to verify the amount the space being used by voice messages.
2. Access the alarm log to see if any warning alarms exist related to speech storage space and follow their repair procedures accordingly.

## Event ID: ADM\_pafd

**Description:** System profile is corrupt; the password aging is disabled.

### Repair Procedure:

Re-administer the SUBSCRIBER PASSWORD AGING LIMITS (DAYS) parameters. Use **change system-parameters features** These parameters are located on Page 1 of the form. Change the parameters first to undesired values, enter, and then change the fields to the desired values and enter the data again. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

If this message appears after you have re-administered the parameters, contact your remote maintenance center for assistance.

## Event ID: ADM\_pewd

**Description:** System profile corrupt, password warning disabled

### Repair Procedure:

Re-administer the Expiration Warning field. Use **change system-parameters features** This parameter is located on Page 1 of the form. Change the parameter first to an undesired value, enter, and then change the field to the desired value and enter the data again. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

If this message appears after you have re-administered the parameters, contact your remote maintenance center for assistance.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for all calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant again, with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for out-of-hours calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for internal calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.



Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for external calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for busy calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for no-answer calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Automated Attendant menu lost for unknown calls, extension <attendant-extension>

**Repair Procedure:**

Record the menu for the automated attendant with the attendant-extension. Use **change subscriber attendant-extension** to view the automated attendant.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for all calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for out-of-hours calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for internal calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for external calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for busy calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for no-answer calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Bulletin Board message lost for unknown calls, extension <bulletin board-extension>

**Repair Procedure:**

Record the bulletin board message for the bulletin board-extension. Use **change subscriber bulletin board-extension** to view the bulletin board.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for all calls, extension <subscriber-extension>

**Repair Procedure:**

Notify the subscriber-extension. The subscriber will have to record the greetings.

This message could be an indication of toll fraud. Use the Activity Log to examine the events of the mailbox.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for out-of-hours calls, extension <subscriber-extension>

**Repair Procedure:**

Notify subscriber-extension. The subscriber will have to record the greeting.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for internal calls, extension <subscriber-extension>

**Repair Procedure:**

Notify subscriber-extension. The subscriber will have to record the greeting.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for external calls, extension <subscriber-extension>

**Repair Procedure:**

Notify subscriber-extension. The subscriber will have to record the greeting. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for busy calls, extension <subscriber-extension>

**Repair Procedure:**

Notify subscriber-extension. The subscriber will have to record the greeting.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for no-answer calls, extension <subscriber-extension>

**Repair Procedure:**

Notify *subscriber-extension*. The subscriber will have to record the greeting.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_pgl

**Description:** Personal greeting lost for unknown calls, extension <subscriber-extension>

**Repair Procedure:**

Notify *subscriber-extension*. The subscriber will have to record the greeting.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_pmad

**Description:** System profile corrupt, minimum password aging disabled.

### Repair Procedure:

Re-administer the Expiration Warning field. Use **change system-parameters features** This parameter is located on Page 1 of the form. Change the parameter first to an undesired value, enter, and then change the field to the desired value and enter the data again. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

If this message appears after you have re-administered the parameters, contact your remote maintenance center for assistance.

## Event ID: ADM\_rmtx

**Description:** Sending matrix <\_\_> missing, default inserted

### Repair Procedure:

Use **change system-parameters sending-restrictions** to administer sending restrictions.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_rmtx

**Description:** Community <\_\_> has illegal entry <\_\_> in sending restriction matrix

### Repair Procedure:

Use **change system-parameters sending-restrictions** to administer sending restrictions.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_rmax

**Description:** Sending restriction matrix file empty. Default records inserted, values=PERMIT

### Repair Procedure:

Use **change system-parameters sending-restrictions** to administer sending restrictions. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_sext

**Description:** Subscriber name has null extension.

**Repair Procedure:**

- 1. Use **list extensions** to identify the subscriber who is missing a name.
- 2. Use **change subscriber *extension*** to correct the database.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_sext

**Description:** Remote subscriber name has null extension.

**Repair Procedure:**

- 1. Use **list subscriber** to identify the subscriber who is missing an extension.
- 2. Use **change remote-subscriber *name*** to correct the database.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_spwd

**Description:** The system password changed.

**Repair Procedure:**

None. This is an informational message that reports a change in the system.

Event ID: ADM\_traf

**Description:** The subscriber traffic file is corrupt.

**Repair Procedure:**

Contact the remote maintenance center.

Event ID: ADM\_traf

**Description:** Remote message traffic corrupt.

**Repair Procedure:**

Contact the remote maintenance center.

## Event ID: ADM\_tsrv

**Description:** Trusted server-specific administration log entry. The software applications on the trusted server used Lucent INTUITY server software to place this message in the Lucent INTUITY Administrator's Log.

### Repair Procedure:

Refer to trusted server application documentation for this particular message's meaning and repair.

## Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

Mailbox full. Sender will be notified.

### Repair Procedure:

If this happens frequently, contact the administrator for machine\_name. The administrator should talk with the subscriber. The mailbox may simply need to be cleaned out more often. If a larger mailbox is needed, the remote machine administrator can use **change subscriber extension** for extension2 to increase the mailbox size (second page of screen).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

A subscriber was not found. This message indicates that a subscriber is no longer administered on machine\_name and the sender will be notified.

### Repair Procedure:

None. This is an informational message. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.



Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>. Permission denied.

The subscriber probably tried to send a private message which is not allowed. The sender was also notified that the message was not delivered.

**Repair Procedure:**

Tell the subscriber not to mark remote messages as private. You may want to review the subscriber's Community ID with **display subscriber extension** for extension1.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>. Transmission problems.

This message can indicate that the machine is not working properly or the dialed facilities used to access this machine are not correct. The sender will be notified.

**Repair Procedure:**

Access the alarm log to see if any alarms exist related to transmission problems and follow their repair procedures accordingly.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>. Sending is restricted. The sender will be notified.

**Repair Procedure:**

None. Recipient has chosen not to receive messages from sender's restriction community.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information on sending restrictions.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

Miscellaneous reason. Sender will be notified.

**Repair Procedure:**

Access the alarm log to see if any alarms exist related to transmission problems and follow their repair procedures accordingly. Contact your remote maintenance center.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

The system only allows one active login announcement.

**Repair Procedure:**

None. The system will notify the sender.

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

AMIS analog recipient, wrong number. The sender will be notified.

**Repair Procedure:**

If the logged number is not a wrong number, a system restart is necessary. Otherwise, you may need to readminister the AMIS number.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

Transmission attempt exception for AMIS analog. The system will notify the sender.

**Repair Procedure:**

Check out the AMIS network connections. If trouble persists, contact the remote maintenance center.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

AMIS returned message. Sender will be notified.

**Repair Procedure:**

Contact the remote maintenance center.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

AMIS message longer than 8 minutes.

**Repair Procedure:**

None. The sender will also be notified.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_undm

**Description:** Undeliverable message from <extension1> to <machine\_name> <extension2>.

Multi-media fail.

**Repair Procedure:**

Multi-media messaging is not supported for the message recipient or the receiving AUDIX system. Examine affected subscriber administration and/or system options. Consult the remote maintenance center for more help.

Event ID: ADM\_undm

**Description:** Attempted send from <name> to sub on deleted node - message purged.

**Repair Procedure:**

Inform subscribers that they should delete references to the deleted node from their mailing lists.

Event ID: ADM\_unod

**Description:** Incoming AMIS message from an unknown machine [ccc] [nxx] [yyyzzzz]

**Repair Procedure:**

Use the **add machine** *machine-name* command in the INTUITY AUDIX administration screens to administer a new AMIS machine, or ignore message.

See *AMIS Analog Networking*, 585-300-512, for more information.

Event ID: ADM\_wrnrm

**Description:** Received wrong number failure for AMIS outgoing. Subscriber error.

**Repair Procedure:**

None. The sender was notified of the error.

See *AMIS Analog Networking*, 585-300-512, for more information.

## Event ID: ADM\_xfer

**Description:** Call Transfer turned on/off by login <login\_id> on port<pt\_id>

### Repair Procedure:

None. This message is informational. The **change system-parameters features** command in the INTUITY AUDIX administration screens allows you to enter values in the Call Transfer Out of AUDIX fields (second page of screen).

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

## VP — Voice Platform

---

The following Administrator's Log messages and repair procedures apply to the Lucent INTUITY Voice Platform (VP):

### Event ID: FXMON003

**Description:** 0 voice channels sold. 0 fax channels enabled.

**Repair Procedure:**

Contact your sales representative to purchase channels. If you have already purchased channels, contact your remote maintenance center.

### Event ID: CGEN020

**Description:** No service assigned. The system will not answer calls.

**Repair Procedure:**

Assign service to channels. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

### Event ID: INIT002

**Description:** Cannot find card. A card previously recognized by the system cannot be located.

**Repair Procedure:**

Contact your remote maintenance center.

### Event ID: INIT003

**Description:** New card recognized. (Dipswitch setting <number>).

**Repair Procedure:**

None. This message is informational. A new voice card has been installed and is recognized by the Lucent INTUITY system. This message appears during initial installation of the Lucent INTUITY system and when new voice cards are added to an existing system.

## Event ID: INIT004

**Description:** Administrative action taken to renumber channels.

**Repair Procedure:**

None. This is an informational message.

## Event ID: VCHK001

**Description:** More than 80% of the purchased hours used.

**Repair Procedure:**

After each step, view system status to see if space has been freed. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.

1. Ask subscribers to delete unneeded messages. You may want to do this using the Broadcast Messages feature of the INTUITY AUDIX system. See *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.
2. Stop the voice system.  
  
See Chapter 3, "Common System Procedures," in the maintenance book for instructions.
3. Start the voice system.
4. Purchase additional hours of speech. For more information, contact you Lucent Technologies sales representative.





# Alarm Log Entries

# 3

## Overview

---

This chapter uses three parts of the alarm message to identify an alarm:

- Application identifier — indicates the software module affected by the alarm
- Resource type — indicates the resource provided by the part of the system that is affected by the alarm
- Alarm code — differentiates the alarm from other alarms in the same category



**NOTE:**

Ignore the Event ID that appears in this chapter. This is for remote maintenance center use only.

## Purpose

---

The purpose of this chapter is to describe the alarm condition and the remedy.

## How to Use this Chapter

---

To locate an Alarm Log message in this chapter:

1. Locate the section for the application identifier. Use the table of contents or go to the application identifier section.

The application identifier is listed in the first column on the Alarm Log screen under the heading “App”. In this chapter, they are organized alphabetically. The possible application identifiers are:

- [CA – Call Accounting System Alarms](#)
- [EL–Enhanced-List Application Alarms](#)
- [LF– Lucent Intuity Lodging FAX Alarms](#)
- [LF– Lucent Intuity Lodging FAX Alarms](#)
- [MT – Maintenance Platform Alarms](#)
- [NW – Networking Alarms](#)
- [SW – Switch Integration Alarms](#)
- [VM – Intuity AUDIX Messaging Alarms](#)
- [VP – Voice Platform Alarms](#)

2. Locate the Resource Type. This is listed in the second column on the Alarm Log screen. Each application identifier has several different resource types. Resource types are organized alphabetically.
3. Locate the alarm code number. This number is listed on the Alarm Log screen under “Alarm Code”; in this chapter, the Alarm Code is at the top of each entry.

### NOTE:

Even though the alarm log can hold up to 1000 active and 1000 resolved alarm entries, you can display only 500 lines of data at one time. Use the display selection criteria to choose the log information you want to see. See [“Alarm Log”](#) in [Chapter 1, “Getting Started”](#), for information about accessing the Alarm Log.

## **CA – Call Accounting System Alarms**

For information about Call Accounting System alarms, see Lucent™ *INTUITY™ Call Accounting System User Guide*, 585-310-728.

## EL–Enhanced-List Application Alarms

The following alarms are associated with the Enhanced List Application software. They indicate conditions that may cause the system or certain functions to fail.

### DELIVTS Resource Type

#### Alarm Code: 1

**Event ID:** ELA-delivts01

**Alarm Level:** Warning

**Description:** Trusted-server data is lost. The data needs to be re-entered or restored.

**Repair Procedure:**

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter all field information.
- Restore data from the most recent backup of system data. See Chapter 3, “Common System Procedures,” in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

#### Alarm Code: 2

**Event ID:** ELA-delivts02

**Alarm Level:** Warning

**Description:** Trusted-server data partially lost. The data needs to be re-entered or restored.

**Repair Procedure:**

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter all field information.
- Restore data from the most recent backup of system data. See Chapter 3, “Common System Procedures,” in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

## Alarm Code: 3

**Event ID:** ELA-delivts03

**Alarm Level:** Warning

**Description:** Trusted-server data corrupt. The data needs to be re-entered or restored.

### Repair Procedure:

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter all field information.
- Restore data from the most recent backup of system data. See Chapter 3, "Common System Procedures," in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

## Alarm Code: 4

**Event ID:** ELA-delivts04

**Alarm Level:** Warning

**Description:** The trusted-server data is no longer valid.

### Repair Procedure:

1. Enter **ch tr administrative\_trusted\_server\_name**
2. Verify or administer the screen information, as required.
3. Repeat for the delivery trusted server.
4. Enter **ch imapi** and verify or administer, as required.
5. After administering the trusted server information, enter the correct information in the Set Up Enhanced-List System Data window.

REGISTRY Resource Type

---

Alarm Code: 1

Event ID: ELA-registry01

Alarm Level: Warning

Description: The E-list registry is lost — the ELA software detected that registry database disappeared. The data needs to be re-entered or restored.

Repair Procedure:

1. Re-administer the registry:
  - a. Go to the Administer Enhanced-Lists window.
  - b. Use **F4** (New E-List) to re-enter the name of each Enhanced List, one at a time. (The individual members do not need to be re-entered.)

See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more detailed procedures.
2. If the alarm persists, restore system data from the nightly backup. See Chapter 3, “Common System Procedures,” in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

Alarm Code: 2

Event ID: ELA-registry02

Alarm Level: Minor

Description: The system is unable to write an updated E-list registry.

Repair Procedure:

This alarm requires remote maintenance center intervention.

## **SHADOW Resource Type**

---

### **Alarm Code: 1**

**Event ID: ELA-shadow01**

**Alarm Level:** Warning

**Description:** Shadow mailbox data lost, re-enter or restore.

**Repair Procedure:**

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter the shadow mailbox extension and community ID. If a shadow mailbox does not exist at the entered extension, the system will create a new mailbox.
- Restore data from the most recent backup of system data. See Chapter 3, "Common System Procedures," in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

### **Alarm Code: 2**

**Event ID: ELA-shadow02**

**Alarm Level:** Warning

**Description:** The shadow mailbox is corrupt. The data needs to be re-entered or restored.

**Repair Procedure:**

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter the shadow mailbox extension and community ID. If a shadow mailbox does not exist at the extension entered, the system will create a new mailbox.
- Restore data from the most recent backup of system data. See Chapter 3, "Common System Procedures," in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

## Alarm Code: 3

**Event ID:** ELA-shadow03

**Alarm Level:** Warning

**Description:** Shadow mailbox data corrupt, re-enter or restore.

### Repair Procedure:

Use one of the following recovery methods:

- Access the Set Up Enhanced-List System Data window and re-enter the shadow mailbox extension and community ID. If a shadow mailbox does not exist at the extension entered, a new mailbox will be created.
- Restore data from the most recent backup of system data. See Chapter 3, "Common System Procedures," in your maintenance book for instructions about restoring data. If you would prefer to have assistance with the restore, contact your remote maintenance center.

## Alarm Code: 4

**Event ID:** ELA-shadow04

**Alarm Level:** Warning

**Description:** The shadow mailbox is not allowing trusted-server access.

### Repair Procedure:

1. In INTUITY AUDIX®, enter **ch cos ELA\_Class\_of\_Service\_Name/Number**
2. Verify that the Trusted Server Access? field is set to y
3. Enter **di sub shadow\_mailbox\_extension**
4. Verify the Class of Service field is the appropriate cos. If it is, contact your remote maintenance center.



## Alarm Code: 5

**Event ID: ELA-shadow05**

**Alarm Level:** Warning

**Description:** The shadow mailbox does not exist at expected extension.

### Repair Procedure:

Access the Set Up Enhanced-List System Data window and re-enter the shadow mailbox extension and community ID. If a shadow mailbox does not exist at the extension entered, a new mailbox will be created.



#### NOTE:

If you wish to move the shadow mailbox to a new extension, only use the Set Up Enhanced-List System Data window.

## Alarm Code: 6

**Event ID: ELA-shadow06**

**Alarm Level:** Warning

**Description:** The shadow mailbox is full of messages for recipients who have full mailboxes. ELA cannot deliver these messages until the recipients make space in their mailboxes.

The INTUITY AUDIX application can take up to two weeks to determine that a message is undeliverable and to generate a log entry for a delivery failure.

### Repair Procedure:

You can correct single instances of this problem by deleting messages from the shadow mailbox. To access the shadow mailbox:

1. Enter **ch su extension** for the enhanced-list mailbox.
2. At the Subscriber screen, enter a new password in the Password : field.  
Remember this password for [Step 5](#) below.
3. Press **F3** (Enter) to save the password.
4. At the enter command: enter **exit**
5. Use Message Manager to log into the shadow mailbox.
6. Open the Outgoing folder and delete messages that have been rescheduled for delivery to full mailboxes. Keep deleting messages until the shadow mailbox is less than 50 percent full.

**3 Alarm Log Entries**

*EL—Enhanced-List Application Alarms*

*Page 3-10*

7. Make a list of the recipients whose mailboxes are full.
8. Log out of the shadow mailbox.
9. Ask users with full mailboxes to delete at least half of their messages. Do use INTUITY AUDIX to make this request, because it cannot deliver messages until the mailboxes have more room.

If you regularly get this alarm, evaluate how your business uses ELA:

- Do your subscribers use large enhanced lists too frequently? Are they being used for trivial or non-business purposes?
- Are subscriber mailboxes too small? Should you increase mailbox space or purchase more hours for storage?
- Is the ELA class-of-service correct? (Check the value in the Mailbox Size (seconds), Maximum: field on the Class of Service screen, Page 2. Is the ELA class-of-service assigned to the shadow mailbox?
- Are the intervals for rescheduling delivery on the System Parameters Features screen appropriate?

# LF– Lucent INTUITY Lodging FAX Alarms

The following alarms are associated with the Lucent INTUITY system's Lodging FAX Messaging application. They indicate conditions that may cause the system or certain functions such as sending a FAX to fail.

## SOFTWARE Resource Type

### Alarm Code: 1

**Event ID:** LFAX00

**Alarm Level:** Major

**Description:** A system operation failed. Lodging FAX Messaging operation may be erratic or completely stopped.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

### Alarm Code: 4

**Event ID:** LFAX05

**Alarm Level:** Major

**Description:** The system is experiencing an inter-process communication failure. Lodging FAX Messaging may not be operational.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

### Alarm Code: 7

**Event ID:** LFAX01

**Alarm Level:** Major

**Description:** A process failed to start. Lodging FAX Messaging operation may be erratic or completely stopped.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 9

Event ID: LFAX02

Alarm Level: Major

Description: The system failed to initialize a channel and could not use the channel to process Lodging FAX messages. Any FAX processing on this channel may have failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 10

Event ID: LFAX06

Alarm Level: Major

Description: The system could not accept an incoming fax message.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 10

Event ID: LFAX08

Alarm Level: Major

Description: The system could not deliver a fax message to a destination such as the guest services' or room fax machine, or to an outside destination.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

## LG – Lucent INTUITY Lodging Alarms

The following alarms are associated with the Lucent INTUITY system's Lodging and Lodging's property management application software. They indicate conditions that may cause the system or certain functions such as leaving a message for a guest to fail.

### SOFTWARE Resource Type

#### Alarm Code: 1

**Event ID:** LGADM00

**Alarm Level:** Major

**Description:** A system operation failed. The system cannot write information to a file.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

#### Alarm Code: 1

**Event ID:** LGDIP00

**Alarm Level:** Major

**Description:** A system operation on a database file failed.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

#### Alarm Code: 1

**Event ID:** LGMSTR00

**Alarm Level:** Major

**Description:** A system operation failed.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: LGRPT00

Alarm Level: Major

Description: A system operation failed. The system cannot open report data files.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: PIM00

Alarm Level: Major

Description: An operation on a database file failed. The system could not open a Lodging file to get the parameters.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: PIM01

Alarm Level: Major

Description: A UNIX system call failed. The system had trouble getting a message from a message queue.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: PIM03

Alarm Level: Major

Description: A timeout occurred while processing a database request. The request may have been a request from the property management system or from the system console to check in or out a guest. The system did not enter the change for the guest into the database. The system may be too busy to process the request.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: PIM05

Alarm Level: Major

Description: The system could not process a request from the property management system.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 2

Event ID: LGDIP01

Alarm Level: Major

Description: A database file is missing.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 2

Event ID: PMS17

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system could not locate information from a parameters file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: LGDIP02

Alarm Level: Major

Description: A database file has illegal data.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: PMS18

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected an invalid parameter in the parameters file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



Alarm Code: 3

Event ID: PMS28

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected an invalid parameter in parameters file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: PMS45

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected corruption in a data file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: LGADM01

Alarm Level: Major

Description: One of the Lodging processes was unable to communicate using the UNIX software.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**Alarm Code: 4**

**Event ID: LGDIP04**

**Alarm Level:** Major

**Description:** The system experienced an internal communications error.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 4**

**Event ID: LGMSTR01**

**Alarm Level:** Major

**Description:** The system experienced an internal communications error.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 4**

**Event ID: LGRPT01**

**Alarm Level:** Major

**Description:** The system experienced an internal communications error.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 4**

**Event ID: PMS23**

**Alarm Level:** Major

**Description:** The Lucent INTUITY property management system software on the Lucent INTUITY system experienced an internal communications failure.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: PMS26

Alarm Level: Major

Description: The Lucent INTUITY property management system software reader process on the Lucent INTUITY system was unable to communicate with writer process.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: PMS32

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected an internal communications failure.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: PIM04

Alarm Level: Major

Description: A property management interface process experienced an internal communications failure.

Repair Procedure:  
This alarm requires remote maintenance center operation.

Alarm Code: 7

Event ID: LGMSTR02

Alarm Level: Major

Description: A process failed to start.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: PMS19

Alarm Level: Major

Description: The Lucent INTUITY property management system software reader process on the Lucent INTUITY system failed to initialize.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: PMS21

Alarm Level: Major

Description: The Lucent INTUITY property management system software startup routine on the Lucent INTUITY system failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

## Alarm Code: 7

### Event ID: PIM06

**Alarm Level:** Major

**Description:** A property management interface process failed to start.  
The failed process will stop and attempt to restart.

### Repair Procedure:

This alarm requires remote maintenance center intervention.

## Alarm Code: 11

### Event ID: PMS01

**Alarm Level:** Warning

**Description:** The link to the property management system is not operating because the Lucent INTUITY system did not detect a heartbeat message for the timeout period set on Lodging's PMS Parameter Administration screen. The link idle timeout determines the time allowed, in seconds, that the property management system link may be idle before the Lucent INTUITY Lodging application removes it from service.

### Repair Procedure:

1. Check to see if your property management system is operational. If your property management system is not operational, follow your service path for your property management system.
2. Check the physical connections between your property management system and the Lucent INTUITY system to ensure that the cable between the systems or between the switch and the property management system is firmly connected.

If the link has become disconnected, reconnect the cables.

3. If the property management system is operational and the link is intact, start the PMS (property management system) Communications Log. See "Logs," in Chapter 7, "Reports, Logs, and Audits," in Lucent *INTUITY Lodging Administration*, 585-310-577.
4. Restart the property management system link. See "PMS Link Procedures," in Chapter 8, "Troubleshooting," in Lucent *INTUITY Lodging Administration*, 585-310-577.
5. View the PMS Communications Log. See "Logs," in Chapter 7, "Reports, Logs, and Audits," in Lucent *INTUITY Lodging Administration*, 585-310-577.

### 3 Alarm Log Entries

LG – Lucent INTUITY Lodging Alarms

Page 3-22

If the two systems are communicating after the link restart, monitor the system for the recurrence of this alarm. Allow the PMS Communications Log to continue to gather data for 24 hours. If this alarm does not recur, stop the PMS Communications Log data collection. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

If this condition persists, contact your property management system vendor to verify that the property management system is sending the heartbeat. If the property management system is issuing the heartbeat signal, contact your remote maintenance center for your Lucent INTUITY system.

## Alarm Code: 11

### Event ID: PMS02

**Alarm Level:** Warning

**Description:** The link to the property management system is not in operation because of invalid data on the property management system link. The maximum link error setting on Lodging's PMS Parameter Administration window has been reached. This parameter determines the number of errors that the Lucent INTUITY system will tolerate before removing the property management system link from operation.

### Repair Procedure:

1. Check to see if your property management system is operational. If your property management system is not operational, follow your service path for your property management system.
2. Check the physical connections between your property management system and the Lucent INTUITY system to ensure that the cable between the systems or between the switch and the property management system is firmly connected.

If the link is loose, tighten the cables.

3. If the property management system is operational and the link is intact, start the PMS (property management system) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
4. Restart the property management system link. See “PMS Link Procedures,” in Chapter 8, “Troubleshooting,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
5. View the property management system (PMS) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

### 3 Alarm Log Entries

LG – Lucent INTUITY Lodging Alarms

Page 3-23

If the two systems are communicating after the link restart, monitor the system for the recurrence of this alarm. Allow the PMS Communications Log to continue to gather data for 24 hours. If this alarm does not recur, stop the PMS Communications Log data collection. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

If this condition persists, contact your property management system vendor to verify the operation of the property management system and investigate why the data on the link is invalid. You may also need to contact your Lucent INTUITY system remote maintenance center.

## Alarm Code: 11

### Event ID: PMS04

**Alarm Level:** Warning

**Description:** The link to the property management system is not operating because of too many retransmission requests. The maximum retransmission request parameter setting on Lodging’s PMS Parameter Administration window has been reached. This parameter determines the number of times that the Lucent INTUITY system will accept requests from the property management system to re-send information.

### Repair Procedure:

1. Check to see if your property management system is operational. If your property management system is not operational, follow your service path for your property management system.
2. Check the physical connections between your property management system and the Lucent INTUITY system to ensure that the cable between the systems or between the switch and the property management system is firmly connected.  
  
If the link is loose, tighten the cables.
3. If the property management system is operational and the link is intact, start the PMS (property management system) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
4. Restart the property management system link. See “PMS Link Procedures,” in Chapter 8, “Troubleshooting,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
5. View the property management system (PMS) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

### 3 Alarm Log Entries

LG – Lucent INTUITY Lodging Alarms

Page 3-24

If the two systems are communicating after the link restart, monitor the system for the recurrence of this alarm. Allow the PM Communications Log to continue to gather data for 24 hours. If this alarm does not recur, stop the PMS Communications Log data collection. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

If this condition persists, contact your property management system vendor to verify the operation of the property management system and investigate why the property management system is repeatedly issuing requests to the Lucent INTUITY system to resend the information. You may need to also contact your Lucent INTUITY system remote maintenance center.

## Alarm Code: 11

### Event ID: PMS05

**Alarm Level:** Warning

**Description:** The link to the property management system is not operational because of too many tries to send data. The maximum retransmission request parameter setting on Lodging's PMS Parameter Administration window has been exceeded, and the Lucent INTUITY system received a negative acknowledgment from the property management system. The link did not provide reliable communication.

### Repair Procedure:

1. Check to see if your property management system is operational. If your property management system is not operational, follow your service path for your property management system.
2. Check to see that the parameters listed on Lodging's PMS (property management system) Parameter Administration window such as baud rate match the link parameters for the property management system. Make any corrections necessary. Check with your property management system vendor for the settings required to operate the property management system with the Lucent INTUITY system.
3. Check the physical connections between your property management system and the Lucent INTUITY system to ensure that the cable between the systems or between the switch and the property management system is firmly connected.

If the link is loose, tightened the cables.

4. If the property management system is operational, the link parameters match, and the link is intact, start the PMS Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.



- 5. Restart the property management system link. See “PMS Link Procedures,” in Chapter 8, “Troubleshooting,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
- 6. View the property management system (PMS) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

If the two systems are communicating after the link restart, monitor the system for the recurrence of this alarm. Allow the PMS Communications Log to continue to gather data for 24 hours. If this alarm does not recur, stop the property management system (PMS) Communications Log data collection. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

If this condition persists, contact your property management system vendor to verify the operation of the property management system and investigate why the property management system is repeatedly issuing requests to the Lucent INTUITY system to resend the information to the property management system. You may also need to contact your Lucent INTUITY system remote maintenance center.

**Alarm Code: 11**

**Event ID: PMS06**

**Alarm Level:** Warning

**Description:** The link to the property management system is not operational because the link has been in the maintenance state too long.

**Repair Procedure:**

- 1. Verify that your property management system is operational and sending a heartbeat signal.
- 2. Start the PMS (property management system) Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
- 3. Restart the property management system link from the Lodging Command menu. See “PMS Link Procedures,” in Chapter 8, “Troubleshooting,” in Lucent *INTUITY Lodging Administration*, 585-310-577.
- 4. View the PMS Communications Log to see if the two systems are communicating. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in Lucent *INTUITY Lodging Administration*, 585-310-577.

5. After 24 hours and if there have been no further problems with the property management system link, stop the PMS Communications Log. See “Logs,” in Chapter 7, “Reports, Logs, and Audits,” in *Lucent INTUITY Lodging Administration*, 585-310-577.
6. If the problem persists, contact you remote maintenance center.

Alarm Code: 12

Event ID: PMS08

Alarm Level:Major

Description:The Lucent INTUITY property management system software on the Lucent INTUITY system is experiencing link problems that it is unable to classify.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 13

Event ID: PMS10

Alarm Level:Major

Description:The Lucent INTUITY property management system software on the Lucent INTUITY system detected a memory allocation failure.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 13

Event ID: PMS11

Alarm Level:Major

Description:The Lucent INTUITY property management system software on the Lucent INTUITY system detected an internal queue error.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 13

**Event ID: PMS38**

**Alarm Level:** Major

**Description:** The Lucent INTUITY property management system software on the Lucent INTUITY system detected internal data corruption.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 14

**Event ID: PMS14**

**Alarm Level:** Minor

**Description:** The Lucent INTUITY property management system software on the Lucent INTUITY system received a bad-sized message.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 15

**Event ID: PMS03**

**Alarm Level:** Minor

**Description:** The Lucent INTUITY property management system software on the Lucent INTUITY system detected full data queues.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

## Alarm Code: 15

### Event ID: PMS09

**Alarm Level:** Warning

**Description:** The Lucent INTUITY property management system software on the Lucent INTUITY system detected that the internal queue is becoming too full of messages. This alarm indicates a potential problem with system resources. Either the Lucent INTUITY system or the property management system may be overloaded. If the problem persists, the system will raise a major alarm.

### Repair Procedure:

1. Check the load on your property management system. If the property management system is not busy, restart the property management system link:
  - a. Start the PMS (property management system) Communications Log. See "Logs," in Chapter 7, "Reports, Logs, and Audits," in Lucent *INTUITY Lodging Administration*, 585-310-577.
  - b. Restart the property management system link from the Lodging Command menu. See "PMS Link Procedures," in Chapter 8, "Troubleshooting," in Lucent *INTUITY Lodging Administration*, 585-310-577.
  - c. View the PMS Communications Log to see if the two systems are communicating. See "Logs," in Chapter 7, "Reports, Logs, and Audits," in Lucent *INTUITY Lodging Administration*, 585-310-577.
  - d. After 24 hours and if there have been no further problems with the property management system link, stop the PMS Communications Log. See "Logs," in Chapter 7, "Reports, Logs, and Audits," in Lucent *INTUITY Lodging Administration*, 585-310-577.
2. If the problem persists, contact you remote maintenance center or if the problem appears to be an overloaded property management system, contact your property management system vendor.

Alarm Code: 15

Event ID: PMS15

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system received an invalid control character.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS16

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system received a bad message type.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS27

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected a database synchronization request failure.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS29

Alarm Level: Major

Description: The link to the property management system changed to an unknown state.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS30

Alarm Level: Minor

Description: The Lucent INTUITY property management system software writer process on the Lucent INTUITY system experienced failure. A checkin failed after a checkout.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS31

Alarm Level: Minor

Description: The Lucent INTUITY property management system software writer process on the Lucent INTUITY system failed. A checkout failed after a display.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS33

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system failed to queue a message waiting indicator request.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS35

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system detected a feature code mismatch.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: PMS39

Alarm Level: Minor

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system received a message with a violation bit set.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 16

Event ID: PMS20

Alarm Level: Major

Description: The Lucent INTUITY property management system software reader process on the Lucent INTUITY system failed to read from the property management system link.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 16

Event ID: PMS22

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system cannot open the property management link device.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 16

Event ID: PMS24

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system failed to get characteristics of the property management system link.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



Alarm Code: 16

Event ID: PMS25

Alarm Level: Major

Description: The Lucent INTUITY property management system software on the Lucent INTUITY system failed to set characteristics of the property management system link.

Repair Procedure:

This alarm requires remote maintenance center intervention.

# MT – Maintenance Platform Alarms

The following alarms are associated with the Lucent INTUITY system's maintenance software. They indicate conditions that may cause the system or certain maintenance functions such as backup to partially or fully fail to function.

## ALARM\_ORIG Resource Type

### Alarm Code: 0

**Event ID:** ALARM00001, ALARM00002

**Alarm Level:** Minor

**Description:** The system is experiencing difficulty generating alarms because of a software problem.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

### Alarm Code: 1

**Event ID:** ALARM00003

**Alarm Level:** Warning

**Description:** The system experienced more than five unsuccessful call attempts to the remote maintenance center. The system has active alarms that the remote maintenance center is not receiving.

**Repair Procedure:**

1. If any active alarms are severely affecting service, contact your remote maintenance center and tell them that your system has been unable to contact them with active alarms.
2. Log in to the system as sa.
3. Start at the Lucent INTUITY main menu and select

> Customer/Services Administration

> Alarm Management

4. Verify that the Product ID and Alarm Destination fields have valid entries. The Product ID is a 10-digit number starting with a “2” that uniquely identifies the machine. The Alarm Destination is a telephone number that the computer dials in order to transmit alarms. If these fields are blank or do not have valid entries, contact your remote maintenance center. If these fields appear to have valid entries, continue with the next step.
5. Check that the modem has power and that all the cables are connected. If your system has a remote maintenance circuit card (RMB) instead of a modem, do not verify power; check that the phone line into the RMB is in place.
6. Contact your remote maintenance center. They will need to perform an Alarm Origination test or other procedures on the system.

**BACKUP Resource Type**

---

**Alarm Code:** 1, 2

**Event ID:** BKRST024, BKRST025

**Alarm Level:** Minor

**Description:** A back-up failed. If the alarm code is 1, the failure occurred during an unattended back-up. If the alarm code is 2, the failure occurred during an attended back-up.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**DISK Resource Type**

---

**Alarm Code:** 0

**Event ID:** FSY001

**Alarm Level:** Major

**Description:** Disk failure occurred on a hard disk drive.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

MIRROR Resource Type

---

Alarm Code: 0

Event ID: FSY002

Alarm Level: Major

Description: Disk mirroring on the system failed. This alarm indicates a possible physical failure of the hard disk, and can occur on both mirrored and unmirrored systems.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: FSY003

Alarm Level: Minor

Description: The disk mirroring feature is not functioning properly. This alarm can occur on both mirrored and unmirrored systems.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

RESTORE Resource Type

---

Alarm Code: 1

Event ID: BKRST026

Alarm Level: Minor

Description: A restore failed. The system was unable to receive information stored on the backup tape or is unable to access the restored information.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

TAPE\_DRIVE Resource Type

---

Alarm Code: 1

Event ID: BKRST021

Alarm Level: Warning

**Description:** The backup command asks the system to rewind the tape before a backup and after a backup. The system failed to rewind the tape. The system automatically resolves this alarm when a backup is successful.

**Repair Procedure:**

Check the tape to be sure that it has been placed into the tape drive correctly.

Retry the backup. See “Common System Procedures” in Chapter 3 in your maintenance book for instructions. Contact your remote maintenance center if the backup fails again.

Alarm Code: 2

Event ID: BKRST022

Alarm Level: Warning

**Description:** This alarm occurs while using the restore command. During the restore, the system failed to move the tape forward. This alarm is automatically resolved when a restore operation is successful.

**Repair Procedure:**

Check the tape to be sure that it has been placed into the tape drive correctly. The tape is in correctly when you hear the tape retensioning. If the tape is in the drive correctly, contact your remote maintenance center.

If the tape was improperly placed in the tape drive, retry the restore. See “Common System Procedures” in Chapter 3 in your maintenance book for instructions. If the restore fails again, contact your remote maintenance center.

UNIX Resource Type

---

Alarm Code: 0

- Event ID: FSY004
- Alarm Level: Major
- Description: A filesystem on the Lucent INTUITY system is close to being full. Unless this alarm is resolved, the system may not be able to record new messages.
- Repair Procedure: This alarm requires remote maintenance center intervention.

Alarm Code: 1

- Event ID: FSY005
- Alarm Level: Major
- Description: The system has used up almost all of the inodes. If all of the inodes are in use, the system will not be able to start new processes and may behave as if it were out of space.
- Repair Procedure: This alarm requires remote maintenance center intervention.

Alarm Code: 2

- Event ID: FSY006
- Alarm Level: Major
- Description: The system's memory is low because one of the process is using too much memory. Unless this alarm is resolved, the system may fail.
- Repair Procedure: This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: FSY007

Alarm Level: Major

Description: The system has too many internal message queues. The number is greater than 90 percent of system limit.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: FSY008

Alarm Level: Major

Description: This alarm can occur when the system is put under an unusually heavy load and processes are getting behind in answering their messages. Unless this alarm is resolved, the system may stop processing calls.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: FSY009

Alarm Level: Major

Description: The system is experiencing too much information in internal communications. The total amount of information is within 60 percent of the limit. Unless this alarm is resolved, the system may stop processing calls.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6

Event ID: FSY010

Alarm Level: Major

Description: The system has too many processes operating and has nearly reached the limit allowed. The system may stop processing calls or operating at any time.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: FSY011

Alarm Level: Major

Description: The system is attempting to operate too many requests for one login.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



## NW – Networking Alarms

The following alarms are associated with INTUITY AUDIX Digital Networking. They indicate conditions that may cause the networking application to partially or fully fail to function.

### SOFTWARE Resource Type

#### Alarm Code: 0000

**Event ID:** SWIPROCDEAD

**Alarm Level:** Major

**Description:** Networking stopped. The system will not perform networking operations.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

#### Alarm Code: 0001

**Event ID:** SWNONSTD

**Alarm Level:** Minor

**Description:** The system found non-standard networking software during the startup of networking. This condition occurs if the files have wrong information associated with them.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

#### Alarm Code: 0002

**Event ID:** SWCOREDUMP

**Alarm Level:** Minor

**Description:** The system saved a core dump file. This alarm is caused by a software bug which forced a networking process to stop.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 0003

Event ID: SWINITFAIL

Alarm Level: Major

Description: The system experienced initialization failure for the networking software. The networking software could not start operations.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 0004

Event ID: SWNWVMDBSYNC

Alarm Level: Minor

Description: Error synchronizing the INTUITY AUDIX and Networking databases. This alarm occurs when the networking software is unable to update the INTUITY AUDIX database with the current networking node information, usually during start up.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 0005

Event ID: SWANECONN

Alarm Level: Warning

Description: The system experienced a connection failure to a machine. This alarm may occur because remote machines stop operating or contend for resources. The system resolves this alarm when a successful connection is made with the remote machine.


Repair Procedure:

1. Write down the VCE ID (Voice ID) number shown in the Description field of the message. Use **list machine** on the INTUITY AUDIX screens to match the Voice ID to the machine name.


2. Access the Alarm Log and enter **NW** in the Application field and **2000** or **2001** in the Alarm code field of the Alarm Log Display Selection screen. If either of these two alarms exist, the alarms will require remote maintenance center intervention.

See [“Alarm Log”](#) in [Chapter 1, “Getting Started”](#), for information about accessing the Alarm Log.

3. Verify the connection to and from the remote machine. Perform the “Remote Connection Test” in Chapter 2 of your maintenance book. Based upon the test results, follow the instructions provided in the procedure.
4. Verify local and remote machine administration.
  - a. Start at the INTUITY main menu and select




```
> Networking Administration
```




```
> Local Machine Administration
```

- - b. Verify that the machine name is correct.
  - c. Press **F6** (Cancel) to exit the screen.
  - d. Start at the Network Administration menu and select



```
> Remote Machine Administration
```



```
> Digital Network Machine Administration
```

- - 
  - 
  - 
  - e. Verify that the dialstring and password are correct. Write down the Connection Type.
  - f. Press **F6** (Cancel) twice to exit the screens.
  - g. From the Network Administration menu, select Networking Channel Administration.
  - h. Verify that there are channels equipped for the connection type (TYPE field) that you wrote down. Verify that the physical hardware connections to the breakout box match what is administered. If the channels are not equipped, press **F8** (Chg-Keys) and then **F2** (Config) and enter the appropriate information. If the hardware and administration do not match, change whichever is incorrect. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.

- i. If the connection type is RS232, press **F8** (Chg-Keys) and then **F2** (Config). Select RS232 Channel Configuration and verify that the Modem Initialization String is correct.
  - j. Press **F6** (Cancel) to exit the screen.
- 5. Examine all networking-related cabling from the Lucent INTUITY system to the switch. Verify that connectors are firmly in place, and that all modems have power.
- 6. If the problem persists, contact your remote maintenance center.

**Alarm Code: 0006**

**Event ID: SWXMQFILL**

**Alarm Level:** Warning


**Description:** The system is experiencing a possible message delivery problem to a machine.

**Repair Procedure:**

- 1. Write down the VCE ID (Voice ID) number shown in the Description field of the message. Use the *list machine* command on the INTUITY AUDIX screens to match the Voice ID to the machine name.
- 2. Access the Alarm Log and enter **NW** in the Application field and **2000** or **2001** in the Alarm code field of the Alarm Log Display Selection screen. If either of these two alarms exist, the system will require remote maintenance center intervention.

See [“Alarm Log”](#) in [Chapter 1, “Getting Started”](#), for information about accessing the Alarm Log.

- 3. Verify the connection to and from the remote machine. Perform the “Remote Connection Test” in Chapter 2 of your maintenance book. Based on the test results, follow the instructions provided in the procedure.
- 4. Verify local and remote machine administration.
  - a. Start at the Lucent INTUITY main menu and select

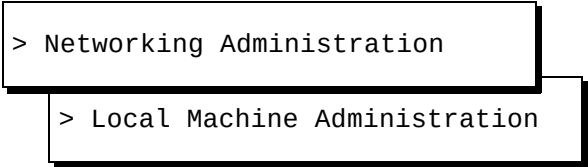

- b. Verify that the machine name is correct.
    - c. Press **F6** (Cancel) to exit the screen.
    - d. From the Network Administration menu select

> Remote Machine Administration

> Digital Network Machine Administration

- e. Verify that the dialstring and password are correct. Write down the Connection Type.
  - f. Press **F6** (Cancel) twice to exit the screens.
  - g. From the Network Administration menu, select Networking Channel Administration.
  - h. Verify that there are channels equipped for the connection type (TYPE field) that you wrote down. Verify that the physical hardware connections to the breakout box match what is administered. If the channels are not equipped, press **F8** (Chg-Keys) and then **F2** (Config) and enter the appropriate information. If the hardware and administration do not match, change whichever is incorrect. See Lucent *INTUITY Messaging Solutions Release 4 Digital Networking*, 585-310-567, for more information.
  - i. If the connection type is RS232, press **F8** (Chg-Keys) and then **F2** (Config). Select RS232 Channel Configuration and verify that the Modem Initialization String is correct.
  - j. Press **F6** (Cancel) to exit the screens.
5. Examine all networking-related cabling from the Lucent INTUITY system to the switch, verify that connectors are firmly in place, and that all modems have power.
  6. If the problem persists, contact your remote maintenance center.

## Alarm Code: 1000

### Event ID: SWNDSTARTFAIL

**Alarm Level:** Major

**Description:** The system experienced network data server failure.

### Repair Procedure:

This alarm requires remote maintenance center intervention.

**Alarm Code: 1001**

**Event ID: SWNDOPENFAIL**

**Alarm Level:** Major

**Description:** The system could not open the networking database.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 1002**

**Event ID: SWNDINTERR**

**Alarm Level:** Major

**Description:** The system experienced a network database internal error. If this alarm is active, INTUITY AUDIX Digital Networking is probably not in service.

**Repair Action.**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 1003**

**Event ID: SWAUddbERR**

**Alarm Level:** Major

**Description:** The system experienced a network database audit error.

**Repair Action.**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 1004**

**Event ID: SWNDDBERR**

**Alarm Level:** Major

**Description:** The system experienced a network database error.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**NETWK\_BD Resource Type**

---

**Alarm Code: 2000**

**Event ID: HWANEACCX**

**Alarm Level:** Major

**Description:** The system experienced a networking circuit card failure. This alarm occurs when the networking software is unable to communicate with the ACCX circuit card. This alarm can occur the circuit card's physical address does not match software administration.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**NETWK\_CHAN Resource Type**

---

**Alarm Code: 2001**

**Event ID: HWANEACCXC**

**Alarm Level:** Minor

**Description:** The system experienced a networking channel failure.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

# SW – Switch Integration Alarms

The following alarms are associated with Lucent INTUITY system's switch integration software. The switch integration software allows the Lucent INTUITY system to receive and send information from and to the switch. These alarms indicate conditions that may cause the system to partially or fully fail to function.

## DCIU\_LINK Resource Type

Alarm Code: 0

Event ID: DCIU001

Alarm Level: Major

Description: The host switch is out of data transfer. The host switch link may have been out of operation too long. The system will resolve this alarm when the link returns to operation.

### Repair Procedure:

1. Log in to the Lucent INTUITY system as sa.
2. Start at the Lucent INTUITY main menu and select

> Customer/Services Administration

> Diagnostics

> Switch Interface Diagnostics

3. Verify that the local switch number has an "I" underneath it. An "I" indicates that the switch is "in data transfer" and operational. An "O" indicates that the switch is "out of data transfer" and inoperational. For more information about switch numbers, see the switch integration document included with your Lucent INTUITY documentation set.
4. Verify that the local switch number matches administration on the switch.
5. Verify that all cable connections to the IDI, MPDM, or equivalent are secure.
6. Contact your remote maintenance center for further assistance. If you have automatic alarm origination, the remote maintenance center will already be aware of this alarm.



Alarm Code: 1


Event ID: DCIU002

Alarm Level: Minor

Description: A remote switch is out of data transfer. The remote switch link may have been out of operation too long. This alarm will be resolved automatically when the link comes up.

Repair Procedure:

- 1. Log in to the Lucent INTUITY system as sa.
- 2. Start at the Lucent INTUITY main menu and select

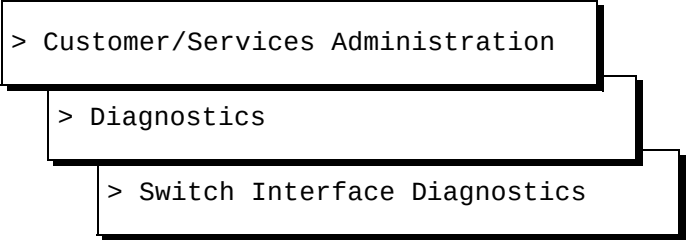

- 3. Verify that the remote switch number has an “I” underneath it. An “I” indicates that the switch is “in data transfer” and operational. An “O” indicates that the switch is “out of data transfer” and inoperational. For more information on switch numbers, see the switch integration document included with your Lucent INTUITY documentation set.
- 4. Verify that the remote switch number matches administration on the switch.
- 5. Contact your remote maintenance center for further assistance. If you have alarm origination that reports minor alarms, the remote maintenance center will already be aware of this alarm.

Alarm Code: 2

Event ID: DCIU004

Alarm Level: Warning

Description: The link to the switch is not operational because it was removed from operation. The system will clear this alarm when the switch link is returned to operation. When this alarm is raised, any other DCIU\_LINK alarms are resolved.

Repair Procedure:

Release the switch integration link. See Chapter 2 in your maintenance book for instructions.

Alarm Code: 3

Event ID: DCIU006

Alarm Level: Minor

Description: The system is experiencing a software problem in switch link area.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: DCIU003

Alarm Level: Minor

Description: The host switch is out of data transfer too frequently.

Repair Procedure:

This alarm will be resolved automatically when the link stops going out of data transfer.

Alarm Code: 5

Event ID: DCIU012

Alarm Level: Minor

Description: The remote switch is stopping transmission of data too frequently.

Repair Procedure:  
This alarm will be resolved automatically when the link stops going out of data transfer.

GPSC\_BOARD Resource Type

---

Alarm Code: 0

Event ID: DCIU005

Alarm Level: Major

Description: The GPSC or DCIU circuit card failed diagnostics. The system will clear this alarm after a successful completion of diagnostics.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SOFTWARE Resource Type

---

Alarm Code: 000

Event ID: ML000

Alarm Level: Major

Description: The system failed to initialize a channel.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**Alarm Code: 001**

**Event ID: ML001**

**Alarm Level:** Major

**Description:** The system failed to send the switch ID.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 002**

**Event ID: ML002**

**Alarm Level:** Minor

**Description:** The system experienced a message waiting indicator processing failure.

**Repair Procedure:**

1. Stop the voice system.  
See “Common System Procedures” in Chapter 3 in your maintenance book for instructions.
2. Start the voice system.
3. If this condition persists, the alarm will require remote maintenance center intervention.

**Alarm Code: 003**

**Event ID: ML003**

**Alarm Level:** Major

**Description:** The system experienced failure in sending data within the switch integration package.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 004**

**Event ID: ML004**

**Alarm Level:** Major

**Description:** The system experienced a software registration failure.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 005**

**Event ID: ML005**

**Alarm Level:** Major

**Description:** The system experienced a failure allocating space within the switch integration package.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 007**

**Event ID: ML007**

**Alarm Level:** Major

**Description:** The system experienced a failure to open a node within the switch integration package.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 008**

**Event ID: ML008**

**Alarm Level:** Major

**Description:** The system experienced a failure to bind a node within the switch integration package.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 009**

**Event ID: ML009**

**Alarm Level:** Major

**Description:** The system experienced a failure while attempting to bind bad node.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 010**

**Event ID: ML010**

**Alarm Level:** Major

**Description:** The system experienced a failure receiving data within the switch integration package.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 011**

**Event ID: ML011**

**Alarm Level:** Minor

**Description:** The system experienced a mode code processing failure. This alarm can occur if a caller to an INTUITY AUDIX mailbox presses touch tones before the system plays the INTUITY AUDIX greeting.

**Repair Procedure:**

1. If possible, ask callers to avoid pressing touch tones before the INTUITY AUDIX greeting.
2. If the problem persists, contact your remote maintenance center.

**Alarm Code: 012**

**Event ID: ML012**

**Alarm Level:** Warning

**Description:** The system experienced a failure while attempting to log in to a channel after rebooting.

**Repair Procedure:**

1. Dial the extension number associated with the channel that is failing to log in, and verify that the channel answers.
2. If the channel does not answer, check the physical connection on the port for that channel.
3. If the alarm persists, contact your remote maintenance center.

**Alarm Code: 013**

**Event ID: ML013**

**Alarm Level:** Minor

**Description:** The system experienced a failure while attempting to refresh a message waiting indicator.

**Repair Procedure:**

The Lucent INTUITY system will automatically attempt to refresh the message waiting indicator again.

If the alarm persists, the alarm will require remote maintenance center intervention.

**SW Resource Type**

---

**Alarm Code: 1**

**Event ID: SMDI001**

**Alarm Level:** Major

**Description:** The system failed to receive or send a message.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 1**

**Event ID: SMDI002**

**Alarm Level:** Major

**Description:** The system failed to send a message.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.



Alarm Code: 1

Event ID: SMDI003

Alarm Level: Major

Description: The system experienced a conversion failure in the software.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: SMDI004

Alarm Level: Minor

Description: The system failed to open an SMDI port.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: SW200

Alarm Level: Major

Description: The system failed to register a process. If this alarm occurs, the system will answer telephone calls with requests that callers enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicators will not be updated.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB518

Alarm Level: Minor

Description: The Lucent INTUITY system failed to send call information details to a process within the system. At least one caller was asked to enter an extension number (non-integrated call answer).

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB529

Alarm Level: Minor

Description: The Lucent INTUITY system failed to locate a process. Callers may be asked to enter extension numbers (non-integrated call answer).

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB531

Alarm Level: Major

Description: The digital interface circuit card does not match the software installed on the system. The system will not answer telephone calls.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: WTR003

Alarm Level: Minor

Description: The writer process started up.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 11

Event ID: WTR000

Alarm Level: Major

Description: The system experienced a failure while attempting to open a file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 11

Event ID: WTR001

Alarm Level: Major

Description: The system experienced a failure while attempting to write to a file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 11

Event ID: WTR002

Alarm Level: Major

Description: The system has a file that is in a bad format.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: WTR004

Alarm Level: Major

Description: SMDI link is not operational.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: WTR005

Alarm Level: Major

Description: All device ports failed to open.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: WTR006

Alarm Level: Minor

Description: The system failed to write to a device.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

## Alarm Code: 111

**Event ID: RDR000**

**Alarm Level:** Minor

**Description:** The reader process has invalid parameters.

**Repair Procedure:**

1. Access the Switch Link Administration screen, and verify the data. Make any changes necessary. See your switch integration book for information.
2. Stop the voice system.  
See "Common System Procedures" in Chapter 3 in your maintenance book for instructions.
3. Start the voice system.

## Alarm Code: 111

**Event ID: RDR001**

**Alarm Level:** Minor

**Description:** The reader process started up.

**Repair Procedure:**

1. Check the power, ports, baud rate, and connection. See your switch integration book for information about baud rate administration.
2. If no problems are found, contact your remote maintenance center for further assistance. If you have automatic alarm origination, the remote maintenance center will already be aware of this alarm.

Alarm Code: 111

Event ID: RDR002

Alarm Level: Minor

Description: The SMDI serial port has no response. One SMDI port is not operational.

Repair Procedure:

- 1. Check the power, ports, baud rate, and connection. See your switch integration book for information about baud rate administration.
- 2. If no problems are found, contact your remote maintenance center for further assistance. If you have automatic Alarm Origination, the remote maintenance center will already be aware of this alarm.

SWIN Resource Type

---

Alarm Code: 0

Event ID: SW140

Alarm Level: Minor

Description: The system failed to locate a process. Callers may be asked to enter extension numbers (non-integrated call answer).

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 0

Event ID: SW240

Alarm Level: Minor

Description: The multiple hunt group initialization failed. Callers reaching systems operating a serial integration (DMS-100 or 5ESS®) will be asked to enter extension numbers (non-integrated call answer).

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 0

Event ID: SW250

Alarm Level: Minor

Description: The attendant translation initialization failed. The Lucent INTUITY system is unable to operate the Automated Attendant feature.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 0

Event ID: SW260

Alarm Level: Minor

Description: The trunk translation initialization failed. If DID lines are directly connected behind the Lucent INTUITY system and being used as lines to log into the Lucent INTUITY system from outside the switch, the calls carried on these lines will fail.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: SW200

Alarm Level: Major

Description: The system failed to register a process. When the system answers the telephone, it will ask the callers to enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicators will not be updated.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SWIN\_IF Resource Type

---

Alarm Code: 0

Event ID: IF100

Alarm Level: Warning

Description: The system has an invalid parameter specification in a parameters file. The system may ask callers to enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicator updates may fail.

Repair Procedure:  
Contact your remote maintenance center.

SWINDIP Resource Type

---

Alarm Code: 1

Event ID: SE140

Alarm Level: Minor

Description: The Lucent INTUITY system was unable to use some of the information sent from the switch. Some telephone calls may not get the expected call-answer treatment.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 2

Event ID: SE150

Alarm Level: Major

Description: The Lucent INTUITY system had trouble starting software used to interpret information from the switch. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer)

Repair Procedure:  
This alarm requires remote maintenance center intervention.



**SWINSERIAL Resource Type**

---

**Alarm Code: 1**

**Event ID: TY100**

**Alarm Level:** Major

**Description:** The Lucent INTUITY system could not open and use the assigned serial port, possibly due to a hardware failure. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicators will not be updated.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**VBPC\_BOARD Resource Type**

---

**Alarm Code: 1**

**Event ID: VB500**

**Alarm Level:** Major

**Description:** The system cannot use the digital interface circuit card. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer).

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB502

**Alarm Level:** Major

**Description:** The system cannot use one of the ports on the digital interface circuit card because of a problem with the circuit card. When the system answers the telephone, the system will ask some of the callers to enter extension numbers (non-integrated call answer).

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB503

**Alarm Level:** Major

**Description:** The system may not be able to use some software for the digital interface circuit card. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer).

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB511

**Alarm Level:** Minor

**Description:** The system is experiencing processing difficulties due to possible digital interface circuit card firmware problems. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicators will not be updated.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB527

Alarm Level: Major

Description: The system is either missing the digital interface circuit card or unable to use the circuit card installed. The system will ask callers to enter extension numbers (non-integrated call answer).

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB532

Alarm Level: Minor

Description: The system may not be able to identify the type of digital interface circuit installed. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer).

This alarm is related to SW VBPC\_BOARD 1, Event IDs VB500, VB501, and VB502. These alarms may also be present on your system.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: VB533

Alarm Level: Minor

Description: The system was not able to set some of the digital interface circuit card options. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer).

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**VBPC\_CARR Resource Type**

---

**Alarm Code: 1**

**Event ID: VB506**

**Alarm Level:** Minor

**Description:** The system is experiencing lost carrier on a digital interface circuit card port and is not receiving call information from the switch. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer).

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**WRITER Resource Type**

---

**Alarm Code: 1**

**Event ID: TY110**

**Alarm Level:** Major

**Description:** The Lucent INTUITY system could not open and use the assigned serial port because the serial link between the Lucent INTUITY system and the switch is not operational. When the system answers the telephone, it will ask callers to enter extension numbers (non-integrated call answer). While this alarm is active, message waiting indicators will not be updated.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

# VM – INTUITY AUDIX Messaging Alarms

---

The following alarms are associated with INTUITY AUDIX Messaging. They indicate conditions that may cause the messaging application to partially or fully fail to function.

## ALARM\_ORIG Resource Type

---

Alarm Code: 0

Event ID: ALARM\_ORIG0000

Alarm Level: Minor

Description: This alarm is a test of Alarm Origination. The remote maintenance center is conducting this test.

Repair Procedure:  
Ignore this message.

## ANNC Resource Type

---

Alarm Code: 4

Event ID: ANNC004

Alarm Level: Major

Description: The active announcement set is inaccessible, nonexistent, or corrupt.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

AUD\_BKUP Resource Type

---

Alarm Code: 0

Event ID: AUD\_BKUP0

Alarm Level: Minor

Description: Portions of the INTUITY AUDIX system data backup failed. The system is providing INTUITY AUDIX service, and the current backup is valid. However, future backups may fail.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

AUDIT Resource Type

---

Alarm Code: 0

Event ID: AUDIT0000

Alarm Level: Minor

Description: The nightly audit that operates each night before the nightly backup failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: AUDIT0001

Alarm Level: Minor

Description: The delivery data audit that operates each night before the nightly backup failed. This alarm is likely related to the mailing lists audit.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 100

Event ID: AUDIT0100

Alarm Level: Minor

Description: Portions of the weekly database audit failed. The system is providing and will continue to provide INTUITY AUDIX service. This service, however, may be limited or inconsistent.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 101

Event ID: AUDIT0101

Alarm Level: Minor

Description: The weekly database audit failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 102

Event ID: AUDIT0102

Alarm Level: Minor

Description: Portions of the weekly database audit failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 103

Event ID: AUDIT0103

Alarm Level: Minor

Description: Portions of the weekly database audit failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

AUDIX\_FS Resource Type

---

Alarm Code: 0

Event ID: AUDIX\_FS0000

Alarm Level: Minor

**Description:** Not enough INTUITY AUDIX data space left. The system logs this alarm when the space used is at 90% capacity or greater. The system will automatically resolve this alarm when the space usage drops below 85%. This condition causes serious user problems.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: AUDIX\_FS0001

Alarm Level: Warning

**Description:** The INTUITY AUDIX data space used reached 80% capacity. The system will automatically resolve this alarm when the space usage drops below 75%. If the space usage does not decrease, this alarm may escalate to a VM AUDIX\_FS 0 alarm.

**Repair Procedure:**  
After each step, check for resolved alarms to see if you have freed enough space.

1. Decrease the maximum number of activity log entries by doing the following.
  - a. Log in to the Lucent INTUITY system as vm or sa.
  - b. Begin at the Lucent INTUITY main menu and pick AUDIX Administration.
  - c. Enter **change system-parameters activity-log**
  - d. Decrease the number in the Maximum Number of Activity Log Entries field. Press **F3** (Enter) to save the information.



3 Alarm Log Entries

VM – INTUITY AUDIX Messaging Alarms

Page 3-73

2. Ask subscribers to delete unneeded messages. You may want to do this using the Broadcast Messages feature. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for instructions.
3. Reduce message retention time by doing the following.
  - a. Log in to the Lucent INTUITY system as vm or sa.
  - b. Start at the Lucent INTUITY main menu and select AUDIX Administration.
  - c. Enter **change COS cos-number**  
  
The cos-number may be any number 0 through 11. You will want to modify the cos-number that applies to most subscribers. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for more information.
  - d. Decrease the number in the Retention Times field under INCOMING MAILBOX and OUTGOING MAILBOX. Press **[F3]** (Enter) to save the information.
4. If the alarm is still active, contact your remote maintenance center.

**Alarm Code: 2**

**Event ID: AUDIX\_FS0002**

**Alarm Level:** Warning

**Description:** The file count reached 80% capacity. This alarm may escalate to VM AUDIX\_FS 0. The system will automatically resolve this alarm when file count used goes below 75%.

**Repair Procedure:**

After each step, check for resolved alarms to see if you have freed enough space.

1. Ask subscribers to delete unneeded messages. You may want to use the Broadcast Message feature. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for instructions.
2. Remove unused local and remote subscribers by doing the following.
  - a. Log in to the Lucent INTUITY system as vm or sa.
  - b. Start at the Lucent INTUITY main menu and select AUDIX Administration.
  - c. Enter **remove subscriber name**

- d. Enter **list remote-extension remote machine name**  
  
To list the remote machine names, use the **list machines** command.
  - e. Look at the Usage Date field for each remote subscriber and delete those that are unused by entering **remove remote-subscriber remote subscriber extension**
3. Reboot the system to allow the Lucent INTUITY system to reclaim unused resources. See “Common System Procedures” in Chapter 3 in your maintenance book for instructions.
  4. If the alarm is still active, contact your remote maintenance center.

Alarm Code: 3

**Event ID:** AUDIX\_FS0003

**Alarm Level:** Major

**Description:** An attempt to restart the INTUITY AUDIX application failed because the INTUITY AUDIX database is corrupt. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 4

**Event ID:** AUDIX\_FS0004

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX data files are corrupt. Although the system is providing INTUITY AUDIX service, users may have trouble sending or receiving messages.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: AUDIX\_FS0005

Alarm Level: Minor

Description: The INTUITY AUDIX data files are corrupt. Although the system is providing INTUITY AUDIX, users may have trouble sending or receiving messages.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6

Event ID: AUDIX\_FS0006

Alarm Level: Minor

Description: The system is experiencing possible database corruption. Although the system is providing INTUITY AUDIX service, this condition could lead to severe problems.

This alarm requires immediate action.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: AUDIX\_FS0007

Alarm Level: Minor

Description: The system is experiencing possible file system corruption. Although the system is providing INTUITY AUDIX service, this condition could lead to severe problems. Nightly and manual backups will usually fail while this alarm is active.

This alarm requires immediate action.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

AUD\_RESTOR Resource Type

---

Alarm Code: 0

Event ID: AUD\_RESTORE1, AUD\_RESTORE2

Alarm Level: Major

Description: An INTUITY AUDIX system-data restore failed. The INTUITY AUDIX application will not start up.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

FAXAP Resource Type

---

Alarm Code: 0

Event ID: FAXAP000

Alarm Level: Minor

Description: Queries to the INTUITY FAX Messaging database are failing. This alarm indicates a possible database corruption.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

LANINTF Resource Type

---

Alarm Code: 0

Event ID: AMAPI0026, LANINTF0000

Alarm Level: Minor

Description: The system has a resource problem.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 1

Event ID: AMAPI0279, LANINTF0001

Alarm Level: Minor

Description: The system has a resource problem.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

RPCTEST Resource Type

---

Alarm Code: 001

Event ID: RPCTEST001

Alarm Level: Minor

Description: IMAPI functionality is impaired so that Lucent INTUITY Message Manager and Trusted Server services are not available. Since the system is providing INTUITY AUDIX services, users can use the telephone interface to retrieve messages.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SERVER Resource Type

---

Alarm Code: 900

Event ID: SERVER0900

Alarm Level: Minor

Description: A trusted server has exceeded the inactivity timeout period administered on the INTUITY AUDIX System Parameters IMAPI-Options screen (ch sy i).

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 901

Event ID: SERVER0901

Alarm Level: Minor

Description: A trusted server has an alarm.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SOFTWARE Resource Type

---

Alarm Code: 0, 1, 2

Event ID: SOFTWARE0000, SOFTWARE0001,  
SOFTWARE0002

Alarm Level: Major

Description: An INTUITY AUDIX process could not operate.

Repair Procedure:  
When this alarm occurs, the INTUITY AUDIX application automatically restarts. This alarm remains active during the restart and will be resolved when the INTUITY AUDIX application successfully restarts.  
If the system does not successfully restart, this and related alarms require remote maintenance center intervention.

Alarm Code: 100

Event ID: SOFTWARE0100

Alarm Level: Minor

Description: An INTUITY AUDIX process could not restart.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**Alarm Code: 101**

**Event ID: SOFTWARE0101**

**Alarm Level:** Minor

**Description:** Non-standard system software is in use.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 201**

**Event ID: SOFTWARE0201**

**Alarm Level:** Minor

**Description:** An INTUITY AUDIX process could not initialize. The system may be providing limited INTUITY AUDIX service.

**Repair Procedure:**

When this alarm occurs, the system automatically attempts to restart the failed process. The alarm remains active until the process successfully initializes, and then the alarm is automatically resolved.

If this alarm fails to resolve, the alarm will require remote maintenance center intervention.

**Alarm Code: 202**

**Event ID: SOFTWARE0202**

**Alarm Level:** Minor

**Description:** An INTUITY AUDIX process could not operate. The system may be providing limited INTUITY AUDIX service.

**Repair Procedure:**

When this alarm occurs, the system automatically attempts to restart the failed process. The alarm remains active until the process successfully initializes, and then the alarm is automatically resolved.

If this alarm remains active, the alarm will require remote maintenance center intervention.

**Alarm Code: 203**

**Event ID: SOFTWARE0203, SOFTWARE0202**

**Alarm Level:** Minor

**Description:** An INTUITY AUDIX process experienced initialization failure.  
The system may be providing limited INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 204**

**Event ID: SOFTWARE0204, SOFTWARE0202**

**Alarm Level:** Minor

**Description:** An INTUITY AUDIX process experienced runtime failures.  
The system may be providing limited INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code:Alarm Code: 601**

**Event ID: SOFTWARE0601**

**Alarm Level:** Minor

**Description:** The system detected non-standard system software in use.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.



Alarm Code: 602

Event ID: SOFTWARE0102, SOFTWARE0602

Alarm Level: Minor

Description: An INTUITY AUDIX process failed during normal service. The system may have already restarted INTUITY AUDIX service.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6000

Event ID: SOFTWARE6000

Alarm Level: Minor

Description: An INTUITY AUDIX process could not initialize. The system is not providing INTUITY AUDIX service.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6001

Event ID: SOFTWARE6001

Alarm Level: Minor

Description: An INTUITY AUDIX process could not operate.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**Alarm Code: 6600**

**Event ID: SOFTWARE6600**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX database automatic rebuild failed. The system is not providing INTUITY AUDIX service. The INTUITY AUDIX application has automatically stopped itself and networking and attempted a restart. During this restart, the application operates database file checks and performs a rebuild audit to correct any problems or discrepancies detected. If the rebuild audit is not successful, this system generates this alarm.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 6603**

**Event ID: SOFTWARE6603**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX application detected file damage during a restart. The system stops the initialization and the software attempts to fix the file problems. The system will automatically resolve this alarm after completing the fix and continue initialization.

**Repair Procedure:**

None. This alarm is active during the automatic rebuild audit process. The failure of the automatic rebuild audit generates VM SOFTWARE 6600.

The VM SOFTWARE 6600 alarm requires remote maintenance center intervention.

## Alarm Code: 6604

### Event ID: SOFTWARE6604

**Alarm Level:** Warning

**Description:** A problem occurred attempting to update extension length values. Although the system updated the extension length, the INTUITY AUDIX application could not update its internal tables. This alarm may block administrators from adding new subscribers.

#### Repair Procedure:

1. Stop the voice system.  
See “Common System Procedures” in Chapter 3 in your maintenance book for instructions.
2. Start the voice system to synchronize the voice platform and the INTUITY AUDIX application.
3. If the alarm fails to resolve, the alarm will require remote maintenance center intervention.

## Alarm Code: 6605

### Event ID: SOFTWARE6605

**Alarm Level:** Warning

**Description:** The INTUITY AUDIX application has inconsistent data in the automated attendant routing table. This alarm occurs when a call to an automated attendant cannot be routed as specified. This alarm can occur if the routing tables are not updated after voice mailboxes listed in the table are removed or if file corruption from a system crash occurs. The system will automatically resolve this alarm after the table is updated.

#### Repair Procedure:

1. Use **change auto-attend-routing routing-table** to update the routing tables with correct data.  
See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.
2. If this alarm persists, notify your remote maintenance center.

**Alarm Code: 6606**

**Event ID: SOFTWARE6606**

**Alarm Level:** Minor

**Description:** The system has an automated attendant software failure. When this alarm occurs, the INTUITY AUDIX application may restart or shut down.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 6607**

**Event ID: SOFTWARE6607**

**Alarm Level:** Warning

**Description:** The system has an inconsistent holiday or business schedule name. This alarm occurs when a call to an automated attendant cannot be routed as specified. The system will automatically resolve this alarm after a successful restoration of data and voice system restart.

**Repair Procedure:**

Restore system data from the nightly backup. See “Common System Procedures” in Chapter 3 of your maintenance book for instructions. If you want to have assistance with the restore, contact your remote maintenance center.

**Alarm Code: 6608**

**Event ID: SOFTWARE6608**

**Alarm Level:** Minor

**Description:** The system is experiencing inconsistent automated attendant software operations.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 6609**

**Event ID: SOFTWARE6609**

**Alarm Level:** Minor

**Description:** The system is detecting inconsistent automated attendant night service data.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 6610**

**Event ID: SOFTWARE6610**

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX application cannot write to the day/night service file. The system is not providing correct night service operation. This alarm may occur with alarm VM SOFTWARE 6609.

**Repair Procedure:**  
This alarm is automatically resolved when the proper night service state is determined.  
If this alarm remains active, it will require remote maintenance center intervention.

**Alarm Code: 6611**

**Event ID: SOFTWARE6611**

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX application cannot communicate with the voice platform software. The system is providing limited or interrupted INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 6612

Event ID: SOFTWARE6612

Alarm Level: Minor

Description: The INTUITY AUDIX outcalling feature is not functioning properly or not operational.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6613

Event ID: SOFTWARE6613

Alarm Level: Minor

Description: An error occurred during system installation or the system experienced incorrect modifications. System operation may be impaired.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6614

Event ID: SOFTWARE6614

Alarm Level: Major

Description: The system cannot initialize the INTUITY AUDIX application because of insufficient system resources. The system is not providing INTUITY AUDIX service.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7701**

**Event ID: SOFTWARE7701**

**Alarm Level:** Major

**Description:** The system cannot locate all of the software needed to initialize the INTUITY AUDIX application. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7702**

**Event ID: SOFTWARE7702**

**Alarm Level:** Major

**Description:** The system found that INTUITY AUDIX database files were missing during AUDIX initialization. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7703**

**Event ID: SOFTWARE7703**

**Alarm Level:** Major

**Description:** The system experienced an unexpected file check failure after a voice system restart or a reboot.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7704**

**Event ID: SOFTWARE7704**

**Alarm Level:** Major

**Description:** The system is experiencing too many restarts. Because of another alarm, the INTUITY AUDIX application has tried to restart itself twice but has failed. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 7705**

**Event ID: SOFTWARE7705**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX maintenance software has automatically shutdown the INTUITY AUDIX application and attempted a restart. This alarm can also indicate that the system attempted too many restarts or that an unexpected error occurred during the shutdown. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 7706**

**Event ID: SOFTWARE7706**

**Alarm Level:** Major

**Description:** Too many reboots. Because of another alarm, INTUITY AUDIX Voice Messaging has tried to restart itself but has failed. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.



**Alarm Code: 7707**

**Event ID: SOFTWARE7707**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX maintenance software has automatically shutdown the INTUITY AUDIX application and attempted a restart. This alarm can also indicate that the system attempted too many restarts or that an unexpected error occurred during shutdown. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7708**

**Event ID: SOFTWARE7708**

**Alarm Level:** Major

**Description:** The system has experienced too many reboots. Because of another alarm, the INTUITY AUDIX application has tried to restart itself but has failed. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7709**

**Event ID: SOFTWARE7709**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX maintenance software has automatically shutdown the INTUITY AUDIX application and attempted a restart. This alarm can also indicate that the system attempted too many restarts or that an unexpected error occurred during shutdown. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7710**

**Event ID: SOFTWARE7710**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX maintenance software stopped INTUITY AUDIX operation during an INTUITY AUDIX restart. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7712**

**Event ID: SOFTWARE7712**

**Alarm Level:** Major

**Description:** The INTUITY AUDIX maintenance software has automatically shutdown the INTUITY AUDIX application and attempted a restart. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 7713**

**Event ID: SOFTWARE7713**

**Alarm Level:** Major

**Description:** The system experienced a problem while attempting to create a new voice filesystem during INTUITY AUDIX initialization. This problem can occur while attempting to add additional hours of speech to the system. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 7714

Event ID: SOFTWARE7714

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX outcalling feature is not functioning properly. The system is providing only limited INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 7715

Event ID: SOFTWARE7715

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX trusted server notification feature is not functioning properly. The system is providing only limited INTUITY AUDIX service.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 7716

Event ID: SOFTWARE7716

**Alarm Level:** Warning

**Description:** The system did not find a trusted server external security password file during INTUITY AUDIX initialization. Any usage of the old, external security password by operating trusted servers will fail.

**Repair Procedure:**

- Administer a new external security password on both the Lucent INTUITY system and the trusted server. Use **change imapi-password**  
  
See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for instructions.
- After changing the password on the Lucent INTUITY system, administer the new password on the trusted server.

**Alarm Code: 7717**

**Event ID: SOFTWARE7717**

**Alarm Level:** Major

**Description:** The system could not find any announcement sets during INTUITY AUDIX initialization. The system is not providing INTUITY AUDIX service.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**VMDIRS Resource Type**

---

**Alarm Code: 0**

**Event ID: VMDIRS\_0**

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX application is experiencing problems with a file. Although the system is providing INTUITY AUDIX service, the system response times may be slow and the performance poor.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**VM\_PT Resource Type**

---

**Alarm Code: 3**

**Event ID: VM\_PT0003**

**Alarm Level:** Minor

**Description:** The INTUITY AUDIX port processes have continuously failed. The system set the service status of the affected channel to manually-out-of-service (manoos).

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

## Alarm Code: 4

**Event ID: VM\_PT0004**

**Alarm Level:** Minor

**Description:** An attempt to send or receive a fax failed. The system generates this alarm after a number of failures occur.

### **Repair Procedure:**

The system automatically resolves this alarm if a failure does not reoccur within 5 minutes. If this alarm fails to remain active, it will require remote maintenance center intervention.

## Alarm Code: 5

**Event ID: VM\_PT0005**

**Alarm Level:** Warning

**Description:** An attempt to record or print a fax failed. The system generates this alarm after a number of failures occur. This alarm can indicate a problem with the users' fax equipment or Lucent INTUITY FAX Messaging administration.

### **Repair Procedure:**

1. Verify that the users' fax equipment is working properly.
2. Verify that INTUITY FAX Messaging is properly administered. See Lucent *INTUITY Messaging Solutions Release 4 Administration*, 585-310-564, for information.
3. If the alarm fails to resolve, it will require remote maintenance center intervention.

## VP – Voice Platform Alarms

---

The following alarms are associated with Lucent INTUITY system's underlying software. They indicate conditions that may cause the messaging application to partially or fully fail to function.

### CGEN Resource Type

---

#### Alarm Code: 1

**Event ID:** CGEN001

**Alarm Level:** Minor

**Description:** The system detected an unexpected message about internal communications.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

#### Alarm Code: 2

**Event ID:** CGEN002

**Alarm Level:** Major

**Description:** The system cannot access a system table, possible because of corruption. The system's functionality is severely impaired.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: CGEN003

Alarm Level: Major

Description: An internal process cannot communicate with other internal processes. The system’s functionality is severely impaired.

Repair Procedure:

Reboot the system. See “Common System Procedures” in Chapter 3 in your maintenance book for instructions.

Alarm Code: 4

Event ID: CGEN004

Alarm Level: Major

Description: The system failed to receive a message because an internal process cannot communicate with other internal processes. The system’s functionality is severely impaired.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: CGEN005

Alarm Level: Major

Description: The system cannot communicate with a process. The system’s functionality is severely impaired.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 6

Event ID: CGEN006

Alarm Level: Major

Description: The system failed to start up properly. The system's functionality is severely impaired.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: CGEN007

Alarm Level: Major

Description: The system failed to allocate memory internally for data. The system's functionality is severely impaired.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 8

Event ID: CGEN008

Alarm Level: Major

Description: Cannot access tip/ring circuit cards. The system's tip/ring circuit cards are unusable. The system is unable to answer or process telephone calls.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



Alarm Code: 11

Event ID: CGEN011

**Alarm Level:** Major

**Description:** The system failed to perform the indicated function on a voice channel or tip/ring circuit card. The system's functionality is severely impaired.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: CGEN012

**Alarm Level:** Minor

**Description:** The system failed to perform the indicated function on a voice channel or tip/ring circuit card. Tip/ring circuit card functionality is impaired.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 13

Event ID: CGEN013

**Alarm Level:** Major

**Description:** The SSP circuit card experienced a failure and is not functional. If the system generates this alarm, the system will automatically run diagnostics and attempt to restore the card to service.

While the SSP circuit card is not operating, the system will only be able to operate the number of text-to-speech channels purchased, to a maximum of four.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 14

Event ID: CGEN014

**Alarm Level:** Minor

**Description:** The SSP circuit card is experiencing errors and may not be fully functional.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 17

Event ID: CGEN017

**Alarm Level:** Major

**Description:** The system was unable to save circuit card configuration changes such as a change in state to MANOOS or other information shown on the Display Voice Equipment window. The system will loose shared memory updates during a restart or a reboot. Call processing should not be affected until a reboot or a restart.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 18

Event ID: CGEN018

**Alarm Level:** Minor

**Description:** The system detected a hardware failure on a voice channel or a tip/ring circuit card. Tip/ring circuit card functionality is impaired.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 21

Event ID: CGEN021

Alarm Level: Major

Description: An internal software error occurred when identifying channel characteristics during a restart or a reboot. After the reboot or the restart, a channel is unusable.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 22

Event ID: CGEN022

Alarm Level: Minor

Description: The system failed to reset the restriction list for a channel. System functionality may be impaired if applications are assigning resource restrictions to channels.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 24

Event ID: M\_CGEN024

Alarm Level: Minor

Description: The system failed to execute a process.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 25

Event ID: CGEN025

Alarm Level: Major

Description: A service registration file has a bad format or is the wrong version. The service corresponding to this registration file may be started incorrectly. If the service is not started correctly, it will not function properly.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 27

Event ID: CGEN027

Alarm Level: Minor

Description: The system could not open a file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 28

Event ID: CGEN028

Alarm Level: Warning

Description: A call to third party API failed.

Repair Procedure:

1. Stop the voice system.  
See “Common System Procedures” in Chapter 3 in your maintenance book for instructions.
2. Start the voice system.  
If the alarm remains active, it will require remote maintenance center intervention.

Alarm Code: 31

Event ID: CGEN031

Alarm Level: Minor

Description: The system detected an error describing groups to the Resource Manager. Applications using the equipment group may not function correctly.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 34

Event ID: CGEN034

Alarm Level: Minor

Description: The system failed to perform an action on a file.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 37

Event ID: CGEN037

Alarm Level: Minor

Description: The system experienced difficulty while enabling a feature license. If this alarm appears, the text-to-speech feature will not be available. Other features on the system already enabled will not be affected.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 38

Event ID: CGEN038

Alarm Level: Minor

Description: The system experienced difficulty while enabling a feature license. If this alarm appears, the text-to-speech feature will not be available. Other features on the system already enabled will not be affected.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 39

Event ID: CGEN039

Alarm Level: Major

Description: The system experienced failure while enabling a feature license. If this alarm appears, the text-to-speech feature will not be available. Other features on the system already enabled will not be affected.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

CHRIN Resource Type

---

Alarm Code: 1

Event ID: CHRIN001

Alarm Level: Major

Description: The system detected an error while describing channel characteristics to the Resource Manager. The system's functionality is severely impaired.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

CRON Resource Type

---

Alarm Code: 2

**Event ID: CRON002**

**Alarm Level:** Minor

**Description:** A system process has been operating for over 24 hours.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

DSKMG System Messages

---

Alarm Code: 1

**Event ID: DSKMG001**

**Alarm Level:** Minor

**Description:** The indicated file cannot be accessed. Applications that need to reserve speech files may fail.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 2

**Event ID: DSKMG002**

**Alarm Level:** Minor

**Description:** An application cannot be reserved a file. Applications that need to record to the file will be incomplete.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**FXAUDOANM Resource Type**

---

**Alarm Code: 17**

**Event ID: FXAUD017**

**Alarm Level:** Minor

**Description:** A file system is low on space.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**FXMONOAMN Resource Type**

---

**Alarm Code: 02**

**Event ID: FXMON002**

**Alarm Level:** Minor

**Description:** The INTUITY FAX subsystem will not log events and future transmission problems may be difficult to diagnose.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 10**

**Event ID: FXMON010**

**Alarm Level:** Minor

**Description:** The system could not add an INTUITY FAX Messaging channel and the channel will not be able to perform Lucent INTUITY FAX Messaging operations. This alarm may be caused by an attempt to enable more channels than INTUITY FAX Messaging licensed permits or by a corruption in the INTUITY FAX Messaging database.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.



Alarm Code: 11

Event ID: FXMON011

Alarm Level: Minor

Description: The INTUITY FAX Messaging subsystem cannot open a file and will not be able to log fax events properly. The ability to transmit fax data should not be affected.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: FXMON012

Alarm Level: Minor

Description: The system could not enable a channel for Lucent INTUITY FAX Messaging operations.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 13

Event ID: FXMON013

Alarm Level: Minor

Description: The system is continuing to wait for a process to complete. The system may not be able to use Lucent INTUITY FAX Messaging.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 14

Event ID: FXMON014

Alarm Level: Minor

Description: The system could not disable a Lucent INTUITY FAX Messaging channel. This alarm indicates a possible corruption in a database.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 16

Event ID: FXMON016

Alarm Level: Minor

Description: The system could not delete an INTUITY FAX Messaging channel. This alarm indicates a possible corruption in a database.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 20

Event ID: FXMON020

Alarm Level: Minor

Description: The system could not hard reset a channel. This alarm indicates that a channel is inoperable for Lucent INTUITY FAX Messaging transmission.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

**FXNSFOANM Resource Type**

---

**Alarm Code: 1**

**Event ID: FXNSF01**

**Alarm Level:** Minor

**Description:** The system could not initialize Lucent INTUITY FAX Messaging. Lucent INTUITY FAX Messaging is not available for use.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 2**

**Event ID: FXNSF02**

**Alarm Level:** Minor

**Description:** The system could not start a Lucent INTUITY FAX Messaging process.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 3**

**Event ID: FXNSF03**

**Alarm Level:** Minor

**Description:** The system could not establish communications with Lucent INTUITY FAX Messaging software.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: FXNSF04

Alarm Level: Minor

Description: An update to a channel failed.

Repair Procedure:

This alarm requires remote maintenance center intervention.

INIT Resource Type

---

Alarm Code: 1

Event ID: INIT001

Alarm Level: Major

Description: The system configuration from the previous operation is completely lost so the system is using default values. Services must be re-assigned to channels, the channels placed into service, and circuit card functionality specified in order for the system to operate under any configuration other than the default settings. The system may not process telephone calls until after the system is readministered.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: INIT005

Alarm Level: Minor

Description: The system cannot save configuration data to the hard disk. If the voice system is stopped and started, some or all of the voice system's administered values may be lost and system functionality will be severely impaired.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 6

Event ID: INIT006

Alarm Level: Major

Description: The system is having trouble determining the identity of a tip/ring or SSP circuit card. The card is not operational. Call processing may be impaired.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 9

Event ID: INIT009

Alarm Level: Warning

Description: The system detected a change in configuration and the manual renumber option is active. This alarm only occurs if the renumber option is active and there has been a change in system configuration such as the replacement of one type of tip/ring circuit card with another.

The renumber option must be activated by the remote maintenance center.

Repair Procedure:  
Renumber the channels. See your maintenance book for instructions.

MTC Resource Type

---

Alarm Code: 1

Event ID: MTC001

Alarm Level: Minor

Description: A card is unable to provide TDM clock to the system and the card state has changed to BROKEN. This alarm can indicate a possible hardware problem with the card. Applications dependent on this card will not function.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 6

Event ID: MTC006

Alarm Level: Minor

Description: The system experienced a diagnostics failure.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: MTC007

Alarm Level: Major

Description: An internal software error occurred during a request for a resource or a release. The system could not process the request, and a card or channel may not be available.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 10

Event ID: MTC010

Alarm Level: Minor

Description: TDM diagnostics failed one or more diagnostics tests. One or more circuit cards may be in the BROKEN state and unable to function. Applications dependent on the card will not function.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 13

Event ID: MTC013

Alarm Level: Minor

Description: One of the circuit cards is in the BROKEN state because it is not receiving clock. The system will not be able to use the circuit card in the BROKEN state.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SF\_VXMDI Resource Type

---

Alarm Code: 2

Event ID: VXMDI002

Alarm Level: Minor

Description: The system experienced an abnormal termination of a Lucent INTUITY FAX Messaging process. The fax transmission occurring at that time failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: VXMDI003

Alarm Level: Minor

Description: The system experienced an illegal transition. The fax transmission occurring at that time failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: VXMDI004

Alarm Level: Minor

Description: The system experienced an internal assertion failure. The fax transmission occurring at that time failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: VXMDI005

Alarm Level: Minor

Description: A driver call failed. The fax transmission occurring at that time failed.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

SOFTWARE Resource Type

---

Alarm Code: 4

Event ID: SPDM002

Alarm Level: Minor

Description: The system is unable to free previously reserved space. This alarm indicates that an application error and may eventually result in failed requests to allocate space for voice or fax recording.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



Alarm Code: 4

Event ID: SPDM003

Alarm Level: Minor

Description: The system experienced a failure during an audit. The system may experience failures in recording voice or fax messages.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: SPDM005

Alarm Level: Minor

Description: A speech audit detected an inconsistency. The system may experience failures in recording voice or fax messages.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: SPDM006

Alarm Level: Minor

Description: The system is unable to reserve space. The system may experience failures in recording voice or fax messages.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 15

Event ID: SPDM007

Alarm Level: Minor

Description: The system detected an invalid value or a non-existent overhead file. The system will use the default overhead values which can adversely impact performance. If the default overhead values are acceptable, system operations will not be affected.

Repair Procedure:

This alarm requires remote maintenance center intervention.

SPDSKMGR Events Messages

---

Alarm Code: 2

Event ID: VCHK002

Alarm Level: Minor

Description: The system has used more than 90% of purchased hours of speech.

Repair Procedure:

Ask users to delete unneeded messages. You may want to use the Broadcast Message feature. Deleting unneeded messages will help to free space in the system as a temporary repair.

This alarm requires remote maintenance center intervention.

**SPEECH\_FS Resource Type**

---

**Alarm Code: 1**

**Event ID: SPDM001**

**Alarm Level:** Minor

**Description:** The system is unable to reserve space because no space is available. Users and callers will not be able to record messages.

**Repair Procedure:**

Ask users to delete unneeded messages. You may want to use the Broadcast Message feature. This will help to free space in the system as a temporary repair.

This alarm requires remote maintenance center intervention.

**THR Resource Type**

---

**Alarm Code: 2**

**Event ID: THR002**

**Alarm Level:** Minor

**Description:** The system exceeded the minor threshold level for messages. This alarm typically indicates that too many messages of a particular type are being generated.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: THR003

**Alarm Level:** Minor

**Description:** The system exceeded the minor threshold level for messages. This alarm typically indicates that too many messages of a particular type are being generated.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 4

Event ID: THR004

**Alarm Level:** Major

**Description:** The system exceeded the major threshold level for messages. This alarm typically indicates that too many messages of a particular type are being generated.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

TRIP Resource Type

---

Alarm Code: 1

Event ID: TRIP001

**Alarm Level:** Major

**Description:** The system is unable to communicate with the tip/ring circuit cards. The system is unable to process telephone calls on the tip/ring channels.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 3

Event ID: TRIP003

Alarm Level: Major

**Description:** The system received excessive simultaneous signals from the network. The voice system is unable to process calls on the tip/ring circuit cards possible due to network or PBX administration. Some network or PBX parameters may need to be tuned differently, such as “howler tone.” PBXs generate howler tone if a channel is off hook for a certain amount of time. A howler tone can consist of a series of touch tones, including “\*” and “#.” Each of these touch tones results in a separate event in the tip/ring channels. The rate at which these events are generated may be beyond what the system can handle.

Repair Procedure:

This alarm requires remote maintenance center intervention.

You may need to consult your network or PBX administrator for assistance with this alarm.

Alarm Code: 4

Event ID: TRIP004

Alarm Level: Minor

**Description:** The system detected a speech break was during a voice coding or playback session. The impact of this error is not severe, and no action is needed if the message is reported less frequently than the threshold limit.

The impact may be significant if this message occurs more than the currently set threshold limit.

Repair Procedure:

This alarm requires remote maintenance center intervention.

## Alarm Code: 5

### Event ID: TRIP005

**Alarm Level:** Warning

**Description:** The channel indicated in the message lost loop current. If loop current is lost during a telephone call, the call will be terminated and the system will remove the channel from service. The system will automatically return the channel to service when the loop current returns.

### Repair Procedure:

1. Make sure the line is plugged in the channel indicated and appropriate switch connections are made.
2. Examine the line cord for damages. Replace the cord if it is damaged.
3. Plug the line into a telephone set and make sure it works. Use the following steps to test the line:
  - a. Check the telephone for dialtone. Most switches provide dialtone.
  - b. Dial the number of the test telephone from another telephone. Make sure it rings and the connection is established.
  - c. Dial another number from the test line. Make sure the connection is established.
  - d. If these tests do not pass, consult your network or switch administrator for help.

If these tests pass, plug in a known working line into the channel indicated. The system should place the channel in service automatically. If the alarm fails to resolve, it will require remote maintenance center intervention.

## UNIX Resource Type

---

### Alarm Code: 2

**Event ID: UNIX002**

**Alarm Level:** Minor

**Description:** The UNIX system kernel detected an error. The type of error present will determine the impact on the system. These errors may not cause the system to stop (panic) but they usually indicate that system functionality is impaired.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

### Alarm Code: 3

**Event ID: UNIX003**

**Alarm Level:** Minor

**Description:** The UNIX system kernel detected an error and the system software placed a copy of the message into the log. The type of error present will determine the impact on the system. These errors may not cause the system to stop (panic) but they usually indicate that system functionality is impaired.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

### Alarm Code: 4

**Event ID: UNIX004**

**Alarm Level:** Major

**Description:** The UNIX system kernel detected an error and the system software placed a copy of the message into the log. The type of error present will determine the impact on the system.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

VROP Resource Type

---

Alarm Code: 2

Event ID: VROP002

Alarm Level: Major

Description: The system cannot record or add a phrase. Phrases already recorded will continue to play properly.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code:Alarm Code: 4

Event ID: VROP004

Alarm Level: Minor

Description: A voice function may have failed and the system canceled the request. Callers affected by the error will hear nothing. The system will not disconnect the call until the caller disconnects. Each time this failure occurs, the system will generate one message.

Repair Procedure:  
This alarm requires remote maintenance center intervention.

Alarm Code: 5

Event ID: VROP005

Alarm Level: Major

Description: Erroneous speech playback or coding may have occurred. The speech that was heard or recorded may have been terminated prematurely or been replaced with other speech. Subsequent speech coding or playback may also be affected until the system is restarted.

Repair Procedure:  
This alarm requires remote maintenance center intervention.



Alarm Code: 6

Event ID: VROP006

Alarm Level: Minor

Description: The system is unable to read a speech configuration file or the file has an invalid or duplicate entry. The system will use default values for non-existent entries until the problem is corrected. However, the default numbers may be unsatisfactory and could cause load or performance problems.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 7

Event ID: VROP007

Alarm Level: Minor

Description: Phrase creation failed because of insufficient space in the speech file systems. This condition could have impacted administrative commands or caused the message recording to fail. Additional similar attempts will also fail.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 10

Event ID: VROP010

Alarm Level: Minor

Description: A failure occurred while performing an action on a phrase. The system aborted the action. This alarm may be caused by an excessive voice activity load.

Repair Procedure:

This alarm requires remote maintenance center intervention.

Alarm Code: 11

Event ID: VROP011

**Alarm Level:** Minor

**Description:** The system has insufficient speech buffers for the number of channels in use. Each time this alarm occurs, an action failed.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 12

Event ID: VROP12

**Alarm Level:** Minor

**Description:** An attempt to add a new phrase to the speech file system failed because the phrase limit was exceeded. This condition could have impacted administrative commands or caused message recording to fail. Other attempts will also fail.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 14

Event ID: VROP014

**Alarm Level:** Minor

**Description:** The system failed to access the speech file indicated. Applications that need access to this file will be incomplete.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

**Alarm Code: 15**

**Event ID: VROP15**

**Alarm Level:** Minor

**Description:** The system was attempting to copy or add a phrase to the speech file system and the attempt failed. This failure usually occurs during backups or restores.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 18**

**Event ID: VROP18**

**Alarm Level:** Major

**Description:** The system has failed to play or record messages. This is likely to continue to occur until the problem is resolved.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

**Alarm Code: 19**

**Event ID: VROP19**

**Alarm Level:** Minor

**Description:** A timeout failure occurred while performing an action on a phrase and the system aborted the action. This alarm may be caused by excessive load on the system or a problem with the tip/ring circuit card.

**Repair Procedure:**  
This alarm requires remote maintenance center intervention.

Alarm Code: 22

Event ID: VROP22

**Alarm Level:** Minor

**Description:** The system could not reserve a file. Applications that need to record to the file will be incomplete.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

VOICE\_PORT Resource Type

Alarm Code: 1

Event ID: TR001

**Alarm Level:** Major

**Description:** More than 25% of the system’s channels are not operational.

**Repair Procedure:**

This alarm requires remote maintenance center intervention.

Alarm Code: 2

Event ID: TR002

**Alarm Level:** Warning

**Description:** A tip/ring circuit card or a channel is busied out. The system cannot use the equipment.

**Repair Procedure:**

Release the busy-out.

1. Start at the Lucent INTUITY main menu and select

- > Voice System Administration
- > Voice Equipment

2. Press **F8** (Actions).
3. Select Assign/Change
4. Select State of Voice Equipment
5. Specify **inserv** (in-service) as the new channel state for any MANOOS (manually-out-of-service) card or channels.



**NOTE:**

You must return to the Display Voice Equipment screen in order to see the change. To return, press **F6** (Cancel).

|   |                            |
|---|----------------------------|
| 3 | Alarm Log Entries          |
|   | VP – Voice Platform Alarms |

Page 3-126

# Glossary

## 5ESS Switch

A central office switch manufactured by Lucent Technologies that can be integrated with the Lucent INTUITY™ system.

---

## A

### accessed message

A message that was received and scanned (either the entire message or just the header).

### ACA

See *automatic circuit assurance*.

### ACD

See *automatic call distribution*.

### activity menu

The list of options spoken to users when they first access a messaging system. Selecting an activity is the starting point for all user operations.

### ADAP

See *administration and data acquisition package*.

### address

INTUITY AUDIX user identification, containing the user's extension and machine, that indicates where the system needs to deliver a message. An address may include several users or mailing lists. Name or number addressing can be selected with the ☐ ☐ (Address) command.

### adjunct

A separate system closely integrated with a switch, such as a Lucent INTUITY system or a call management system (CMS).

### administration

The process of setting up a system (such as a switch or a messaging system) to function as desired. Options and defaults are normally set up (translated) by the system administrator or service personnel.

### administration and data acquisition package (ADAP)

A software package that allows the system administrator to transfer system user, maintenance, or traffic data from an INTUITY AUDIX system to a personal computer (PC).

### ADU

See *asynchronous data unit*.

### alarm log

A list of alarms that represent all of the active or resolved problems on a Lucent INTUITY system. The alarm log is stored in a software file on disk and can be accessed either locally or remotely on a terminal connected to the system.

## **alarms**

Hardware, software, or environmental problems that may affect system operation. Alarms are classified as *major*, *minor*, or *warning*.

## **alphanumeric**

Consisting of alphabetic and numeric symbols or punctuation marks.

## **ALT**

See *assemble, load, and test*.

## **American wire gauge (AWG)**

A standard measuring gauge for nonferrous conductors.

## **AMIS**

See *Audio Messaging Interchange Specification*.

## **AMIS prefix**

A number added to the destination number to indicate that it is an AMIS analog networking number.

## **analog networking**

A method of transferring a message from one messaging system to another whereby the message is played back (voiced) during the transfer.

## **analog signal**

In teleprocessing usage, a communications path that usually refers to a voice-grade telephone line.

## **announcement**

A placeholder within the Lucent INTUITY system for playing fragments. Each event that may occur within AUDIX has one or more announcement numbers permanently assigned to it. Fragment numbers are then assigned to the announcement numbers.

## **announcement fragment**

A numbered piece of spoken information that makes up a system message or prompt.

## **antistatic**

A treatment for material to prevent the build-up of static electricity.

## **API**

See *application programming interface*.

## **application**

A computer software program.

## **application identifier**

A two-letter code used in the administrator's log to identify the application or subsystem for which an alarm is being generated. There are 11 application identifiers as follows: CA (Call Accounting), EL (Enhanced List), LF (Lodging Fax), LG (Lucent INTUITY Lodging), ML (MERLIN LEGEND), MT (Maintenance), NW (Digital Networking), SW (Switch Integration), VM (Voice Messaging), VP (Voice Processing), and VR (Voice Response).

## **application programming interface (API)**

A set of formalized software calls and routines that an application program can reference to access underlying network services.

## **assemble, load, and test (ALT)**

The Lucent factory process that preloads software, installs hardware, and tests the system prior to shipping.



## **ASP**

advanced signal processor

## **asynchronous communication**

A method of data transmission in which bits or characters are sent at irregular intervals and spaced by start and stop bits rather than time. See also *synchronous communication*.

## **asynchronous data unit (ADU)**

An electronic communications device that can extend data transmission over asynchronous lines more than 50 feet in length. Recommended ADUs for use with the Lucent INTUITY system include Z3A1 or Z3A4.

## **asynchronous transmission**

A form of serial communications where each transmitted character is bracketed with a start bit and one or two stop bits. The Lucent INTUITY system provides asynchronous EIA-232 capabilities for INTUITY AUDIX Digital Networking, if required.

## **attendant console**

A special-purpose telephone with numerous lines and features usually located at the front desk of a business or other organization. The front desk attendant uses this telephone to answer and transfer calls.

## **Audio Messaging Interchange Specification (AMIS)**

An analog networking protocol that allows users to exchange messages with any messaging system that also has AMIS Analog Networking capabilities. Messages can be exchanged with users on Lucent INTUITY systems as well as with users on remote messaging systems made by vendors other than Lucent Technologies.

## **Audio Information Exchange (AUDIX)**

A complete messaging system accessed and operated by touch-tone telephones and integrated with a switch.

## **audit**

A software program that resolves filesystem incompatibilities and updates restored filesystems to a workable level of service. Audits are done automatically on a periodic basis, or can be performed on demand.

## **AUDIX**

See *Audio Information Exchange*.

## **autodelete**

An INTUITY AUDIX feature that allows users to designate that faxes be automatically deleted from their mailboxes after they are printed.

## **automated attendant**

A Lucent INTUITY system feature that allows users to set up a main extension number with a menu of options that routes callers to an appropriate department at the touch of a button.

## **automatic call distribution (ACD)**

The System 85, Generic 2, or Generic 3 call-distribution group of analog ports that connects Lucent INTUITY users to the system. See also *call-distribution group*.

## **automatic circuit assurance (ACA)**

A feature of the switch that keeps records of both very long and very short calls and notifies the attendant when these calls exceed a certain parameter. The logic is that many very short calls or one very long one may suggest a trunk that is hung, broken, or out of order. The attendant can then physically dial into the trunk to check it.

**automatic message scan**

An INTUITY AUDIX feature that allows users to scan all message headers and messages at the touch of two buttons. With Lucent INTUITY FAX Messaging, this feature allows all new faxes to be bundled and transmitted over a single fax call delivery call. Also called *autoscan*.

**autoprint**

An INTUITY AUDIX feature that allows users to designate that faxes be automatically sent to a specified print destination.

**autoscan**

See *automatic message scan*.

**AWG**

See *American wire gauge*.

---

**B**

**background testing**

Testing that runs continuously when the system is not busy doing other tasks.

**backplane**

A centrally located device within a computer to which individual circuit cards are plugged for communication across an internal bus.

**backup**

A duplicate copy of files and directories saved on a removable medium such as floppy diskette or tape. The back-up filesystem can be copied back (restored) if the active version is damaged (corrupted) or lost.

**basic input/output system (BIOS)**

A system that contains the buffers for sending information from a program to the actual hardware device for which the information is intended.

**basic call transfer**

The switch-hook flash method used to send the INTUITY AUDIX transfer command over analog voice ports.

**basic rate access**

See *basic rate interface*.

**basic rate interface (BRI)**

International standard protocol for connecting a station terminal to an integrated systems digital network (ISDN) switch. ISDN BRI supports two 64-Kbps information-bearer channels (B1 and B2), and one 16-Kbps call status and control (D) channel (a 2B + D format). Also called *basic rate access*.

**binary synchronous communications (BSC)**

A character-oriented synchronous link protocol.

**BIOS**

See *basic input/output system*.

**body**

The part of a Lucent INTUITY voice mail that contains the actual spoken message. For a leave word calling (LWC) message, it is a standard system announcement.

## **boot**

The operation to start a computer system by loading programs from disk to main memory (part of system initialization). Booting is typically accomplished by physically turning on or restarting the system. Also called *reboot*.

## **boot filesystem**

The filesystem from which the system loads its initial programs.

## **BRI**

See *basic rate interface*.

## **broadcast messaging**

An INTUITY AUDIX feature that enables the system administrator and other designated users to send a message to all users automatically.

## **BSC**

See *binary synchronous communications*.

## **buffer**

A temporary storage area used to equalize or balance different operating speeds. A buffer can be used between a slow input device, such as a terminal keyboard, and the main computer, which operates at a very high speed.

## **bulletin board**

An INTUITY AUDIX feature that allows a message to be played to callers who dial the bulletin board extension. Callers cannot leave a message since it is a listen-only service. Also called *information service*.

## **bundling**

Combining several calls and handling them as a single call. See also *automatic message scan*.

## **bus**

An electrical connection/cable allowing two or more wires, lines, or peripherals to be connected together.

## **busy-out/release**

To remove a Lucent INTUITY device from service (make it appear busy or in use), and later restore it to service (release it). The Lucent INTUITY switch data link, voice ports, or networking ports can be busied out if they appear faulty or when maintenance tests are run.

---

# **C**

## **CA**

Call accounting system application identifier. See *application identifier*.

## **call accounting system (CAS)**

A software device that monitors and records information about a calling system.

## **call-answer**

An INTUITY AUDIX feature that allows the system to answer a call and record a message when the user is unavailable. Callers can be redirected to the system through the call coverage or call forwarding switch features. INTUITY AUDIX users can record a personal greeting for these callers.

## **call-answer language choice**

The capability of user mailboxes to accept messages in different languages. For the INTUITY AUDIX application, this capability exists when the multilingual feature is turned on.

**callback number**

In AMIS analog networking, the telephone number transmitted to the recipient machine to be used in returning messages that cannot be delivered.

**call classification analysis (CCA)**

A process that enables application designers to use information available within the system to classify the disposition of originated and transferred calls.

**call coverage**

A switch feature that defines a preselected path for calls to follow if the first (or second) coverage points are not answered. The Lucent INTUITY system can be placed at the end of a coverage path to handle redirected calls through call coverage, send all calls, go to cover, etc.

**call data handler process (CDH)**

A software process that accumulates generic call statistics and application events.

**call detail recording (CDR)**

A switch feature that uses software and hardware to record call data. See also *call detail recording utility*.

**call detail recording utility (CDRU)**

Applications software that collects, stores, optionally filters, and outputs call detail records for direct or polled output to peripheral devices. See also *call detail recording*.

**call delivery**

See *message delivery*.

**call-distribution group**

The set of analog port cards on the switch that connects switch users to the Lucent INTUITY system by distributing new calls to idle ports. This group (or split) is called automatic call distribution (ACD) on System 85, Generic 2, and Generic 3 and uniform call distribution (UCD) on System 75, Generic 1, and Generic 3. See also *automatic call distribution* and *uniform call distribution*.

**call management system (CMS)**

An inbound call distribution and management reporting package.

**called tone (CED tone)**

The distinctive tone generated by a fax endpoint when it answers a call (a constant 2100-Hz tone).

**called subscriber information (CSI)**

The identifier for the answering fax endpoint. This identifier is sent in the T.30 protocol and is generally the telephone number of the fax endpoint.

**calling tone (CNG tone)**

The distinctive tone generated by a fax endpoint when placing a call (a constant 1100-Hz tone that is on for 1/2 second, off for 3 seconds).

**call vectoring**

A System 85 R2V4, Generic 2, and Generic 3 feature that uses a vector (switch program) to allow a switch administrator to customize the behavior of calls sent to an automatic call distribution (ACD) group.

**card cage**

An area within the Lucent INTUITY hardware platform that contains and secures all of the standard and optional circuit cards used in the system.

**cartridge tape drive**

A high-capacity data storage/retrieval device that can be used to transfer large amounts of information onto high-density magnetic cartridge tape based on a predetermined format. This tape is to be removed from the system and stored as a backup.

**CAS**

See *call accounting system*.

**CCA**

See *call classification analysis*.

**CDH**

See *call data handler process*.

**CDR**

See *call detail recording*.

**CDRU**

See *call detail recording utility (CDRU)*.

**CED tone**

See *called tone*.

**CELP**

See *code excited linear prediction*.

**central office (CO)**

An office or location in which large telecommunication equipment such as telephone switches and network access facilities are maintained. In a CO, private customer lines are terminated and connected to the public network through common carriers.

**central processing unit (CPU)**

The component of the computer that manipulates data and processes instructions coming from software.

**channel**

A telecommunications transmission path for voice and/or data.

**channel capacity**

A measure of the maximum bit rate through a channel.

**class of restriction (COR)**

A feature that allows up to 64 classes of call-origination and call-termination restrictions for telephones, telephone groups, data modules, and trunk groups. See also *class of service*.

**class of service (COS)**

The standard set of INTUITY AUDIX features given to users when they are first administered (set up with a voice mailbox). See also *class of restriction*.

**clear to send (CTS)**

Located on Pin 5 of the 25-conductor RS-232 interface, CTS is used in the transfer of data between the computer and a serial device.

**client**

A computer that sends, receives and uses data, but that also shares a larger resource whose function is to do most data storage and processing. For Lucent INTUITY Message Manager, the user's PC running Message Manager is the client. See also *server*.

**CMS**

See *call management system*.

**CNG tone**

See *calling tone*.

**CO**

See *central office*.

**COR**

See *class of restriction*.

**COS**

See *class of service*.

**code excited linear prediction (CELP)**

An analog-to-digital voice coding scheme.

**collocated**

A Lucent INTUITY system installed in the same physical location as the host switch. See also *local installation*.

**collocated adjunct**

Two or more adjuncts that are serving the same switch (that is, each has voice port connections to the switch) or that are serving different switches but can be networked through a direct RS-232 connection due to their proximity.

**comcode**

A numbering system for telecommunications equipment used by Lucent Technologies. Each comcode is a 9-digit number that represents a specific piece of hardware, software, or documentation.

**command**

An instruction or request given by the user to the software to perform a particular function. An entire command consists of the command name and options. Also, one-key or two-key touch tones that control a mailbox activity or function.

**community**

A group of telephone users administered with special send and receive messaging capabilities. A community is typically comprised of people who need full access to each other by telephone on a frequent basis. See also *default community*.

**compound message**

A message that combines a voice message and a fax message into one unit, which INTUITY AUDIX then handles as a single message.

**configuration**

The particular combination of hardware and software components selected for a system, including external connections, internal options, and peripheral equipment.

**controller circuit card**

A circuit card used on a computer system that controls its basic functionality and makes the system operational. These cards are used to control magnetic peripherals, video monitors, and basic system communications.

**COS**

See *class of service*.

**coverage path**

The sequence of alternate destinations to which a call to a user on a Lucent INTUITY system is automatically sent when it is not answered by the user. This sequence is set up on the switch, normally with the Lucent INTUITY system as the last or only destination.

## CPU

See *central processing unit*.

## cross connect

Distribution-system equipment used to terminate and administer communication circuits.

## cross connection

The connection of one wire to another, usually by anchoring each wire to a connecting block and then placing a third wire between them so that an electrical connection is made.

## CSI

See *called subscriber information*.

## CTS

See *clear to send*.

---

# D

## DAC

See *dial access code*.

## database

A structured set of files, records, or tables. Also, a collection of filesystems and files in disk memory that store the voice and nonvoice (program data) necessary for Lucent INTUITY system operation.

## data communications equipment (DCE)

Standard type of data interface normally used to connect to data terminal equipment (DTE) devices. DCE devices include the data service unit (DSU), the isolating data interface (IDI), and the modular processor data module (MPDM).

## data communications interface unit (DCIU)

A switch device that allows nonvoice (data) communication between a Lucent INTUITY system and a Lucent switch. The DCIU is a high-speed synchronous data link that communicates with the common control switch processor over a direct memory access (DMA) channel that reads data directly from FP memory.

## data link

A term used to describe the communications link used for data transmission from a source to a destination, for example, a telephone line for data transmission.

## data service unit (DSU)

A device used to access digital data channels. DATAPHONE II 2500 DSUs are synchronous data communications equipment (DCE) devices used for extended-local Lucent INTUITY system connections. The 2600 or 2700 series may also be used; these support diagnostic testing and the DATAPHONE II Service network system.

## data set

Another term for a modem, although a data set usually includes the telephone. See also *modem*.

## data terminal equipment (DTE)

Standard type of data interface normally used for the endpoints in a connection. Normally the Lucent INTUITY system, most terminals, and the switch data link are DTE devices.

## DBP

See *data base processor*.

**DCE**

See *data communications equipment*.

**DCIU**

See *data communications interface unit*.

**DCP**

See *digital communications protocol*.

**DCS**

See *distributed communications system*.

**debug**

See *troubleshooting*.

**dedicated line**

A communications path that does not go through a switch. A dedicated (hard-wired) path can be formed with directly connected cables. MPDMs, DSUs, or other devices can also be used to extend the distance that signals can travel directly through the building wiring.

**default**

A value that is automatically supplied by the system if no other value is specified.

**default community**

A group of telephone users administered with restrictions to prevent them from sending messages to or receiving messages from other communities. If a system is administered to use communities, the default community is comprised of all the AUDIX users defined on that system.

**default print number**

The user-administered extension to which autprinted faxes are redirected upon their receipt into the user's mailbox. This default print destination is also provided as a print option when the user is manually retrieving and printing faxes from the mailbox.

**delivered message**

A message that has been successfully transmitted to a recipient's incoming mailbox.

**demand testing**

Testing performed on request (usually by service personnel).

**diagnostic testing**

A program run for testing and determining faults in the system.

**dial-ahead/dial-through**

The act of interrupting or preceding INTUITY AUDIX system announcements by typing (buffering) touch-tone commands in the order the system would normally prompt for them.

**dial string**

A series of numbers used to initiate a call to a remote AMIS machine. A dial string tells the switch what type of call is coming (local or long distance) and gives the switch time to obtain an outgoing port, if applicable

**dialed number identification service (\*DNIS\_SVC)**

An available channel service assignment on the Lucent INTUITY system. Assigning this service to a channel permits the Lucent INTUITY system to interpret information from the switch and operate the appropriate application for the incoming telephone call.

**DID**

See *direct inward dialing*.



**digital communications protocol (DCP)**

A 64-Kbps digital data transmission code with a 160-Kbps bipolar bit stream divided into two information (I) channels and one signaling (S) channel.

**digital networking**

A method of transferring messages between messaging systems in a digital format. See also *INTUITY AUDIX Digital Networking*.

**digital signal processor (DSP)**

A specialized digital microprocessor that performs calculations on digitized signals that were originally analog and then sends the results on.

**DIP switch**

See *dual in-line package switch*.

**direct inward dialing (DID)**

The ability for an outside caller to call an internal extension without having to pass through an operator or attendant.

**direct memory access (DMA)**

A quick method of moving data from a storage device directly to RAM, which speeds processing.

**directory**

1. A Lucent INTUITY AUDIX feature that allows you to hear a user's name and extension after pressing    at the activity menu. 2. A group of related files accessed by a common name in software.

**display terminal**

A data terminal with a screen and keyboard used for displaying Lucent INTUITY screens and performing maintenance or administration activities.

**distributed communications system (DCS)**

A network of two or more switches that uses logical and physical data links to provide full or partial feature transparency. Voice links are made using tie trunks.

**distribution list**

See *mailing list*.

**DMA**

See *direct memory access*.

**DNIS**

See *dialed number identification service*.

**domain**

An area where data processing resources are under common control. The INTUITY AUDIX system is one domain and an e-mail system is another domain.

**DSP**

See *digital signal processor*.

**DSU**

See *data service unit*.

**DTE**

See *data terminal equipment*.

**DTMF**

See *dual tone multifrequency*.

**dual in-line package (DIP) switch**

A small switch, usually attached to a printed circuit card, in which there are only two settings: on or off (or 0 or 1). DIP switches are used to configure the card in a semipermanent way.

**dual language greetings**

The capability of INTUITY AUDIX users to create personal greetings in two different languages—one in a primary language and one in a secondary language. This capability exists when the multilingual feature is turned on, and the prompts for user mailboxes can be in either of the two languages.

**dual tone multifrequency (DTMF)**

A way of signaling consisting of a pushbutton or touch-tone dial that sends out a sound consisting of two discrete tones that can be picked up and interpreted by telephone switches.

---

## E

**EIA interface**

A set of standards developed by the Electrical Industries Association (EIA) that specifies various electrical and mechanical characteristics for interfaces between electronic devices such as computers, terminals, and modems. Also known as *RS-232*.

**ELA**

*See Enhanced-List Application.*

**electronic mail**

*See e-mail.*

**electrostatic discharge (ESD)**

The discharge of a static charge on a surface or body through a conductive path to ground, ESD can damage integrated circuits.

**e-mail**

The transfer of a wide variety of message types across a computer network (LAN or WAN). E-mail messages may be text messages containing only ASCII files or may be complex multimedia messages containing embedded voice messages, software files, and images.

**enabled/disabled**

The state of a hardware device that indicates whether it is available for use by the Lucent INTUITY system. Devices must be equipped before they can be enabled (made active). See also *equipped/unequipped*.

**endpoint**

*See fax endpoint.*

**enhanced call transfer**

An INTUITY AUDIX feature that allows compatible switches to transmit messages digitally over the BX.25 (data) link. This feature is used for quick call transfers and requires a fully integrated digital switch. Callers can only transfer to other extensions in the switch dial plan.

**Enhanced-List Application (ELA)**

An INTUITY AUDIX option that facilitates message delivery to large numbers of recipients. There can be up to 100 enhanced lists per system, each of which can contain up to 1500 addresses.

**enhanced serial data interface (ESDI)**

A software-controlled and hardware-controlled method used to store data on magnetic peripherals.

**equipped/unequipped**

The state of a networking channel that indicates whether Lucent INTUITY software has recognized it. Devices must be equipped before they can be enabled (made active). See also *enabled/disabled*.

**error message**

A message on the screen indicating that something is wrong within the system and possibly suggesting how to correct it.

**errors**

Problems detected by the system during operation and recorded in the maintenance log. Errors can produce an alarm if they exceed a threshold.

**escape from reply**

The ability to quickly return to getting messages for a user who encounters a problem trying to respond to a message. To escape, the user presses [#].

**escape to attendant**

An INTUITY AUDIX feature that allows users with the call answer feature to have a personal attendant or operator administered to pick up their unanswered calls. A system-wide extension could also be used to send callers to a live agent.

**ESD**

See *electrostatic discharge*.

**ESDI**

See *enhanced serial data interface*.

**event**

An informational messages about the system's activities. For example, an event is logged when the system is rebooted. Events may or may not be related to errors and alarms.

---

**F**

**facilities restriction level (FRL)**

A value that determines which types of calls the users of a switch are allowed to make.

**facility out-of-service (FOOS)**

State of operation during which the current channel is not receiving a dial tone and is not functioning.

**facsimile**

1. A digitized version of written, typed, or drawn material transmitted over telephone lines and printed out elsewhere. 2. Computer-generated text or graphics transmitted over computer networks. A computer-generated fax is typically printed to a fax machine, but can remain stored electronically.

**fax**

See *facsimile*.

**fax addressing prefix**

Uniquely identifies a particular fax nodepoint to the Lucent INTUITY system. Used by the system as a "template" to differentiate all call-delivery machines on the network from each other.

**fax endpoint**

Any device capable of receiving fax calls. Fax endpoints include fax machines, individual PC fax modems, fax ports on LAN fax servers, and ports on fax-enabled messaging systems.

**fax print destination prefix**

A dial string that the Lucent INTUITY system adds to the fax telephone number the user enters to print a fax. The system takes the full number (fax print destination prefix + fax telephone extension) and hunts through the machine translation numbers until it finds the specific fax endpoint.

**field**

An area on a screen, menu, or report where information can be typed or displayed.

**FIFO**

See *first-in/first-out*.

**file**

A collection of data treated as a basic unit of storage.

**filename**

Alphanumeric characters used to identify a particular file.

**file redundancy**

See *mirroring*.

**file system**

A collection of related files (programs or data) stored on disk that are required to initialize a Lucent INTUITY system.

**first-in/first-out (FIFO)**

A method of processing telephone calls or data in which the first call or data to be received is the first call or data to be processed.

**F key**

See *function key*.

**FNPAC**

See *foreign numbering-plan area code*.

**FOOS**

See *facility out-of-service*.

**foreign exchange (FX)**

A central office (CO) other than the one providing local access to the public telephone network.

**foreign numbering-plan area code (FNPAC)**

An area code other than the local area code that must be dialed to call outside the local geographical area.

**format**

To set up a disk, floppy diskette, or tape with a predetermined arrangement of characters so that the system can read the information on it.

**FRL**

See *facilities restriction level*.

**function**

Individual steps or procedures within a mailbox activity.

**function key (F key)**

A key on a computer keyboard programmed to perform a defined function when pressed. The user interface for the Lucent INTUITY system defines keys F1 through F8.

**FX**

See *foreign exchange*.

---

## G

### **Generic 1, 2, or 3**

Lucent switch system software releases, designed for serving large communities of System 75 and System 85 users.

### **generic tape**

A copy of the standard software and stand-alone tape utilities that is shipped with a new Lucent INTUITY system.

### **GOS**

See *grade of service*.

### **grade of service (GOS)**

A parameter that describes the delays in accessing a port on the Lucent INTUITY system. For example, if the GOS is P05, 95% of the callers hear the system answer and 5% hear ringing until a port becomes available to answer the call.

### **guaranteed fax**

A feature of Lucent INTUITY FAX Messaging that temporarily stores faxes sent to a fax machine. In cases where the fax machine is busy or does not answer a call, the call is sent to an INTUITY AUDIX mailbox.

### **guest password**

A feature that allows callers who are not INTUITY AUDIX users to leave messages on the system by dialing a user's extension and entering a system-wide guest password.

---

## H

### **hard disk drive**

A high-capacity data-storage and data-retrieval device that is located inside a computer. A hard disk drive stores data on nonremovable high-density magnetic media based on a predetermined format for retrieval by the system at a later date.

### **hardware**

The physical components of a computer system. The central processing unit, disks, tape, and floppy drives are all hardware.

### **header**

Information that the system creates to identify a message. A message header includes the originator or recipient, type of message, creation time, and delivery time.

### **help**

A command run by pressing **HELP** or **CTRL ?** on a Lucent INTUITY display terminal to show the options available at your current screen position. In the INTUITY AUDIX system, press **\* (H)** on the telephone keypad to get a list of options. See also *on-line help*.

### **host switch**

The switch directly connected to the Lucent INTUITY system over the data link. Also, the physical link connecting a Lucent INTUITY system to a distributed communications system (DCS) network.

**hunt group**

A group of analog ports on a switch usually administered to search for available ports in a circular pattern.

---

**I**

**I/O**

Input/output.

**IDI**

See *isolating data interface*.

**IMAPI**

See *INTUITY messaging application programming interface*.

**INADS**

See *initialization and administration system*.

**information service**

See *bulletin board*.

**initialization**

The process of bringing a system to a predetermined operational state. The start-up procedure tests hardware; loads the boot filesystem programs; locates, mounts, and opens other required filesystems; and starts normal service.

**initialization and administration system (INADS)**

A computer-aided maintenance system used by remote technicians to track alarms.

**initialize**

To start up the system for the first time.

**input**

A signal fed into a circuit or channel.

**integrated services digital network (ISDN)**

A network that provides end-to-end digital connectivity to support a wide range of voice and data services.

**integrated voice processing CELP (IVC6) card**

A computer circuit card that supports both fax processing and voice processing capabilities. It provides two analog ports to support six analog channels. All telephone calls to and from the Lucent INTUITY system are processed through the IVC6 card.

**interface**

The device or software that forms the boundary between two devices or parts of a system, allowing them to work together. See also *user interface*.

**internal e-mail**

Software on a PC that provides messaging capability between users on the same AUDIX system, or to administered remote AUDIX systems and users. Users can create, send, and receive a message that contains multiple media types; specifically, voice, fax, text, or file attachments (software files, such as a word processing or spreadsheet file).

**interrupt request (IRQ)**

Within a PC, a signal sent from a device to the CPU to temporarily suspend normal processing and transfer control to an interrupt handling routine.

**INTUITY AUDIX Digital Networking**

A Lucent INTUITY feature that allows customers to link together up to 500 remote Lucent INTUITY machines for a total of up to 500,000 remote users. See also *digital networking*.

**INTUITY Message Manager**

A Windows-based software product that allows INTUITY AUDIX users to receive, store, and send their voice/FAX messages from a PC. The software also enables users to create and send multimedia messages that include voice, fax, file attachments, and text.

**INTUITY messaging application programming interface (IMAPI)**

A software function-call interface that allows INTUITY AUDIX to interact with Lucent INTUITY Message Manager.

**IRQ**

See *interrupt request*.

**ISDN**

See *integrated services digital network*.

**isolating data interface (IDI)**

A synchronous, full duplex data device used for cable connections between a Lucent INTUITY GPSC-AT/E card and the switch data communications interface unit (DCIU).

**IVC6**

See *integrated voice processing CELP (IVC6) card*.

---

**J**

**jumper**

Pairs or sets of small prongs or pins on circuit cards and mother boards the placement of which determines the particular operation the computer selects. When two pins are covered, an electrical circuit is completed. When the jumper is uncovered, the connection is not made. The computer interprets these electrical connections as configuration information.

---

**K**

---

**L**

**label**

The name assigned to a disk device (either a removable tape cartridge or permanent drive) through software. Cartridge labels may have a generic name (such as "3.3") to show the software release, or a descriptive name if for back-up copies (such as "back01"). Disk drive labels usually indicate the disk position (such as "disk00" or "disk02").

## **LAN**

See *local area network*.

## **last-in/first-out (LIFO)**

A method of processing telephone calls or data in which the last call (or data) received is the first call (or data) to be processed.

## **LCD**

See *liquid crystal display*.

## **leave word calling (LWC)**

A switch feature that allows the calling party to leave a standard (nonvoice) message for the called party using a feature button or dial access code.

## **LED**

See *light emitting diode*.

## **LIFO**

See *last-in/first-out*.

## **light emitting diode (LED)**

A light on the hardware platform that shows the status of operations.

## **liquid crystal display (LCD)**

The 10-character alphanumeric display that shows the status of the system, including alarms.

## **load**

The process of reading software from external storage (such as disk) and placing a copy in system memory.

## **local area network (LAN)**

A network of PCs that communicate with each other and that normally share the resources of one or more servers. Operation of Lucent INTUITY Message Manager requires that the INTUITY AUDIX system and the users' PCs be on a LAN.

## **local AUDIX machine**

The Lucent INTUITY system where a user's INTUITY AUDIX mailbox is located. All users on this home machine are called *local users*.

## **local installation**

A switch, adjunct, or peripheral device installed physically near the host switch or system. See also *collocated*.

## **local network**

An INTUITY AUDIX Digital Network in which all Lucent INTUITY systems are connected to the same switch.

## **login**

A unique code a user must enter to gain approved access to the Lucent INTUITY system. See also *password*.

## **login announcement**

A feature enabling the system administrator and other designated users to create a mail message that is automatically played to all INTUITY AUDIX users every time they log in to the system.

## **Lotus Notes**

Information management software for work groups that allows individuals to share and manipulate information over a local or wide area network



## LWC

See *leave word calling*.

---

## M

### magnetic peripherals

Data storage devices that use magnetic media to store information. Such devices include hard disk drives, floppy disk drives, and cartridge tape drives.

### mailbox

A portion of disk memory allotted to each Lucent INTUITY system user for creating and storing outgoing and incoming messages.

### mailing list

A group of user addresses assigned a list ID# and public or private status. A mailing list may be used to simplify the sending of messages to several users.

### maintenance

The process of identifying system errors and correcting them, or taking steps to prevent problems from occurring.

### major alarm

An alarm detected by Lucent INTUITY software that affects at least one fourth of the Lucent INTUITY ports in service. Often a major alarm indicates that service is affected.

### MANOOS

See *manually out-of-service*.

### manually out-of-service

State of operation during which a unit has been intentionally taken out of service.

### MAP

See *multi-application platform*.

### mean time between failures

The average time a manufacturer estimates will elapse before a failure occurs in a component or system.

### media type

The form a message takes. The media types supported by the Lucent INTUITY system are voice, text, file attachments, and fax.

### memory

A device that stores logic states such that data can be accessed and retrieved. Memory may be temporary (such as system RAM) or permanent (such as disk).

### menu

A list of options displayed on a computer terminal screen or spoken by a voice processing system. Users choose the option that reflects what action they want the system to take.

### menu tree

The way in which nested automated attendants are set up.

### **message categories**

Groups of messages in INTUITY AUDIX users' mailboxes. Categories include *new*, *unopened*, and *old* for the incoming mailbox and *delivered*, *accessed*, *undelivered*, *undeliverable* (not deliverable), and *file cabinet* for the outgoing mailbox.

### **message component**

A media type included in a multimedia message. These types include voice, text, file attachments, and fax messages.

### **message delivery**

An optional Lucent INTUITY feature that permits users to send messages to any touch-tone telephone, as long as the telephone number is in the range of allowable numbers. This feature is an extension of the AMIS analog networking feature and is automatically available when the AMIS feature is activated.

### **Message Manager**

See *INTUITY Message Manager*.

### **message waiting indicator (MWI)**

An indicator that alerts Lucent INTUITY users that they have received new mail messages. An MWI can be an LED or neon lamp, or an audio tone (stutter dial tone).

### **message waiting lamp (MWL)**

See *message-waiting indicator*.

### **migration**

An installation that moves data to the Lucent INTUITY system from another type of Lucent messaging system, for example, from AUDIX R1, DEFINITY AUDIX, or AUDIX Voice Power.

### **minor alarm**

An alarm detected by maintenance software that affects less than one fourth of the Lucent INTUITY ports in service, but has exceeded error thresholds or may impact service.

### **mirroring**

A Lucent INTUITY system feature that allows data from crucial filesystems to be continuously copied to back-up (mirror) filesystems while the system is running. If the system has some problem where an original filesystem cannot be used, the backup filesystem is placed in service automatically.

### **ML**

MERLIN LEGEND application identifier. See *application identifier*.

### **mode code**

A string of touch-tones from a MERLIN LEGEND switch. A mode code may send the INTUITY AUDIX system information such as call type, calling party, called party, and on/off signals for message waiting indicators.

### **modem**

A device that converts data from a form that is compatible with data processing equipment (digital) to a form compatible with transmission facilities (analog), and vice-versa.

### **modular**

A term that describes equipment made of plug-in units that can be added together to make the system larger, improve its capabilities, or expand its size.

### **modular processor data module (MPDM)**

A data device that converts RS-232C or RS-449 protocol signals to digital communications protocol (DCP) used by System 75/85, Generic1, and Generic 3 switches. MPDMs can connect the Lucent INTUITY system to a switch DCIU or SCI link or connect terminals to a switch port card.

## **MPDM**

See *modular processor data module*.

## **MT**

Maintenance application identifier. See *application identifier*.

## **MTBF**

See *mean time between failures*.

## **multi-application platform (MAP)**

The computer hardware platform used by the Lucent INTUITY system.

## **multilingual feature**

A feature that allows announcement sets to be active simultaneously in more than one language on the system. Mailboxes can be administered so that users can hear prompts in the language of their choice.

## **MWI**

See *message waiting indicator*.

---

# **N**

## **networking**

See *INTUITY AUDIX Digital Networking*.

## **networking prefix**

A set of digits that identifies a Lucent INTUITY machine.

## **night attendant**

The automated attendant created on a MERLIN LEGEND switch that automatically becomes active during off-hours. The night attendant substitutes for one or more daytime attendants.

## **not deliverable message**

A message that could not be delivered after a specified number of attempts. This usually means that the user's mailbox is full.

## **NPA**

See *numbering plan area*.

## **NT**

Networking application identifier. See *application identifier*.

## **MWL**

See *message waiting lamp*.

## **numbering plan area**

Formal name for 3-digit telephone area codes in North America. Within an area code, no two telephone lines may have the same 7-digit phone number. The code is often designated as *NXX*, to indicate the three digits.

---

## O

### **off-hook**

See *switch hook*.

### **on-hook**

See *switch hook*.

### **on-line help**

A Lucent INTUITY system feature that provides information about user interface windows, screens, and menus by pressing a predetermined key. See also *help*.

### **open systems interconnection (OSI)**

An internationally accepted framework of standards for communication between systems made by different vendors.

### **operating system (OS)**

The set of software programs that runs the hardware and interprets software commands.

### **option**

A choice selected from a menu, or an argument used in a command line to specify program output by modifying the execution of a command. When you do not specify any options, the command executes according to its default options.

### **OS**

See *operating system*.

### **OSI**

See *open systems interconnection*.

### **outcalling**

A Lucent INTUITY system feature that allows the system to dial users' numbers to inform them they have new messages.

### **outgoing mailbox**

A storage area on the Lucent INTUITY system where users can keep copies of messages for future reference or action.

---

## P

### **parallel transmission**

The transmission of several bits of data at the same time over different wires. Parallel transmission of data is usually faster than serial transmission.

### **password**

1. A word or character string recognized automatically by the Lucent INTUITY system that allows a user access to his/her mailbox or a system administrator access to the system data base. 2. An alphanumeric string assigned to local and remote networked machines to identify the machines or the network. See also *login*.

### **password aging**

An INTUITY AUDIX feature that allows administrators to set a length of time after which a user's AUDIX password or the administrator's system password expires. The user or administrator must then change the password.

**PBX**

See *private branch exchange*.

**PC**

See *power converter*.

**PDM (processor data module)**

See *modular processor data module (MPDM)*.

**peripheral device**

Equipment such as a printer or terminal that is external to the Lucent INTUITY cabinet, but necessary for full operation and maintenance of the system. Also called a *peripheral*.

**personal directory**

An INTUITY AUDIX feature that allows each user to create a private list of customized names.

**personal fax extension**

See *secondary extension*.

**PI**

See *processor interface*.

**PIB**

See *processor interface*.

**pinouts**

The signal description per pin number for a particular connector.

**PMS**

See *property management system*.

**port**

A connection or link between two devices that allows information to travel to a desired location. For example, a switch port connects to a Lucent INTUITY voice port to allow a caller to leave a message.

**POST**

See *power-on self test*.

**power on self test (POST)**

A set of diagnostics stored in ROM that tests components such as disk drives, keyboard, and memory each time the system is booted. If problems are identified, a message is sent to the screen.

**priority call answer**

An INTUITY AUDIX feature that allows users to designate a call answer message as a priority message. To make a message a priority message, the caller presses **2** after recording.

**priority messaging**

An INTUITY AUDIX feature that allows some users to send messages that are specially marked and preferentially presented to recipients. See also *priority outcalling*.

**priority outcalling**

An INTUITY AUDIX feature that works with the priority messaging feature by allowing the message recipient to elect to be notified by outcalling only when a priority message has been received. See also *priority messaging*.

**private branch exchange (PBX)**

An analog, digital, or electronic telephone switching system where data and voice transmissions are not confined to fixed communications paths, but are routed among available ports or channels. See also *switch*.

**private mailing list**

A list of addresses that only the Lucent INTUITY system user who owns it can access.

**private messaging**

A feature of INTUITY AUDIX that allows a user to send a message that cannot be forwarded by the recipient.

**processor data module (PDM)**

See *modular processor data module (MPDM)*.

**processor interface (PI)**

A System 75, Generic 1, Generic 3i, Generic 3s, and Generic 3vs switch data link. Also called *processor interface board (PIB)*.

**programmed function key**

See *function key*.

**property management system (PMS)**

A product used by lodging establishments to automate the management of guest records, reservations, room assignments, and billing. In an integrated PMS environment, special software links the PMS to the Lucent INTUITY Lodging system so that both systems share a common set of messages and commands.

**protocol**

A set of conventions or rules governing the format and timing of message exchanges (signals) to control data movement and the detection and possible correction of errors.

**public mailing list**

A list of addresses that any INTUITY AUDIX user can use if that user knows the owner's list ID number and extension number. Only the owner can modify a public mailing list.

**pulse-to-tone converter**

A device connected to the switch that converts signals from a rotary pulses to touch tone signals. This device allows callers to use rotary telephones to access options in a Lucent INTUITY user's mailbox or in an automated attendant.

---

## R

**RAM**

See *random access memory*.

**random access memory (RAM)**

The memory used in most computers to store the results of ongoing work and to provide space to store the operating system and applications that are actually running at any given moment.

**read-only memory (ROM)**

A form of computer memory that allows values to be stored only once; after the data is initially recorded, the computer can only read the contents. ROM is used to supply constant code elements such as bootstrap loaders, network addresses, and other more or less unvarying programs or instructions.

**reboot**

See *boot*.

**remote access**

Sending and receiving data to and from a computer or controlling a computer with terminals or PCs connected through communication (that is, telephone) links.

**remote installation**

A system, site, or piece of peripheral equipment that is installed in a different location from the host switch or system.

**remote maintenance**

The ability of Lucent personnel to interact with a remote computer through a telephone line or LAN connection to perform diagnostics and some system repairs. See also *remote service center*.

**remote network**

A network in which the systems are integrated with more than one switch.

**remote service center**

A Lucent or Lucent-certified organization that provides remote support to Lucent INTUITY customers. Depending upon the terms of the maintenance contract, your remote service center may be notified of all major and minor alarms and have the ability to remotely log in to your system and remedy problems. See also *remote maintenance*.

**remote terminal**

A terminal connected to a computer over a telephone line.

**remote users**

INTUITY AUDIX users whose mailboxes reside on a remote INTUITY AUDIX Digital Networking machine.

**REN**

See *ringer equivalence number*.

**reply loop escape**

An INTUITY AUDIX feature that allows a user the option of continuing to respond to a message after trying to reply to a nonuser message.

**reply to sender**

An INTUITY AUDIX feature that allows users to immediately place a call to the originator of an incoming message if that person is in the switch's dial plan.

**request to send (RTS)**

One of the control signals on an EIA-232 connector that places the modem in the originate mode so that it can begin to send.

**restart**

1. A Lucent INTUITY feature that allows INTUITY AUDIX users who have reached the system through the call answer feature to access their own mailboxes by entering the **[\*][R]** (Restart) command. This feature is especially useful for long-distance calls or for users who want to access the Lucent INTUITY system when all the ports are busy. 2. The reinitialization of certain software, for example, *restarting* the messaging system.

**restore**

The process of recovering lost or damaged files by retrieving them from available back-up tapes, floppy diskette, or another disk device.

**retention time**

The amount of time messages are saved on disk before being automatically deleted from a user's mailbox.

**reusable upgrade kit (RUK)**

A package shipped to the customer's site prior to an upgrade that contains materials the technician needs to complete the installation. This package includes an A/B switch box, a keyboard, a 25-foot coaxial cable, two T adapters, and terminations to a LAN circuit card. It remains the property of Lucent once the installation is finished.

**right-to-use (RTU) fee**

A charge to the customer to access certain functions or capacities that are otherwise restricted, for example, additional voice or networking ports or hours of speech storage. Lucent Technologies personnel can update RTU parameters either at the customer's site or remotely via a modem.

**ringer equivalence number (REN)**

A number required in the United States for registering your telephone equipment with a service provider.

**ROM**

See *read-only memory*.

**RS-232**

See *EIA interface*.

**RTS**

See *request to send*.

**RUK**

See *reusable upgrade kit*.

---

**S**

**scan**

To automatically play mail messages, headers, or both.

**scheduled delivery time**

A time and/or date that an INTUITY AUDIX user can assign to a message that tells the system when to deliver it. If a delivery time is omitted, the system sends the message immediately.

**screen**

That portion of the Lucent INTUITY user interface through which most administrative tasks are performed. Lucent INTUITY screens request user input in the form of a command from the `enter` command: prompt.

**SCSI**

See *small computer system interface*.

**secondary extension**

A second, fax-dedicated extension that directs incoming faxes directly into a user's mailbox without ringing the telephone. The secondary extension shares the same mailbox as the voice extension, but acts like a fax machine. Also called *personal fax extension*.

**serial transmission**

The transmission of one bit at a time over a single wire.



- server**  
A computer that processes and stores data that is used by other smaller computers. For Lucent INTUITY Message Manager, INTUITY AUDIX is the server. See also *client*.
- shielded cables**  
Cables that are protected from interference with metallic braid or foil.
- SID**  
See *switch integration device*.
- SIMM**  
See *single in-line memory module*.
- simplified message service interface (SMSI)**  
Type of data link connection to an integrated 1A ESS or 5ESS switch in the Lucent INTUITY system.
- simplified message desk interface (SMDI)**  
Also known as station message desk interface. Type of data link from the central office that contains information and instructions for the Lucent INTUITY system. With SMDI, the caller need not re-enter the called number once the call terminates to the Lucent INTUITY system. See also *simplified message service interface*.
- single in-line memory module (SIMM)**  
A method of containing random access memory (RAM) chips on narrow strips that attach directly to sockets on the CPU circuit card. Multiple SIMMs are sometimes installed on a single CPU circuit card.
- small computer systems interface (SCSI)**  
An interface standard defining the physical, logical, and electrical connections to computer system peripherals such as tape and disk drives.
- SMDI**  
See *station message desk interface*.
- SMDR**  
See *station message detail recording*.
- SMSI**  
See *simplified message service interface*.
- SP**  
signal processor
- SSP**  
scaleable signal processor
- station message desk interface (SMDI)**  
See *simplified message desk interface*.
- station message detail recording**  
See *call detail recording (CDR)*.
- subscriber**  
A Lucent INTUITY user who has been assigned the ability to access the INTUITY AUDIX Voice Messaging system.
- surge**  
A sudden rise and fall of voltage in an electrical circuit.

**surge protector**

A device that plugs into the telephone system and the commercial AC power outlet to protect the telephone system from damaging high-voltage surges.

**SW**

Switch integration application identifier. See *application identifier*.

**switch**

An automatic telephone exchange that allows the transmission of calls to and from the public telephone network. See also *private branch exchange (PBX)*.

**switched access**

A connection made from one endpoint to another through switch port cards. This allows the endpoint (such as a terminal) to be used for several applications.

**switch hook**

The device at the top of most telephones that is depressed when the handset is resting in the cradle (that is, when the telephone is *on hook*). This device is raised when the handset is picked up (that is, when the telephone is *off hook*).

**switch-hook flash**

A signaling technique in which the signal is originated by momentarily depressing the switch hook.

**switch integration**

Sharing of information between a messaging system and a switch to provide a seamless interface to callers and system users. A fully integrated INTUITY AUDIX system, for example, answers each incoming telephone call with information taken directly from the switch. Such information includes the number being called and the circumstances under which the call was sent to it, for example, covered from a busy or unanswered extension.

**switch integration device (SID)**

A combination of hardware and software that passes information from the switch to the Lucent INTUITY system thus allowing it to share information with non-Lucent switches. The operation of a SID is unique to the particular switch with which it interfaces.

**switch network**

Two or more interconnected switching systems.

**synchronized mailbox**

A mailbox that is paired with a corresponding mailbox in another domain and linked via software that keeps track of changes to either mailbox. When the contents of one mailbox change, the software replicates that change in the other mailbox.

**synchronizer**

The name given to the trusted server by the e-mail vendor, Lotus Notes.

**synchronous communication**

A method of data transmission in which bits or characters are sent at regular time intervals, rather than being spaced by start and stop bits. See also *asynchronous communication*.

**synchronous transmission**

A type of data transmission where the data characters and bits are exchanged at a fixed rate with the transmitter and receiver synchronized. This allows greater efficiency and supports more powerful protocols.

**System 75**

An advanced digital switch manufactured by Lucent Technologies that supports up to 800 lines for voice and data communications.

## System 85

An advanced digital switch manufactured by Lucent Technologies that supports up to 3000 lines for voice and data communications.

## system configuration

See *configuration*.

---

# T

## T.30

The standard for Group III fax machines that covers the protocol used to manage a fax session and negotiate the capabilities supported by each fax endpoint.

## tape cartridge

One or more spare removable cartridges required to back up system information.

## tape drive

The physical unit that holds, reads, and writes to magnetic tape.

## TCP/IP

See *transmission control protocol/internet protocol*.

## TDD

See *telecommunications device for the deaf*.

## TDM

See *time division multiplexing*.

## telecommunications device for the deaf (TDD)

A device with a keyboard and display unit that connects to or substitutes for a telephone. The TDD allows a deaf or hearing-impaired person to communicate over the telephone lines with other people who have TDDs. It also allows a deaf person to communicate with the INTUITY AUDIX system.

## terminal

See *display terminal*.

## terminal type

A number indicating the type of terminal from which a user is logging in to the Lucent INTUITY system. Terminal type is the last required entry before gaining access to the Lucent INTUITY display screens.

## terminating resistor

A grounding resistor placed at the end of a bus, line, or cable to prevent signals from being reflected or echoed.

## time division multiplexing (TDM)

A method of serving multiple channels simultaneously over a common transmission path by assigning the transmission path sequentially to the channels, with each assignment being for a discrete time interval.

## tip/ring

A term used to denote the analog telecommunications interface.

## tone generator

A device acoustically coupled to a rotary telephone used to produce touch-tone signals.

**traffic**

The flow of attempts, calls, and messages across a telecommunications network.

**translations**

Software assignments that tell a system what to expect on a certain voice port or the data link, or how to handle incoming data. Translations customize the Lucent INTUITY system and switch features for users.

**transmission control protocol/internet protocol (TCP/IP)**

A suite of protocols that allow disparate hosts to connect over a network. Transmission control protocol (TCP) organizes data on both ends of a connection and ensures that the data that arrives matches that which was sent. Internet protocol (IP) ensures that a message passes through all the necessary routers to the proper destination.

**T/R**

See *tip/ring*.

**troubleshooting**

The process of locating and correcting errors in computer programs (also called *debugging*) or systems.

**trusted server**

A server that uses IMAPI to access an INTUITY AUDIX mailbox on behalf of a user and is empowered to do everything to a user message that INTUITY AUDIX can do.

**TTS**

Text-to-Speech

---

**U**

**UCD**

See *uniform call distribution*.

**Undelete**

An INTUITY AUDIX feature that allows users to restore the last message deleted by pressing  .

**undelivered message**

A message that has not yet been sent to an INTUITY AUDIX user's incoming mailbox. The message resides in the sender's outgoing mailbox and may be modified or redirected by the sender.

**unequipped**

See *equipped/unequipped*.

**unfinished message**

A message that was recorded but not approved or addressed, usually as the result of an interrupted INTUITY AUDIX session. Also called *working message*.

**uniform call distribution (UCD)**

The type of call-distribution group (or hunt group) of analog port cards on some switches that connects users to the INTUITY AUDIX system. System 75, Generic 1, Generic 3, and some central office switches use UCD groups. See also *call-distribution group*.

**uninterruptable power supply (UPS)**

An auxiliary power unit that provides continuous power in cases where commercial power is lost.

## **UNIX operating system**

A multi-user, multi-tasking computer operating system.

## **upgrade**

An installation that moves a Lucent INTUITY system to a newer release.

## **untouched message**

An INTUITY AUDIX feature that allows a user to keep a message in its current category by using the **[\*]** **[\*]** **[H]** (Hold) command. If the message is in the new category, message-waiting indication remains active (for example, the message-waiting lamp remains lit).

## **UPS**

See *uninterruptable power supply*.

## **U. S. 123**

An alternate announcement set in U. S. English whose prompts use numbers, not letters, to identify telephone keypad presses. For example, a prompt might say, "*Press star three,*" instead of, "*Press star D.*"

## **user interface**

The devices by which users access their mailboxes, manage mailing lists, administer personal greetings, and use other messaging capabilities. Types of user interfaces include a touch-tone telephone keypad and a PC equipped with Lucent INTUITY Message Manager.

## **user population**

A combination of different types of users on which Lucent INTUITY configuration guidelines are based.

---

# **V**

## **vector**

A customized program in the switch for processing incoming calls.

## **VM**

Voice messaging application identifier. See *application identifier*.

## **voice link**

The Lucent INTUITY analog connection(s) to a call-distribution group (or hunt group) of analog ports on the switch.

## **voice mail**

See *voice message*.

## **voice mailbox**

See *mailbox*.

## **voice message**

Digitized information stored by the Lucent INTUITY system on disk memory. Also called *voice mail*.

## **voice port**

The IVC6 port that provides the interface between the Lucent INTUITY system and the analog ports on the switch.

## **voice terminal**

A telephone used for spoken communications with the Lucent INTUITY system. A touch-tone telephone with a message-waiting indicator is recommended for INTUITY AUDIX users.

**voicing**

1. Speaking a message into the Lucent INTUITY system during recording.
2. Having the system play back a message or prompt to a user.

**VP**

Voice platform application identifier. See *application identifier*.

**VR**

Voice response application identifier. See *application identifier*.

---

**W**

**WAN**

See *wide area network*.

**wide area network (WAN)**

A data network typically extending a local area network (LAN) over telephone lines to link with LANS in other buildings and/or geographic locations.

**window**

That portion of the Lucent INTUITY user interface through which you can view system information or status.

# Index

---

## A

- acknowledged, [1-20](#)
- activity log
  - definition, [1-4](#)
  - description, [1-4](#)
  - introduction, [1-1](#)
- administrator's log
  - access, [1-5](#)
  - display selections, [1-7](#)
    - defaults, [1-7](#)
    - example screen, [1-7](#)
    - with log field, [1-8](#)
  - fields
    - application identifier, [1-9](#)
    - count, [1-10](#)
    - date/time, [1-8](#)
    - event ID, [1-9](#)
  - introduction, [1-1](#), [1-5](#)
  - messages, [2-1](#)
  - notification of messages, [1-4](#)
  - number of entries, [1-5](#)
  - searching, [1-10](#)
- alarm level display, [1-20](#)
- alarm log
  - access, [1-12](#)
  - description, [1-11](#)
  - display selections, [1-14](#)
    - defaults, [1-14](#)
  - fields
    - acknowledged, [1-20](#)
    - alarm level, [1-18](#)
    - alarm type, [1-14](#)
    - application identifier, [1-15](#)
    - date/time alarmed, [1-20](#)
    - date/time resolved, [1-21](#)
    - location, [1-18](#)
    - resolve reason, [1-21](#)
    - resource type, [1-15](#)
    - start date and time, [1-21](#)
  - introduction, [1-1](#)
  - location, [1-18](#)
  - number of entries, [1-11](#)
  - order of entries, [1-11](#)
  - searching, [1-15](#)
- alarm management screen, [1-22](#)
  - alarm suppression, [1-24](#)
  - clear alarm notification, [1-24](#)
  - destination, [1-23](#)
  - product id, [1-23](#)
- alarm type
  - alarm log field, [1-14](#)
- alarmed resource type, [1-15](#)

- alarms
  - see also alarm log
  - acknowledgement from remote maintenance center, [1-20](#)
  - active, [1-11](#), [1-14](#)
  - after reboot, [1-11](#)
  - clear alarm notification, [1-24](#)
  - destination, [1-23](#)
  - how responded to, [1-22](#)
  - levels, [1-18](#)
  - resolve reason, [1-21](#)
  - resolved, [1-11](#), [1-14](#)
    - date/time, [1-21](#)
  - suppression, [1-24](#)
  - unresolved, [1-20](#)
- application identifier
  - administrator's log field, [1-9](#)
  - alarm log, [1-15](#)
  - CA, [1-9](#), [1-15](#)
  - EL, [1-9](#), [1-15](#)
  - LG, [1-9](#), [1-15](#)
  - ML, [1-9](#), [1-15](#)
  - MT, [1-9](#), [1-15](#)
  - NW, [1-9](#), [1-15](#)
  - SW, [1-9](#), [1-15](#)
  - VM, [1-9](#), [1-15](#)
  - VP, [1-9](#), [1-15](#)

- 
- C
- CA, [1-9](#), [1-15](#)
    - administrator's Log entries, [2-3](#)
    - alarm Log entries, [3-3](#)
  - clearing
    - clear alarm notification, [1-24](#)
  - count
    - administrator's log field, [1-10](#)

- 
- D
- date/time
    - administrator's log field, [1-8](#)
  - date/time alarmed
    - alarm log field, [1-20](#)
  - date/time resolved
    - alarm log field, [1-21](#)

- 
- E
- EL, [1-9](#), [1-15](#)
    - administrator's Log entries, [2-4](#)
    - alarm log entries, [3-4](#)
  - DELIVTS
    - alarm code 1, [3-4](#)



- alarm code 2, [3-4](#)
- alarm code 3, [3-5](#)
- alarm code 4, [3-5](#)
- ELA-badreca01 through ELA-badreca12, [2-4](#)
- ELA-chkrestrct, [2-7](#)
- ELA-delivts01, [3-4](#)
- ELA-delivts02, [3-4](#)
- ELA-delivts03, [3-5](#)
- ELA-delivts04, [3-5](#)
- ELA-delivts05, [2-7](#)
- ELA-loopvioltn, [2-6](#)
- ELA-lostlock01 through ELA-lostlock10, [2-5](#)
- ELA-mboxlock01, [2-6](#)
- ELA-nestvioltn, [2-5](#)
- ELA-no\_members, [2-5](#)
- ELA-registry01, [3-6](#)
- ELA-registry02, [3-6](#)
- ELA-shadow01, [3-7](#)
- ELA-shadow02, [3-7](#)
- ELA-shadow03, [3-8](#)
- ELA-shadow04, [3-8](#)
- ELA-shadow05, [3-9](#)
- ELA-shadow06, [3-9](#)
- ELA-shadow07, [2-7](#)
- REGISTRY
  - alarm code 1, [3-6](#)
  - alarm code 2, [3-6](#)
- SHADOW
  - alarm code 1, [3-7](#)
  - alarm code 2, [3-7](#)
  - alarm code 3, [3-8](#)
  - alarm code 4, [3-8](#)
  - alarm code 5, [3-9](#)
  - alarm code 6, [3-9](#)
- event ID
  - administrator's log field, [1-9](#)
  - alarm log, [3-1](#)

G

- glossary, [GL-1](#)

L

- LF, [1-9](#), [1-15](#)
- LFAX00, [3-11](#)
- LFAX01, [3-11](#)
- LFAX02, [3-12](#)
- LFAX05, [3-11](#)
- LFAX06, [3-12](#)
- LFAX08, [3-12](#)
- SOFTWARE
  - alarm code 1, [3-11](#)
  - alarm code 10, [3-12](#)

- alarm code 4, [3-11](#)
  - alarm code 7, [3-11](#)
  - alarm code 9, [3-12](#)
- LG, [1-9](#), [1-15](#)
  - LGADM01, [3-17](#)
  - LGMSTR00, [3-13](#)
  - LGMSTR02, [3-20](#)
  - PIM00, [3-14](#)
  - PMS10, [3-26](#)
  - PMS14, [3-27](#)
  - PMS20, [3-32](#)
  - PMS22, [3-32](#)
  - PMS23, [3-18](#)
  - PMS24, [3-32](#)
  - PMS25, [3-33](#)
  - PMS31, [3-30](#)
  - PMS33, [3-31](#)
  - PMS35, [3-31](#)
  - PMS39, [3-31](#)
- SOFTWARE
  - alarm code 1, [3-13](#), [3-14](#)
  - alarm code 13, [3-26](#)
  - alarm code 14, [3-27](#)
  - alarm code 15, [3-30](#), [3-31](#)
  - alarm code 16, [3-32](#), [3-33](#)
  - alarm code 4, [3-17](#), [3-18](#)
  - alarm code 7, [3-20](#)
- location
  - alarm log field, [1-18](#)
- logs
  - introduction, [1-1](#)
  - see activity log
  - see alarm log

---

## M

- major alarms, [1-19](#)
- message
  - administrator's log field, [1-10](#)
- minor alarms, [1-19](#)
- ML, [1-9](#), [1-15](#)
  - ML200, [2-9](#)
  - ML201, [2-9](#)
- MT, [1-9](#), [1-15](#)
  - administrator's entries, [2-10](#)
- ALARM\_ORIG
  - alarm code 0, [3-34](#)
  - alarm code 1, [3-34](#)
- ALARM00001, [3-34](#)
- ALARM00002, [3-34](#)
- ALARM00003, [3-34](#)
- AOMADM00001, [2-10](#)
- AOMADM00002, [2-10](#)
- BACKUP
  - alarm code 1, [3-35](#)
  - alarm code 2, [3-35](#)

BKDONE, [2-11](#)  
BKRST021, [3-37](#)  
BKRST022, [3-37](#)  
BKRST024, [3-35](#)  
BKRST025, [3-35](#)  
BKRST026, [3-36](#)  
DISK  
    alarm code 1, [3-35](#)  
FSY001, [3-35](#)  
FSY002, [3-36](#)  
FSY003, [3-36](#)  
FSY004, [3-38](#)  
FSY006, [3-38](#)  
FSY007, [3-39](#), [3-40](#)  
FSY008, [3-39](#)  
FSY009, [3-39](#)  
FSY010, [3-40](#)  
MIRROR  
    alarm code 0, [3-36](#)  
    alarm code 1, [3-36](#)  
RESTORE  
    alarm code 1, [3-36](#)  
RSTDONE, [2-11](#)  
TAPE\_DRIVE  
    alarm code 1, [3-37](#)  
    alarm code 2, [3-37](#)  
UDTADM00000, [2-11](#)  
UDTADM00001, [2-11](#)  
UDTADM00002, [2-12](#)  
UDTADM00003, [2-12](#)  
UDTADM00004, [2-12](#)  
UDTADM00005, [2-12](#)  
UNIX  
    alarm code 0, [3-38](#)  
    alarm code 1, [3-38](#)  
    alarm code 2, [3-38](#)  
    alarm code 3, [3-39](#)  
    alarm code 4, [3-39](#)  
    alarm code 5, [3-39](#)  
    alarm code 6, [3-40](#)  
    alarm code 7, [3-40](#)

---

## N

notification  
    of administrator's log messages, [1-4](#)  
NW, [1-9](#), [1-15](#)  
    administrator's log entries, [2-13](#), [2-24](#)  
    HWANEACCX, [3-47](#)  
NETWK\_BD  
    alarm code 2000, [3-47](#)  
NETWK\_CHAN  
    alarm code 2001, [3-47](#)  
SOFTWARE  
    alarm code 0001, [3-41](#)  
    alarm code 0002, [3-41](#)

- alarm code 0003, [3-42](#)
- alarm code 0004, [3-42](#)
- alarm code 0005, [3-42](#)
- alarm code 0006, [3-44](#)
- alarm code 1000, [3-45](#)
- alarm code 1001, [3-46](#)
- alarm code 1002, [3-46](#)
- alarm code 1003, [3-46](#)
- alarm code 1004, [3-46](#)
- SWANECONN, [3-42](#)
- SWANENAME, [2-13](#)
- SWANENAMEREM, [2-13](#)
- SWANEPASS, [2-14](#)
- SWANEPASSREM, [2-14](#)
- SWANEPERM, [2-14](#)
- SWANETHRESH, [2-15](#)
- SWANEUPDABORT1, [2-15](#)
- SWANEUPDABORT2, [2-15](#)
- SWANEUPDPERM1, [2-16](#)
- SWANEUPDPERM2, [2-16](#)
- SWANEUPDPERM3, [2-17](#)
- SWANEUPDPERM4, [2-17](#)
- SWANEUPDREQD1, [2-18](#)
- SWANEUPDREQD2, [2-19](#)
- SWANEUPDREQD3, [2-19](#)
- SWANEUPDSUB, [2-20](#)
- SWANIUPDREQ, [2-20](#)
- SWANIUPDSTAT1, [2-20](#)
- SWANIUPDSTAT2, [2-21](#)
- SWANIUPDSTAT3, [2-21](#)
- SWANIUPDSTAT4, [2-21](#)
- SWANIUPDSTAT5, [2-22](#)
- SWANIUPDSUBCHG, [2-22](#)
- SWAUDBERR, [3-46](#)
- SWCOREDUMP, [3-41](#)
- SWINITFAIL, [3-42](#)
- SWNDDBERR, [3-46](#)
- SWNDINTERR, [3-46](#)
- SWNDINVLDEQP, [2-23](#)
- SWNDOPENFAIL, [3-46](#)
- SWNDSTARTFAIL, [3-45](#)
- SWNONSTD, [3-41](#)
- SWNWMDBSYNC, [3-42](#)
- SWXMQFILL, [3-44](#)

---

**P**

- product ID, [1-23](#)

---

**R**

- reboots
  - administrator's log information, [1-5](#)
  - alarm log information, [1-11](#)

- resolve reason
  - alarm log field, [1-21](#)
- resources
  - books, [xxxix](#)
  - technical assistance, [xl](#)

S

- searching
  - administrator's log, [1-7](#), [1-10](#)
  - alarm log, [1-14](#)
- start date and time
  - alarm log field, [1-21](#)
- subscribers
  - activity log, [1-4](#)
- SW, [1-9](#), [1-15](#)
  - , [3-64](#), [3-66](#)
  - administrator's log entries, [2-25](#)
- DCIU\_LINK
  - alarm code 0, [3-48](#), [3-49](#)
  - alarm code 2, [3-50](#)
  - alarm code 3, [3-50](#)
  - alarm code 4, [3-50](#)
  - alarm code 5, [3-51](#)
- DCIU001, [3-48](#)
- DCIU002, [3-49](#)
- DCIU003, [3-50](#)
- DCIU004, [3-50](#)
- DCIU005, [3-51](#)
- DCIU006, [3-50](#)
- DCIU008, [2-25](#)
- DCIU009, [2-25](#)
- DCIU010, [2-26](#)
- DCIU011, [2-26](#)
- DCIU012, [3-51](#)
- GPSC\_BOARD
  - alarm code 0, [3-51](#)
- IB100, [2-28](#)
- IB110, [2-28](#)
- IF100, [3-64](#)
- IF110, [2-26](#)
- IF120, [2-26](#)
- ML000, [3-51](#)
- ML001, [3-52](#)
- ML002, [3-52](#)
- ML003, [3-52](#)
- ML004, [3-53](#)
- ML005, [3-53](#)
- ML007, [3-53](#)
- ML008, [3-54](#)
- ML009, [3-54](#)
- ML010, [3-54](#)
- ML011, [3-55](#)
- ML012, [3-55](#)
- ML013, [3-56](#)
- RDR000, [3-61](#)
- RDR001, [3-61](#)

RDR002, [3-62](#)

SE120, [2-27](#)

SE130, [2-27](#)

SE140, [3-64](#)

SM201, [2-24](#)

SMDI001, [3-56](#)

SMDI002, [3-56](#)

SMDI003, [3-57](#)

SMDI004, [3-57](#)

SOFTWARE

alarm code 000, [3-51](#)

alarm code 001, [3-52](#)

alarm code 002, [3-52](#)

alarm code 003, [3-52](#)

alarm code 004, [3-53](#)

alarm code 005, [3-53](#)

alarm code 007, [3-53](#)

alarm code 008, [3-54](#)

alarm code 009, [3-54](#)

alarm code 010, [3-54](#)

alarm code 011, [3-55](#)

alarm code 012, [3-55](#)

alarm code 013, [3-56](#)

SW

alarm code 1, [3-56](#), [3-57](#), [3-58](#), [3-59](#)

alarm code 11, [3-59](#)

alarm code 111, [3-61](#), [3-62](#)

alarm code 12, [3-60](#)

SW140, [3-62](#)

SW160, [2-27](#)

SW200, [3-57](#), [3-63](#)

SW240, [3-62](#)

SW260, [3-63](#)

SWIN

alarm code 0, [3-62](#), [3-63](#), [3-64](#)

alarm code 1, [3-64](#)

alarm code 3, [3-63](#)

SWIN250, [3-63](#)

SWINDIP

alarm code 1, [3-64](#)

SWINSERAIL

alarm code 1, [3-65](#)

TY100, [3-65](#)

TY110, [3-68](#)

TY160, [2-27](#)

VB500, [3-65](#)

VB502, [3-66](#)

VB503, [3-66](#)

VB504, [2-27](#)

VB506, [3-68](#)

VB508, [2-28](#)

VB513, [2-28](#)

VB516, [2-29](#)

VB517, [2-29](#)

VB518, [3-58](#)

VB527, [3-67](#)

VB529, [3-58](#)

VB531, [3-58](#)  
VB532, [3-67](#)  
VB533, [3-67](#)  
VBPC\_BOARD  
    alarm code 1, [3-65](#), [3-66](#), [3-67](#)  
VBPC\_CARR  
    alarm code 1, [3-68](#)  
VP515, [2-29](#)  
WRITER  
    alarm code 1, [3-68](#)  
WTR000, [3-59](#)  
WTR001, [3-59](#)  
WTR002, [3-59](#)  
WTR003, [3-59](#)  
WTR004, [3-60](#)  
WTR005, [3-60](#)  
WTR006, [3-60](#)  
WTR200, [2-30](#)

T

The, [3-64](#)  
time  
    administrator's log field, [1-8](#)  
    alarmed  
        alarm log field, [1-20](#)  
    format in logs, [1-8](#), [1-21](#)  
    resolved alarms, [1-21](#)

V

VM, [1-9](#), [1-15](#)  
    ADM\_aabe, [2-31](#)  
    ADM\_aanb, [2-31](#)  
    ADM\_adm, [2-31](#)  
    ADM\_amcb, [2-32](#)  
    ADM\_ams, [2-32](#)  
    ADM\_ann, [2-38](#)  
    ADM\_ann, [2-32](#), [2-33](#), [2-34](#), [2-35](#), [2-36](#), [2-37](#), [2-38](#), [2-39](#)  
    ADM\_apib, [2-39](#)  
    ADM\_atpg, [2-39](#)  
    ADM\_attm, [2-40](#), [2-41](#)  
    ADM\_attx, [2-41](#), [2-42](#)  
    ADM\_bsxt, [2-42](#)  
    ADM\_bver, [2-42](#)  
    ADM\_cais, [2-43](#), [2-44](#), [2-45](#)  
    ADM\_cbnm, [2-45](#)  
    ADM\_cmt, [2-45](#)  
    ADM\_cmw, [2-46](#)  
    ADM\_cpas, [2-46](#)  
    ADM\_ctna, [2-46](#)  
    ADM\_gpcf, [2-47](#)  
    ADM\_ilbm, [2-48](#)  
    ADM\_inva, [2-48](#)  
    ADM\_isum, [2-48](#)

- ADM\_lfmb, [2-49](#)
- ADM\_innr, [2-49](#)
- ADM\_ipba, [2-49](#), [2-50](#)
- ADM\_isos, [2-50](#)
- ADM\_isxl, [2-50](#)
- ADM\_mlfq, [2-50](#)
- ADM\_mnod, [2-51](#)
- ADM\_ncyc, [2-52](#)
- ADM\_ndig, [2-53](#)
- ADM\_ndsd, [2-53](#)
- ADM\_nloc, [2-53](#)
- ADM\_nmtl, [2-54](#)
- ADM\_nntr, [2-54](#)
- ADM\_noci, [2-51](#)
- ADM\_nrng, [2-54](#)
- ADM\_nsmg, [2-55](#)
- ADM\_pafd, [2-55](#)
- ADM\_pewd, [2-55](#)
- ADM\_pgl, [2-58](#)
- ADM\_pglt, [2-56](#), [2-57](#), [2-58](#), [2-59](#), [2-60](#), [2-61](#)
- ADM\_pmad, [2-62](#)
- ADM\_rmax, [2-62](#)
- ADM\_rmtx, [2-62](#)
- ADM\_sext, [2-63](#)
- ADM\_spwd, [2-63](#)
- ADM\_traf, [2-63](#)
- ADM\_tsr, [2-64](#)
- ADM\_und, [2-64](#)
- ADM\_undm, [2-64](#), [2-65](#), [2-66](#), [2-67](#), [2-68](#)
- ADM\_unod, [2-68](#)
- ADM\_wrm, [2-68](#)
- ADM\_xfer, [2-69](#)
- ADM-dups, [2-47](#)
- ADM-dupt, [2-47](#)
- administrator's log messages, [2-31](#)
- ALARM\_ORIG
  - alarm code 0, [3-69](#)
- ALARM\_ORIG0000, [3-69](#)
- AMAPI0026, [3-76](#)
- AMAPI0279, [3-77](#)
- ANNC
  - alarm code 0, [3-69](#)
- ANNC004, [3-69](#)
- AU\_RESTOR
  - alarm code 0, [3-76](#)
- AUD\_BKUP
  - alarm code 0, [3-70](#)
- AUD\_BKUP0, [3-70](#)
- AUD\_RESTORE1, [3-76](#)
- AUD\_RESTORE2, [3-76](#)
- AUDIT
  - alarm code 0, [3-70](#)
  - alarm code 1, [3-70](#)
  - alarm code 100, [3-71](#)
  - alarm code 101, [3-71](#)
  - alarm code 102, [3-71](#)
  - alarm code 103, [3-71](#)
- AUDIT0000, [3-70](#)
- AUDIT0001, [3-70](#)



AUDIT0100, [3-71](#)  
AUDIT0101, [3-71](#)  
AUDIT0102, [3-71](#)  
AUDIT0103, [3-71](#)  
AUDIX\_FS  
    alarm code 0, [3-72](#)  
    alarm code 1, [3-72](#)  
    alarm code 2, [3-73](#)  
    alarm code 3, [3-74](#)  
    alarm code 4, [3-74](#)  
    alarm code 5, [3-75](#)  
    alarm code 6, [3-75](#)  
    alarm code 7, [3-75](#)  
AUDIX\_FS0000, [3-72](#)  
AUDIX\_FS0001, [3-72](#)  
AUDIX\_FS0002, [3-73](#)  
AUDIX\_FS0003, [3-74](#)  
AUDIX\_FS0004, [3-74](#)  
AUDIX\_FS0005, [3-75](#)  
AUDIX\_FS0006, [3-75](#)  
AUDIX\_FS0007, [3-75](#)  
FAXAP000, [3-76](#)  
    alarm code 0, [3-76](#)  
LANINTF  
    alarm code 0, [3-76](#)  
    alarm code 1, [3-77](#)  
LANTF0000, [3-76](#)  
LANTF0001, [3-77](#)  
RPCTEST  
    alarm code 001, [3-77](#)  
RPCTEST001, [3-77](#)  
SERVER  
    alarm code 900, [3-77](#)  
    alarm code 901, [3-78](#)  
SERVER0900, [3-77](#)  
SERVER0901, [3-78](#)  
SOFTWARE  
    alarm code 0, [3-78](#)  
    alarm code 1, [3-78](#)  
    alarm code 100, [3-78](#)  
    alarm code 101, [3-79](#)  
    alarm code 2, [3-78](#)  
    alarm code 201, [3-79](#)  
    alarm code 202, [3-79](#)  
    alarm code 203, [3-80](#)  
    alarm code 204, [3-80](#)  
    alarm code 6000, [3-81](#)  
    alarm code 6001, [3-81](#)  
    alarm code 601, [3-80](#)  
    alarm code 602, [3-81](#)  
    alarm code 6600, [3-82](#)  
    alarm code 6603, [3-82](#)  
    alarm code 6604, [3-83](#)  
    alarm code 6605, [3-83](#)  
    alarm code 6606, [3-84](#)  
    alarm code 6607, [3-84](#)

|                  |                                             |
|------------------|---------------------------------------------|
| alarm code 6608, | <a href="#">3-84</a>                        |
| alarm code 6609, | <a href="#">3-85</a>                        |
| alarm code 6610, | <a href="#">3-85</a>                        |
| alarm code 6611, | <a href="#">3-85</a>                        |
| alarm code 6612, | <a href="#">3-86</a>                        |
| alarm code 6613, | <a href="#">3-86</a>                        |
| alarm code 6614, | <a href="#">3-86</a>                        |
| alarm code 7701, | <a href="#">3-87</a>                        |
| alarm code 7702, | <a href="#">3-87</a>                        |
| alarm code 7703, | <a href="#">3-87</a>                        |
| alarm code 7704, | <a href="#">3-88</a>                        |
| alarm code 7705, | <a href="#">3-88</a>                        |
| alarm code 7706, | <a href="#">3-88</a>                        |
| alarm code 7707, | <a href="#">3-89</a>                        |
| alarm code 7708, | <a href="#">3-89</a>                        |
| alarm code 7709, | <a href="#">3-89</a>                        |
| alarm code 7710, | <a href="#">3-90</a>                        |
| alarm code 7712, | <a href="#">3-90</a>                        |
| alarm code 7713, | <a href="#">3-90</a>                        |
| alarm code 7714, | <a href="#">3-91</a>                        |
| alarm code 7715, | <a href="#">3-91</a>                        |
| alarm code 7716, | <a href="#">3-91</a>                        |
| alarm code 7717, | <a href="#">3-92</a>                        |
| SOFTWARE0000,    | <a href="#">3-78</a>                        |
| SOFTWARE0001,    | <a href="#">3-78</a>                        |
| SOFTWARE0002,    | <a href="#">3-78</a>                        |
| SOFTWARE0100,    | <a href="#">3-78</a>                        |
| SOFTWARE0101,    | <a href="#">3-79</a>                        |
| SOFTWARE0102,    | <a href="#">3-81</a>                        |
| SOFTWARE0201,    | <a href="#">3-79</a>                        |
| SOFTWARE0202,    | <a href="#">3-79</a> , <a href="#">3-80</a> |
| SOFTWARE0203,    | <a href="#">3-80</a>                        |
| SOFTWARE0204,    | <a href="#">3-80</a>                        |
| SOFTWARE0601,    | <a href="#">3-80</a>                        |
| SOFTWARE0602,    | <a href="#">3-81</a>                        |
| SOFTWARE6000,    | <a href="#">3-81</a>                        |
| SOFTWARE6001,    | <a href="#">3-81</a>                        |
| SOFTWARE6600,    | <a href="#">3-82</a>                        |
| SOFTWARE6603,    | <a href="#">3-82</a>                        |
| SOFTWARE6604,    | <a href="#">3-83</a>                        |
| SOFTWARE6605,    | <a href="#">3-83</a>                        |
| SOFTWARE6606,    | <a href="#">3-84</a>                        |
| SOFTWARE6607,    | <a href="#">3-84</a>                        |
| SOFTWARE6608,    | <a href="#">3-84</a>                        |
| SOFTWARE6609,    | <a href="#">3-85</a>                        |
| SOFTWARE6610,    | <a href="#">3-85</a>                        |
| SOFTWARE6611,    | <a href="#">3-85</a>                        |
| SOFTWARE6612,    | <a href="#">3-86</a>                        |
| SOFTWARE6613,    | <a href="#">3-86</a>                        |
| SOFTWARE6614,    | <a href="#">3-86</a>                        |
| SOFTWARE7701,    | <a href="#">3-87</a>                        |
| SOFTWARE7702,    | <a href="#">3-87</a>                        |
| SOFTWARE7703,    | <a href="#">3-87</a>                        |
| SOFTWARE7704,    | <a href="#">3-88</a>                        |
| SOFTWARE7705,    | <a href="#">3-88</a>                        |
| SOFTWARE7706,    | <a href="#">3-88</a>                        |
| SOFTWARE7707,    | <a href="#">3-89</a>                        |

- SOFTWARE7708, [3-89](#)
- SOFTWARE7709, [3-89](#)
- SOFTWARE7710, [3-90](#)
- SOFTWARE7712, [3-90](#)
- SOFTWARE7713, [3-90](#)
- SOFTWARE7714, [3-91](#)
- SOFTWARE7715, [3-91](#)
- SOFTWARE7716, [3-91](#)
- SOFTWARE7717, [3-92](#)
- VM\_PT
  - alarm code 3, [3-92](#)
  - alarm code 4, [3-93](#)
  - alarm code 5, [3-93](#)
- VM\_PT0003, [3-92](#)
- VM\_PT0004, [3-93](#)
- VM\_PT0005, [3-93](#)
- VMDIRS
  - alarm code 0, [3-92](#)
- VMDIRS\_0, [3-92](#)
- VP, [1-9](#), [1-15](#)
  - administrator's log messages, [2-70](#)
- CGEN
  - alarm code 1, [3-94](#)
  - alarm code 11, [3-97](#)
  - alarm code 12, [3-97](#), [3-102](#)
  - alarm code 13, [3-97](#)
  - alarm code 14, [3-98](#)
  - alarm code 17, [3-98](#)
  - alarm code 18, [3-98](#)
  - alarm code 2, [3-94](#)
  - alarm code 21, [3-99](#)
  - alarm code 22, [3-99](#)
  - alarm code 24, [3-99](#)
  - alarm code 25, [3-100](#)
  - alarm code 27, [3-100](#)
  - alarm code 28, [3-100](#)
  - alarm code 3, [3-95](#)
  - alarm code 31, [3-101](#)
  - alarm code 34, [3-101](#)
  - alarm code 37, [3-101](#)
  - alarm code 38, [3-102](#)
  - alarm code 4, [3-95](#)
  - alarm code 5, [3-95](#)
  - alarm code 6, [3-96](#)
  - alarm code 7, [3-96](#)
  - alarm code 8, [3-96](#)
- CGEN001, [3-94](#)
- CGEN0011, [3-97](#)
- CGEN0012, [3-97](#), [3-102](#)
- CGEN0013, [3-97](#)
- CGEN0014, [3-98](#)
- CGEN0017, [3-98](#)
- CGEN0018, [3-98](#)
- CGEN002, [3-94](#)
- CGEN003, [3-95](#)
- CGEN004, [3-95](#)
- CGEN005, [3-95](#)

- CGEN006, [3-96](#)
- CGEN007, [3-96](#)
- CGEN008, [3-96](#)
- CGEN020, [2-70](#)
- CGEN021, [3-99](#)
- CGEN022, [3-99](#)
- CGEN024, [3-99](#)
- CGEN025, [3-100](#)
- CGEN027, [3-100](#)
- CGEN028, [3-100](#)
- CGEN031, [3-101](#)
- CGEN034, [3-101](#)
- CGEN037, [3-101](#)
- CGEN038, [3-102](#)
- CHRIN
  - alarm code 1, [3-102](#)
- CHRIN001, [3-102](#)
- CRON
  - alarm code 2, [3-103](#)
- CRON002, [3-103](#)
- DSKMG001, [3-103](#)
- DSKMG002, [3-103](#)
- DSKMGR
  - alarm code 1, [3-103](#)
  - alarm code 2, [3-103](#)
- FXAUD017, [3-104](#)
- FXAUDOANM
  - alarm code 17, [3-104](#)
- FXMON002, [3-104](#)
- FXMON003, [2-70](#)
- FXMON010, [3-104](#)
- FXMON011, [3-105](#)
- FXMON012, [3-105](#)
- FXMON013, [3-105](#)
- FXMON014, [3-106](#)
- FXMON016, [3-106](#)
- FXMONOANM
  - alarm code 02, [3-104](#)
  - alarm code 10, [3-104](#)
  - alarm code 11, [3-105](#)
  - alarm code 12, [3-105](#)
  - alarm code 13, [3-105](#)
  - alarm code 14, [3-106](#)
  - alarm code 16, [3-106](#)
- FXNSF01, [3-107](#)
- FXNSF02, [3-107](#)
- FXNSF03, [3-107](#)
- FXNSF04, [3-108](#)
- FXNSFOANM
  - alarm code 1, [3-107](#)
  - alarm code 2, [3-107](#)
  - alarm code 3, [3-107](#)
  - alarm code 4, [3-108](#)
- INIT
  - alarm code 1, [3-108](#)
  - alarm code 5, [3-108](#)
  - alarm code 6, [3-109](#)
  - alarm code 9, [3-109](#)

- INIT001, [3-108](#)
- INIT002, [2-70](#)
- INIT003, [2-70](#)
- INIT004, [2-71](#)
- INIT005, [3-108](#)
- INIT006, [3-109](#)
- INIT009, [3-109](#)
- MTC
  - alarm code 1, [3-109](#)
  - alarm code 6, [3-110](#)
- MTC001, [3-109](#)
- MTC006, [3-110](#)
- S{DSL, [3-114](#)
- SF\_VXMDI
  - alarm code 2, [3-111](#)
  - alarm code 3, [3-111](#)
  - alarm code 4, [3-112](#)
  - alarm code 5, [3-112](#)
- SOFTWARE
  - alarm code 15, [3-114](#)
  - alarm code 4, [3-112](#), [3-113](#)
- SPDM001, [3-115](#)
- SPDM002, [3-112](#)
- SPDM003, [3-113](#)
- SPDM006, [3-113](#)
- SPDM007, [3-114](#)
- SPEECH\_FS
  - alarm code 1, [3-115](#)
- THR
  - alarm code 2, [3-115](#)
  - alarm code 3, [3-116](#)
  - alarm code 4, [3-116](#)
- THR002, [3-115](#)
- THR003, [3-116](#)
- THR004, [3-116](#)
- TR001, [3-124](#)
- TR002, [3-124](#)
- TRIP
  - alarm code 1, [3-116](#)
  - alarm code 3, [3-117](#)
  - alarm code 4, [3-117](#)
  - alarm code 5, [3-118](#)
- TRIP001, [3-116](#)
- TRIP003, [3-117](#)
- TRIP004, [3-117](#)
- TRIP005, [3-118](#)
- UNIX
  - alarm code 2, [3-119](#)
  - alarm code 3, [3-119](#)
  - alarm code 4, [3-119](#)
- UNIX002, [3-119](#)
- UNIX003, [3-119](#)
- UNIX004, [3-119](#)
- VCHK001, [2-71](#)
- VCHK002, [3-114](#)
- VOICE\_PORT
  - alarm code 1, [3-124](#)
  - alarm code 2, [3-124](#)

- VROP
  - alarm code 14, [3-122](#)
  - alarm code 15, [3-123](#)
  - alarm code 18, [3-123](#)
  - alarm code 19, [3-123](#)
  - alarm code 22, [3-124](#)
  - alarm code 4, [3-120](#)
  - alarm code 5, [3-120](#)
  - alarm code 7, [3-121](#)
- VROP004, [3-120](#)
- VROP005, [3-120](#)
- VROP007, [3-121](#)
- VROP014, [3-122](#)
- VROP015, [3-123](#)
- VROP018, [3-123](#)
- VROP019, [3-123](#)
- VROP022, [3-124](#)
- VXMDI002, [3-111](#)
- VXMDI003, [3-111](#)
- VXMDI004, [3-112](#)
- VXMDI005, [3-112](#)

---

W

- warning alarms, [1-19](#)