




# Xbox One Wireless Controller Model 1708 Top Motherboard Replacement

This guide will show you how to replace the motherboard.

Written By: Lien (Ally) Quan

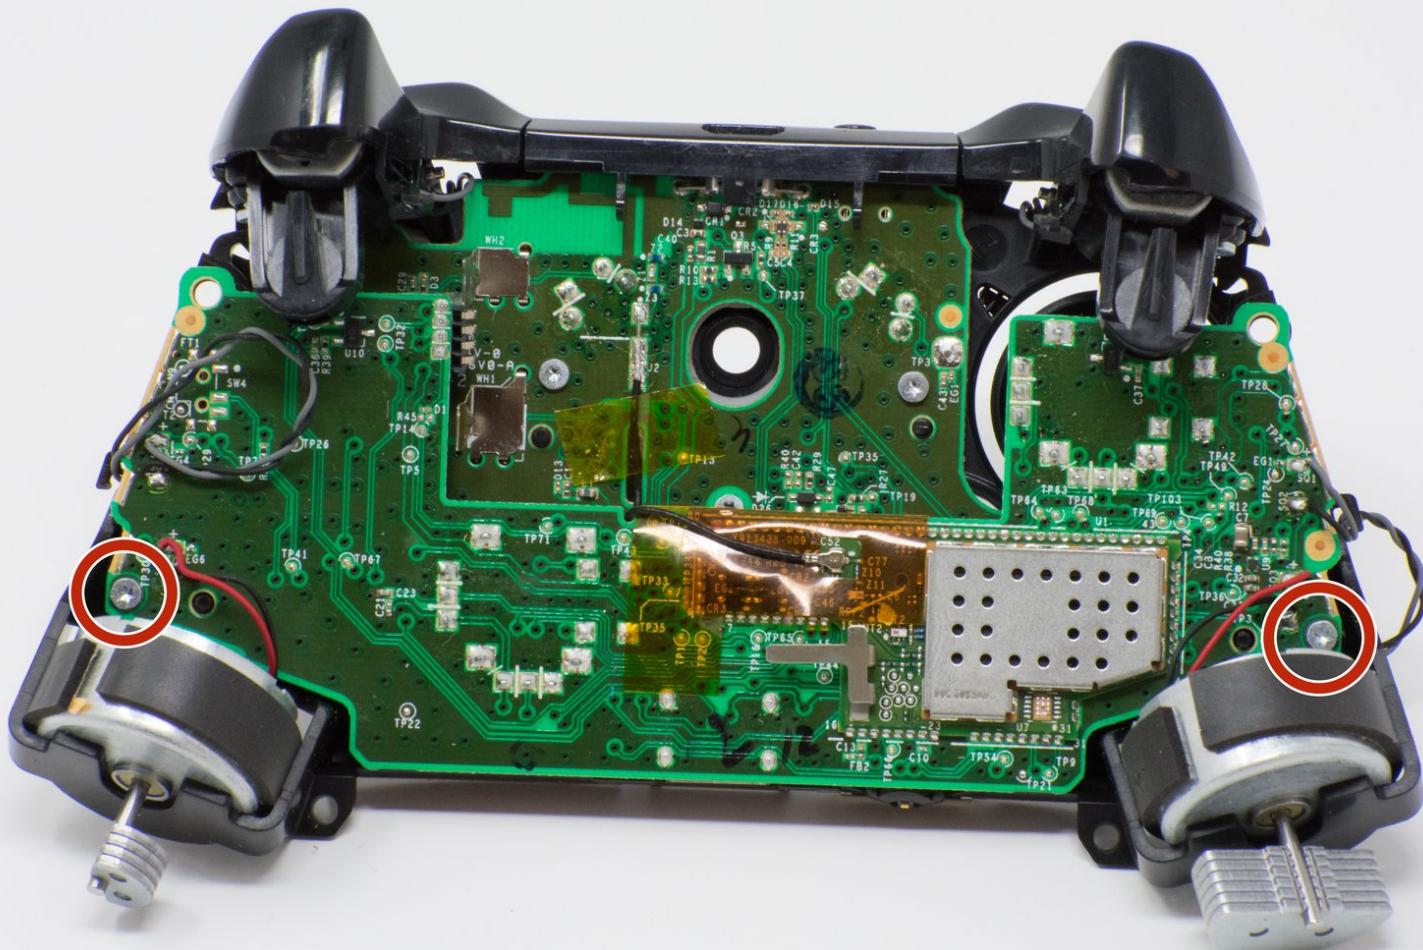

## INTRODUCTION

This guide will show you how to access and replace the top motherboard. Soldering is required, so the link to the [soldering guide](#) is included to help you.

### TOOLS:

- Tweezers (1)
- iFixit Opening Tools (1)
- TR9 Torx Security Screwdriver (1)
- T6 Torx Screwdriver (1)

### PARTS:


- Xbox One Controller (1708) Midframe Assembly (1)

## Step 1 — Cover Plate




- Slide the battery cover toward the top of the controller to remove it.
- Lift up the batteries or the battery pack from the battery compartment.

## Step 2

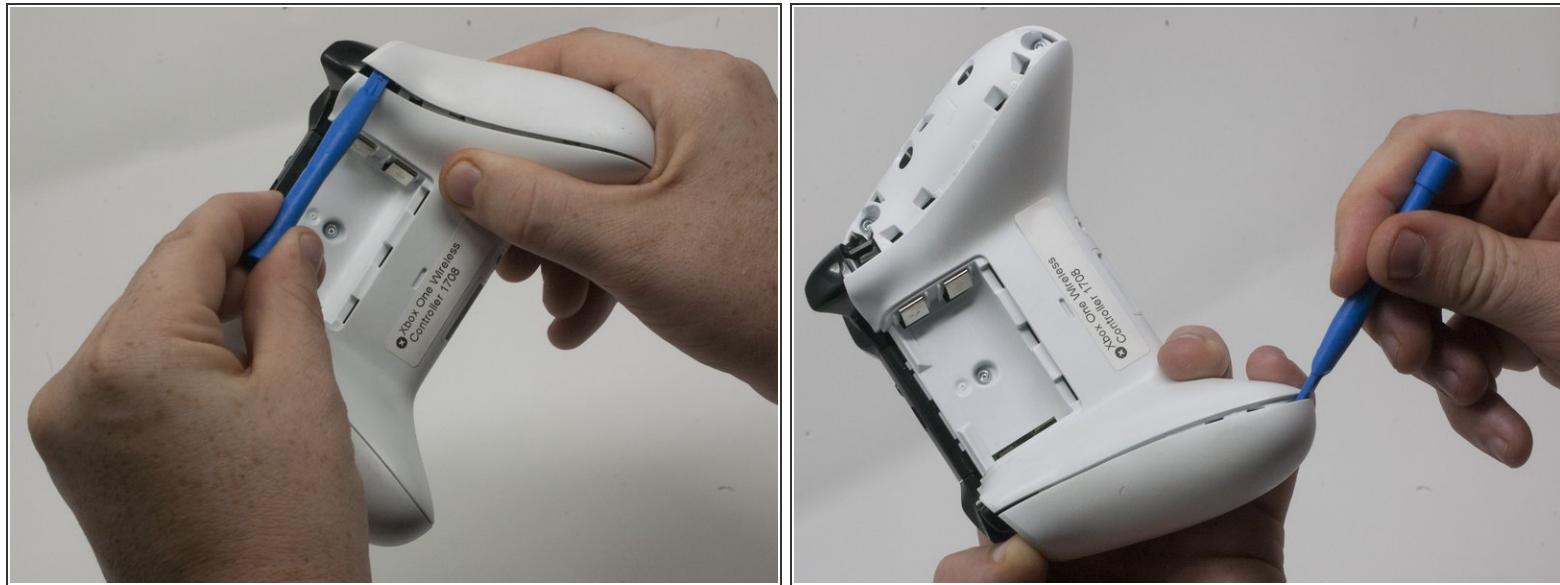

- Insert a plastic opening tool into the top seam, and gently work the opening tool to the bottom of the controller.
- Continue using the opening tool to gently pry the side plate off of the controller.
- Repeat this process for the second side plate.

## Step 3

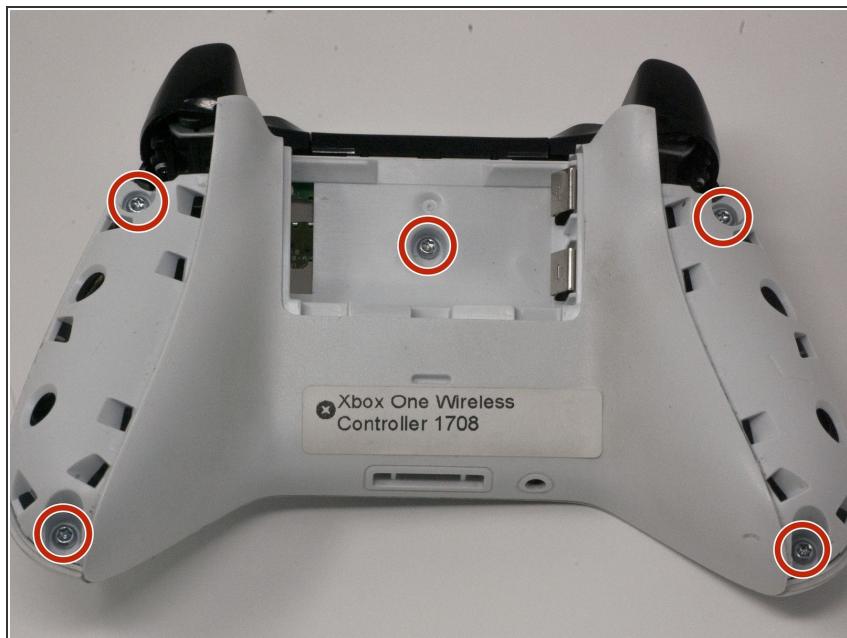


- Gently peel the battery label or punch a hole in the center of the sticker in the battery compartment to reveal the hidden screw.
- Remove the five 9mm torx-9 security screws from the back of the controller.

## Step 4



- Orient the controller so the front plate is facing up.
- Lift the front cover off of the controller.

## Step 5

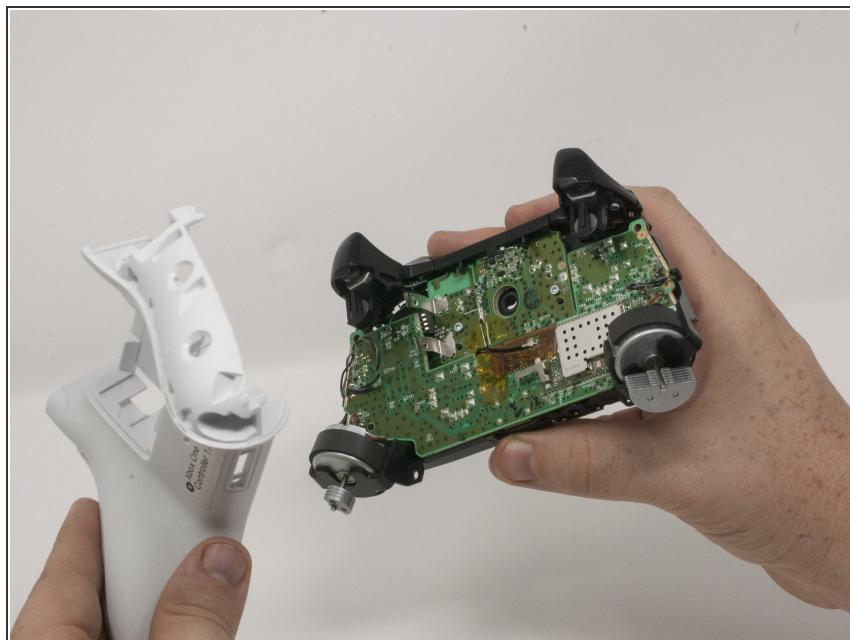

- Turn the controller face down and gently lift the rear plate.

## Step 6 — Directional Pad



- Turn the device over and remove the directional pad by gently pulling it away from the controller.

## Step 7 — Joysticks



- Pull the joysticks off of the controller.

## Step 8 — Top Motherboard



**⚠** If the rumble motors fall out of frame, the wires may disconnect from the motherboard. The wires will have to be soldered to reattach the motor.

- Turn the device over and remove the two 70mm torx-6 screws in the bottom left and right corners.

## Step 9



- Firmly grasp the top and bottom motherboards in opposite hands, then gently pull them apart.
- **i** The top motherboard is still connected to the bottom motherboard. To fully separate the top motherboard, you will need to use a soldering iron.

To reassemble your device, follow these instructions in reverse order.