



# ZTE Lever Charging Port Replacement

This guide will show you how to replace the charging port in a ZTE Lever phone; not charging while plugged in.

Written By: Rebekah Earhart



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #0 Screwdriver \(1\)](#)
- [iFixit Pro Tech Toolkit \(1\)](#)
- [Soldering Iron \(1\)](#)
- [Nylon Tipped Tweezers \(1\)](#)


## Step 1 — Battery



- Remove the SD card and the Sim card from the device.

*(i)* The Sim and SD cards are not shown here as our device did not come with them.

## Step 2

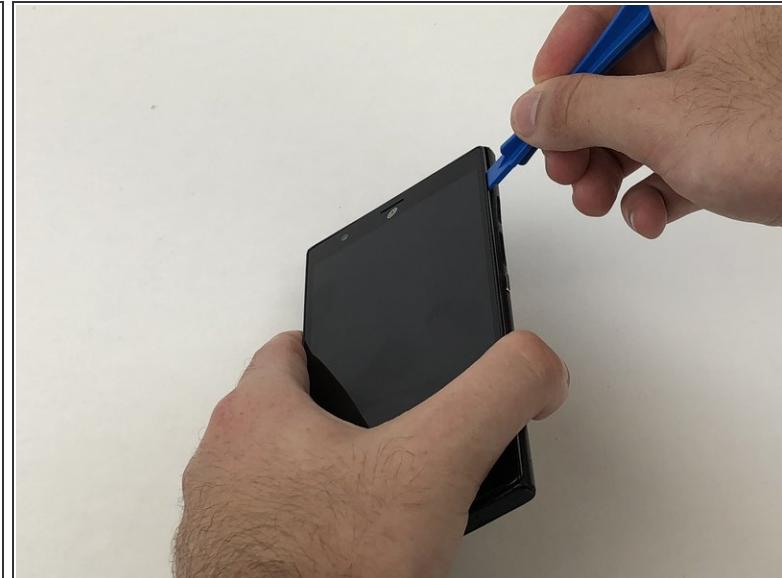

- Use an iFixit opening tool to separate the back from the device.

## Step 3



- Remove the two 1.6mm Phillips #0 screws from the battery plug cover.
- Remove the cover.

## Step 4



- Disconnect the battery cable from the motherboard with a plastic opening tool.

## Step 5



- Use your hands, or a plastic opening tool, to pry the battery from the phone.

## Step 6 — Volume Buttons




- Remove the three 1.6mm Phillips #0 screws from the plastic cover on the motherboard.

## Step 7




- Remove the top plastic motherboard cover using a plastic opening tool.

## Step 8

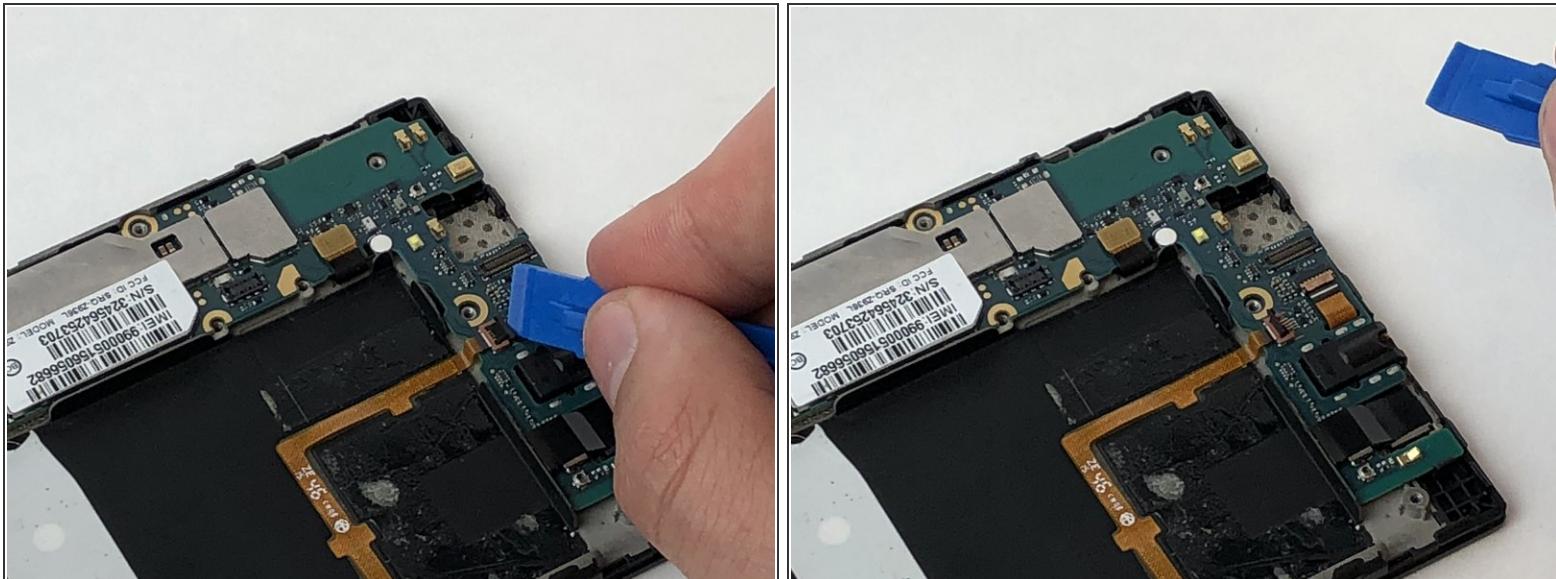

- Use a plastic opening tool to flip up the retaining flap on the volume ribbon cable [ZIF](#) socket.

## Step 9

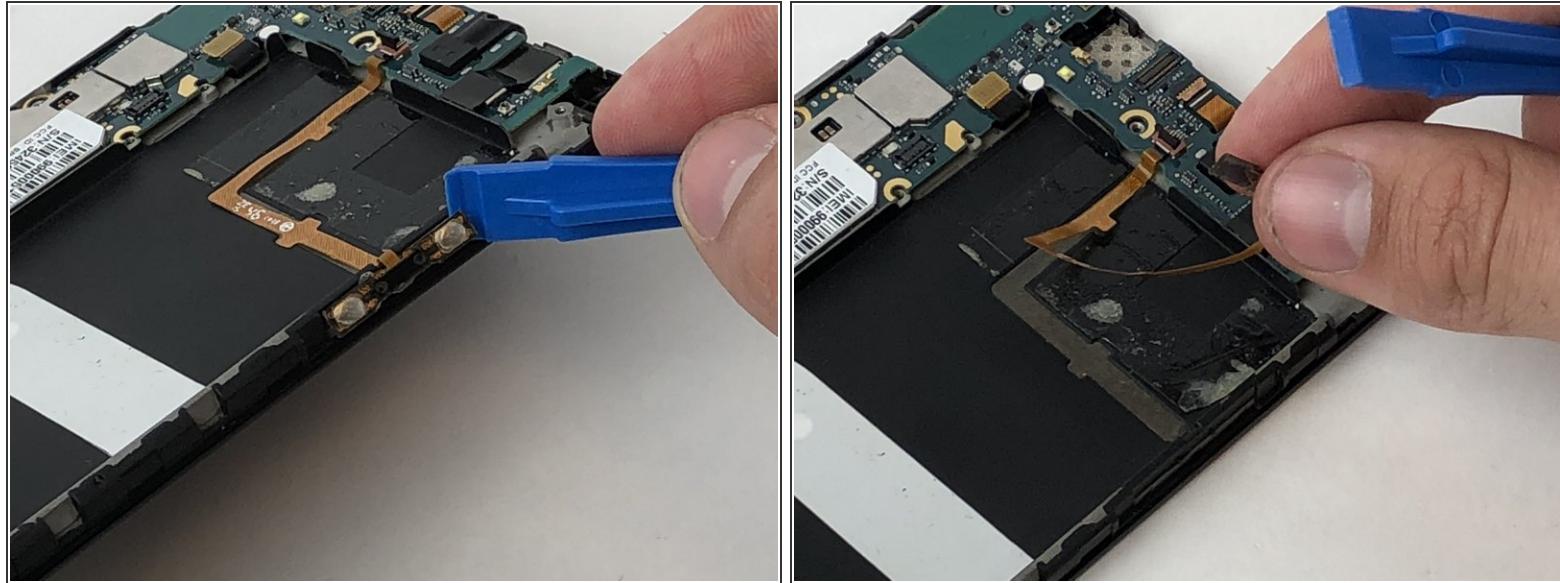

- Peel up the volume button cable from the phone with hands, or plastic opening tool.

## Step 10 — Power Button




- Disconnect the power button from the motherboard with a plastic opening tool.

## Step 11




- Peel the power button cable up from the phone with you hands, or a plastic opening tool.

## Step 12 — Motherboard

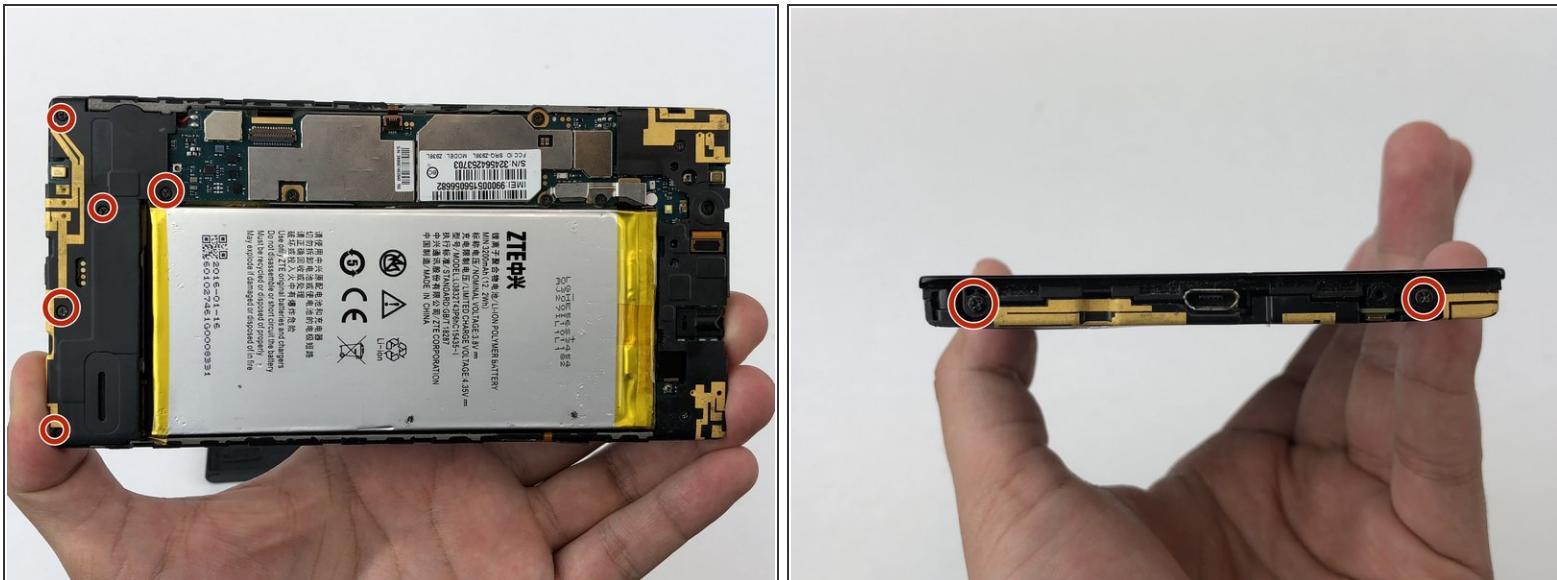


- Remove the seven 1.6mm Phillips #0 screws from the plastic cover on the bottom of the motherboard.

## Step 13

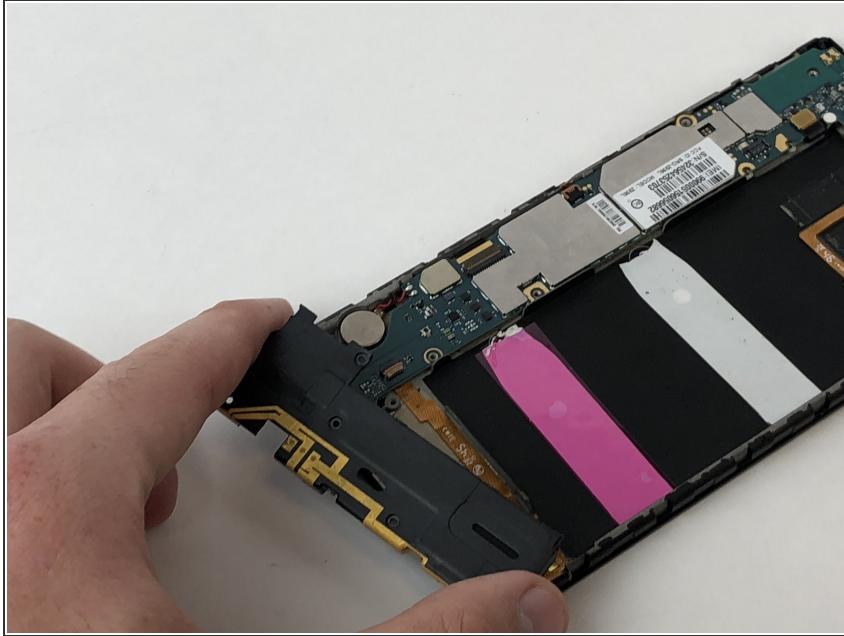


- Remove the bottom plastic motherboard cover with your fingers

## Step 14

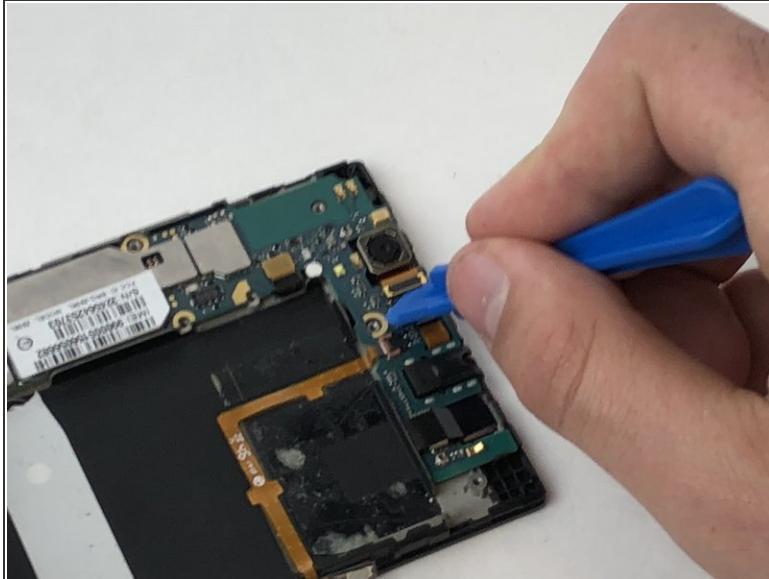


- Disconnect the camera from the motherboard with a plastic opening tool.

## Step 15

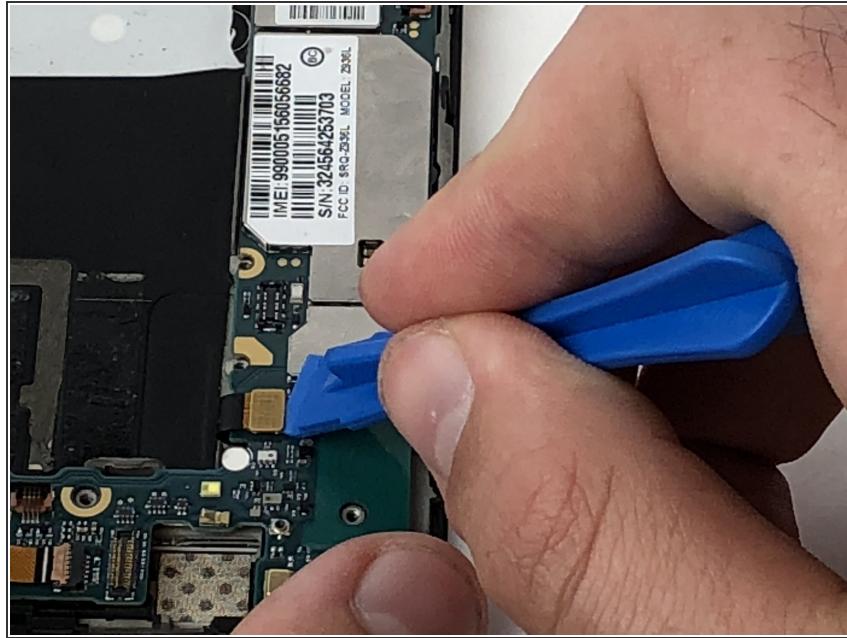


- Disconnect the display cable from the motherboard with a plastic opening tool.

## Step 16

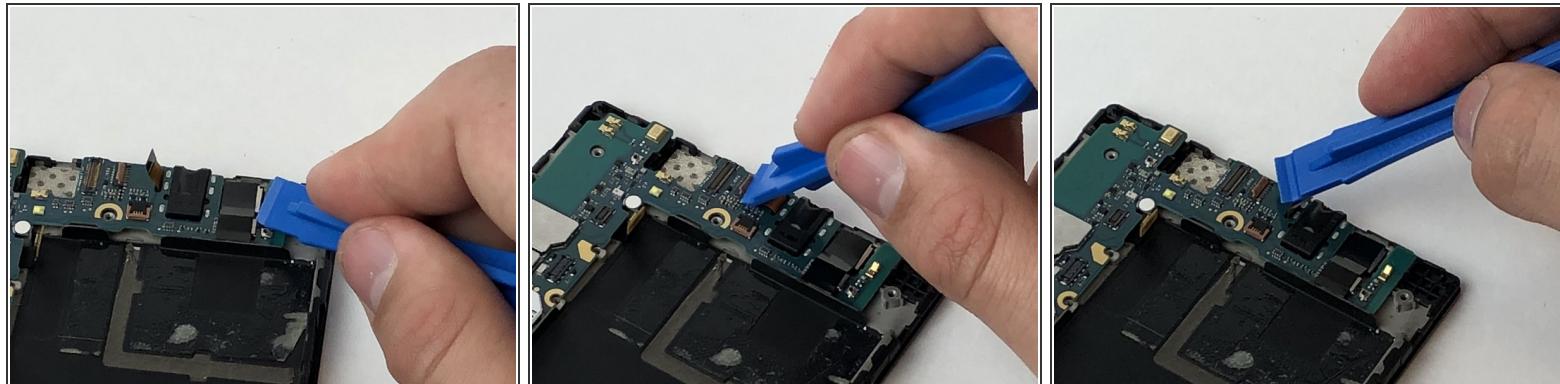


- Disconnect the camera from the motherboard with a plastic opening tool.

## Step 17

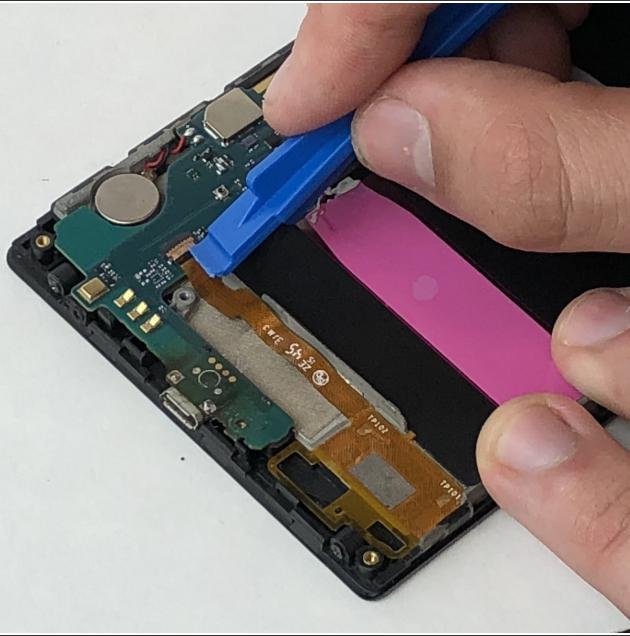


- Disconnect the rear speaker cable from the motherboard with a plastic opening tool.

## Step 18

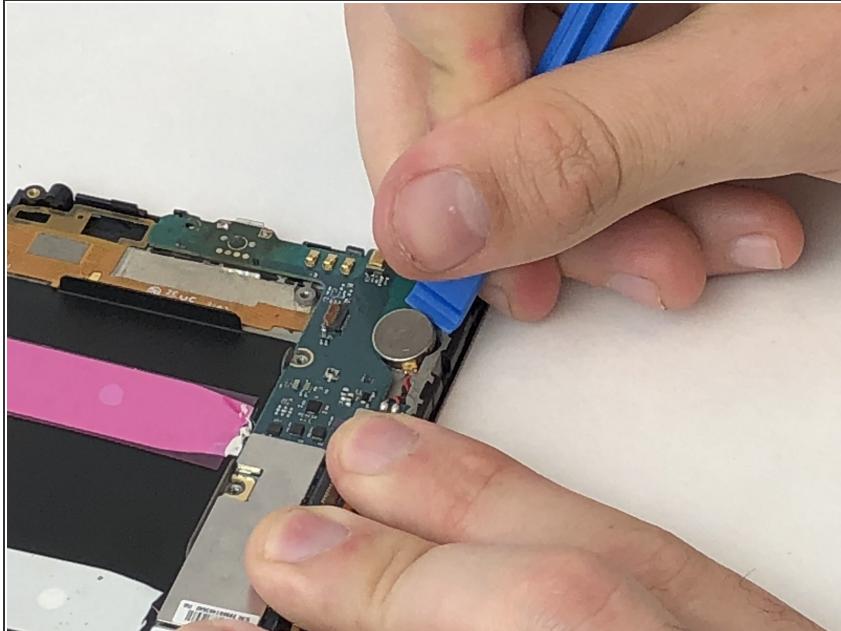


- Pry the motherboard cell battery from its position on the case of the phone

## Step 19

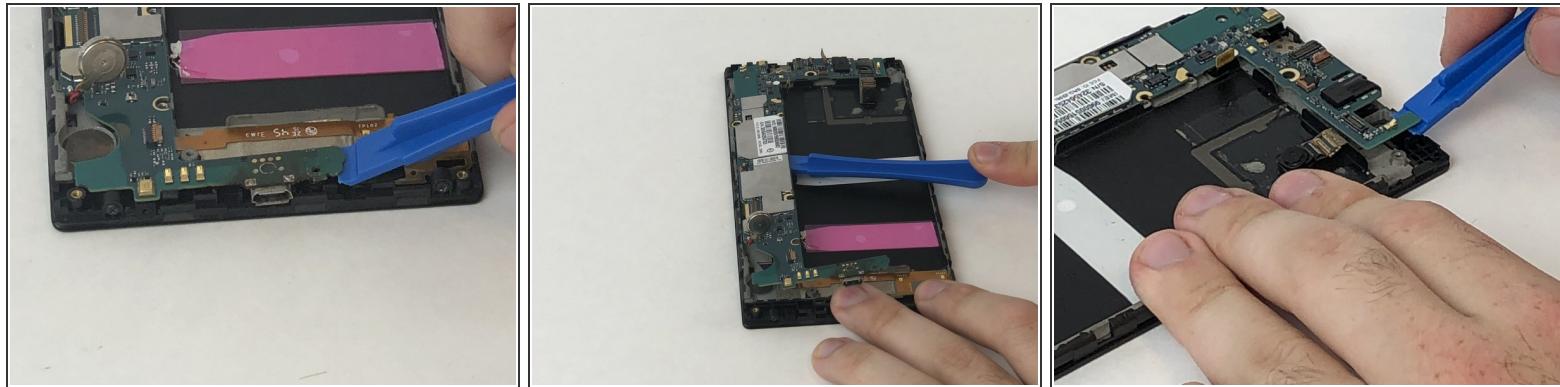


- Using the plastic opening tool, pry the motherboard up, sliding along the edge to separate the pieces.

## Step 20

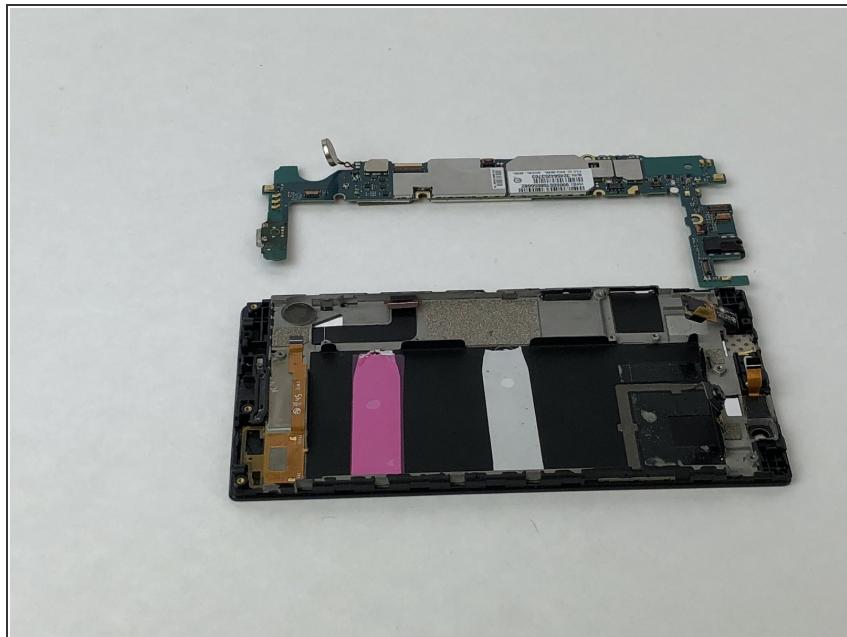

- Remove the motherboard with your fingers.


## Step 21 — Charging Port

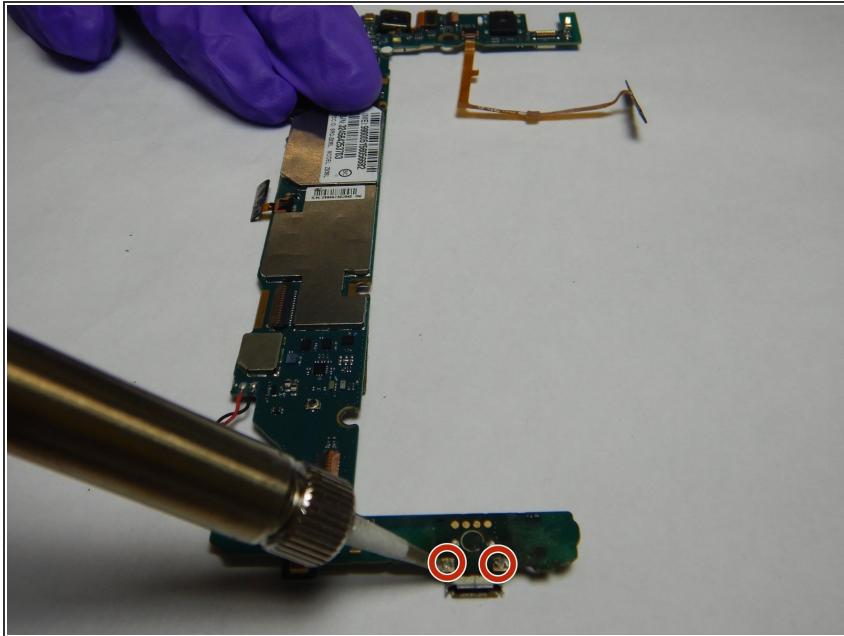

- Use a soldering gun to desolder the two points connecting the charging port to the motherboard.

**i** Check out our [How to Solder and Desolder Connections guide](#) if you are unfamiliar with the process.

## Step 22

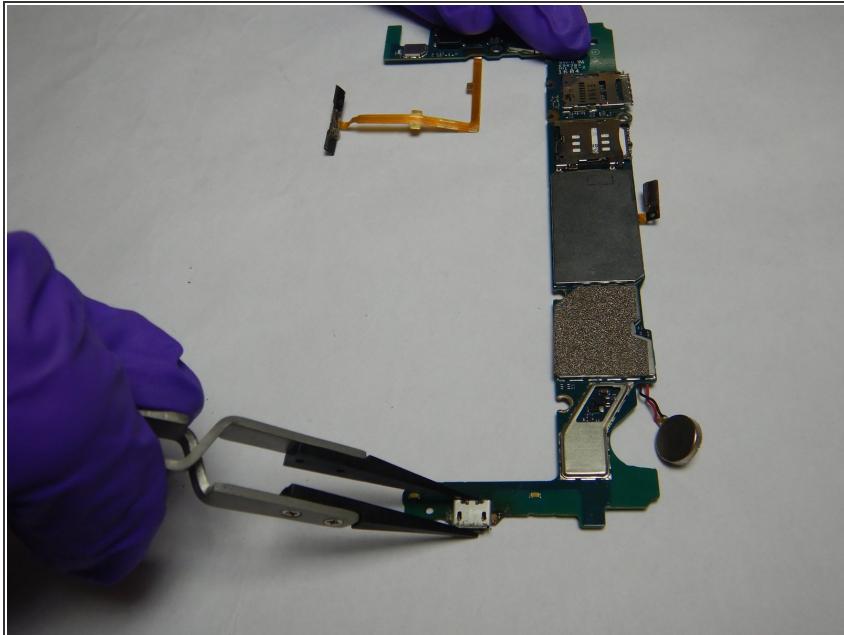

- Using a pair of tweezers, separate the charging port from the motherboard.

**!** Do not touch the metal as it may still be hot.

To reassemble your device, follow these instructions in reverse order.