

Lucent Technologies
Bell Labs Innovations



INTUITY™ CONVERSANT® System
Customer Assist Dial Plan User Guide

585-313-707
Comcode 108340977
Issue 1
September 1998

Copyright © 1998, Lucent Technologies
All Rights Reserved
Printed in U.S.A.

Notice

Every effort was made to ensure that the information in this book was complete and accurate at the time of printing. However, information is subject to change.

Your Responsibility for Your System's Security

Toll fraud is the unauthorized use of your telecommunications system by an unauthorized party, for example, persons other than your company's employees, agents, subcontractors, or persons working on your company's behalf. Note that there may be a risk of toll fraud associated with your telecommunications system and, if toll fraud occurs, it can result in substantial additional charges for your telecommunications services.

You and your system manager are responsible for the security of your system, such as programming and configuring your equipment to prevent unauthorized use. The system manager is also responsible for reading all installation, instruction, and system administration documents provided with this product in order to fully understand the features that can introduce risk of toll fraud and the steps that can be taken to reduce that risk. Lucent Technologies does not warrant that this product is immune from or will prevent unauthorized use of common-carrier telecommunication services or facilities accessed through or connected to it. Lucent Technologies will not be responsible for any charges that result from such unauthorized use.

Lucent Corporate Security

Whether or not immediate support is required, all toll fraud incidents involving Lucent products or services should be reported to Lucent Corporate Security at 1 800 821-8235. In addition to recording the incident, Lucent Corporate Security is available for consultation on security issues, investigation support, referral to law enforcement agencies, and educational programs.

Lucent Technologies Fraud Intervention

If you *suspect that you are being victimized* by toll fraud and you need technical support or assistance, call the Lucent Technologies National Customer Care Center Toll Fraud Intervention Hotline at 1 800 643-2353.

Federal Communications Commission Statement

Part 15: Class A Statement. This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio-frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Part 68: Network Registration Number. This equipment is registered with the FCC in accordance with Part 68 of the FCC Rules. It is identified by an FCC registration number.

Part 68: Answer-Supervision Signaling. Allowing this equipment to be operated in a manner that does not provide proper answer-supervision signaling is in violation of Part 68 Rules. This equipment returns answer-supervision signals to the public switched network when:

- Answered by the called station
- Answered by the attendant
- Routed to a recorded announcement that can be administered by the CPE user

This equipment returns answer-supervision signals on all DID calls forwarded back to the public switched telephone network. Permissible exceptions are:

- A call is unanswered
- A busy tone is received
- A reorder tone is received

Canadian Department of Communications (DOC)

Interference Information

This digital apparatus does not exceed the Class A limits for radio noise emissions set out in the radio interference regulations of the Canadian Department of Communications.

Le Présent Appareil Numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la class A prescrites dans le règlement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

Trademarks

See the section titled "About This Book."

Ordering Information

Call: Lucent Technologies BCS Publications Center
Voice 1 800 457-1235 International Voice 317 322-6416
Fax 1 800 457-1764 International Fax 317 322-6699

Write: Lucent Technologies BCS Publications Center
2855 N. Franklin Road
Indianapolis, IN 46219

Order: Document No. 585-313-707
Comcode 108340977
Issue 1, September 1998

For additional documents, refer to the section in "About This Document" entitled "Related Resources."

You can be placed on a standing order list for this and other documents you may need. Standing order will enable you to automatically receive updated versions of individual documents or document sets, billed to account information that you provide. For more information on standing orders, or to be put on a list to receive future issues of this document, contact the Lucent Technologies Publications Center.

Warranty

Lucent Technologies provides a limited warranty on this product. Refer to the "Limited Use Software License Agreement" card provided with your package.

European Union Declaration of Conformity

Lucent Technologies Business Communications Systems declares that the equipment specified in this document conforms to the referenced European Union (EU) Directives and Harmonized Standards listed below:

EMC Directive 89/336/EEC
Low-Voltage Directive 73/23/EEC



The "CE" mark affixed to the equipment means that it conforms to the above directives.

Comments

To comment on this document, return the comment card at the front of the document.

Acknowledgment

This document was prepared by Product Publications, Lucent Technologies, Columbus, OH.



Contents

About This Document	ix
■ Intended Audiences	ix
■ How to Use This Document	ix
■ Organization of This Document	x
■ Conventions	xi
Terminology	xi
Screen Displays	xii
Other Typography	xii
Safety and Security Alert Labels	xiii
■ Trademarks	xiii
■ Related Resources	xiii
UnixWare Operating System and CONVERSANT Documentation	xiii
DEFINITY G3 or ECS R5 Documentation	xiv
■ How to Comment on This Document	xv

1	Product Introduction	1-1
	■ Overview	1-1
	■ Example of Dial Plan Usage	1-4
	The Voice Platform Application Interaction with Dial Plan	1-4
	Scenario	1-4
	Process	1-4
	Construct the Dial String	1-4
	Perform the Make Call	1-6
	Summary of Dial Plan Example	1-7
	■ Why Dial Plan?	1-8
	■ Dial String Construction	1-9
	Voice Platform Application Interaction with Dial Plan	1-9
	Structure of Dial String	1-9
	Telephone Number Types	1-10

Contents

Dial String Formation	1-14
■ Summary	1-18

2	Getting Started	2-1
■	Accessing the Dial Plan Administration Menus	2-1
	Logging in Via CONVERSANT Administration	2-1
	Logging in Via UNIX	2-1
■	User Interface Conventions	2-2
	Function Keys	2-2
	On-line Help	2-3
■	Dial Plan Administration	2-3
	Application Specific Settings	2-4
	Area Specific Settings	2-5
	Switch Specific Settings	2-5
	Function Specific Settings	2-7
	Select Defaults	2-8
	Backup and Restore	2-8
	Exit	2-8
■	Configuration Planning	2-8
	Types of Information to Gather	2-8
■	Summary	2-11

3	System Administration	3-1
■	System Administration Overview	3-1
■	Parameter Settings and Field Descriptions	3-2
■	Application Specific Settings	3-2
	Access Application Specific Settings	3-2
	Applying Default Settings	3-7
■	Area Specific Settings	3-8
	Access Area Codes and Prefixes	3-8
	Access Non-Toll Local Area Codes	3-16

Contents

■ Switch Specific Settings	3-21
Access Switch Specific Settings	3-21
Dial String Formats	3-25
■ Function Specific Settings	3-28
Dial Plan Field Values	3-28
Access Function Specific Settings	3-30
Drop Actions	3-34
Hold Actions	3-35
Intelligent Actions	3-37
Make Call Actions	3-39
Message Waiting Lights	3-42
Transfer Actions	3-45
■ Select Defaults	3-49
Access Select Defaults	3-49
■ Backup and Restore	3-51
Access Backup and Restore	3-51
Accessing Backup Configuration Sets	3-53
■ Summary	3-54

4	Release Notes	4-1
■	Packages in Dial Plan	4-1
■	General Availability Release Version	4-1
■	Compatibility with Previous Versions	4-1
	Data and Configuration Compatibility	4-2
■	Features Changed	4-2
■	Features Added	4-2
■	Summary	4-2

5	Installation and Removal	5-1
■	Dial Plan Packages	5-1
■	Installation Requirements	5-2

Contents

Software Requirements	5-2
Hardware Requirements	5-2
Tested Switches	5-2
Hard Disk Space Requirements	5-3
■ Installation Instructions	5-4
Install Spanlink Communications Base Package	5-4
Install Dial Plan Base Package	5-5
Install Default Settings Package	5-7
■ Verifying Installation	5-9
■ Upgrading from Dial Plan V1.3	5-9
Backing up the Configuration	5-9
Restoring the Configuration	5-9
■ Removal	5-9
Remove Default Settings Package	5-10
Remove Dial Plan Base Package	5-10
Remove Spanlink Communications Base Package	5-11
■ Summary	5-12

6	Technical Package Information	6-1
■	Directories	6-1
■	Log and Debug Files	6-2
	Log File	6-2
	Debug File	6-2
■	Configuration Files	6-3
■	Scripts	6-3
■	Prominent Programs	6-3
■	Summary	6-3

Contents

7	Troubleshooting	7-1
	■ Isolating and Diagnosing the Problem	7-1
	General System Checks	7-1
	General Dial Plan Checks	7-2
	■ Isolating the Problem	7-3
	Troubleshooting for Dial Plan Actions	7-3
	Troubleshooting for Dialing a Number	7-7
	■ Problems and Solutions	7-7
	■ Turning On the DIP	7-8
	■ Running a Trace	7-9
	Optional Commands	7-10
	■ Summary	7-10

8	Logs and Error Codes	8-1
	■ Log Names, Locations, and Viewing	8-1
	■ Error Codes	8-2
	Example of Log File	8-2
	Example of Debug File	8-2
	■ Other Problems	8-3
	Possible Problems	8-3
	Cause and Possible Remedy	8-3
	■ Summary	8-4

A	Planning Forms	A-1
	■ Planning Forms	A-1
	General Dialing Related Questions Planning Form: Digits Related	A-2
	General Dialing Related Questions Planning Form: Format Related	A-4
	General Dialing Related Questions Planning Form: Fixed Format	A-6

Contents

General Dialing Related Questions	
Planning Form: Variable Format	A-9
Application Specific Planning Form	A-10
Telephone Functions Planning Form	A-11

B	Switch Configuration	B-1
	■ Switch Configuration	B-1
	■ DEFINITY G3 Default Settings	B-2
	Switch Specific Settings	B-2
	Function Specific Settings	B-3

C	Intelligent Actions and Speech Energy	C-1
	■ Intelligent Actions and Speech Energy	C-1

IN	Index	IN-1
-----------	--------------	------

About This Document

This chapter introduces you to Dial Plan and provides an overview of the document. It also directs you to additional related documentation.

Intended Audiences

This document is written for personnel who have the responsibility for installing and maintaining Dial Plan, or supporting customers. As a secondary audience, telecom administrators who are responsible for maintaining or updating Dial Plan at customer sites may consult this document when performing administrative procedures.

How to Use This Document

Before you begin to read this document, determine which category best describes your responsibility relative to Dial Plan:

- Are you responsible for installing or configuring Dial Plan?
- Are you responsible for helping customers who are having difficulty with their system?
- Are you responsible for on-site customer administration, such as changing an area or prefix code? This person is referred to as the system administrator throughout this document.

If you are just starting off with Dial Plan, read Chapter 1, "Product Introduction", to familiarize yourself with the product. Each chapter ends with a summary that directs you to the next chapter you should read based on your responsibilities. If you are not directed to a particular chapter, read the next chapter in the document.

Organization of This Document

This document is divided into 13 chapters including the appendices, glossary, and index.

- Chapter 1, "Product Introduction", provides an overview of Dial Plan and describes how it interacts with the switch and network.
- Chapter 2, "Getting Started", describes how to access Dial Plan and navigate the administration interface. It also shows you what type of parameters need to be configured for your particular site.
- Chapter 3, "System Administration", describes how to administer Dial Plan. It also describes each menu, form, and field from the administrative interface in detail.
- Chapter 4, "Release Notes", provides basic information about the current version of the product and its packages, including any changes such as features added, changed, or removed.
- Chapter 5, "Installation and Removal", describes the requirements and procedures for installing, upgrading, restoring, and removing Dial Plan.
- Chapter 6, "Technical Package Information", describes the file and directory structure of Dial Plan.
- Chapter 7, "Troubleshooting", describes problems and solutions to help troubleshoot Dial Plan.
- Chapter 8, "Logs and Error Codes", describes where and how to find error messages if there is a problem.
- Appendix A, "Planning Forms", describes how to plan for an installation. Use these forms in conjunction with Chapter 2, "Getting Started".
- Appendix B, "Switch Configuration", describes how to configure Dial Plan depending on the type of switch you have.
- Appendix C, "Intelligent Actions and Speech Energy", describes what to do when the CONVERSANT cannot perform intelligent actions because it fails to detect speech energy.
- The index contains a detailed list of key terms along with the pages where they can be found.

Conventions

This section describes the conventions used in this document.

Terminology

- The word “type” means to press the key or sequence of keys specified. For example, an instruction to type the letter “y” is shown as
Type **y** to continue.
- The word “enter” means to type a value and then press **ENTER**. For example, an instruction to type the letter “y” and press **ENTER** is shown as
Enter **y** to continue.
- The word “select” means to move the cursor to the desired menu item and then press **ENTER**. For example, an instruction to move the cursor to the start test option on the Network Loop-Around Test screen and then press **ENTER** is shown as
Select Start Test.
- The INTUITY CONVERSANT system displays *screens* and *menus*. Large screens both show and request system information. Smaller screens, sometimes called windows, may only request information. Menus provide a list of available selections.
- Keys that you press on your terminal or PC are represented as rounded boxes. For example, an instruction to press the enter key is shown as
Press **ENTER**.
- Two or three keys that you press at the same time on your terminal or PC (that is, you hold down the first key while pressing the second and/or third key) are represented as a series of separate rounded boxes. For example, an instruction to press and hold **ALT** while typing the letter “d” is shown as
Press **ALT** **D**
- Function keys on your terminal, PC, or system screens, also known as soft keys, are represented as round boxes followed by the function or value of that key enclosed in parentheses. For example, an instruction to press function key 3 is shown as
Press **F3** (Choices)
- Keys that you press on your telephone keypad are represented as square boxes. For example, an instruction to press the first key on your telephone keypad is shown as
Press **1** to record a message.

Screen Displays

- Values, system messages, field names, and prompts that appear on the screen are shown in typewriter-style constant-width type, as shown in the following examples:

Example 1:

```
Enter the number of ports to be dedicated to outbound traffic in the
Maximum Simultaneous Ports field.
```

Example 2:

```
Alarm Form Update was successful.
Press <Enter> to continue.
```

- The sequence of menu options that you must select to display a specific screen or submenu is shown as follows:

Start at the INTUITY CONVERSANT Main Menu and select:

```
> Voice System Administration
```

In this example, you would access the Main Menu and select Voice System Administration menu.

- Screens show in this document are examples only. The screens you see on your machine will be similar, but not exactly the same.

Other Typography

- Commands and text you type in or enter appear in bold type, as in the following examples:

Example 1:

Enter **change-switch-time-zone** at the `enter` command: prompt.

Example 2:

Type **high** or **low** in the `Speed:` field.

- Command variables, arguments, and return values are shown in ***bold italic*** type when they are part of what you must type in and *regular italic* type when they are not, for example

Enter ***ch ma machine_name***, where *machine_name* is the name of the call delivery machine you created.

Safety and Security Alert Labels

This document uses the following symbols to call your attention to helpful hints, potential problems that could cause damage to equipment, loss of data, service interruptions, or breaches of toll fraud security.



NOTE:

Information in notes are helpful hints for using Dial Plan. Helpful hints may include basic theory or procedural shortcuts. Notes are indented from the main text.



CAUTION:

Indicates the presence of a hazard that if not avoided can or will cause property damage, including loss of data.

Trademarks

Lucent Technologies has made every effort to supply trademark information about company names, products, and services mentioned in the INTUITY CONVERSANT Systems documentation library. Trademarks indicated below were derived from various sources.

- CONVERSANT and DEFINITY are registered trademarks of Lucent Technologies.
- INTUITY and Customer Assist Care Center are trademarks of Lucent Technologies.
- UnixWare is a registered trademark of Santa Cruz Operations, Inc.
- UNIX is a registered trademark of UNIX Systems Laboratories, Inc.
- Novell is a registered trademark of UNIX System Laboratories, Inc.
- ORACLE is a trademark of the Oracle Corporation.
- Ethernet is a trademark of Xerox Corporation.

Related Resources

This section describes additional documentation for you to learn more about the INTUITY CONVERSANT product.

UnixWare Operating System and CONVERSANT Documentation



NOTE:

The INTUITY CONVERSANT System Version 7.0 System Description, 585-313-204, contains a detailed description of all documents included in

V7.0 INTUITY CONVERSANT documentation library. Always refer to the appropriate document for specific information on planning, installing, administering, or maintaining an INTUITY CONVERSANT system.

- *SCO UnixWare Documentation Set*, 585-350-908
- *INTUITY CONVERSANT System Version 7.0 Upgrade Procedures*, 585-313-111
- *INTUITY CONVERSANT System Version 7.0 Administration*, 585-313-501
- *INTUITY CONVERSANT System Version 7.0 MAP/40 Maintenance*, 585-313-108

or

INTUITY CONVERSANT System Version 7.0 MAP/100 Maintenance, 585-313-109

DEFINITY G3 or ECS R5 Documentation

- *Lucent DEFINITY Communications System Generic 3 Call Vectoring/EAS Guide*, 555-230-520

or

Lucent DEFINITY ECS R5 Call Vectoring/EAS Guide, 555-230-521

- *Lucent DEFINITY Communications System Generic 3 Feature Description*, 555-230-204

or

Lucent DEFINITY ECS R5 Feature Description, 555-230-301

- *Lucent DEFINITY Communications System Generic 3i Implementation*, 555-230-650,

Lucent DEFINITY Communications System Generic 3r Implementation, 555-230-651,

Lucent DEFINITY Communications System Generic 3i-Global Implementation, 555-230-652,

Lucent DEFINITY Communications System Generic 3 V2 and V3 Implementation, 555-230-653,

Lucent DEFINITY Communications System Generic 3 V4 Implementation, 555-230-655

or

Lucent DEFINITY ECS R5 Implementation, 555-230-302

How to Comment on This Document

We are interested in your suggestions for improving this document. Please complete and return the reader comment card that is located behind the title page.

If the reader comment card has been removed, send your comments to:

Lucent Technologies
Product Documentation
Room 22-2H15
11900 North Pecos Street
Denver, Colorado 80234 USA

You may also fax your comments to the attention of the Lucent Technologies Intuity CONVERSANT System writing team at (303) 538-1741.

Please mention the name and order number of this document, *Intuity CONVERSANT System Customer Assist Dial Plan User Guide*, 585-313-707.

This chapter contains a general overview of Dial Plan. You will learn what a dial plan is and develop a basic understanding of its purpose.

Overview

A voice platform application is any software program that runs on the CONVERSANT and sends commands to the switch to perform telephone actions. Dial Plan is a voice platform application that accepts commands from other voice platform applications such as Customer Assist Care Center (referred to in this document as Customer Assist). Dial Plan makes the application portable to different locations with different network and switch environments. The voice platform applications that use Dial Plan are usually not responsible for specific switch and network environment adjustments. If changes in network or switch environment occur, the telecom administrator makes the necessary adjustments through Dial Plan Administration. You do not need to hire a programmer to adjust the code. (See “Why Dial Plan?” on page 1-8 for more information.)

Dial Plan operates as follows:

1. Dial Plan receives a command from a voice platform application. The application requests Dial Plan to perform a telephone action, such as transfer a call or make a call. The application gives Dial Plan a telephone number.
2. Dial Plan takes the telephone number. Depending on how the software is configured, Dial Plan may add access codes and accounting codes to the number. Dial Plan determines whether the number is local or long distance and adjusts the digits accordingly. The number is now a Dial String.
3. Dial Plan then inserts pauses into the Dial String as necessary. These pauses insure that Dial Plan does not start dialing until the switch is ready to accept input.
4. Dial Plan then delivers the commands to the switch and telephone network. The commands instruct the switch to perform a specific telephone action. Dial Plan may also obtain the dialing result from the switch and return the result of the call to the voice platform application.

Some telephone actions, such as placing a call on hold, do not require dialing digits. In these situations, Dial Plan delivers the commands to the switch to perform the action.

Figure 1-1 shows how voice platform applications use Dial Plan.

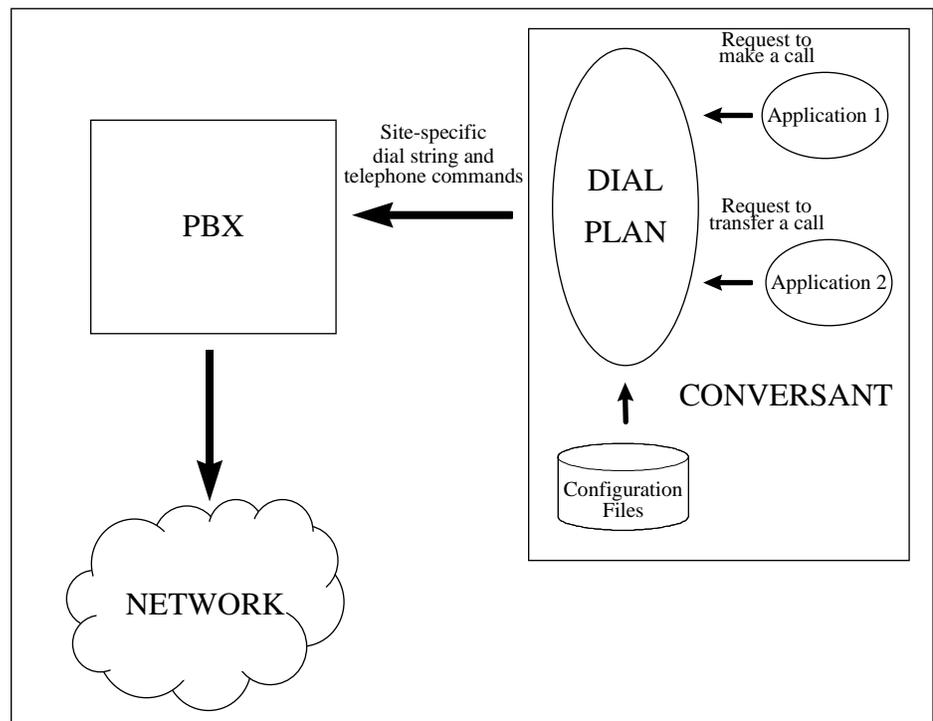


Figure 1-1. Interaction of Dial Plan with the switch and network

Example of Dial Plan Usage

The following example demonstrates how Dial Plan constructs a Dial String and then performs a Make Call in a specific voice platform application.

The Voice Platform Application Interaction with Dial Plan

For this example, the voice platform application must call customer. It must dial in an intelligent mode, that is, detect the result of the call, to insure that the called party answers. The voice platform application uses Dial Plan as its interface to the switch and telephone network.

Scenario

The switch is located in Rochester, Minnesota, with an area code of 507. The customer's telephone number is (612) 971-2101.

Process

The voice platform application passes the customer's telephone number to Dial Plan. It requires that Dial Plan perform a Make Call, or call the customer, in an intelligent mode to detect the result of the call.

Construct the Dial String

Dial Plan analyzes the telephone number passed to it. It uses the information you enter into the Dial Plan Administration to construct a complete telephone number, or Dial String, that can be dialed to reach the customer, as follows (See "Dial String Construction" on page 1-9 for more information on constructing Dial Strings):

- Determines whether the number is local, nearby long distance, or long distance. If the number is nearby long distance or long distance, the voice platform application adds the necessary access code.
- Adds Accounting Codes
- Inserts any pauses the switch may require

Example of Constructing the Dial String

The voice platform application passes the telephone number to Dial Plan. The following list shows where Dial Plan gets each part of the Dial String. Dial Plan constructs the Dial String as follows (See Chapter 3, "System Administration", for field definitions):

- Determines call type

The voice platform application informs Dial Plan that the telephone number is an external number. Dial Plan compares the customer's area code to that of the switch. Since the area codes are different, Dial Plan determines the number is Distant Long Distance.

- Adds necessary codes

- "9" to reach an outside line

Dial Plan includes the outside access code to signal the switch to make a call outside the switch. The `Outside Access Code` field entry in the `Application Specific Settings` form is "9."

Dial Plan does not include the outside access code in the Dial String unless `Dial Outside Access Code` field entry in the `Distant Long Distance Number Format` form is set to "Y."

- "1" for long distance service

The call requires long distance service. Dial Plan must include the long distance access code in order to access long distance service. The `Long Distance Access Code` field entry in the `Application Specific Settings` form is "1."

Dial Plan does not include the long distance access code in the Dial String unless `Dial Long Distance Access Code` field entry in the `Distant Long Distance Number Format` form is set to "Y."

- "6129712101", the customer's telephone number

The voice platform application passes this telephone number to Dial Plan. Dial Plan includes the area code in the Dial String because the customer's area code does not match the area code of the switch.

Dial Plan does not include the area code in the Dial String unless `Dial Area Code` field entry in the `Distant Long Distance Number Format` form is set to "Y."

- Accounting Codes

- “012117”, the accounting code for the voice platform application calls

The customer requires an accounting code to track the cost of calls. The *Ending Accounting Code* field entry in *Application Specific Settings* is “012117.”

Dial Plan does not include the accounting code in the Dial String unless *Dial Ending Accounting Code* field entry in the *Distant Long Distance Number Format* form is set to “Y.”

- Inserts any pauses the switch may require

- PP, a pause of 2 seconds

The switch requires a pause between the telephone number and the ending accounting code. Dial Plan includes this pause in the Dial String. It places the pause before the ending accounting code.

The *Pre and Post Codes* form under the *Switch Specific Settings* form instructs Dial Plan whether to enter pauses between the various parts of the Dial String.

Perform the Make Call

Now that the Dial String is complete, Dial Plan can call the customer. It performs the Make Call as follows:

1. Sends commands to the voice platform. Commands are signals Dial Plan must send to the voice platform to execute basic telephone actions. The voice platform port goes off hook and detects dial tone. It outputs the Dial String, as follows: 916129712101PP012117 (the telephone number, a pause of two seconds, and then the accounting code).
2. Dial Plan sends commands requesting the voice platform wait until it detects error, busy, touch-tone input, or speech energy, or until a specified number of ring cycles elapse without detecting speech energy.
3. The voice platform detects the result of the call and returns it to Dial Plan.
 - a. If the result of the call is error, busy, ring, or no answer, then Dial Plan sends commands to end the call to the customer and provides the result of the call to the voice platform application.
 - b. If the result of the call is answer, Dial Plan returns the result to the voice platform application and ends Dial Plan activity. The voice platform application conducts the dialogue with the called party.

Summary of Dial Plan Example

The voice platform application had to determine the 10-digit number of the customer to dial. It also had to instruct Dial Plan to call the number and return the result of the call. Dial Plan made the adjustments for timing as well as the access and accounting codes. Dial Plan issued the commands to the switch and then received and interpreted its responses.

Figure 1-1 on page 1-3 shows the relationship between Dial Plan, the voice platform applications that use Dial Plan, the switch, and the telephone network.

Why Dial Plan?

Dial Plan serves three functions:

- It frees the programmer and the application code from the specific concerns of the switch and telephone network.

In our example, the voice platform application has only two responsibilities:

- To invoke the Intelligent Make Call Action
- To provide the telephone number of the party to dial

The application code is usually not responsible for specific switch and network environment adjustments. Dial Plan takes on the following responsibilities:

- Timing considerations
- Access or accounting code adjustments
- Long distant versus local dialing
- Switch-specific commands

Dial Plan makes the application portable to different locations with different network and switch environments. Dial Plan handles the switch and telephone network differences between these locations.

- If changes in network or switch environment occur, then the adjustments are made in one place.

Example: The telephone company decides to split your area code into two area codes in order to accommodate new telephone numbers. If your voice platform applications use Dial Plan, you do not need to make changes to each voice platform application. All you need to do is update Dial Plan. The telecom administrator goes to one place, Dial Plan Administration, and quickly makes the necessary adjustments. The adjustments are faster, easier, and more reliable than if the telecom administrator had to adjust individual applications separately.

- If changes in network or switch environment occur, then the telecom administrator makes the necessary adjustments through Dial Plan Administration. You do not need to hire a programmer to adjust the code.

Example: The accounting practices at your company change. You have a new Accounting Code that you must enter when making outbound calls. If your voice platform applications uses Dial Plan, you do not need a developer to make the changes to the application code. The telecom administrator can make the necessary adjustments to the voice platform applications through Dial Plan. Dial Plan eliminates the time, expense, and risk of code changes.

Dial String Construction

This section explains how Dial Plan constructs Dial Strings.

Voice Platform Application Interaction with Dial Plan

The voice platform application instructs Dial Plan to perform a telephone action, such as one of the following (See “Function Specific Settings” on page 3-28 for more information on telephone actions):

- Conference Actions
- Drop Actions
- Hold Actions
- Intelligent Actions
- Make Call Actions
- Message Waiting Lights
- Transfer Actions

If the telephone action requires dialing, then the voice platform application supplies Dial Plan with the following:

- The telephone number of the party to dial
- Whether the number is an internal number to the switch or an outside number
- If the number is an international number, then the country code for the number

Structure of Dial String

Dial Plan sees the Dial String as a series of parts, as follows:

- Outside Access Code
- Beginning Accounting Code
- Equal Access Code
- Long Distance Access Code
- International Access Code
- Country Code
- Area or City Code
- Prefix of Subscriber Number
- Remainder of Subscriber Number

- International — number outside the local country code

Figure 1-3 on page 1-11, Figure 1-4 on page 1-12, and Figure 1-5 on page 1-13 show the algorithm that Dial Plan uses to determine the type of telephone number.

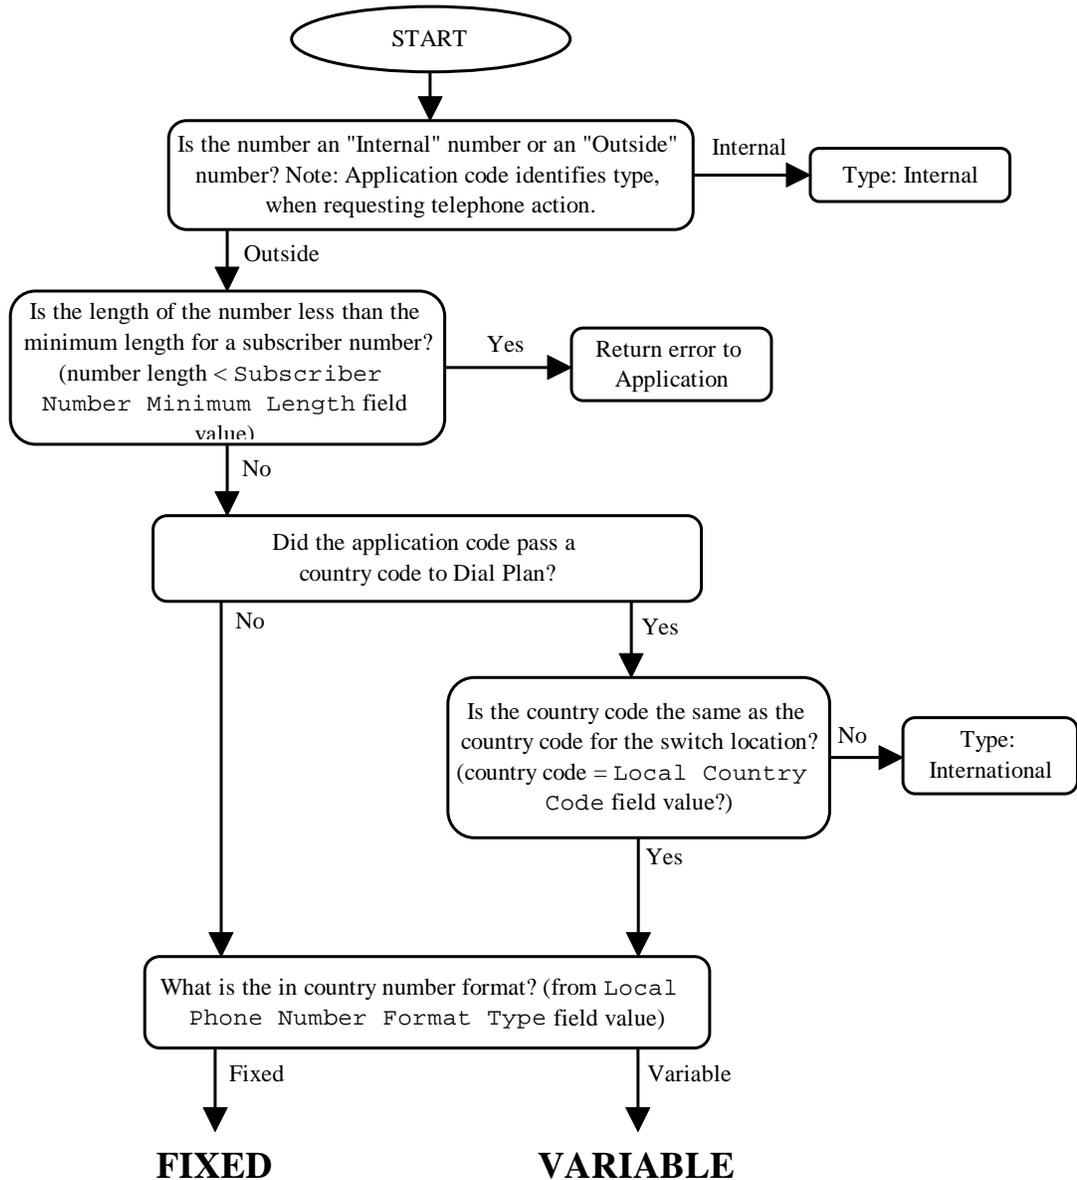


Figure 1-3. Application Code uses Dial Plan to create a Dial String

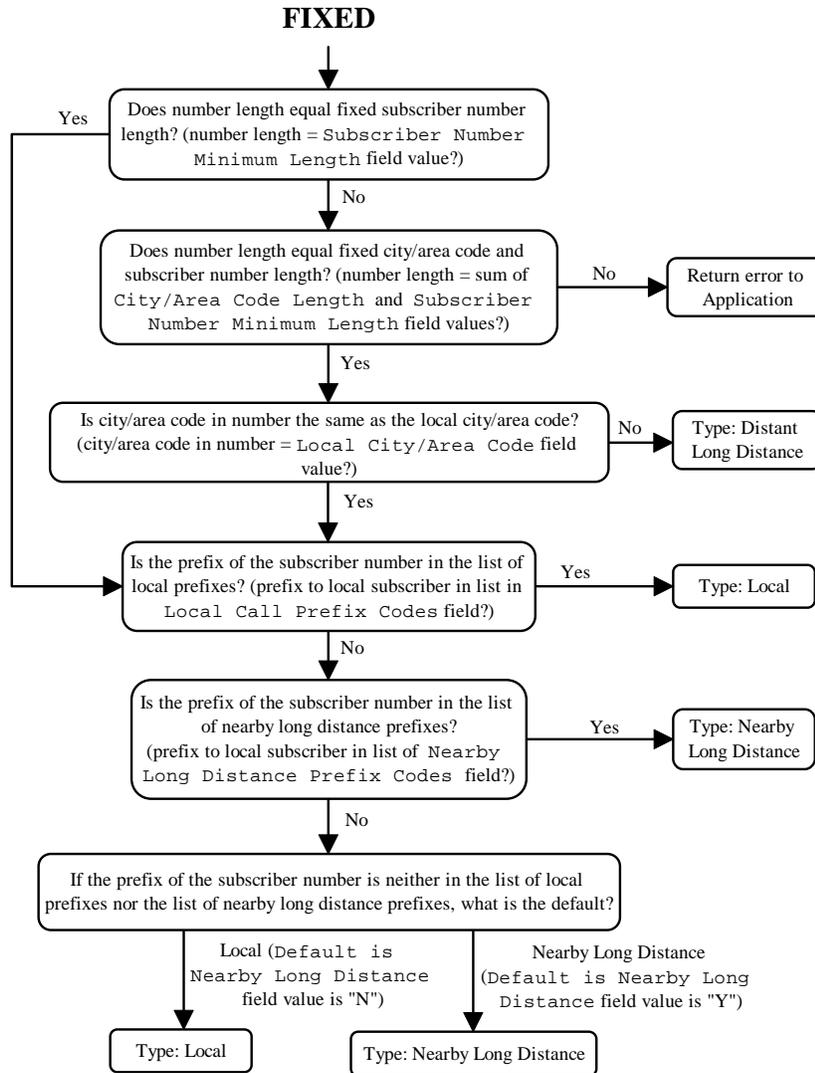


Figure 1-4. Fixed Format

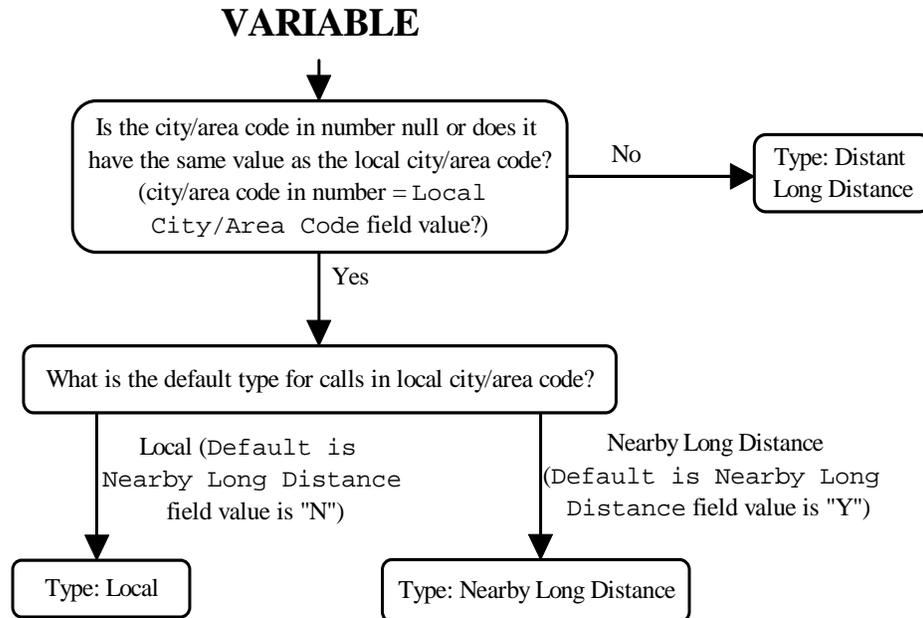


Figure 1-5. Variable Format

Dial String Formation

After Dial Plan determines the type of telephone number, it creates the Dial String. It decides the fields to include according to the following rules (See “Application Specific Settings” on page 3-2 for field definitions):

Internal Extension

- As is, without any additions or changes to the digits in the Dial String provided by the voice platform application

Local Number

- Outside Access Code field value, if:
 - The field has an entry and the Dial Outside Access Code field in the Local Number Form is set to “Y”
- Beginning Accounting Code field value, if:
 - The field has an entry, and:
 - The Dial Beginning Accounting Code field in the Local Number form is set to “Y”
- Long Distance Access Code, if:
 - The field has an entry, and:
 - The Dial Long Distance Access Code field in the Local Number Format form is set to “Y”
- City/area code, which the voice platform application provides, if:
 - The Dial Area Code field in the Local Number Format form is set to “Y”
- Local subscriber number, which the voice platform application provides
- Termination Code field value, if:
 - The field has an entry
 - The Dial Termination Code field in the Local Number Format form is set to “Y”
- Ending Accounting Code field value, if:
 - The field has an entry, and:
 - The Dial Ending Accounting Code field in the Local Number form is set to “Y”

Non-Toll Local Number

- Outside Access Code field value, if:
 - The field has an entry
 - The Dial Outside Access Code field in the Non-Toll Local Number Format form is set to “Y”
- Beginning Accounting Code field value, if:
 - The field has an entry
 - The Dial Beginning Accounting Code field in the Non-Toll Local Number Format form is set to “Y”
- Equal Access Code field value, if:
 - The field has an entry
- Long Distance Access Code field value, if:
 - The field has an entry, and:
 - The Dial Long Distance Access Code field in the Non-Toll Local Number Format form is set to “Y”
- City/area code, which the voice platform application provides, if:
 - The Dial Area Code field in the Non-Toll Local Number Format form is set to “Y”
- Local subscriber number, which the voice platform application provides
- Termination Code field value, if:
 - The field has an entry
 - The Dial Termination Code field in the Non-Toll Local Number Format form is set to “Y”
- Ending Accounting Code field value, if:
 - The field has an entry, and:
 - The Dial Ending Accounting Code field in the Non-Toll Local Number Format form is set to “Y”

Nearby Long Distance Number (Intra-lata)

- Outside Access Code field value, if:
 - The field has an entry
 - The Dial Outside Access Code field in the Nearby Long Distance Format form is set to “Y”
- Beginning Accounting Code field value, if:
 - The field has an entry, and:

- The Dial Beginning Accounting Code field in the Nearby Long Distance Format form is set to “Y”
- Equal Access Code field value, if:
 - The field has an entry
- Long Distance Access Code field value, if:
 - The field has an entry, and:
 - The Dial Long Distance Access Code field in the Nearby Long Distance Format form is set to “Y”
- City/area code, which the voice platform application provides, if:
 - The Dial Area Code field in the Nearby Long Distance Format form is set to “Y”
- Local subscriber number, which the voice platform application provides
- Termination Code field value, if:
 - The field has an entry
 - The Dial Termination Code field in the Nearby Long Distance Format form is set to “Y”
- Ending Accounting Code field value, if:
 - The field has an entry, and:
 - The Dial Ending Accounting Code field in the Nearby Long Distance Format form is set to “Y”

Long Distance Number (Inter-lata)

- Outside Access Code field value, if:
 - The field has an entry
 - The Dial Outside Access Code field in the Distant Long Distance Format form is set to “Y”
- Beginning Accounting Code field value, if:
 - The field has an entry
 - The Dial Beginning Accounting Code field in the Distant Long Distance Format form is set to “Y”
- Equal Access Code field value, if:
 - The field has an entry
- Long Distance Access Code field value, if:
 - The field has an entry, and:
 - The Dial Long Distance Access Code field in the Distant Long Distance Format form is set to “Y”

- City/area code, which the voice platform application provides, if:
 - The `Dial Area Code` field in the Distant Long Distance Format form is set to "Y"
- Local subscriber number, which the voice platform application provides
- `Termination Code` field value, if:
 - The field has an entry
 - The `Dial Termination Code` field in the Distant Long Distance Format form is set to "Y"
- `Ending Accounting Code` field value, if:
 - The field has an entry, and:
 - The `Dial Ending Accounting Code` field in the Distant Long Distance Format form is set to "Y"

International Number

- `Outside Access Code` field value
- `Beginning Accounting Code` field value, if:
 - The field has an entry, and:
- `Equal Access Code` field value, if:
 - The field has an entry
- `International Access Code` field value
- Country code, which the voice platform application provides
- City/area code, which the voice platform application provides
- Local subscriber number, which the voice platform application provides
- `Termination Code` field value, if:
 - The field has an entry
- `Ending Accounting Code` field value, if:
 - The field has an entry, and:

Summary

This chapter provided an overview of the features and services of Dial Plan.

- See Chapter 2, “Getting Started”, for instructions on how to log into the system and set it up for your needs.
- See Chapter 4, “Release Notes”, for basic information about the current version and its packages, as well as information about changes such as features added, changed, or removed.
- See Chapter 5, “Installation and Removal”, for instructions on how to install and remove Dial Plan.
- See Chapter 7, “Troubleshooting”, to learn how to troubleshoot for Dial Plan.

This chapter describes how to log in to Dial Plan and navigate screens. It also includes instructions for system administrators who must make changes to the city/area code or prefixes.

Accessing the Dial Plan Administration Menus

Dial Plan Administration can be reached through CONVERSANT Administration or the UNIX Interface.

Logging in Via CONVERSANT Administration

To log in to Dial Plan through CONVERSANT Administration:

1. Select Application Package Administration
2. Select Dial Plan

The system displays the Dial Plan Administration menu (Figure 2-1).

Logging in Via UNIX

To log in to Dial Plan from UNIX:

1. Log in as root
2. Enter your password
3. Enter **cd /usr/spanlink/SplkDPlan/admin**



NOTE:

The directory structure layout has been reorganized. All files are now located in the **/spanlink** partition. See “Features Changed” on page 4-2 for more information.

4. Enter **DPAdmin**

The system displays the Dial Plan Administration menu (Figure 2-1).

User Interface Conventions

You begin all system activities by highlighting a menu option and pressing **ENTER**.

Dial Plan uses function and arrow keys to select options and save changes. Use the Up **▲** arrow key to highlight the option above the highlighted area on the screen. Use the Down **▼** arrow key to highlight the option below the highlighted area on the screen.

Function Keys

At the bottom of each screen are function keys. Dial Plan assigns specific tasks to function keys F1 to F8. The task may change with each screen. Function keys correspond with the function keys on your keyboard. The following tasks are assigned to the function keys:

- **HELP (F1)**; context sensitive information about using the current menu or form
- **CHOICES (F2)**; shows values available for entry into the selected field
- **MARK (F2)**; selects the highlighted option
- **ENTER (F3)**; executes the highlighted option, moves to the next field, or moves to the highlighted menu
- **CLOSE (F3)**; closes the screen and saves your changes
- **DEFAULTS (F4)**; returns the form settings to the default settings
- **PREV-FRM (F4)**; displays the previous screen
- **NEXT-FRM (F5)**; displays the next screen
- **CANCEL (F6)**; cancels the selected action or closes the current menu or form and returns to the previous screen without saving your changes
- **CMD-MENU (F7)**; displays the Command menu

On-line Help

This option allows you to view menu, form, and field definitions on screen. Press **F1** to access on-line help.

Dial Plan Administration



NOTE:

The Dial Plan Administration menu is the starting point for all Dial Plan Administration. Any changes made to the Administration take effect as soon as you exit Dial Plan Administration.



NOTE:

Selecting an option brings up that menu in addition to any other menus currently displayed. This means several menus can be visible at the same time.

After you start Dial Plan Administration, the Dial Plan Administration menu appears (Figure 2-1):

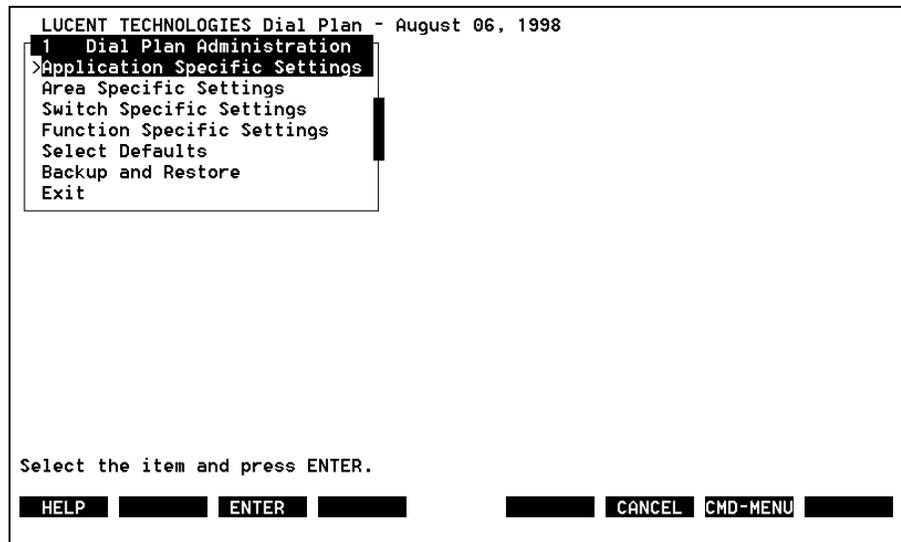


Figure 2-1. Dial Plan Administration menu

The following sections provide an overview for each of the menu items in the Dial Plan Administration menu.

Application Specific Settings

This menu option includes settings that relate to the content of the Dial String, such as long distant service access codes, accounting codes, and termination codes. It also includes settings that determine whether Dial Plan performs blind or intelligent dialing in cases where the voice platform application submits a request to dial without specifying the mode. These settings can vary between the voice platform applications that use Dial Plan.

Select the Application Specific Settings screen from the Dial Plan Administration screen (Figure 2-2):

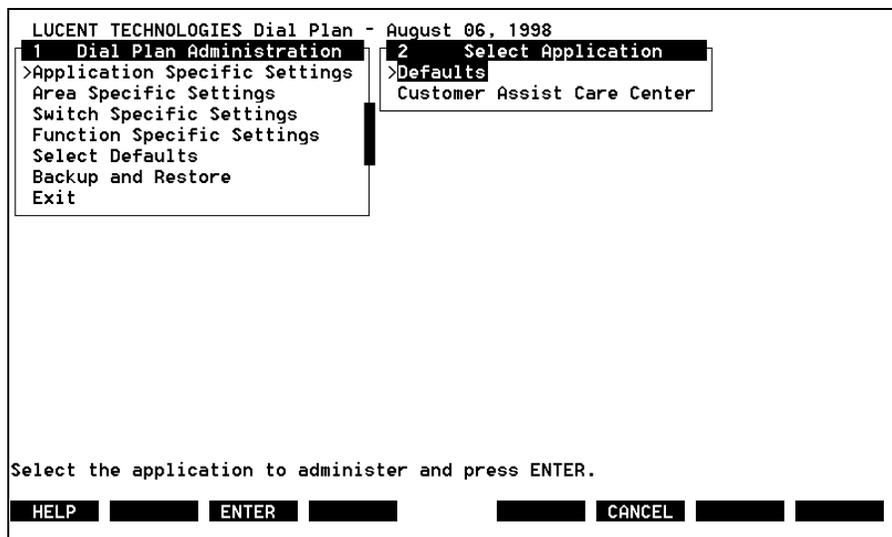


Figure 2-2. Application Specific Settings menu

This menu allows you to perform two types of administration:

- Change the individual field settings for your system default settings. For example, you could change the Accounting Code default value.
- Administer the field settings for the individual voice platform applications that use Dial Plan.

Area Specific Settings

This menu option includes settings that relate to the specific location of your switch, such as country codes, city/areas codes, and prefixes.

Select the Area Specific Settings screen from the Dial Plan Administration screen (Figure 2-4):

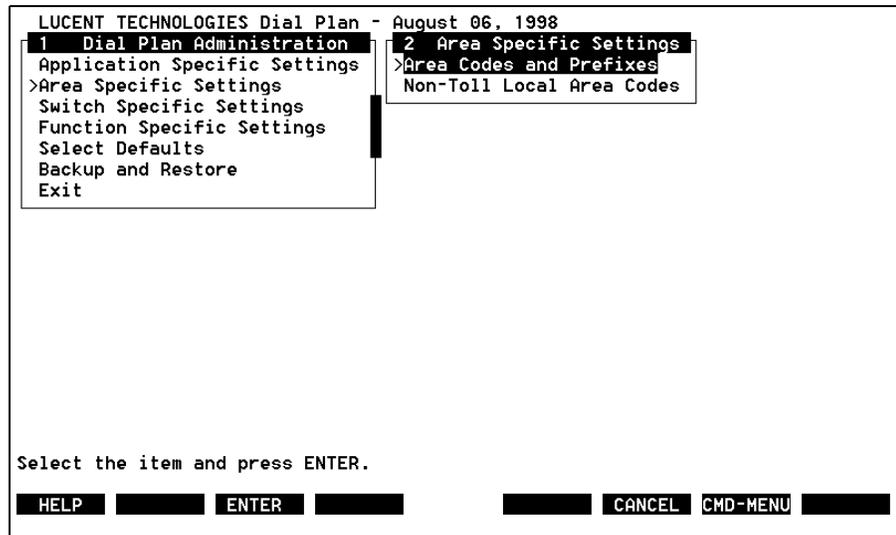


Figure 2-3. Area Specific Settings menu

This menu allows you to perform two types of administration:

- Change the area code and prefixes. For example, Dial Plan uses the country code of the switch to determine whether an outbound call must be dialed as an international number.
- Administer non-toll local area codes. For example, you can enter area codes that are different from the local area code but are considered to be local telephone numbers when dialed.

Switch Specific Settings

This menu option allows you to insert pauses to insure Dial Plan does not dial before the switch is ready to accept the input into the Dial String. It also allows you to identify what parts of the telephone number Dial Plan should dial for each type of call. For example, should it dial an equal access code or the city/area code for a given long distance number? These settings are global for all voice platform applications that use Dial Plan.

Select the Switch Specific Settings screen from the Dial Plan Administration screen (Figure 2-4):

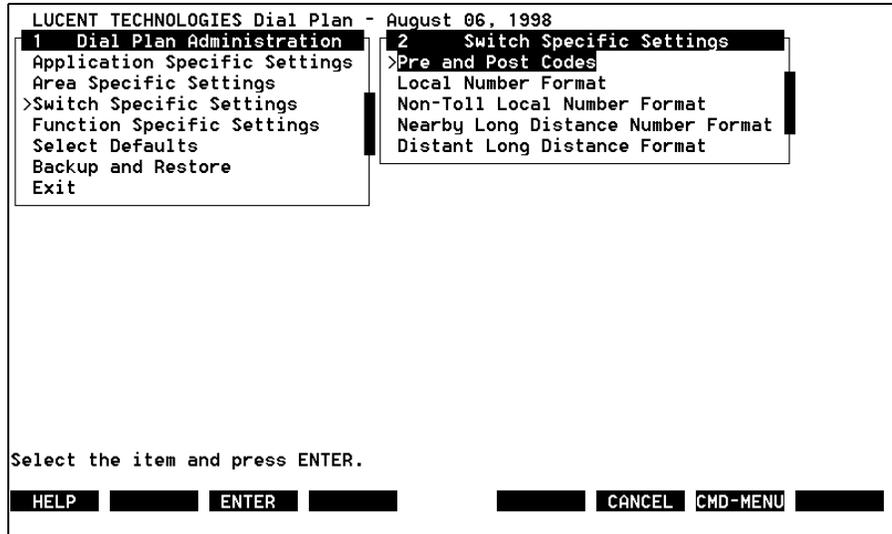


Figure 2-4. Switch Specific Settings menu

This menu allows you to perform two types of administration:

- Administer Pre and Post Codes to instruct Dial Plan where to insert pauses in the Dial String. (See “Switch Specific Settings” on page 3-21 for more information.)
- Designate what telephone number parts and codes Dial Plan should include in the Dial String for each type of call. Select the option that corresponds to the type of call you want to administer:
 - Local Number Format
 - Non-Toll Local Number Format
 - Nearby Long Distance Number Format
 - Distant Long Distance Number Format

Function Specific Settings

This menu option allows you to define the internal sequence of the switch-dependent field values Dial Plan requires to carry out basic telephone actions. Field values are actions such as pauses, flashes, and feature access codes. Telephone actions are actions such as Transfer, Conference, Make Call, and illuminating and extinguishing Message Waiting Lights. These settings are global for all voice platform applications that use Dial Plan.

Select the Function Specific Settings screen from the Dial Plan Administration screen (Figure 2-5):

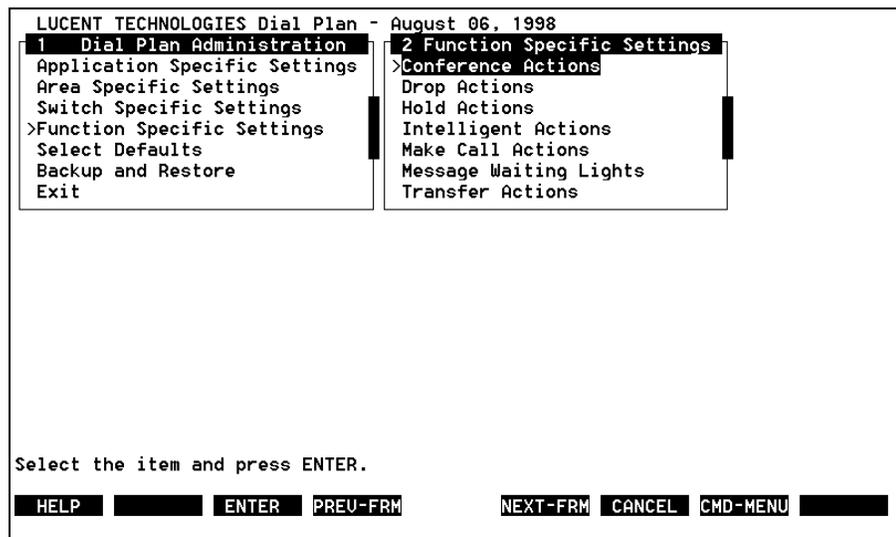


Figure 2-5. Function Specific Settings screen

This menu allows you to administer the following telephone actions:

- Conference Action
- Drop Actions
- Hold Actions
- Intelligent Actions
- Make Call Actions
- Message Waiting Lights
- Transfer Actions

Select Defaults

This menu option allows you to select a Default Settings package based on switch and country, as well as change the default settings for all your applications simultaneously. Your options for Default Settings packages depend on what is installed on your system.

⇒ NOTE:

At any time you can press DEFAULTS (F4) to return all field values to the default package settings.

Backup and Restore

This menu option allows you to back up and restore the configuration. This should be done as a safety precaution whenever the configuration changes or when upgrading to a new version of Dial Plan.

Exit

This menu option closes Dial Plan Administration and returns you to the Application Package Administration window. If you logged in through UNIX, the system returns you to the UNIX command line.

Configuration Planning

This section shows you how to collect the information you need to configure Dial Plan using the planning forms in Appendix A, "Planning Forms". These forms contain questions you should ask the customer telecom administrator about the particular switch and network services.

Types of Information to Gather

The planning forms divide the information you must gather into five categories:

- Switch and telephone network information
- Components of the Dial String
- Questions for fixed and variable format telephone numbers
- Application specific information
- How the switch performs telephone actions

Each category has an associated planning form in Appendix A, "Planning Forms". Figure 2-6 shows part of the planning form, "General Dialing Related Questions Planning Form: Digits Related."

Question	Answer	Action
What is your local country code?		Form: Area Specific Settings Field: Local Country Code
What is your local city or area code?		Form: Area Specific Settings Field: Local City/Area Code
Is the length of the local subscriber numbers and city/area codes always fixed, or sometimes variable?	Circle one: Fixed (F) Variable (V)	Form: Area Specific Settings Field: Local Phone Number Format Type

Figure 2-6. General Dialing Related Questions Planning Form: Digits Related

- The left-hand column shows the questions you must ask the customer telecom administrator or person knowledgeable about the switch and network environment.
- The center column provides space for you to record their answers.
- The right-hand column shows the relationship between the questions and the Dial Plan settings.

Switch and Telephone Network Information

This planning form contains basic questions about the characters and digits Dial Plan needs to construct the Dial String. It includes switch and telephone network-specific information such as the city/area code, country code, local subscriber number prefixes, and pre and post codes. Dial Plan attaches some of these characters and digits to the telephone number passed by the voice platform application in order to construct the Dial String.

- Use the “General Dialing Related Questions Planning Form: Digits Related” on page A-2 for this type of information.

Components of the Dial String

This planning form contains basic questions about how a particular telephone number type is dialed from the customer’s site. It determines the characters and digits that should be attached to each type of telephone number.

- Use Table A-4, “General Dialing Related Questions Planning Form: Format Related” for this type of information.

Questions for Fixed and Variable Format Phone Numbers

These planning forms contain questions that are specific to fixed format or variable format telephone numbers. These planning forms determine whether Dial Plan dials a long distance access code for numbers within the same city/area code as the switch. Use one of the following forms:

- Use the “General Dialing Related Questions Planning Form for Fixed Format” on page A-6 for sites with fixed format numbers.
 - Fixed format telephone numbers have a fixed length subscriber number and fixed length city/area code. The US, Canada, and Mexico are among the countries that use fixed format.
- Use Table A-4, “General Dialing Related Questions Planning Form for Variable Format” for sites with variable format numbers.
 - Variable format telephone numbers do not have a fixed length subscriber number and/or fixed length city/area code. The United Kingdom, Germany, and Japan are among the countries that have variable formats.

Application Specific Information

This planning form contains basic questions that are specific to a particular voice platform application. For example, the form determines the accounting code Dial Plan uses for a particular application.

- Use Table A-5, “Application Specific Planning Form” for this type of information.

NOTE:

Please refer to your voice platform application documentation for additional information on how Dial Plan interacts with your voice platform application.

How the Switch Performs Telephone Actions

This planning form contains questions that determine the commands Dial Plan must deliver to the switch in order to perform telephone actions.

- Use the “Telephone Functions Planning Form” on page A-11 for this type of information.

Summary

This chapter introduced you to the screen-based administration and showed you how to navigate the system. It also gave you an overview of the types of questions you must ask the customer telecom administrator in order to configure Dial Plan correctly. Use this chapter in conjunction with Appendix A, "Planning Forms".

- See Chapter 3, "System Administration", for more information on configuring Dial Plan or performing on-site administration, and for the specific parameter values.
- See Appendix A, "Planning Forms", for planning forms that are designed to help you configure Dial Plan.
- See Appendix B, "Switch Configuration", for default settings for your switch.

This chapter describes each menu, form, and field in detail. It assumes Dial Plan is installed on your system. See Chapter 5, "Installation and Removal", for information on how to install Dial Plan.

System Administration Overview

After you install Dial Plan, you must configure it so that it can perform the following tasks for the switch, network, and application environment:

- Construct a Dial String
- Insert pauses into the Dial String to insure Dial Plan does not dial until the switch is ready to accept the input
- Issue commands to execute basic telephone actions, such as hold or transfer

Parameter Settings and Field Descriptions

The Dial Plan Administration menu has an option for each of the following system administration tasks:

- Application Specific Settings allows you to enter the parameters Dial Plan uses when constructing a Dial String.
- Area Specific Settings allows you to enter the area codes and prefixes that Dial Plan use to determine how to dial the number it is given and the area codes and prefixes that should be treated as local telephone numbers.
- Switch Specific Settings allows you to insert pauses into the Dial String. It also allows you to specify the components of the telephone number that Dial Plan must dial for different types of calls.
- Function Specific Settings allows you to enter the commands Dial Plan must pass to the switch to execute basic telephone actions.

Application Specific Settings

This menu provides two options. You can administer either the default settings or the voice platform application settings.

Access Application Specific Settings

Use the following steps to access the Application Specific Settings menu:

1. Start at the Dial Plan Administration menu and select

```
> Application Specific Settings
```

```
> Customer Assist
```

The system displays the Application Specific Settings Configuration Defaults form (Figure 3-1 and Figure 3-2):



NOTE:

Please consult the manual for the application you want to administer for specific field settings.

```
LUCENT TECHNOLOGIES Dial Plan - August 06, 1998
1 Dial Plan Administration
>Application Specific Settings
Area Specific Settings
Switch Specific Settings
Function Specific Settings
Select Defaults
Backup and Restor
Exit
2 Select Application
>Defaults
Customer Assist Care Center
3 Application Specific Settings Configuration Defaults
Outside Access Code: 9
Beginning Accounting Code:
Equal Access Code:
Long Distance Access Code: 1
International Access Code: 011
Termination Code:
Ending Accounting Code:
Default MakeCall Type: B
Default AddParty Type: B
Default Transfer Type: B
Intelligent Answer Supervision: N
Blind Answer Supervision: N
Number of Loops for Ans Supervision: 5
Enter the Outside Access Code followed by the Return or ENTER key.
HELP CHOICES CLOSE DEFAULTS ENTER CANCEL REFRESH
```

Figure 3-1. Application Specific Settings Configuration Defaults, screen 1

```

LUCENT TECHNOLOGIES Dial Plan - August 10, 1998
1 Dial Plan Adm 3 Application Specific Settings Configuration Defaults
>Application Speci
Switch Specific S
Function Specific
Select Defaults
Backup and Restor
Exit
Local Call Prefix Codes:
____
____
____
____
____
____
____

Nearby Long Distance Prefix Codes:
____
____
____
____
____

Default is Nearby Long Distance:  N

Enter the Local Call Prefix Codes followed by the Return or ENTER key.
HELP CHOICES CLOSE DEFAULTS ENTER CANCEL REFRESH
    
```

Figure 3-2. Application Specific Settings Configuration Defaults, screen 2

The following table describes each field that appears in the Application Specific Settings form. Use these descriptions to determine what to enter into each field.

Table 3-1. Field Descriptions for Application Specific Settings

Field	Description
Outside Access Code	The digit or digits you dial to get an outside line.
Beginning Accounting Code	A code used for billing, accounting, and determining who placed the call. Consult the telecom administrator to make sure the switch is configured for beginning accounting codes. This field is optional based on the application. Leave blank if it is not used.
Equal Access Code	The sequence of digits needed to specify a long distance carrier, such as Sprint, MCI, or AT&T.
Long Distance Access Code	The sequence of digits needed to indicate that this is an in-country, long distance call. For North America use "1".

Continued on next page

Table 3-1. Field Descriptions for Application Specific Settings — *Continued*

Field	Description
International Access Code	The sequence of digits that indicates an international call. For North America use "011".
Termination Code	The sequence of digits that mark the end of a telephone number. Not all switches support or require this field. The switch determines the value of this field. Any digits after this code, such as an accounting code, are not part of the telephone number and must be separated from it.
Ending Accounting Code	A code used for billing, accounting, and determining who placed the call. It is dialed after Dial Plan dials all digits of a telephone number and termination code if any. Consult the telecom administrator to make sure the switch is configured for ending accounting codes. This field is optional based on the application. Leave blank if not used.
Default Make Call Type	A Make Call occurs when Dial Plan instructs the voice platform to dial a number; that is, to make a call. To perform a Make Call, Dial Plan must format the number; that is, create the Dial String, and then dial the number. This field determines whether Dial Plan checks for speech energy during a Make Call. If this field is set to "I" for Intelligent and the voice platform hears a non-answer call-progress tone, such as a busy signal, or if it does not detect speech energy, then the call to the new party is considered a failure and dropped. If this field is set to "B" for blind, then Dial Plan does not check for speech energy. In order to perform intelligent actions, you must have IVC analog ports or T1/E1 SSP digital ports. ¹ Please see your switch manual for specific field settings.

Continued on next page

Table 3-1. Field Descriptions for Application Specific Settings — Continued

Field	Description
Default AddParty Type	AddParty occurs when the voice platform adds a new party to the conference call. This field determines whether the voice platform checks for speech energy and call progress tones before adding a new party to a conference call. This field determines whether the voice platform checks for speech energy during an AddParty. If this field is set to "I" for Intelligent and the voice platform hears a non-answer call-progress tone, such as a busy signal, or if it does not detect speech energy, then the call to the new party is considered a failure and dropped. If this field is set to "B" for blind, then the voice platform does not check for speech energy. In order to perform intelligent actions, you must have IVC analog ports or T1/E1 SSP digital ports. ¹ Please see your switch manual for specific field settings.
Default Transfer Type	During a transfer, the voice platform moves a call from one extension to another. This field determines whether Dial Plan checks for speech energy and call progress tones before transferring a call. If this field is set to "I" for Intelligent and Dial Plan hears a non-answer call-progress tone, such as a busy signal, or if it does not detect speech energy, then the call to the new party is considered a failure and dropped. If this field is set to "B" for blind, then Dial Plan transfers the call without checking for speech energy or call progress tones. In order to perform intelligent actions, you must have IVC analog ports or T1/E1 SSP digital ports. ¹ Please see your switch manual for specific field settings.
Intelligent Answer Supervision	If this field is set to "Y," the voice platform waits for speech energy (including music-on-hold) before adding a party to the conference call and then loops as it recites "Press one to connect" to the called party. If "N," the voice platform adds the called party as soon as it detects speech energy. The default value is "N."

Continued on next page

Table 3-1. Field Descriptions for Application Specific Settings — *Continued*

Field	Description
Blind Answer Supervision	Enter “Y” if Dial Plan should not wait for speech energy before prompting the called party to enter a touch-tone response during a conference call. If this field is set to “Y,” then Dial Plan prompts continuously. The default value is “N.”
Number of Loops for Answer Supervision	This field, which applies to conference calls, allows you to set the number of times Dial Plan will prompt the person receiving the call for a touch-tone response before Dial Plan considers the call a failure.

1. The Line Side E1/T1 card (AYC21) provides dial-tone supervision to accommodate intelligent transfers. This is particularly important when used with Callback Messaging. With the older AYC LS-T1 board, on occasion, call center agents would get callback messages played back to them in the middle since there is no supervision on these cards. Callback messages began to play based on a timing interval and not on positive answer detection that has now been added to the AYC21 card. While the AYC21 provides significant improvements to the transfer option within the PBX, reliable intelligent transfers into the Public Switched Network (PSN) vary. It is recommended that Callback messages to the PSN be configured for blind transfer.

Applying Default Settings

This option enables you to return the voice platform application settings to the default settings. For example, you have changed the prefix lists. Dial Plan gives you two ways to apply the default settings to applications:

- Apply the default settings to an individual application using Application Specific Settings menu option.
- Apply the default settings to several applications simultaneously using the Select Default menu option. See “Select Defaults” on page 3-49 for more information.

Use the following steps to apply the default settings to the selected voice platform application:

1. Start at the Application Specific Settings menu and select

```
> Customer Assist
```

The system displays the Application Specific Settings Configuration Defaults form (Figure 3-1 and Figure 3-2).

⚠ CAUTION:

Do not proceed with the next step unless you want to change all the fields to the default settings.

2. Press DEFAULTS (F4).
3. Close the form.

Your changes are saved automatically.

Area Specific Settings


This menu allows you to perform two types of administration:

- Area Codes and Prefixes that Dial Plan uses to determine whether the number it is given must be dialed as a local number, a nearby long distance number, or a distant long distance number
- Non-Toll Local Area Codes allows you to specify the area codes and prefixes that should be treated as local telephone numbers.

Access Area Codes and Prefixes

Use the following steps to access the Area Specific Settings menu:

1. Start at the Dial Plan Administration menu and select

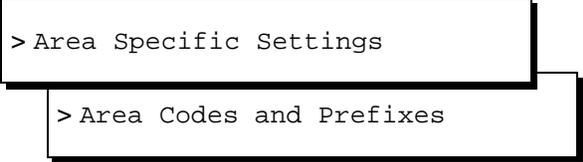

```
> Area Specific Settings
> Area Codes and Prefixes
```

The system displays the Area Codes and Prefixes form (Figure 3-3).

```

LUCENT TECHNOLOGIES Dial Plan - August 10, 1998
1 Dial Plan Administration
Application Specific Settings
>Area Specific Settings
Switch Specific Settings
Function Specific Settings
Select Defaults
Backup and Restore
Exit
2 Area Specific Settings
>Area Codes and Prefixes
Non-Toll Local Area Codes

3 Area Codes and Prefixes

Local Country Code: 1
Local City/Area Code:
Local Phone Number Format Type: F
City/Area Code Length: 3
Prefix Length: 3
Subscriber Number Minimum Length: 7

HELP CHOICES CLOSE PREUPAGE NEXTPAGE CANCEL REFRESH
    
```

Figure 3-3. Area Codes and Prefixes form, screen 1

```

LUCENT TECHNOLOGIES Dial Plan - August 10, 1998
3 Area Codes and Prefixes
Default is Nearby Long Distance: N
Local Call Prefix Codes:
____
____
____
____
Nearby Long Distance Prefix Codes:
____
____
____
____
Nearby? -- Y(es) or N(o) followed by the Return or ENTER key.
HELP CHOICES CLOSE PREUPAGE NEXTPAGE CANCEL REFRESH
    
```

Figure 3-4. Area Codes and Prefixes form, screen 2

The following table describes each field that appears in the Area Codes and Prefixes form. Use these descriptions to determine what to enter into each field.

Table 3-2. Field Descriptions for Area Specific Settings

Field	Description
Local Country Code	The country code for the site. Use "1" in the United States. Dial Plan checks the Local Country Code field to determine whether an outbound call is international. If the outbound call country code, which is provided by the voice platform application, is different from the Local Country Code field, Dial Plan determines the call is international.
Local City/Area Code	The city/area code of the site. The term area code is used in North America. In other countries, it may be known as city code. If the city/area code on an outbound call does not match this entry, then Dial Plan determines the telephone number is a long distance number.
Local Phone Number Format Type	Local telephone numbers and city/area codes are either fixed in length, such as in the United States, or variable in length, such as in Europe. Use "F" for fixed or "V" for variable length.
City/Area Code Length	The number of digits in the city/area code part of a telephone number. In North America, an area code is three digits in length. If the length is variable, enter the minimum number of digits in a city/area code.

Continued on next page

Table 3-2. Field Descriptions for Area Specific Settings — *Continued*

Field	Description
Prefix Length	The number of digits in the prefix part of the subscriber number. For instance, the subscriber number 971-2000 has the prefix 971. Dial Plan parses the prefix from the subscriber number. It compares the prefix to the digits in the prefix lists, either the Local Call Prefix Codes list or the Nearby Long Distance Prefix Codes list, to determine if the outbound call is local or nearby long distance. In North America, the prefix length is three. This field is used only in the US to distinguish whether a telephone number is local or nearby long distance. Fixed format telephone numbers require an entry in this field. Leave this field blank for variable format telephone numbers.
Subscriber Number Minimum Length	The minimum number of digits in a subscriber number in your local city/area code, excluding any access codes. A local outbound call is any call outside your switch but within your local network or numbering area. Dial Plan considers any number shorter than this size as an error except internal extensions. In North America, the subscriber number length is fixed at seven. You must dial seven digits to make a local outbound call.

Continued on next page

Table 3-2. Field Descriptions for Area Specific Settings — *Continued*

Field	Description
Local Call Prefix Codes	<p>A list of prefix codes for local telephone numbers (Leave this list blank for variable length format telephone numbers). Dial Plan uses this list to determine whether the prefix of the telephone number passed by the voice platform application is local. This field is used only for determining the type of call. If Dial Plan determines the number is local, it will not dial a city/area code.</p> <p>If you set the <code>Default is Nearby Long Distance</code> field to "N," you do not need to enter prefixes into this list (For fixed format telephone numbers, the <code>Default is Nearby Long Distance</code> field requires an entry). Dial Plan assumes that any number that does not appear in either list should be dialed as a local number. However, you must complete the <code>Nearby Long Distance Prefix Codes</code> field. Delimit each entry with a space.</p>

Continued on next page

Table 3-2. Field Descriptions for Area Specific Settings — Continued

Field	Description
Nearby Long Distance Prefix Codes	<p>A list of prefix codes for nearby long distance telephone numbers (Leave this list blank for variable length format telephone numbers). Dial Plan uses this list to determine whether the prefix of the telephone number passed by the voice platform application is nearby long distance. This field is used only for determining the type of call. If Dial Plan determines the number is nearby long distance, it will dial the city/area code.</p> <p>If you set the <code>Default is Nearby Long Distance</code> field to "Y," you do not need to enter prefixes into this field (For fixed format telephone numbers, the <code>Default is Nearby Long Distance</code> field requires an entry). Dial Plan assumes that any number that does not appear in either list should be dialed as a nearby long distance number. However, you must complete the <code>Local Call Prefix Codes</code> field. Delimit each entry with a space.</p>

Continued on next page

Table 3-2. Field Descriptions for Area Specific Settings — Continued

Field	Description
Default is Nearby Long Distance	Dial Plan compares the prefix of the telephone number the voice platform application provides to the prefix numbers in the Local Call Prefix Codes and Nearby Long Distance Prefix Codes fields. If the prefix does not appear in either list, then Dial Plan cannot determine whether the number is local or nearby long distance. If the site has fixed format telephone numbers and the Default is Nearby Long Distance field is set to "Y," then Dial Plan considers the number nearby long distance. Dial Plan inserts the City/Area Code and Long Distance Access Code field values in the Dial String. If the site has fixed format telephone numbers and the Default is Nearby Long Distance field is set to "N," then Dial Plan considers the number local. It does not include the City/Area Code or Long Distance Access Code field values in the Dial String. This field defaults to "N."


Maintaining City/Area Codes and Prefixes

If you have an area code split or a new prefix in your area, you may need to make changes to the voice platform applications. You can do this using Dial Plan Administration.

Changing Area Codes

Use the following steps to change an area code:

1. Start at the Dial Plan Administration menu and select

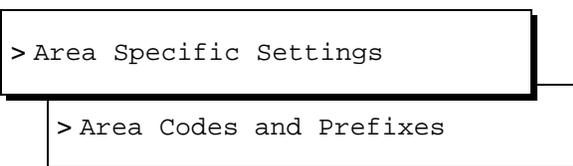

The system displays the Area Codes and Prefixes form (Figure 3-3).

2. Enter the new area code into the `Local City/Area Code` field.
3. Close the form.

Your changes are saved automatically.

To Add, Delete, or Change a Prefix

NOTE:

This form allows you to administer prefixes WITHIN your area code. See “Access Non-Toll Local Area Codes” on page 3-16 for information on how to administer prefixes for an area code that is different from your own.

The prefix lists apply to two types of telephone number formats: Fixed and Variable. Read the section below that corresponds to the format of the telephone numbers dialed from your site:

- Fixed length — See “Fixed Length City/Area Code and Local Subscriber Number”.
- Variable length — See “Variable Length City/Area Codes and Local Subscriber Number”.

Fixed Length City/Area Code and Local Subscriber Number. The Area Specific Settings form enables you to maintain two local subscriber number prefix lists for prefixes WITHIN your area code. (See “Access Non-Toll Local Area Codes” on page 3-16 for information on how to administer prefixes for an area code that is different from your own.) Dial Plan uses these lists to determine whether it must dial the long distance access code for a number within your local city/area code. Dial Plan checks to see whether the prefix of the telephone number passed by the voice platform application matches the prefixes that appear in either list. Prefixes are categorized as follows:

- Prefixes that require the long distance access code
- Prefixes that do not require the long distance access code

If the prefix does not appear in either list, Dial Plan checks the `Default to Nearby Long Distance` field to determine what type of call to make.

- If the field is set to “Y,” Dial Plan uses long distance access for this number.
- If the field is set to “N,” Dial Plan does not use long distance access for this number.

Add or Delete Prefixes or Change Default Setting. Use the following steps to add or delete prefixes for your area code, or change the `Default to Nearby Long Distance` field:

1. Start at the Area Specific Settings menu and select Non-Toll Local Area Codes.

2. Select one of the following:
 - Add Area Code
 - Copy Area Code
 - Delete Area Code
3. Do one of the following:
 - If you are adding an area code, enter your changes. Press NEXTPAGE (F5) to scroll down to the next screen.
 - If you are copying an area code, enter your changes.
 - If you are deleting an area code, highlight the area code you wish to delete and press MARK (F2).
4. Press CLOSE (F3).

Dial Plan saves your changes automatically.

Variable Length City/Area Codes and Local Subscriber Number. Dial Plan does not check the prefix lists for variable format telephone numbers. For variable format, answer the following question before setting the Default is Nearby Long Distance field:

- Do some numbers within your Local City/Area Code require long distance service?
 - If no, then set the Default is Nearby Long Distance field to "N."
 - If yes, then set the Default is Nearby Long Distance field to "Y."

Access Non-Toll Local Area Codes

This menu option allows you to perform three types of administration.

- Add Area Codes allows you to add area codes that are different from your own but must be dialed as local telephone numbers.
- Copy Area Codes allows you to copy the settings of an area code to create a new one.
- Delete Area Codes allows you to delete an area code from the system.

```

LUCENT TECHNOLOGIES Dial Plan - August 10, 1998
1 Dial Plan Administra 4 Add Non-Toll Area Code
Application Specific Set
>Area Specific Settings
Switch Specific Settings
Function Specific Settin
Select Defaults
Backup and Restore
Exit

City/Area Code:
Default is Nearby Long Distance: N

Local Call Prefix Codes:
____
____
____
____

Nearby Long Distance Prefix Codes:
____
____
____
____

Enter the City/Area Code followed by the Return or ENTER key.
HELP CHOICES CLOSE DEFAULTS ENTER CANCEL REFRESH
    
```

Figure 3-5. Add Non-Toll Area Code form

The following table describes each field that appears in Add Non-Toll Area Code form. Use these descriptions to determine what to enter into each field.

Table 3-3. Field Descriptions for Add Non-Toll Area Code form

Field	Description
City/Area Code	The city/area code that is considered a local number when dialed from your site. The term area code is used in North America. In other countries, it may be known as city code. If the city/area code on an outbound call does not match this entry, then Dial Plan determines the telephone number is a long distance number.

Continued on next page

Table 3-3. Field Descriptions for Add Non-Toll Area Code form — *Continued*

Field	Description
Default is Nearby Long Distance	Dial Plan compares the prefix of the telephone number the voice platform application provides to the prefix numbers in the Local Call Prefix Codes and Nearby Long Distance Prefix Codes fields. If the prefix does not appear in either list, then Dial Plan cannot determine whether the number is local or nearby long distance. If the site has fixed format telephone numbers and the Default is Nearby Long Distance field is set to "Y," then Dial Plan considers the number nearby long distance. Dial Plan inserts the City/Area Code and Long Distance Access Code field values in the Dial String. If the site has fixed format telephone numbers and the Default is Nearby Long Distance field is set to "N," then Dial Plan considers the number local. It does not include the City/Area Code or Long Distance Access Code field values in the Dial String. This field defaults to "N."

Continued on next page

Table 3-3. Field Descriptions for Add Non-Toll Area Code form — *Continued*

Field	Description
Local Call Prefix Codes	<p>A list of prefix codes for local telephone numbers (Leave this list blank for variable length format telephone numbers). Dial Plan uses this list to determine whether the prefix of the telephone number passed by the voice platform application is local. This field is used only for determining the type of call. If Dial Plan determines the number is local, it will not dial a city/area code.</p> <p>If you set the <code>Default is Nearby Long Distance</code> field to "N," you do not need to enter prefixes into this list (For fixed format telephone numbers, the <code>Default is Nearby Long Distance</code> field requires an entry). Dial Plan assumes that any number that does not appear in either list should be dialed as a local number. However, you must complete the <code>Nearby Long Distance Prefix Codes</code> field. Delimit each entry with a space.</p>

Continued on next page

Table 3-3. Field Descriptions for Add Non-Toll Area Code form — *Continued*

Field	Description
Nearby Long Distance Prefix Codes	<p>A list of prefix codes for nearby long distance telephone numbers (Leave this list blank for variable length format telephone numbers). Dial Plan uses this list to determine whether the prefix of the telephone number passed by the voice platform application is nearby long distance. This field is used only for determining the type of call. If Dial Plan determines the number is nearby long distance, it will dial the city/area code.</p> <p>If you set the <code>Default is Nearby Long Distance</code> field to "Y," you do not need to enter prefixes into this field (For fixed format telephone numbers, the <code>Default is Nearby Long Distance</code> field requires an entry). Dial Plan assumes that any number that does not appear in either list should be dialed as a nearby long distance number. However, you must complete the <code>Local Call Prefix Codes</code> field. Delimit each entry with a space.</p>

Switch Specific Settings


This menu allows you to perform two types of administration:

- Pre and Post Codes that determine the pauses between the parts of the Dial String
- Format settings that determine the parts of the Dial String for Local, Non-Toll Local, Nearby Long Distance, and Distant Long Distance numbers

Access Switch Specific Settings

Use the following steps to access the Switch Specific Settings screen:

1. Start at the Dial Plan Administration menu and select



```
> Switch Specific Settings
```

The system displays the Switch Specific Settings (Figure 3-6).

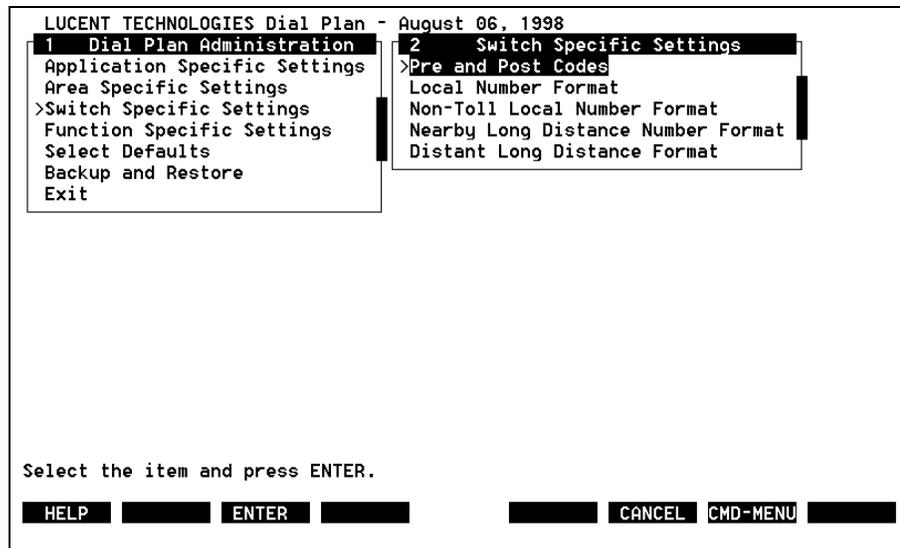


Figure 3-6. Switch Specific Settings screen

Pre and Post Codes

The Pre and Post Codes allow you to specify timing within the Dial String. Use the following steps to access the Pre and Post Codes screen:

1. Start at the Switch Specific Settings menu and select

```
> Pre and Post Codes
```

The system displays the Pre and Post Codes screen (Figure 3-7 and Figure 3-8):

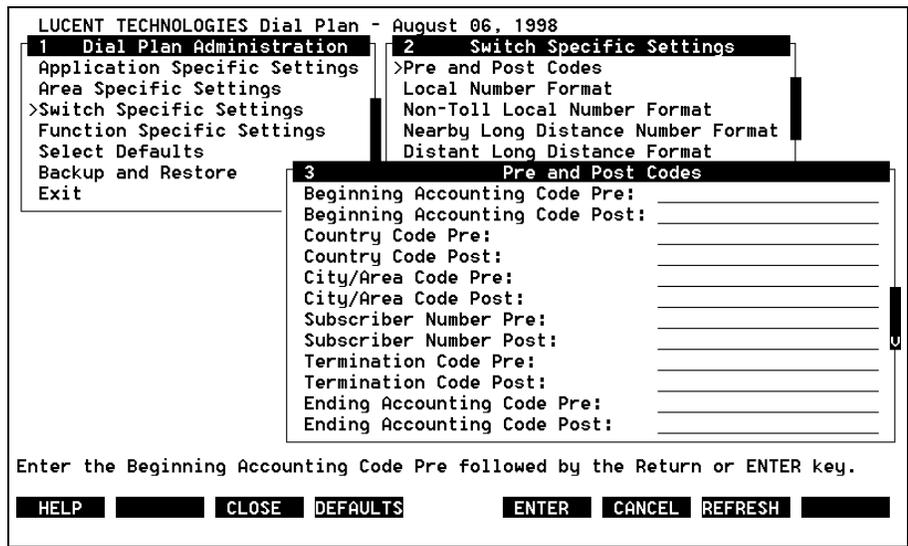


Figure 3-7. Pre and Post Codes Screen, screen 1

```

LUCENT TECHNOLOGIES Dial Plan - August 16, 1998
1 Dial Plan Administration
Application Specific Settings
Area Specific Settings
>Switch Specific Settings
Function Specific Settings
Select Defaults
Backup and Restore
Exit

2 Switch Specific Settings
>Pre and Post Codes
Local Number Format
Non-Toll Local Number Format
Nearby Long Distance Number Format
Distant Long Distance Format

3 Pre and Post Codes
External Display Pre: p0010
External Display Post:
Outside Access Code Pre:
Outside Access Code Post: N0020
Equal Access Code Pre:
Equal Access Code Post:
Long Distance Access Code Pre:
Long Distance Access Code Post:
International Access Code Pre:
International Access Code Post:

Enter the External Display Pre followed by the Return or ENTERRRER
HELP CLOSE DEFAULTS ENTER CANCEL REFRESH
    
```

Figure 3-8. Pre and Post Codes Screen, screen 2

Pre and Post Code Values

Each Pre and Post field specifies the pauses surrounding a given part of the Dial String. Table 3-4 shows the possible entries for the Pre and Post fields. Leave Pre and Post fields blank if Dial Plan should not enter a pause at that point.

Table 3-4. Field Values for Pre and Post Pause Code

Field Value	Constructing Value	Length of Pause
P	Pause	P is equal to one second
pxxxx	Replace xxxx with 0001 to 9999	pxxxx represents pause for xxxx seconds
Nxxxx	Replace xxxx with 0001 to 9999	Nxxxx represents pause for xxxx hundredths of a second

You can use several field values to come up with a specific amount of time. For example, **PPPp0020N0010P** means pause for 24.1 seconds.

Table 3-5 is designed to help you understand each field that appears in the Switch Specific Settings form. Use the field descriptions in conjunction with “Dial Plan Field Values” on page 3-28 to determine what to enter into each field.

Table 3-5. Field Descriptions for Pre and Post Codes

Field	Description
Beginning Accounting Code Pre	Inserts pause before Dial Plan dials the beginning accounting code.
Beginning Accounting Code Post	Inserts pause after Dial Plan dials the beginning accounting code.
Country Code Pre	Inserts a pause before Dial Plan dials the country code.
Country Code Post	Inserts a pause after Dial Plan dials the country code.
City/Area Code Pre	Inserts a pause before Dial Plan dials the city/area code.
City/Area Code Post	Inserts a pause after Dial Plan dials the city/area code.
Subscriber Number Pre	Inserts a pause before Dial Plan dials the subscriber number.
Subscriber Number Post	Inserts a pause after Dial Plan dials the subscriber number.
Termination Code Pre	Inserts a pause before Dial Plan dials the termination code.
Termination Code Post	Inserts a pause after Dial Plan dials the termination code.
Ending Accounting Code Pre	Pre inserts a pause before Dial Plan dials the ending accounting code.
Ending Accounting Code Post	Inserts a pause after Dial Plan dials the ending accounting code.
External Display Pre	Inserts a pause before Dial Plan dials the external display.
External Display Post	Inserts a pause after Dial Plan dials the external display.
Outside Access Code Pre	Inserts a pause before Dial Plan dials the outside access code.
Outside Access Code Post	Inserts a pause after Dial Plan dials the outside access code.
Equal Access Code Pre	Inserts a pause before Dial Plan dials the equal access code.

Continued on next page

Table 3-5. Field Descriptions for Pre and Post Codes — Continued

Field	Description
Equal Access Code Post	Inserts a pause after Dial Plan dials the equal access code.
Long Distance Access Code Pre	Inserts a pause before Dial Plan dials the long distance access code.
Long Distance Access Code Post	Inserts a pause after Dial Plan dials the long distance access code.
International Access Code Pre	Inserts a pause before Dial Plan dials the international access code.
International Access Code Post	Inserts a pause after Dial Plan dials the international access code.

Dial String Formats

Dial Plan allows you to specify the format of the Dial String for each type of call:

- Local Number Format
- Non-Toll Local Number Format
- Nearby Long Distance
- Distant Long Distance Format

Access Dial String Formats

Use the following steps to access the Dial String formats:

1. Start at the Switch Specific Settings menu and do one of the following:
 - Select Local Number Format to instruct Dial Plan what to include in the Dial String for this type of number
 - Select Non-Toll Local Number Format to instruct Dial Plan what to include in the Dial String for this type of number
 - Select Nearby Long Distance Number Format to instruct Dial Plan what to include in the Dial String for this type of number
 - Select Distant Long Distance Format to instruct Dial Plan what to include in the Dial String for this type of number

If you select Local Number Format, the system displays the Local Number Format screen (Figure 3-9):

```

LUCENT TECHNOLOGIES Dial Plan - August 06, 1998
1 Dial Plan Administration
  Application Specific Settings
  Area Specific Settings
  >Switch Specific Settings
  Function Specific Settings
  Select Defaults
  Backup and Restore
  Exit
2 Switch Specific Settings
  Pre and Post Codes
  >Local Number Format
  Non-Toll Local Number Format
  Nearby Long Distance Number Format
  Distant Long Distance Format
3 Local Number Format
  Dial Outside Access Code: Y
  Dial Beginning Accounting Code: N
  Dial Long Distance Access Code: N
  Dial Area Code: N
  Dial Subscriber Number: Y
  Dial Termination Code: N
  Dial Ending Accounting Code: N

Enter Y(es) to dial the Outside Access Code. Enter N(o) to skip it.

HELP CHOICES CLOSE DEFAULTS ENTER CANCEL REFRESH
  
```

Figure 3-9. Local Number Format screen

Dial Plan uses your entries to determine the telephone number parts it should dial for each type of call. For example, you can configure Dial Plan so that it includes an accounting code whenever it dials a nearby long distance telephone number.

Field Descriptions

The following table describes each field that appears in the four Switch Specific Settings forms. Use the field descriptions to determine what to enter into each field. The field descriptions are the same for Local, Non-Toll Local Number, Nearby Long Distance, and Distant Long Distance formats.

Table 3-6. Field Description for Dial String Formats

Field	Description
Dial Outside Access Code	Determines whether Dial Plan includes the Outside Access Code field value in the Dial String. Enter "Y" or "N."
Dial Beginning Accounting Code	Determines whether Dial Plan includes the Beginning Accounting Code field value in the Dial String. Enter "Y" or "N."
Dial Long Distance Access Code	Determines whether Dial Plan includes the Long Distance Access Code field value in the Dial String. Enter "Y" or "N."
Dial Area Code	Determines whether Dial Plan includes the City/Area Code field value in the Dial String. Enter "Y" or "N."
Dial Subscriber Number	Determines whether Dial Plan includes the subscriber number in the Dial String. This field is always set to "Y."
Dial Termination Code	Determines whether Dial Plan includes the termination code in the Dial String. Enter "Y" or "N."
Dial Ending Accounting Code	Determines whether Dial Plan includes the Ending Accounting Code field value in the Dial String. Enter "Y" or "N."

Function Specific Settings

Use the Function Specific Settings screen to configure Dial Plan so that it can perform seven types of telephone actions:

- Conference Actions
- Drop Actions
- Hold Actions
- Intelligent Actions
- Make Call Actions
- Message Waiting Lights
- Transfer Actions

**NOTE:**

For CONVERSANT Version 7.0, you must adjust parameters in order for intelligent external calls to work. See Appendix C, "Intelligent Actions and Speech Energy", for more information about adjusting parameters.

Dial Plan Field Values

In order to perform telephone actions, Dial Plan must pass signals and special instructions to the switch. You must enter these signals and instructions for each telephone action that Dial Plan performs.

Table 3-7 shows the symbol for each signal and instruction. Some switches may require more than one symbol in order to perform a given telephone action. The sequence of the signals and the set of instructions differ for each switch. Appendix B, "Switch Configuration", describes the default settings for each type of switch.

Table 3-7. Dial Plan Field Values

Field Values	Explanation
0-9, #, *	Dial the digits.
D	Wait for dial tone or stutter dial tone; any other call progress reports an error.
F	Flash hook, wait for dial tone.
f	Flash hook.

Continued on next page

Table 3-7. Dial Plan Field Values — *Continued*

Field Values	Explanation
Wxxx	<p>W means pause.</p> <p>xxx means number of rings. Appropriate xxx values are 0001 to 9999. The xxx value must consist of four digits.</p> <p>For example, W0005 means wait for call progress tones for five rings. <i>The "W" command is not supported by all hardware configurations. Specifically, it is not supported for AYC11 and AYC3B voice cards on an LST1 channel. This consistently produces an erroneous timeout error. If you have an AYC11 or AYC3B voice board, you need to make a Blind call.</i></p>
wnnnn	Wait n rings for answer, or no answer, (four digits are required, nnnn must be 0001 to 9999).
P	Pause for 1 second.
pnnnn	Pause for nnnn seconds, (four digits are required, nnnn must be 0001 to 9999).
Nnnnn	<p>N means pause.</p> <p>nnnn means for hundredths of a second. Appropriate nnnn values are 0001 to 9999. The nnnn value must consist of four digits.</p> <p>For example, N0050 means a delay of .5 second.</p>
h	Hang up.
O	Go off hook, wait for dial tone, and dial the next sequence of 0-9, #, *.
o	Go off hook, and dial the next sequence of 0-9, #, *.

Access Function Specific Settings

Use the following steps to access the Function Specific Settings screen:

1. Start at the Dial Plan Administration menu and select

```
> Function Specific Settings
```

The system displays the Function Specific Settings screen (Figure 3-10):

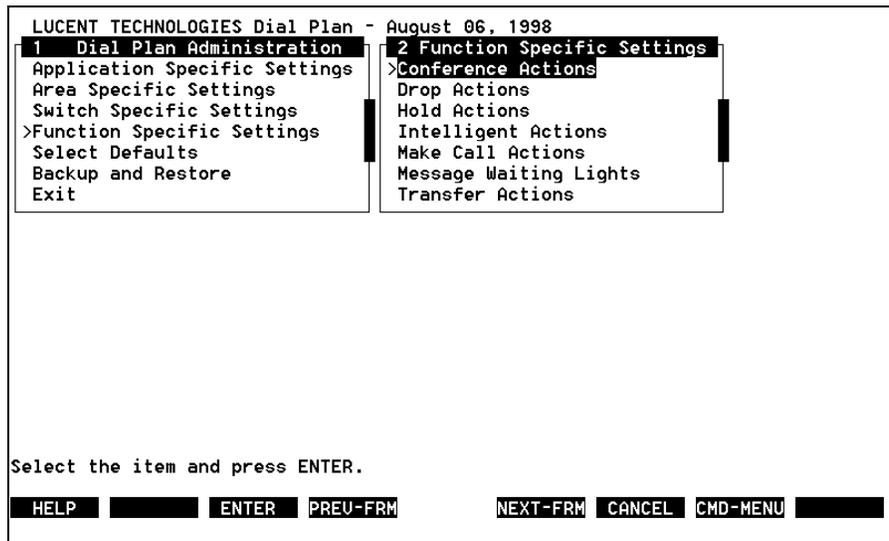


Figure 3-10. Function Specific Settings screen

Conference Actions

The voice platform application uses the Conference Action when it has a connection to one party and wants to add a second party to the call. This creates a conference call that includes the CONVERSANT port, the first party, and the second party.

NOTE:

Customer Assist does NOT use the Conference Action.

Access Conference Actions

Use the following steps to access the Conference Actions screen:

1. Start at the Function Specific Settings menu and select



The system displays the Conference Actions Configuration screen (Figure 3-11):

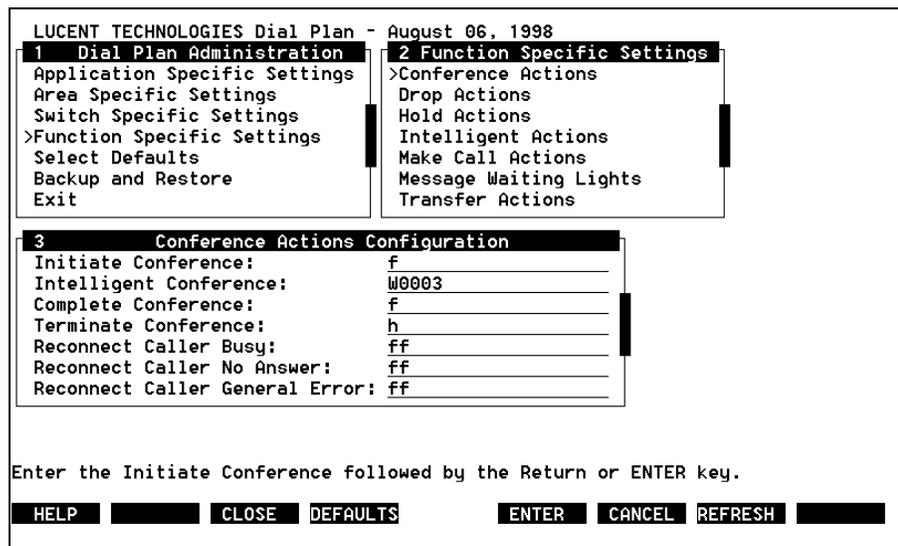


Figure 3-11. Conference Actions Configuration screen

How Conference Actions Work

Dial Plan executes the Conference Action as follows:

- Places the first party on hold through the `Initiate Conference` command.
- For analog or digital ports, Dial Plan waits for tones from the switch.
- Dial Plan then outputs the Dial String. (See “Dial String Construction” on page 1-9 for more information.)

- If the `Intelligent Conference` field is blank, Dial Plan executes the `Complete Conference` field value immediately after dialing the telephone number. This takes the first party off hold so that all three parties are active members of the call. In this case Dial Plan dials in a blind mode. It does not attempt to detect the result of the dialing.
- If the `Intelligent Conference` field has an entry, Dial Plan waits the specified number of ring cycles for the result of the dialing before accepting the status as "ring, no answer". In this case Dial Plan dials in an intelligent mode, that is, it detects the result of the call.
 - If the result is a busy signal, Dial Plan classifies the call as busy and executes the `Reconnect Caller Busy` command. This drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again.
 - If ringing occurs for the number of cycles specified in the `Intelligent Conference` field without answer, Dial Plan classifies the call as "ring, no answer" and executes the `Reconnect Caller No Answer` command. This drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again.
 - If the result of the call is any error tone, Dial Plan classifies the call as an error condition and executes the `Reconnect Caller General Error` command. This drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again.
 - If Dial Plan detects speech energy, it recognizes an answer condition and executes the `Complete Conference` command. It takes the first party off hold.
 - If the voice platform application requires that Dial Plan drops from the conference call, then Dial Plan executes the `Terminate Conference` command. This drops the CONVERSANT port from the call. If at least one of the remaining call parties in a conference call is an internal number, then the current members of the conference remain connected after the CONVERSANT drops from the conference. Otherwise, every member of the conference is disconnected.

Field Descriptions

The following table describes each field that appears in the Conference Actions screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-8. Field Descriptions for Conference Actions

Field	Description
Initiate Conference	Enter the commands the CONVERSANT must deliver to the switch to place the first party on hold. See Table 3-7.
Intelligent Conference	Enter the number of rings Dial Plan should wait for call progress tones when dialing a telephone number during a conference call. The command is entered as Wnnnn . See Table 3-7. If the field is left blank, the conference is blind. Dial Plan will not check for call progress tones.
Complete Conference	Enter the commands the CONVERSANT must deliver to the switch to take the first party off hold. See Table 3-7.
Terminate Conference	Enter the commands the CONVERSANT must deliver to the switch in order to drop from the conference call. See Table 3-7.
Reconnect Caller Busy	Enter the commands the CONVERSANT must deliver to the switch in order to end the call to the second party because of a busy signal. This command takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.
Reconnect Caller No Answer	Enter the commands the CONVERSANT must deliver to the switch in order to end the call to the called party when the called party does not answer within the specified number of ring cycles. This command takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.
Reconnect Caller General Error	Enter the commands the CONVERSANT must deliver to the switch in order to end the call to the second party because of an error tone. This command takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.

Drop Actions

The voice platform application uses the Drop Action to drop the last party added to the conference call. If the CONVERSANT port is connected to only one party, see your switch manual to find out what happens to that party.

Access Drop Actions

Use the following steps to access the Drop Actions screen:

1. Start at the Function Specific Settings menu and select



```
> Drop Actions
```

The system displays the Drop Actions Configuration screen (Figure 3-12):

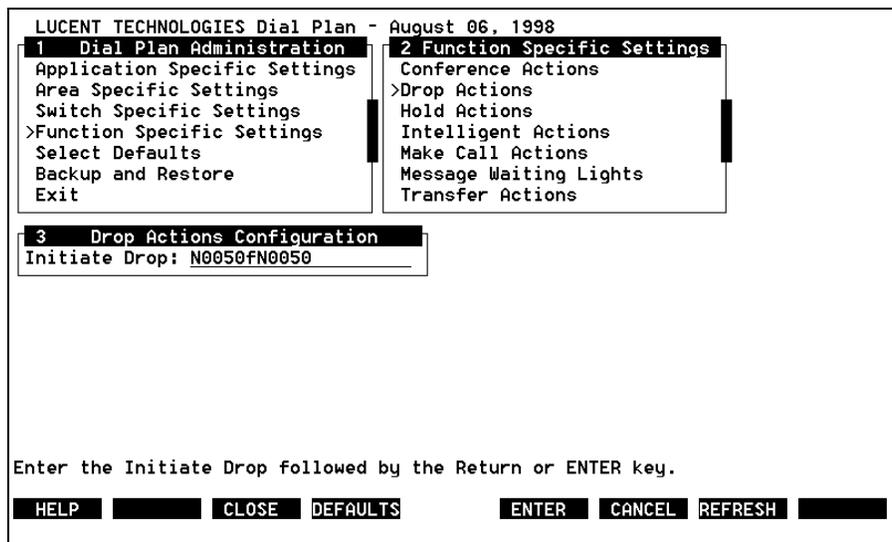


Figure 3-12. Drop Actions Configuration screen

How Drop Actions Work

Dial Plan executes the Drop Action as follows:

- Executes the `Initiate Drop` command to drop the last party added to the conference.

Field Descriptions

Table 3-9 describes each field that appears in the Drop Actions screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-9. Field Descriptions for Drop Actions

Field	Description
Initiate Drop	Enter the command the CONVERSANT must deliver to the switch to drop the last caller from conference. Include 1/2 second pauses before and after the flash to insure the switch recognizes the command. The command is entered as NxxxxfNxxxx. See Table 3-7.

Hold Actions

The voice platform uses the Hold Action to:

- Put the caller connected to the port on hold. A conference call can only connect three parties (including the CONVERSANT). If you attempt to add another party to a three-party conference call, the CONVERSANT drops the last party added to the conference call.
- Retrieve a caller from hold. It returns the party on hold to an active state.

Access Hold Actions

Use the following steps to access the Hold Actions screen:

1. Start at the Function Specific Settings menu and select



> Hold Actions

The system displays the Hold Actions Configuration screen (Figure 3-13):

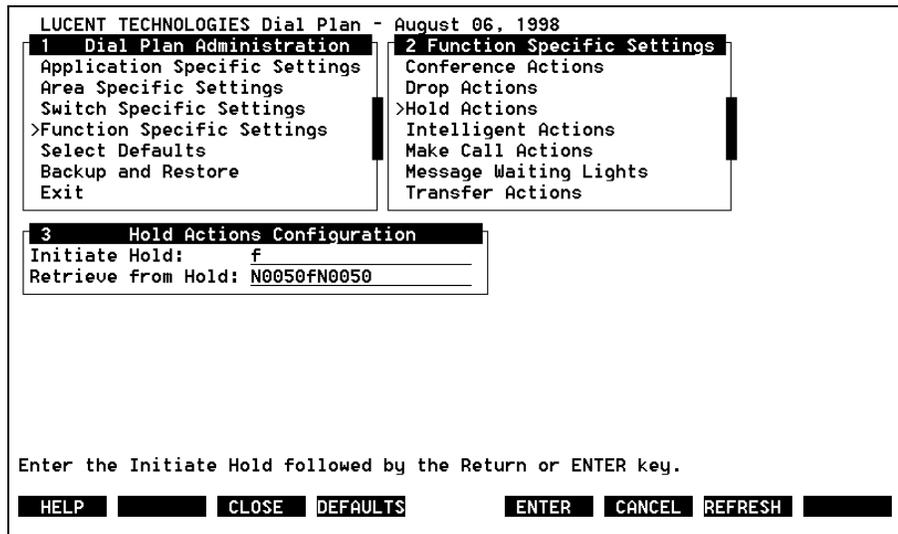


Figure 3-13. Hold Actions Configuration screen

How Hold Actions Work

Dial Plan executes the Hold Action as follows:

- Places a party on hold using the `Initiate Hold` command.
- Removes a party from hold using the `Retrieve from Hold` command. This makes the party an active participant in the call again.

Field Descriptions

The following table describes each field that appears in the Hold Actions screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-10. Field Descriptions for Hold Actions

Field	Description
Initiate Hold	Enter the command(s) the CONVERSANT must deliver to the switch to place a caller on hold. See Table 3-7.
Retrieve from Hold	Enter the command(s) the CONVERSANT must deliver to the switch to retrieve a caller from hold. See Table 3-7.

Intelligent Actions

The voice platform application uses the Intelligent Action to detect the result of a call placed by Dial Plan. The Intelligent Action returns the result to the voice platform application. This action applies to conference calls. It must detect speech energy before it connects the original party to the called party.

Access Intelligent Actions

Use the following steps to access the Intelligent Actions screen:

1. Start at the Function Specific Settings menu and select



> Intelligent Actions

The system displays the Intelligent Actions screen (Figure 3-14):

```
LUCENT TECHNOLOGIES Dial Plan - August 06, 1998
1 Dial Plan Administration
Application Specific Settings
Area Specific Settings
Switch Specific Settings
>Function Specific Settings
Select Defaults
Backup and Restore
Exit

2 Function Specific Settings
Conference Actions
Drop Actions
Hold Actions
>Intelligent Actions
Make Call Actions
Message Waiting Lights
Transfer Actions

3 Intelligent Actions Configuration
Wait for Response: W0003

Enter the Wait for Response followed by the Return or ENTER key.

HELP  CLOSE  DEFAULTS  ENTER  CANCEL  REFRESH
```

Figure 3-14. Intelligent Actions Configuration screen

How Intelligent Actions Work

Dial Plan executes the Intelligent Action as follows:

- The Intelligent Action begins to operate as soon as dialing is finished.
- If the `Wait for Response` field is blank, Dial Plan acts in a blind mode. It does not check for speech energy or call progress tones and returns a successful result immediately, regardless of the outcome of the dialing.
- If the `Wait for Response` field has an entry, Dial Plan detects and returns one of the following results (See "Conference Actions" on page 3-30 for more information):
 - busy, if it detects busy tone
 - error, if it detects any sort of error tone
 - "ring, no answer", if it detects ringing for the number of ring cycles specified in the `Wait for Response` field
 - answer, if it detects speech energy before the number of ring cycles specified in the `Wait for Response` field elapse

Field Descriptions

Table 3-11 describes each field that appears in the Intelligent Actions screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-11. Field Descriptions for Intelligent Actions

Field	Description
Wait for Response	Enter the number of rings Dial Plan should wait for speech energy and call progress tones. The command is entered as Wxxxx. See Table 3-7.

Make Call Actions

The voice platform application uses the Make Call Action to dial a number. It provides the number of the party to dial and instructs Dial Plan whether or not to determine the result of the dialing; that is, whether the dialing is blind or intelligent.

During a Make Call, the voice platform application can pass Dial Plan information digits, or call information, that Dial Plan enters immediately after dialing the extension number. DEFINITY can deliver caller information to the agent's display or make it available for screen pop solutions. For such situations, the voice platform application also provides Dial Plan with the call information digits. Dial Plan dials these digits immediately after entering the party's extension number.

⇒ NOTE:

See your switch manual for information on how to set up a vector to handle extra dialed numbers.

Access Make Call Actions

Use the following steps to access the Make Call Actions screen:

1. Start at the Function Specific Settings menu and select

> Make Call Actions

The system displays the Make Call Configuration screen (Figure 3-15):

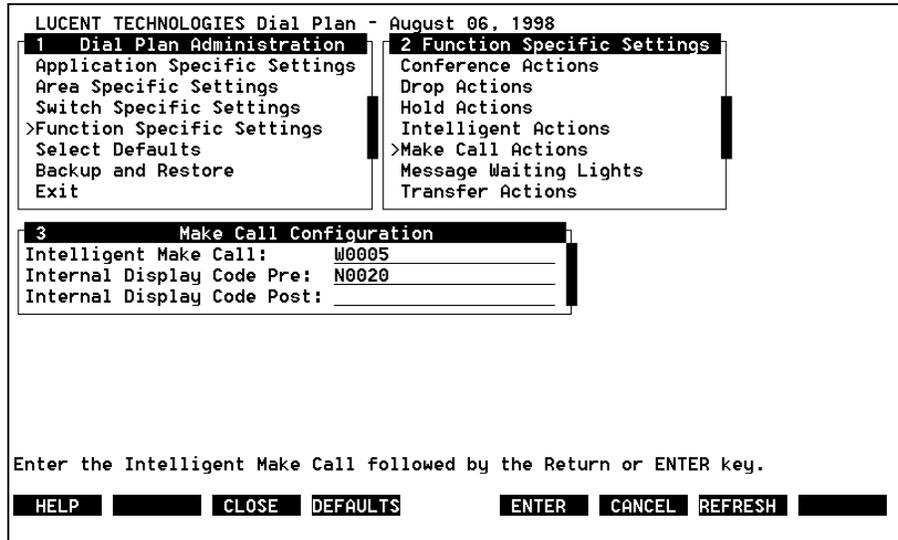


Figure 3-15. Make Call Configuration screen

How Make Call Actions Work

Dial Plan executes the Make Call Action as follows:

- Dial Plan dials the adjusted Dial String. (See “Dial String Construction” on page 1-9 for more information.) If the voice platform application provides call information digits, Dial Plan dials these digits. The *Internal Display Code Pre* and *Internal Display Code Post* fields determine whether Dial Plan inserts a pause between the adjusted Dial String and these digits.
- If the *Intelligent Make Call* field is blank, Dial Plan acts in a blind mode. It does not check for speech energy or call progress tones and returns a successful result immediately, regardless of the outcome of the dialing.

- If the `Intelligent Make Call` field has an entry, Dial Plan detects and returns one of the following results (See “Conference Actions” on page 3-30 for more information):
 - busy, if it detects busy tone
 - error, if it detects any sort of error tone
 - "ring, no answer", if it detects ringing for the number of ring cycles specified in the `Intelligent Make Call` field
 - answer, if it detects speech energy before the number of ring cycles specified in the `Intelligent Make Call` field elapse

Field Descriptions

Figure 3-12 describes each field that appears in the Make Call Actions screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-12. Field Descriptions for Make Call Actions

Field	Description
<code>Intelligent Make Call</code>	<p>Enter the number of rings Dial Plan should wait for speech energy and call progress tones. The command is entered as <code>Wxxxx</code>. See Table 3-7.</p> <p>If the field is left blank, then the Make Call is blind. Dial Plan will not check for speech energy or call progress tones.</p>
<code>Internal Display Code Pre</code>	Enter the length of the pause Dial Plan must insert into the Dial String before the Internal Display Code, if any. See Table 3-7.
<code>Internal Display Code Post</code>	Enter the length of the pause Dial Plan must insert into the Dial String after the Internal Display Code, if any. See Table 3-7.


Message Waiting Lights

The voice platform application uses the Message Waiting Lights Action to illuminate and extinguish message waiting lights. It provides the extension number of the message waiting light and instructs the Message Waiting Lights Action either to illuminate or to extinguish the message waiting light.

Access Message Waiting Lights Actions


Use the following steps to access the Message Waiting Lights Actions screen:

1. Start at the Function Specific Settings menu and select



```
> Message Waiting Lights
```

The system displays the Message Waiting Lights Configuration screen (Figure 3-16):

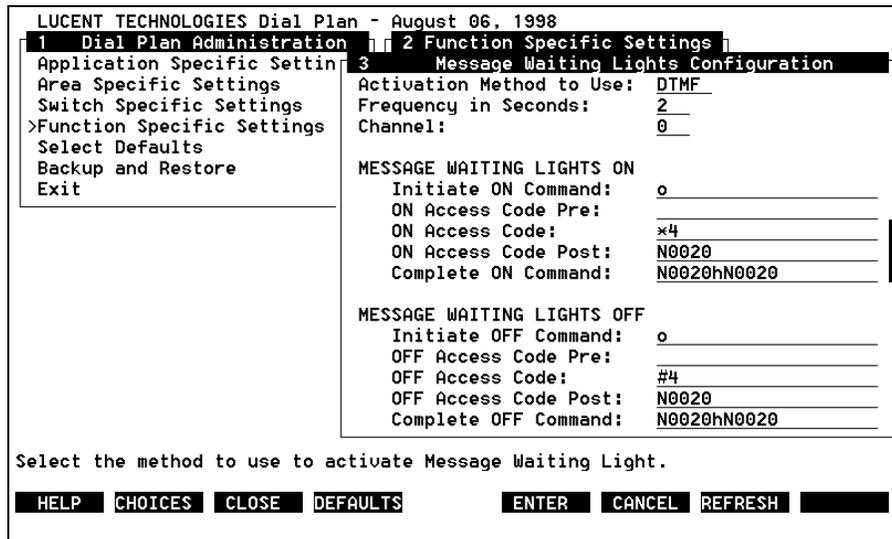

```
LUCENT TECHNOLOGIES Dial Plan - August 06, 1998
1 Dial Plan Administration | 2 Function Specific Settings |
Application Specific Settings | 3 Message Waiting Lights Configuration
Area Specific Settings
Switch Specific Settings
>Function Specific Settings
Select Defaults
Backup and Restore
Exit
Activation Method to Use: DTMF
Frequency in Seconds: 2
Channel: 0
MESSAGE WAITING LIGHTS ON
Initiate ON Command: o
ON Access Code Pre:
ON Access Code: x4
ON Access Code Post: N0020
Complete ON Command: N0020hN0020
MESSAGE WAITING LIGHTS OFF
Initiate OFF Command: o
OFF Access Code Pre:
OFF Access Code: #4
OFF Access Code Post: N0020
Complete OFF Command: N0020hN0020
Select the method to use to activate Message Waiting Light.
HELP CHOICES CLOSE DEFAULTS ENTER CANCEL REFRESH
```

Figure 3-16. Message Waiting Lights Configuration screen

How Message Waiting Lights Actions Work

Dial Plan executes the Message Waiting Light Action as follows:

- Uses the method specified in the `Activation Method to Use` field to illuminate and extinguish message waiting lights. At present, Dial Plan supports one method:
 - Inband DTMF tone signaling through a `CONVERSANT` port
- Dial Plan uses the port specified in the `Channel` field for the signaling activity. If the voice platform application requires a change in message waiting light condition, Dial Plan waits the number of seconds specified in the `Frequency in Seconds` field, as follows:
 - If another request is not made before the number of seconds expires, Dial Plan makes the change in the message waiting light condition.
 - If another request is made before the number of seconds expires, Dial Plan waits the number of seconds specified in the `Frequency in Seconds` field to see whether an additional request is made. It continues waiting until the number of `Frequency in Seconds` passes without a request, and then changes the condition.
- Dial Plan illuminates a message waiting light as follows:
 - Executes the `Initiate ON Command` command to start the message waiting light calling activity on the port. In most cases, this activity is a simple off hook action.
 - Dial Plan pauses for the `ON Access Code Pre` field interval and then dials the `ON Access Code` field value. It pauses for the `ON Access Code Post` field interval and then dials the extension for the message waiting light.
 - Finally, Dial Plan executes the `Complete ON Command` field commands. This completes the activity.
- To extinguish message waiting lights, Dial Plan uses a method similar to that for illumination. However, to extinguish message waiting lights, Dial Plan uses the corresponding `OFF` field values.

Field Descriptions

Table 3-13 describes each field that appears in the Message Waiting Lights Configuration screen. Use these descriptions in conjunction with Table 3-7 to determine what to enter into each field.

Table 3-13. Field Descriptions for Message Waiting Lights Actions

Field	Description
Activation Method to Use	Enter the method Dial Plan should use to turn on Message Waiting Lights. Dial Plan currently supports one method: DTMF uses inband signaling Feature Access Codes to inform the switch to turn the Message Waiting Lights on and off. Dial Plan uses the port specified in the <code>Channel</code> field to inform the switch of the action it wants to take.
Frequency in Seconds	Enter the number of seconds Dial Plan should pause before sending a request to illuminate or extinguish a message waiting light.
Channel	Enter the number of the port the system uses to turn message lights on or off. If this field is blank, you will not be able to light or extinguish Message Waiting Lights.
MESSAGE WAITING LIGHTS ON	This option instructs Dial Plan how to turn on Message Waiting Lights.
Initiate ON Command	Enter the command the CONVERSANT must pass to the switch to start Message Waiting Light activity. This command takes the CONVERSANT off hook. See Table 3-7.
ON Access Code Pre	Enter the number of seconds Dial Plan must pause before dialing the Access Code, if required by the switch. See Table 3-7.
ON Access Code	Enter the touch-tone code specified on the switch that allows you to turn on Message Waiting Lights.

Continued on next page

**Table 3-13. Field Descriptions for Message Waiting Lights Actions —
Continued**

Field	Description
ON Access Code Post	Enter the number of seconds Dial Plan must pause after dialing the Access Code, if required by the switch. See Table 3-7.
Complete ON Command	Enter the command the CONVERSANT must pass to the switch to complete the Message Waiting Lights On Action.
MESSAGE WAITING LIGHTS OFF	This option instructs Dial Plan how to turn off the Message Waiting Lights.
Initiate OFF Command	Enter the command Dial Plan must pass to instruct the CONVERSANT to go off hook.
OFF Access Code Pre	Enter the number of seconds Dial Plan must pause before dialing the Access Code, if required by the switch. See Table 3-7.
OFF Access Code	Enter the touch-tone code specified on the switch that allows you to turn off Message Waiting Lights.
OFF Access Code Post	Enter the number of seconds Dial Plan must pause after dialing the Access Code, if required by the switch. See Table 3-7.
Complete OFF Command	Enter the command the CONVERSANT must pass the switch in order to complete the Message Waiting Lights Off Action.

Transfer Actions

The voice platform application uses the Transfer Action to transfer a call. The voice platform application provides the transfer number and then determines whether the Transfer Action should determine the result of the dialing, that is, whether the dialing is blind or intelligent.

Access Transfer Actions

Use the following steps to access the Transfer Actions screen:

1. Start at the Function Specific Settings menu and select

```
> Transfer Actions
```

The system displays the Transfer Actions Configuration screen (Figure 3-17):

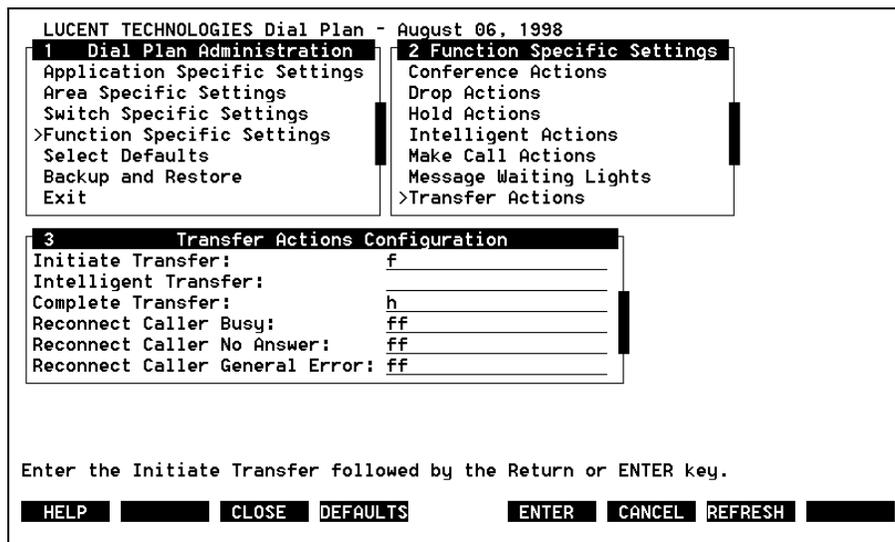


Figure 3-17. Transfer Actions Configuration screen

How Transfer Actions Work

Dial Plan executes the Transfer Action as follows:

- Places the original party on hold through the Initiate Transfer command.
- For analog or digital ports, Dial Plan waits for tone from the switch.
- Dial Plan then outputpulses the Dial String number. (See “Dial String Construction” on page 1-9 for more information.)

- If the `Intelligent Transfer` field is blank, Dial Plan executes the `Complete Transfer` command immediately after dialing. This drops the `CONVERSANT` port from the call and connects the first party to the new party. When the field is left blank, Dial Plan acts in a blind mode. It does not check for speech energy or call progress tones. It returns a successful result immediately, regardless of the outcome of the dialing.
- If the `Intelligent Transfer` field has an entry, Dial Plan waits the specified number of ring cycles before accepting the status as "ring, no answer". When the field contains an entry, Dial Plan acts in an intelligent mode. It detects the result of the dialing.
 - If the result is busy, then Dial Plan executes the `Reconnect Caller Busy` command. This drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again.
 - If ringing occurs for the number of cycles specified in the `Intelligent Transfer` field without answer, then Dial Plan recognizes a "ring, no answer" condition and executes the `Reconnect Caller No Answer` command, to drop the dialing attempt and take the first party off hold. The first party becomes an active member of the call again.
 - If the result is error tone, then Dial Plan executes the `Reconnect Caller General Error` command, to drop the dialing attempt and take the first party off hold. The first party becomes an active member of the call again.
 - If Dial Plan detects speech energy, then it recognizes an answer condition and executes the `Complete Transfer` command to connect the original party on the call to the new party. It then drops the `CONVERSANT` port from the call.

Field Descriptions

Table 3-14 describes each field that appears in the Transfer Actions screen. Use these descriptions in conjunction with Table 3-7 on page 3-28 to determine what to enter into each field.

Table 3-14. Field Descriptions for Transfer Actions

Field	Description
<code>Initiate Transfer</code>	Enter the command the <code>CONVERSANT</code> must pass to the switch in order to put the first party on hold. See Table 3-7.

Continued on next page

Table 3-14. Field Descriptions for Transfer Actions — *Continued*

Field	Description
Intelligent Transfer	<p>Enter the number of ring cycles Dial Plan should wait for speech energy before returning the result of “ring, no answer” to the application. The command is entered as Wxxxx. See Table 3-7.</p> <p>If this field does not contain a value, then Dial Plan dials in a blind mode.</p>
Complete Transfer	<p>Enter the command the CONVERSANT must pass to the switch when the call is considered a success. This command connects the first party to the second party. It then drops the CONVERSANT port from the call. See Table 3-7.</p>
Reconnect Caller Busy	<p>Enter the command the CONVERSANT must pass to the switch to drop the dialing attempt because Dial Plan reaches a busy signal. This command takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.</p>
Reconnect Caller No Answer	<p>Enter the command the CONVERSANT must pass to the switch to drop the dialing attempt because Dial Plan does not hear speech energy within the specified number of rings. This command drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.</p>

Continued on next page

Table 3-14. Field Descriptions for Transfer Actions — *Continued*

Field	Description
Reconnect Caller General Error	Enter the command the CONVERSANT must pass to the switch to drop the dialing attempt because Dial Plan detects an error tone. This command drops the dialing attempt and takes the first party off hold. The first party becomes an active member of the call again. See Table 3-7.


Select Defaults

This option allows you to set one of the Default Package(s) installed on your system as the default settings. Once you have selected default settings, you can apply them to your applications, instead of having to administer each application separately. See “Applying Default Settings” on page 3-7 for more information. This option also allows you to mark an application you want to return to the default settings.

Access Select Defaults

Use the following steps to access the Select Defaults screen.

1. Start at the Dial Plan Administration and select



The system displays the Select Application screen (Figure 3-18):

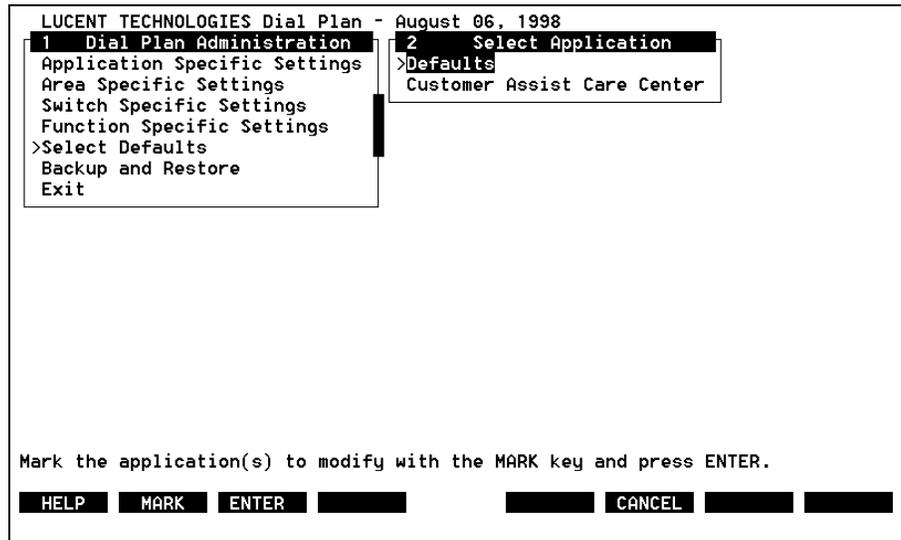


Figure 3-18. Select Application screen

Modify Default Settings

Use the following steps to select the Dial Plan default settings and/or apply the default settings to individual applications:

1. Start at the Select Defaults screen and do one of the following:



CAUTION:

Make sure that current settings in the marked application are not needed before overwriting them.

- If you want to change the Dial Plan default settings, highlight Defaults and press MARK (F2).
 - If you want to apply the Dial Plan default settings to an individual application, highlight that application and press MARK (F2).
2. When you have marked each application you want to administer, press (ENTER).
 3. Select the Dial Plan default settings.



NOTE:

Your options depend on what default packages are installed on your system.

4. Press **ENTER**.
5. Press **CONT** (F3) to accept the new settings. Press **CANCEL** (F6) to abort.

Backup and Restore

Backup and Restore allows you to save the Dial Plan configuration to a floppy disk in UNIX format or restore the Dial Plan configuration to your system.



NOTE:

Backup the Dial Plan configuration whenever you make changes as a disaster recovery precaution.

Access Backup and Restore

Use the following steps to access the Backup and Restore screen.

1. Start at the Dial Plan Administration and select

```
> Backup and Restore
```

The system displays the Backup/Restore Dial Plan Configuration screen (Figure 3-19):

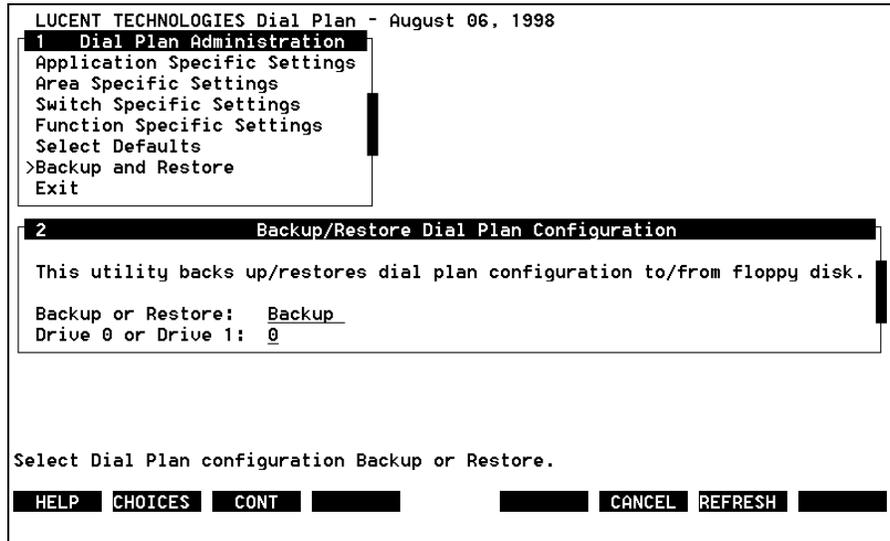


Figure 3-19. Backup/Restore Dial Plan Configuration screen

Field Descriptions

Table 3-15 describes each field that appears in the Backup and Restore screen. Use these descriptions in order to determine what to enter into each field.

Table 3-15. Field Descriptions for Backup and Restore

Field	Description
Backup or Restore	Enter Backup to save the Dial Plan configuration to a floppy disk. Enter Restore to transfer the Dial Plan configuration from a floppy disk to your hard drive.
Drive 0 or Drive 1	Enter either 0 or 1 to select a disk drive.

Accessing Backup Configuration Sets

This menu option allows you to select the type of configuration information you wish to backup. Use the steps below to access the Backup Configuration Sets menu:

1. Start at the Backup/Restore Dial Plan Configuration form and enter the action you wish to take in the `Backup` or `Restore`: field.
2. Enter **0** or **1** in the `Drive 0` or `Drive 1`: field to specify the drive you are using for the backup or restore.
3. Press **CONT** (F3) to begin backing up or restoring your configuration information.

The system displays the Backup Configuration Sets menu (Figure 3-20).



NOTE:

If you enter **Restore** in the `Backup` or `Restore` field, this menu will not appear. Instead, the system will begin restoring your configuration information from your floppy diskette. You do not need to continue with the steps below.

```

LUCENT TECHNOLOGIES Dial Plan - August 10, 1998
1 Dial Plan Administration
Application Specific Settings
Area Specific Settings
Switch Specific Settings
Function Specific Settings
Select Defaults
>Backup and Restore
Exit

3 Backup Configuration Sets
>ALL
Current Default Settings
Area/Switch and Function Specific Settings
Customer Assist Care Center

2 Backup/Restore Dial Plan Configuration

This utility backs up/restores dial plan configuration to/from floppy disk.

Backup or Restore: Backup
Drive 0 or Drive 1: 0

Mark the configuration(s) to backup with the MARK key and press ENTER

HELP MARK ENTER CANCEL REFRESH

```

Figure 3-20. Backup Configuration Sets menu, with backup option

4. Highlight your choice and press **MARK** (F2) to select it.
5. Press **ENTER** (F3) to begin the backup.

Summary

This chapter provides an overview of administering Dial Plan. The following chapters are technical in nature. You do not need to read them if your duties do not extend beyond system administration.

- See Chapter 4, “Release Notes”, for basic information about the current version of Dial Plan.
- See Chapter 7, “Troubleshooting”, for information on detecting and solving problems.

This chapter contains basic information about the current version of Dial Plan including the packages available as well as their compatibility with earlier versions of Dial Plan.

Packages in Dial Plan

Dial Plan Version 1.4 comes with the following country and switch packages:

- Dial Plan Base Package
- Dial Plan Defaults for DEFINITY – US Package
- Dial Plan Defaults for DEFINITY – UK Package
- Dial Plan Defaults for DEFINITY – Japan Package

General Availability Release Version

The version number for the General Availability is Version 1.4. To check whether the correct build is on the CONVERSANT, enter **pkginfo -l DPInBase** at the UNIX command line and check the `Version` field.

Compatibility with Previous Versions

This section addresses the question of Version 1.4's compatibility with previous versions of Dial Plan. See Chapter 5, "Installation and Removal", for more information regarding upgrades.

Data and Configuration Compatibility

Use the backup and restore utility to upgrade from a previous version of Dial Plan to the next. See “Upgrading from Dial Plan V1.3” on page 5-9 for more information.

Features Changed

Changes have been made in how certain features work. See the sections of this manual that describe these features for more information.

- The directory structure layout has been reorganized. All files are now located in the **/spanlink** partition unless they must be in another directory to function properly.
- Application Specific Settings—site-specific fields were removed from this form and placed in a new form called Area Specific Settings
- Backup/Restore menu—this menu now provides four options that allow you to specify which part of the configuration you want to backup

Features Added

The following list describes the features that have been added to Dial Plan Version 1.4:

- Area Specific Settings—a new menu option that contains fields for site-specific configuration information.
- Non-Toll Local Number Format—a new menu option that gives you more control over the Dial String. You can specify the fields that Dial Plan should include when dialing that type of number.

Summary

Dial Plan has some new features and improvements to existing features. This chapter gives an overview of Dial Plan Version 1.4.

- See Chapter 5, “Installation and Removal”, for information on installing and removing Dial Plan.

This chapter describes the procedures required to install, upgrade, and remove the packages that make up Dial Plan.

This chapter is organized as follows:

- Description of the software packages in Dial Plan
- Installation requirements
- Installing individual packages on the voice platform
- Upgrading from previous versions of Dial Plan
- Removing individual packages from the voice platform

Dial Plan Packages

Dial Plan consists of one required package and three optional Default Setting packages. You must install the Dial Plan Base package and at least one optional Default Setting package in order for Dial Plan to function properly.

⇒ NOTE:

You can install any number of Default Setting packages on the same system. However, only one will be in effect at any time.

Optional packages are available for the following switch and countries:

- DEFINITY default settings are available for UK, Japan, and US

⇒ NOTE:

You can configure Dial Plan for other countries as well.

Installation Requirements

Installing Dial Plan requires specific hardware and software. Use the list of software and hardware requirements below.

Software Requirements

Dial Plan requires the following software packages:

- UnixWare 2.1
- INTUITY CONVERSANT 7.0
- Spanlink Base Package V1.1

Hardware Requirements

Dial Plan requires the following hardware:

- CPU
 - MAP/5P 120 Mhz CPU
 - MAP/40 120 Mhz CPU
 - MAP/100 120 Mhz CPU
- One of the following:
 - Analog Voice Card
 - IVP6
 - IVC6
 - NGTR
 - Digital Voice Cards
 - T1/E1 with SSP
 - T1 with SP

Tested Switches

Dial Plan operates with the following switches:

- DEFINITY ECS R5, G3V2, G3V3, G3V4
- InterTel Axxess v4.2-01
- Siemens 9751 models 10, 40, 50 and 70
- Nortel Meridian SL-1 PBX.

Options: 11, 21A, 21, 51, 61, 71 and 81.

Software Generic X11 Release 15 or greater.

For other switches, please contact your Professional Service Representative.

Hard Disk Space Requirements

Dial Plan requires less than 2 Mbytes of hard disk space for software and configuration files.

Installation Instructions

This section details the procedures needed to install Dial Plan. If you are performing an upgrade, you need to consult “Upgrading from Dial Plan V1.3” on page 5-9 before reading this section. Follow the procedures closely to insure that you install the software correctly.

 **NOTE:**

A trained technician should install and remove Dial Plan.

Install Spanlink Communications Base Package

Use the following procedure to install the Spanlink Communications Base package:

1. Log into the system as root
2. Enter **pkgadd -d diskette1** at the UNIX prompt.
3. Insert Spanlink Communications Base package into the floppy drive.

Insert diskette into Floppy Drive 1.

Type [go] when ready,

or [q] to quit: (default: go)

4. Press **(ENTER)** to install or **q** to quit.

The system responds:

Installation in progress. Do not remove the diskette.

The following packages are available:

```
1  SplkBase      SPANLINK COMMUNICATIONS Base
                        (pentium) 1.1
```

Select package(s) you wish to process (or 'all' to process all packages). (default: all) [?,??,q]:

5. Press **(ENTER)**.

The system responds:

Copyright (c) 1997 SpanLink Communications

All Rights Reserved.

Processing package information.

Processing system information.

Verifying package dependencies.

Verifying disk space requirements.

Installing SPANLINK COMMUNICATIONS Base as <SplkBase>

```
## Executing preinstall script.
## Installing part 1 of 1.
/usr/spanlink/bin/.exrc
/usr/spanlink/bin/.kshrc
...
/usr/spanlink/bin/where
/usr/spanlink/bin/zcat
[ verifying class <none> ]
Installation of SPANLINK COMMUNICATIONS Base
(SplkBase) was
successful.
```

Insert diskette into FloppyDrive 1.

Type [go] when ready,
or [q] to quit: (default: go)

6. Remove the disk from the floppy drive.

The Spanlink Communications Base package is installed on your system.
You must now install the Dial Plan Base package.

Install Dial Plan Base Package

Use the following procedure to install the Dial Plan Base Package:

1. Do one of the following:
 - If your system prompts you to enter a diskette, see Step 2.
 - If your system does not prompt you to enter a diskette, enter **pkgadd -d diskette1** at the UNIX prompt.

2. Insert Dial Plan Base Version 1.4 Disk 1 of 2 into the floppy drive.

Insert diskette into Floppy Drive 1.

Type [go] when ready,
or [q] to quit: (default: go)

3. Press **ENTER** to install or **q** to quit.

The system responds:

Installation in progress. Do not remove the diskette.

The following packages are available:

```
 1 DPlnBase      SPANLINK COMMUNICATIONS  Dial Plan
Base
```

```
(pentium) 1.4
```

Select package(s) you wish to process (or 'all' to process all packages). (default: all) [?,??,q]:

4. Press **ENTER**.

The system responds:

PROCESSING:

```
Package: SPANLINK COMMUNICATIONS  Dial Plan  Base
(DPlnBase) from
```

```
<diskette1>.
```

```
SPANLINK COMMUNICATIONS  Dial Plan  Base
```

```
(pentium) 1.4
```

Using </> as the package base directory.

Copyright (c) 1997 SpanLink Communications

All Rights Reserved.

Processing package information.

Processing system information.

Verifying package dependencies.

```
Installing SPANLINK COMMUNICATIONS  Dial Plan  Base as
<DPlnBase>...
```

READY TO PROCESS:

```
Package: SPANLINK COMMUNICATIONS  Dial Plan  Base
(DPlnBase)
```

```
diskette 2 of 2
```

Insert diskette 2 of 2 into Floppy Drive 1

Type [go] when ready,

or [q] to quit: (default: go)

5. Remove Disk 1 from the floppy drive.

6. Insert Dial Plan Base Version 1.4 Disk 2 of 2 into the floppy drive.

7. Press **ENTER**.

```
## Installing part 2 of 2.
```

```
Installation of SPANLINK COMMUNICATIONS Dial Plan  
Base (DPlnBase) was successful.
```

```
Insert diskette into Floppy Drive 1.
```

```
Type [go] when ready,
```

```
or [q] to quit: (default: go)
```

8. Remove Disk 2 from the floppy drive.

The Dial Plan Base package is installed on your system. You must now install the Default Settings package.

Install Default Settings Package

Use the following procedure to install the Default Settings package:

1. Do one of the following:

- If your system prompts you to enter a diskette, see Step 2.
- If your system does not prompt you to enter a diskette, enter **pkgadd -d diskette1** at the UNIX prompt.

2. Insert the disk Dial Plan Defaults Disk 1 of 1 into floppy drive 1.

Make sure you have the correct default settings for your switch. The following example shows the installation for US DEFINITY.

3. Press **ENTER**.

The system responds:

```
Installation in progress. Do not remove the diskette.
```

```
The following packages are available:
```

```
1 DPlnDefUS SPANLINK COMMUNICATIONS Dial Plan  
Defaults for US Definity
```

```
(i386) 1.4
```

```
Select package(s) you wish to process (or 'all' to  
process all packages). (default: all) [?,??,q]: ?
```

4. Press **ENTER** to install.

The system responds:

```
PROCESSING:
```

```
Package: SPANLINK COMMUNICATIONS Dial Plan Defaults  
for US Definity
```

(DPlnDefUS) from <diskette1>.

SPANLINK COMMUNICATIONS Dial Plan Defaults for US
Definity

(i386) 1.4

Using </> as the package base directory.

Copyright (c) 1997 SpanLink Communications

All Rights Reserved.

Processing package information.

Processing system information.

Verifying package dependencies.

Verifying disk space requirements.

Installing SPANLINK COMMUNICATIONS Dial Plan Defaults
for US Definity as <DPln

DefUS>

Installing part 1 of 1.

/usr/spanlink/SplkDPlan/defaults/def_us_app.cfg

/usr/spanlink/SplkDPlan/defaults/def_us_switch.cfg

[verifying class <none>]

Executing postinstall script.

Installation of SPANLINK COMMUNICATIONS Dial Plan
Defaults for US

Definity (DPlnDefUS) was successful.

Insert diskette into Floppy Drive 1.

Type [go] when ready,

or [q] to quit: (default: go)

5. Remove the Dial Plan Defaults Disk 1 of 1 from the floppy drive.
6. Enter **q** to end the installation.

Verifying Installation

Use the following procedure to verify installation:

1. Enter **pkginfo | more** at the UNIX command.
2. Press **(ENTER)**.

The system responds (the following is an example of the output for US Definity):

```
spanlink  DPlnBase          SPANLINK COMMUNICATIONS  Dial
Plan  Base
```

```
spanlink  DPlnDefUS        SPANLINK COMMUNICATIONS  Dial
Plan  Defaults for <Switch>
```

3. Insure that the base package and switch default settings are installed.
4. Enter **pkginfo -l <pkgname>** at the UNIX prompt.
5. Insure that each installation was complete.

Upgrading from Dial Plan V1.3

This section describes the procedures for backing up and restoring your configuration information during an upgrade.

Backing up the Configuration

Use the steps below to backup your configuration information onto a diskette:

1. Start at the Dial Plan Administration menu and select Backup and Restore.
2. Enter **Backup** in the Backup or Restore: field.
3. Enter **0** or **1** in the Drive 0 or Drive 1: field to specify the drive you are using for the backup.
4. Press **CLOSE (F3)** to begin backing up your configuration information.

Restoring the Configuration

See "Backup and Restore" on page 3-51 for information on how to restore your configuration information.

Removal

In order to remove the Dial Plan packages, you must remove the default settings packages first. Remove packages in the following order:

- Dial Plan Defaults

- Dial Plan Base
- Spanlink Base



NOTE:

Before removing Dial Plan, you must remove all packages that depend on Dial Plan.

Remove Default Settings Package

Use the following procedure to remove the Dial Plan Defaults package:

1. Enter **pkgrm <pkgname>** at the UNIX prompt.

Replace <pkgname> with the appropriate Default Setting package name. The following example is for US DEFINITY.

2. Press **(ENTER)**.

The system responds:

The following package is currently installed:

```
DPlnDefUS SPANLINK COMMUNICATIONS Dial Plan
Defaults for US Definity
                (i386) 1.4
```

Do you want to remove this package [y,n,?,q]

Press y to remove the default settings

3. Enter **y** to remove the default settings.

```
## Removing installed package instance <DPlnDefUS>
## Verifying package dependencies.
## Processing package information.
## Executing preremove script.
## Removing pathnames in <none> class
/usr/spanlink/SplkDPlan/defaults/def_us_switch.cfg
/usr/spanlink/SplkDPlan/defaults/def_us_app.cfg
## Updating system information.
```

Removal of <DPlnDefUS> was successful.

The package is removed.

Remove Dial Plan Base Package

Use the following procedure to remove the Dial Plan Base package:

1. Enter **pkgrm DPlnBase** at the UNIX prompt.

2. Press **ENTER**.

The system responds:

The following package is currently installed:

```
DPlnBase SPANLINK COMMUNICATIONS Dial Plan Base(i386)
Version 1.4
```

```
Do you want to remove this package [y,n,?,q]
```

3. Enter **y** to remove the Dial Plan Base package.

The system responds with a message similar to the following:

```
## Removing installed package instance <DPlnBase>
```

```
## Verifying package dependencies.
```

```
## Processing package information.
```

```
## Executing preremove script.
```

```
Removing the inittab entries...
```

```
Inittab successfully rebuilt
```

```
## Removing pathnames in <none> class
```

```
/usr/spanlink/SplkDPlan/logs...
```

```
.../usr/spanlink/SplkDPlan/admin
```

```
## Updating system information.
```

```
Removal of <DPlnBase> was successful.
```

```
The package is removed.
```

Remove Spanlink Communications Base Package

Use the following procedure to remove the Spanlink Communications Base package:

1. Enter **pkgrm SplkBase** at the UNIX prompt.

2. Press **ENTER**.

The system responds:

The following package is currently installed:

```
SplkBase SPANLINK COMMUNICATIONS Base
(pentium) 1.1
```

```
Do you want to remove this package [y,n,?,q]
```

3. Enter **y** to remove the Spanlink Communications Base package.

The system responds with a message similar to the following:

```
## Removing installed package instance <SplkBase>
## Verifying package dependencies.
## Processing package information.
## Removing pathnames in <none> class
/usr/spanlink/tmp
/usr/spanlink/regdir
...
/usr/spanlink/bin
/usr/spanlink <shared pathname not removed>
## Executing postremove script.
## Updating system information.
Removal of <SplkBase> was successful.
The package is removed.
```

Summary

Installing and removing Dial Plan should be done by a trained technician. Any configuration files you want to keep should be backed up, and then the old version should be removed before installing the new version of Dial Plan.

- See Chapter 6, “Technical Package Information”, for information on the file and directory structure of Dial Plan to help troubleshoot.

This chapter contains technical information such as the directories and files used by Dial Plan. It is designed for personnel who need help troubleshooting Dial Plan after it is installed.

Directories

Table 6-1 shows the major directories used by Dial Plan.

Table 6-1. Directories Used by Dial Plan

Directories	Description
/usr/spanlink/SplkDPlan	Parent directory used by Dial Plan
/usr/spanlink/SplkDPlan/admin	Contains Dial Plan user interface administration
/usr/spanlink/SplkDPlan/bin	Contains Dial Plan executables
/usr/spanlink/SplkDPlan/config	Contains Dial Plan configuration files
/usr/spanlink/SplkDPlan/defaults	Contains Dial Plan default configuration files
/usr/spanlink/SplkDPlan/logs	Contains Dial Plan log files

Log and Debug Files

Log files contain information about significant events or errors that the Dial Plan DIP or script encountered. Debug files contain debugging information for the Dial Plan DIP and script. See Chapter 8, “Logs and Error Codes”, for more information about logs.

Log File

The system stores the log file in the **/usr/spanlink/SpkDPlan/logs/SpkDPlanDip.log** directory. It moves this file to the **/usr/spanlink/SpkDPlan/logs/Old/SpkDPlanDip.log** directory when it reaches 300,000 bytes.

Debug File

The system stores the log file in the **/usr/spanlink/SpkDPlan/logs/SpkDPlanDip.dbg** directory. It moves this file to the **/usr/spanlink/SpkDPlan/logs/Old/SpkDPlanDip.dbg** directory when it reaches 300,000 bytes.

Debugging Dial Plan

Use the following steps to turn on debugging for the Dial Plan DIP:

1. Enter **vi /usr/spanlink/SpkDPlan/config/SpkDPlanDip.cfg**
2. Search for a line containing [Debug Log].
3. Change the `Level` entry from 0 to a higher number.
Acceptable values are 0 to 5, where 0 turns off debugging and 5 is the highest debug level.
4. Save the file.
5. Kill the `SpkDPlanDip` so that it reads the new configuration.
 - a. Enter **ps -ef | grep SpkDPlanDip** at the UNIX prompt.
 - b. Look for the process id. The number in the 2nd column is the process id.
 - c. To kill the DIP, enter **kill <process id>**.



CAUTION:

Do not kill the DIP when calls are in progress. Otherwise, calls may result in errors.

Configuration Files

Configuration files determine how Dial Plan operates. There are three configuration files used by Dial Plan. These configuration files reside in **/usr/spanlink/SplkDPlan/config** directory. They are:

- **SplkDPlanDip.cfg** is the configuration file used by **SplkDPlanDip**. This configuration file is a combination of the configuration files located in **/usr/spanlink/SplkDPlan/config/AppFiles** and **Switch.cfg**.
- **SplkDPlanRegister.dat** is the list of installed applications registered with Dial Plan.
- **Switch.cfg** is the current default configuration for switch settings.

These configuration files should not be modified directly using an editor because any mistakes could corrupt the configuration and cause problems for Dial Plan. The only time you might modify them directly is if there are explicit instructions either in this document or after consultation with technical support personnel.

Scripts

There is one Script Builder script that comes with Dial Plan and it is called **sbPeriodic**. It is used to light and extinguish Message Waiting Lights on telephones for some switches.

Prominent Programs

Prominent programs used by Dial Plan include:

- **DPAdmin** — starts the administration of Dial Plan
- **SplkDPlanDip** — is a DIP that handles all the functions of Dial Plan
- **SplkDPlanRegister** and **SplkDPlanRegConfig** — register packages with Dial Plan

Summary

In this chapter you learned in which directories you find files that may help you troubleshoot Dial Plan. You also learned how to turn on debugging.

- See Chapter 7, “Troubleshooting”, for information on how to resolve problems you encounter.

This chapter describes the procedures to isolate, diagnose, and correct possible problems encountered in Dial Plan. If a problem is not documented in this chapter, please contact the technical support personnel for help.

Isolating and Diagnosing the Problem

The most common problems in Dial Plan are due to configuration errors. Use the sections below to isolate and diagnose the different levels of configuration errors.

General System Checks

Use the following procedure to troubleshoot configuration errors:

1. Enter **who -r** at the UNIX prompt. The number that appears after `run-level` shows the current run level.
 - a. Make sure the run level is 4. If the run level is not 4, enter **start_vs** to change it to 4.
2. Verify that all telephone lines to the CONVERSANT are plugged in securely to voice cards. Secure loose connections.
3. Enter **display card** at the UNIX prompt.
 - a. Insure all voice cards and ports are in service. If they are not in service, put them in service using the CONVERSANT Administration.
4. Enter **dfspace** at the UNIX prompt. Make sure the system is not out of space in any of the disk partition.



NOTE:

Dial Plan uses **/root** partition.

5. Enter **sar** at the UNIX prompt.
6. Check the numbers under the `%idle` column to find out how busy the system is.

The lower the number, the busier the system. If the system is too busy, it could account for slowness in response and possible time-outs.

General Dial Plan Checks

Use the following procedure to troubleshoot for configuration errors:

1. Enter **pkginfo -l DPInBase** at the UNIX prompt.
 - a. Verify that `completely installed` appears in the `STATUS` field. This insures the Dial Plan Base package was installed correctly. If it does not appear, remove the package and reinstall it.
 - b. Make sure the correct version is installed.
2. Enter **pkginfo -l <pkgname>** at the UNIX prompt. Replace `<pkgname>` with the Default Settings package name.
 - a. Check the `STATUS` field to insure the correct default package is installed. The default configuration must match the switch and country for the site.
3. Enter **ls /vs/trans** at the UNIX prompt.
 - a. Verify that the Dial Plan scripts **sbPeriodic.T** and **sbPeriodic.D** exist in the **/vs/trans** directory. If they are not there, reinstall Dial Plan.
4. Enter **ps -ef | grep SplkDPlanDip** at the UNIX prompt.
 - a. Check the process table to verify that the **SplkDPlanDip** is running.
 - b. Verify that a Dial Plan configuration for Customer Assist exists.

See Chapter 2, "Getting Started", to find out how to start the Dial Plan administration. Select Application Specific Settings. Select Defaults. Make sure the form has entries.

Isolating the Problem

The following topics address common problems encountered. In addition to the specific steps listed, look at the log file for **SpIkDPlanDip** and trace the channel.

Troubleshooting for Dial Plan Actions

Dial Plan dials telephone numbers when performing a Make Call, transfer, or conference. An action is the act of dialing. It consists of three parts:

- Preparations before dialing the number
- Dialing the number
- After dialing the number

Isolating Problems in Make Call

In a Make Call, Dial Plan goes off hook and dials the number. You should not encounter problems going off hook. In order to determine where the problem occurs, you must isolate the problem.

Use the following procedure to isolate the problem:

1. Enter **sysmon 1** at the UNIX prompt. The System Monitor program starts with a refresh rate of 1 second.
 - a. If the telephone did not ring, try dialing that number from a telephone to see if the number is correct. If the line is an analog line, unplug it from the voice card and plug it into an analog telephone. Make the same call to determine whether some restriction on that line that prevents it from making a call.
 - b. If it dialed the correct number, then the problem is in the preparations after dialing the number.
 - c. If it is an intelligent Make Call, the `Voice Service` column on the System Monitor will have CCA while it is waiting to detect speech energy.
 - i. When the telephone was answered, did Dial Plan detect the speech energy from the person answering that telephone immediately? The `Voice Service` column will not be set to CCA once the speech energy was recognized.
 - ii. For CONVERSANT Version 7.0, you must adjust parameters in order for Intelligent external calls to work. See Appendix C, "Intelligent Actions and Speech Energy" for more information about adjusting parameters.
2. Did the telephone ring when you dialed the number? Determine whether the number that was dialed was correct.
3. Duplicate the call or events.

4. Watch the channel where the problem script runs. The number dialed appears in the `Dialed Digits` column.
 - a. Verify that the number Dial Plan should dial appears in the `Dialed Digits` column. If not, or if no value appears, see “Troubleshooting for Dialing a Number” on page 7-7.

Isolating Problems in Transfers

Use the following procedure to determine the reason transfers fail:

1. Were you placed on hold at all?
 - a. If not, then the problem is in the preparation before dialing the number.
 - b. If you were placed on hold, did any value appear on the System Monitor?
 - i. If values appeared, that means Dial Plan has successfully placed you on hold and attempted to dial the number.
 - ii. If values do not appear, then Dial Plan either:
 - operates as though it was unsuccessful in placing you on hold so it did not attempt to dial the number, or:
 - operates as though you have been placed on hold but a value was not passed to it to dial.
2. Did the telephone ring when you dialed the number?
 - a. If the telephone did not ring, try dialing that number from a telephone to see if the number is correct. If the line is an analog line, unplug it from the voice card and plug it into an analog telephone. Make the same call to determine whether some restriction on that line that prevents it from making a call.
 - b. If it dialed the correct number, then the problem is in the preparations after dialing the number.
 - c. If it is an intelligent transfer, the `Voice Service` column on the System Monitor will have CCA while it is waiting to detect speech energy.
 - i. When the telephone was answered, did Dial Plan detect the speech energy from the person answering that telephone immediately? The `Voice Service` column will not be set to CCA once the speech energy was recognized.
 - ii. For CONVERSANT Version 7.0, you must adjust parameters in order for Intelligent external calls to work. See Appendix C, “Intelligent Actions and Speech Energy”, for more information about adjusting parameters.

3. Once the number has been dialed, Dial Plan will reconnect the caller back on to complete the transfer. Were you taken off hold and connected to the dialed person?
 - a. If not, determine whether the sequence specified to complete the transfer or reconnect the caller is incorrect.

Isolating Problems in Conferences

The initial steps in a conference are the same as a transfer. However, during a conference, the CONVERSANT remains on the line at the end.

Use the following procedure to troubleshoot for conferences:

1. Follow Steps 1 to 3 under "Isolating Problems in Transfers".
2. Once you are connected to the dialed person, does the CONVERSANT stay on the line?
3. The script should still be active in the `Voice Service` column at the end of the conference action. If not, there is a configuration problem in the `Complete Conference` field.

Isolating Problems in Drop a Caller

Use the following procedure to troubleshoot the Drop Action:

1. Was the caller dropped from conference?
 - a. If not, use three telephones to duplicate the Drop Action commands that appear in the Dial Plan Administration. If there is a timing issue, modify the sequence timing until you are successful.

Isolating Problems in Hold

Use the following procedure to troubleshoot the Hold Action:

1. Are you able to place and retrieve a caller on hold?
 - a. If not, use two telephones to duplicate the Hold Action commands that appear in the Dial Plan Administration. If there is a timing issue, modify the sequence timing until you are successful.

Isolating Problems in Intelligent Action

Use the following procedure to troubleshoot Intelligent Actions:

1. When the dialed telephone was answered, did Dial Plan detect the speech energy from the person answering that telephone immediately?
 - a. An intelligent action is used after dialing a number. The `Voice Service` column on the System Monitor will have CCA while it is waiting to detect speech energy. The `Voice Service` column will not be set to CCA once the speech energy was recognized.

- i. For CONVERSANT Version 7.0, you must adjust parameters in order for Intelligent external calls to work. See Appendix C, "Intelligent Actions and Speech Energy", for more information about adjusting parameters.

Isolating Problems in Message Waiting Lights

Use the following procedure to troubleshoot Message Waiting Lights:

1. Is the activation method used valid for the switch?
 - a. If the activation method is DTMF, is the channel in service? Is it constantly being used by other scripts?
2. After the application request to turn on or off message waiting light, does the script **sbPeriodic** appear in the `Voice Service` column on the System Monitor?
 - a. To prevent unnecessary requests, the application sends the message or request to illuminate or extinguish a light only once. Therefore, if the same message light was supposed to be lit earlier, then it will not light it again soon. Use an extension that has not been lit.
3. Does the script appear?
 - a. If not, consult technical support personnel.
 - b. If so, check the values in `Dialed Digits` column on the System Monitor.
4. Are the access codes and extensions in the `Dialed Digits` column accurate?
 - a. If not, replace them with the correct values.
 - b. If so, try dialing the same codes and extensions from another telephone or the same line plug into an analog telephone. Sometimes the telephone extensions must be configured on the switch to allow lighting and extinguishing of message waiting lights.

Troubleshooting for Dialing a Number

Dial Plan dials telephone numbers when performing a Make Call, transfer, or conference. It adds or removes numbers from the telephone number given to it when necessary. For example, it will add outside access codes to any outside telephone numbers.

If Dial Plan is not dialing numbers correctly, it may indicate an incorrect dial string configuration.

- Make sure each field is configured correctly.
- Verify the telephone number. Dial the expected Dial String from a telephone to see if it is correct.
- Be careful of timing involved. Use a telephone to give you a rough estimate of the timing. See Chapter 3, "System Administration", for more information about configuration.

Problems and Solutions

The following table describes the basic kinds of problems and their solutions.

Table 7-1. Problems That Affect What Callers Hear

Problem	Cause and Possible Remedy
All commands were tried and failed.	Verify that the Dial Plan DIP is running. Enter ps -ef grep SplkDPlanDip at the UNIX prompt. If <code>SplkDPlanDip</code> appears in the output, the DIP is running. If it does not appear in the output, the DIP is not running. If the DIP is not running, please consult "Turning On the DIP" on page 7-8 for instructions.
One or more commands fail, while some commands are successful.	The Dial Plan DIP configuration codes are set incorrectly for the commands that fail, or the related files are corrupted. Use your Dial Plan administration to verify the codes for each setting. Correct any wrong or corrupted settings.

Continued on next page

Table 7-1. Problems That Affect What Callers Hear — Continued

Problem	Cause and Possible Remedy
Dial Plan is unable to construct a proper telephone number or execute any common functions.	The Dial Plan DIP does not have a legitimate configuration. Use your Dial Plan Administration to verify and correct the configuration.
Diagnostics show Dial Plan is creating the proper command strings, but some commands or digits are skipped during execution.	Place short delays (pauses) before or after commands to give the Dial Plan extra time to dial. See Chapter 3, “System Administration”, for instructions on how to place pauses in the commands.

Turning On the DIP

If the DIP is not running, find out whether the DIP executable exists:

1. Enter **cd /usr/spanlink/SplkDPlan/bin** at the UNIX prompt.
2. Enter **ls** at the UNIX prompt.
3. Look for `SplkDPlanDip` in the output.
4. Do one of the following:
 - If `SplkDPlanDip` does not appear, reinstall Dial Plan.
 - If `SplkDPlanDip` does appear, go to Step 5.
5. Enter **ps -ef | grep SplkDPlanDip**
6. Look for `SplkDPlanDip` in the output.
7. Do one of the following:
 - If `SplkDPlanDip` does not appear, go to Step 8.
 - If `SplkDPlanDip` does appear, your dip is running. You do not need to proceed.
8. If the Dial Plan Base was completely installed and the `SplkDPlanDip` is not running, enter **vi /etc/inittab** at the UNIX prompt.
9. Look for the line:


```
DPO0:4:respawn:/usr/spanlink/SplkDPlan/bin/SplkDPlanDip
> /dev/console 2>&1
```
10. Do one of the following:

- If the line does not appear, enter **mkitab** at the UNIX prompt and go to Step 5.
 - If the line appears, look for `respawn` in the 3rd field of the output and do one of the following:
 - If `respawn` appears, enter **telinit q**
The DIP should start running.
 - If `off` appears instead, enter **cd /etc/conf/init.d**
 - a. Look for a file that contains `DPlnBase`.
 - b. For example, `I109DPlnBase`.
 - c. View the file. Enter **vi <file name>**
 - d. Change `off` to `respawn`.
 - e. Go back to Step 10a.
11. The DIP should restart. If it fails to restart or respawns continuously:
- a. Look at the log file
/usr/spanlink/SplkDPlan/log/SplkDPlanDip.log. (See “Log Names, Locations, and Viewing” on page 8-1 for more information about the Dial Plan log file.)
 - b. Turn on debugging.
 - c. Start the DIP.
 - d. Look at the log and debug files.

Running a Trace

To run a trace for a specific channel, enter
trace chan x TSM SplkDPlanDip > /<directory path>/<trace filename>
at the UNIX prompt. Replace “x” with a specific channel number, a range of channel numbers, or **all**.

Optional Commands

To run a more specific trace, use one of the following parameters in the trace above:

- **date** timestamps each line of the trace file
- **TRIP** or **TWIP** adds lower-level trace statements that are helpful when debugging. Use TRIP for analog cards or TWIP for digital cards.

For example, if you want to run a trace using the date and TRIP, and write the output to **/tmp/trace.file**, enter the following sequence at the UNIX prompt:

```
trace chan 4 TSM date TRIP SpIkDPlanDip > /tmp/trace.file
```

Summary

This chapter showed you how to isolate and diagnose problems that may occur. It also showed you possible solutions to these problems.

- See Chapter 8, “Logs and Error Codes”, for more information about how to find error code messages if there is a problem.

This chapter discusses logs maintained by Dial Plan. The logs contain the set of events generated by Dial Plan. These events may represent actions taken by Dial Plan, implications of a user-defined configuration setting, or limitations of the hardware (such as, disk space, ports free, etc.). The error codes are brief descriptions of the events.

This chapter defines each log and describes how to view its contents. For each error code, a detailed definition is given along with possible corrective actions.

Log Names, Locations, and Viewing

The Dial Plan log is stored in **`/usr/spanlink/SplkDPlan/logs/SplkDPlanDip.log`**.

An older copy of the log file, if it exists, is stored in **`/usr/spanlink/SplkDPlan/logs/Old/SplkDPlanDip.log`**.

View logs using the **vi** editor.

Error Codes

Error codes are the messages you see in the log and debug files. FATAL error codes are displayed on the console. A detailed message is logged after the error to indicate the actual problem.

- FATAL is displayed on the console. It also appears in the log file. It occurs when the program encounters an unrecoverable error condition. The program will terminate under normal circumstances.
- MAJOR appears in the log file. It indicates a serious error. The program does not terminate.
- INFO appears in the log file. It records important events. It is useful for traces.
- DEBUG1 indicates the debugging level is set at Debug Level 1 or higher. This provides extra information normally not displayed in the log.
- DEBUG2 indicates debugging is set at Debug Level 2 or higher. It provides a more detailed account than DEBUG 1.

Example of Log File

The **SplkDPlanDip.log** appears as follows:

```
14:03:25 10/1/97 SplkDPlanDip INFO DipInit succeeded
14:03:25 10/1/97 SplkDPlanDip INFO Added MsgId=100
```

Example of Debug File

The **SplkDPlanDip.dbg** appears as follows:

```
14:03:25 10/1/97 SplkDPlanDip INFO DipInit succeeded
14:03:25 10/1/97 SplkDPlanDip INFO Added MsgId=100
14:03:25 10/1/97 SplkDPlanDip DEBUG1 EntryValue=[2]
14:03:25 10/1/97 SplkDPlanDip DEBUG1 Entered DipProc
14:03:25 10/1/97 SplkDPlanDip DEBUG1 DipProc : malloc'ed
Receive buffer 1056 bytes
14:03:25 10/1/97 SplkDPlanDip DEBUG1 DipProc : malloc'ed
Send buffer 596 bytes
14:03:25 10/1/97 SplkDPlanDip DEBUG1 cleared out -1 bytes
from rcv msg queue.
14:03:25 10/1/97 SplkDPlanDip DEBUG1 SplkDPlanDip: in for
loop, waiting to receive a message.
```

Other Problems

Due to the structure of Dial Plan, a single problem can sometimes have many causes and remedies. The following section describes common problems and possible solutions to them.

Possible Problems

The system operates improperly or database(s) have become corrupted. Specifically:

- Cannot open file: file does not exist error encountered
- System does not write data to fields
- System does not write to fields that it normally populates after the user enters information elsewhere on the form
- Error is encountered when attempting to save, close, or cancel a form or text entry
- The save operation appears to work, but user finds information missing after reentering form
- System will not back up or restore configurations
- DIP dumps core
- Terminal freezes
- Form accepts invalid input or rejects valid input
- System routinely gives warning messages when starting Dial Plan

Cause and Possible Remedy

The system is improperly tuned or configured. Verify:

- Free disk space under **/root**
- Console system messages
- Invalid UnixWare operating system parameters
- Faulty hardware in all key components
- TERM or SMTERM environmental variable is not set to the correct terminal type.

NOTE:

If one of the databases has been corrupted, follow the guidelines under "Cause and Possible Remedy" on page 8-3 to correct the underlying problem, and then restore the configuration from a backup on diskette. If a backup is not available, restore by verifying every field in every form to verify that they are correct. Change the fields to correct them as necessary

and save the form. *Do not save a form if you think it may corrupt your configuration.*

Summary

Logs and error codes provide technicians with information about what is happening in Dial Plan. Use them to diagnose possible problems. See Chapter 7, “Troubleshooting”, for more information on how to solve the problem.

Planning Forms



This appendix includes planning forms to complete before installation. The professional service associate responsible for installing Dial Plan must communicate with the customer telecom administrator to insure the forms are completed correctly. Use these planning forms in conjunction with Chapter 2, "Getting Started".

Planning Forms

Use the following forms to determine how to configure Dial Plan for your specific site, switch, and applications.

- "General Dialing Related Questions Planning Form: Digits Related" — includes questions that relate to your overall switch and telephone network configuration.
- "General Dialing Related Questions Planning Form: Format Related" — includes questions that relate to the components of the Dial String.
- "General Dialing Related Questions Planning Form: Fixed Format" — includes questions for sites with fixed length telephone numbers.
- "General Dialing Related Questions Planning Form: Variable Format" — includes questions for sites with variable length telephone numbers.
- "Application Specific Planning Form" — includes questions regarding the Dial Plan settings for Customer Assist.
- "Telephone Functions Planning Form" — includes questions about how your switch performs various telephone actions.

**General Dialing Related Questions
Planning Form: Digits Related**

Table A-1 includes questions related to your overall switch and telephone network configuration.

**Table A-1. General Dialing Related Questions Planning Form:
Digits Related**

Question	Answer	Action
What is your local country code?		Form: Area Codes and Prefixes Field: Local Country Code
What is your local city or area code?		Form: Area Codes and Prefixes Field: Local City/Area Code
Is the length of the local subscriber numbers and city/area codes always fixed, or sometimes variable?	Circle one: Fixed (F) Variable (V)	Form: Area Codes and Prefixes Field: Local Phone Number Format Type
What is the minimum length for a local subscriber number?		Form: Area Codes and Prefixes Field: Subscriber Number Minimum Length
What digit(s) do you dial to obtain access to your domestic long distance network?		Form: Application Specific Settings Field: Long Distance Access Code
What digit(s) do you dial to obtain access to international long distance?		Form: Application Specific Settings Field: International Access Code
What digit(s) do you dial to get an outside line?		Form: Application Specific Settings Field: Outside Access Code

Continued on next page

**Table A-1. General Dialing Related Questions Planning Form:
Digits Related — *Continued***

Question	Answer	Action
When dialing a long distance number, do you enter a special character to terminate the number? If so, what?		Form: Application Specific Settings Field: Termination Code
When making an outbound call, as a standard in your call center, how many ring cycles do you wait before considering a call not answered?		Form: Application Specific Settings Field: Number of Loops for Ans Supervision
Do you need to dial special digits to obtain access to your particular long distance provider? If so, what digits?		Form: Application Specific Settings Field: Equal Access Code
Should the voice platform wait for speech energy before adding the called party to the conference call?	Y or N	Form: Application Specific Settings Field: Intelligent Answer Supervision and Blind Answer Supervision
When does your switch require you to insert pauses when dialing and what are the lengths of the pauses?		Form: Pre and Post Codes Fields: Pre and Post values in appropriate fields. Leave the other fields blank.

**General Dialing Related Questions
Planning Form: Format Related**

Table A-2 includes questions that relate to the components of the Dial String.

**Table A-2. General Dialing-Related Questions Planning Form:
Format Related**

Question	Answer	Action
Which of the following must you dial for local calls:	Circle one:	Form: Local Number Format
Outside Access Code	Y N	Fields: Dial Outside Access Code; Dial
Beginning Accounting Code	Y N	Beginning Accounting Code; Dial Long
Long Distance Access Code	Y N	Distance Access Code; Dial Area Code; Dial
Area Code	Y N	Subscriber Number; Dial
Subscriber Number	Y	Termination Code; Dial
Termination Code	Y N	Ending Accounting Code
Ending Accounting Code	Y N	
Which of the following must you dial for non-toll local numbers:	Circle one:	Form: Non-Toll Local Number Format
Outside Access Code	Y N	Fields: Dial Outside Access Code; Dial
Beginning Accounting Code	Y N	Beginning Accounting Code; Dial Long
Long Distance Access Code	Y N	Distance Access Code; Dial Area Code; Dial
Area Code	Y N	Subscriber Number; Dial
Subscriber Number	Y	Termination Code; Dial
Termination Code	Y N	Ending Accounting Code
Ending Accounting Code	Y N	

Continued on next page

**Table A-2. General Dialing-Related Questions Planning Form:
Format Related — *Continued***

Question	Answer	Action
<p>Which of the following must you dial when dialing numbers within your city/area code that require long distance service:</p> <p>Outside Access Code</p> <p>Beginning Accounting Code</p> <p>Long Distance Access Code</p> <p>Area Code</p> <p>Subscriber Number</p> <p>Termination Code</p> <p>Ending Accounting Code</p>	<p>Circle one:</p> <p>Y N</p> <p>Y N</p> <p>Y N</p> <p>Y N</p> <p>Y</p> <p>Y N</p> <p>Y N</p>	<p>Form: Nearby Long Distance Number Format</p> <p>Fields: Dial Outside Access Code; Dial Beginning Accounting Code; Dial Long Distance Access Code; Dial Area Code; Dial Subscriber Number; Dial Termination Code; Dial Ending Accounting Code</p>
<p>Which of the following must you dial when dialing long distance numbers outside your city/area code:</p> <p>Outside Access Code</p> <p>Beginning Accounting Code</p> <p>Long Distance Access Code</p> <p>Area Code</p> <p>Subscriber Number</p> <p>Termination Code</p> <p>Ending Accounting Code</p>	<p>Circle one:</p> <p>Y N</p> <p>Y N</p> <p>Y N</p> <p>Y N</p> <p>Y</p> <p>Y N</p> <p>Y N</p>	<p>Form: Distant Long Distance Format</p> <p>Fields: Dial Outside Access Code; Dial Beginning Accounting Code; Dial Long Distance Access Code; Dial Area Code; Dial Subscriber Number; Dial Termination Code; Dial Ending Accounting Code</p>

General Dialing Related Questions
Planning Form: Fixed Format

Table A-3 includes questions for sites with fixed length telephone numbers.

**Table A-3. General Dialing Related Questions Planning Form:
 Fixed Format**

Question	Answer	Action
How many digits are in your city/area code?		Form: Area Codes and Prefixes Field: City/Area Code Length?
How many digits are in the prefix to your local subscriber numbers?		Form: Area Codes and Prefixes Field: Prefix Length
For numbers within your city/area code: Which local subscriber number prefixes can you dial with just the local subscriber number and not any long distances access?		Form: Area Codes and Prefixes Field: Local Call Prefix Codes
For numbers within your city/area code: Which local subscriber number prefixes must you dial long distances access?		Form: Area Codes and Prefixes Field: Nearby Long Distance Prefix Codes

Continued on next page

**Table A-3. General Dialing Related Questions Planning Form:
Fixed Format — *Continued***

Question	Answer	Action
<p>For numbers within your city/area code:</p> <p>If the prefix to the local subscriber number is in neither of the lists above, what should Dial Plan assume:</p> <ul style="list-style-type: none"> ■ That you can dial with just the local subscriber number and not any long distance access. ■ That you must dial with long distance access. 		<p>Form: Application Specific Settings</p> <p>Field: Default is Nearby Long Distance</p> <p>If Dial Plan need not dial any long distance access, then the field value is "N." If Dial Plan must dial long distance access, then the field value is "Y."</p>
<p>For numbers outside your city/area code:</p> <p>Which city/area codes different from your own do not incur long-distance charges when dialed?</p>		<p>Form: Non-Toll Local Area Code Settings (Add Area Code)</p> <p>Field: City/Area Code</p>
<p>For numbers outside your city/area code:</p> <p>Which local subscriber number prefixes can you dial with just the local subscriber number and not any long distances access?</p>		<p>Form: Non-Toll Local Area Code Settings (Add Area Code)</p> <p>Field: Local Call Prefix Codes</p>
<p>For numbers outside your city/area code:</p> <p>Which local subscriber number prefixes must you dial long distances access?</p>		<p>Form: Non-Toll Local Area Code Settings (Add Area Code)</p> <p>Field: Nearby Long Distance Prefix Codes</p>

Continued on next page

**Table A-3. General Dialing Related Questions Planning Form:
Fixed Format — *Continued***

Question	Answer	Action
<p>For numbers outside your city/area code:</p> <p>If the prefix to the local subscriber number is in neither of the lists above, what should Dial Plan assume:</p> <ul style="list-style-type: none"> ■ That you can dial with just the local subscriber number and not any long distance access. ■ That you must dial with long distance access. 		<p>Form: Non-Toll Local Area Code Settings (Add Area Code)</p> <p>Field: Default is Nearby Long Distance</p> <p>If Dial Plan need not dial any long distance access, then the field value is "N." If Dial Plan must dial long distance access, then the field value is "Y."</p>

**General Dialing Related Questions
Planning Form: Variable Format**

Table A-4 includes questions for sites with variable length telephone numbers.

Table A-4. General Dialing Related Questions Planning Form: Variable Format

Question	Answer	Action
<p>For numbers within your city/area code:</p> <p>If the prefix to the local subscriber number is in neither of the lists above, what should Dial Plan assume:</p> <ol style="list-style-type: none"> 1. That you can dial with just the local subscriber number and not any long distance access. 2. That you must dial with long distance access. 		<p>Form: Area Codes and Prefixes</p> <p>Field: Default is Nearby Long Distance</p> <p>If Dial Plan need not dial any long distance access, then the field value is "N." If Dial Plan must dial long distance access, then the field value is "Y."</p>

Application Specific Planning Form

Table A-5 includes questions regarding the Dial Plan settings for Customer Assist.

Table A-5. Application Specific Planning Form

Question	Answer	Action
What is the name of the application you want to administer?	Customer Assist	Form: Select Application. Field: Press ENTER (F3) to select the application
Should Dial Plan insert an Accounting Code before the telephone number? If so, what is it?		Form: Application Specific Settings Fields: Beginning Accounting Code
Should Dial Plan insert an Accounting Code after the telephone number? If so, what is it?		Form: Application Specific Settings Fields: Ending Accounting Code

Telephone Functions Planning Form

Table A-6 includes questions about how your switch performs various telephone actions.



NOTE:

Customer Assist does NOT use the Conference Action.

Table A-6. Telephone Functions Planning Form

Question	Answer	Action
What series of flashes, pauses, and feature access codes do you use to initiate a conference with an analog telephone?		<p>Form: Conference Actions Configuration</p> <p>Field: Initiate Conference</p>
Can the CONVERSANT ports provide call progress detection? If so, should any of the applications that use Dial Plan perform intelligent conference actions?		<p>Form: Conference Actions Configuration</p> <p>Field: Intelligent Conference. If both answers are "yes," then this field should have an entry. Otherwise, leave it blank.</p>
What series of flashes, pauses, and feature access codes do you use with an analog telephone to bring the party on hold back into the conference?		<p>Form: Conference Actions Configuration</p> <p>Field: Complete Conference</p>
What series of flashes, pauses, and feature access codes do you use to drop the analog line that initiated the conference from the conference?		<p>Form: Conference Actions Configuration</p> <p>Field: Terminate Conference</p>

Continued on next page

Table A-6. Telephone Functions Planning Form — Continued

Question	Answer	Action
What series of flashes, pauses, and feature access codes do you use with an analog line to drop the conference attempt and reconnect the party on hold if the conference attempt results in busy?		Form: Conference Actions Configuration Field: Reconnect Caller Busy
What series of flashes, pauses, and feature access codes do you use with an analog line to drop the conference attempt and reconnect the party on hold if the conference attempt results in no answer?		Form: Conference Actions Configuration Field: Reconnect Caller No Answer
What series of flashes, pauses, and feature access codes do you use with an analog line to drop the conference attempt and reconnect the party on hold if the conference attempt results in an error tone?		Form: Conference Actions Configuration Field: Reconnect Caller General Error
What series of flashes, pauses, and feature access codes would you use with an analog telephone to drop a party from a call?		Form: Drop Actions Configuration Field: Initiate Drop
What series of flashes, pauses, and feature access codes would you use with an analog telephone to place a party on hold?		Form: Hold Actions Configuration Field: Initiate Hold
What series of flashes, pauses, and feature access codes would you use with an analog line to retrieve a caller from hold?		Form: Hold Actions Configuration Field: Retrieve from Hold

Continued on next page

Table A-6. Telephone Functions Planning Form — Continued

Question	Answer	Action
Can the CONVERSANT ports provide call progress detection? If so, should any of the applications that use Dial Plan perform intelligent actions?		<p>Form: Intelligent Actions Configuration</p> <p>Field: Wait for Response. If both answers are "yes," then this field should have an entry. Otherwise, leave it blank.</p>
Can the CONVERSANT ports provide call progress detection? If so, should any of the applications that use Dial Plan perform intelligent make calls?		<p>Form: Make Call Actions Configuration</p> <p>Field: Intelligent Make Call. If both answers are "yes," then this field should have an entry. Otherwise, leave it blank.</p>
Can you dial a number and have the digits appear on the agent's display? If so, do you need to enter a pause between the number and the digits? If so, how long a pause?		<p>Form: Make Call Actions Configuration</p> <p>Field: Internal Display Code Pre</p>
Can you dial a number and then digits such that the digits appear on the agent's display? If so, do you need to enter a pause after entering the digits? If so, how long a pause?		<p>Form: Make Call Actions Configuration</p> <p>Field: Internal Display Code Post</p>
Will any voice platform applications that use Dial Plan require Message Waiting Light services?		If so, continue with the next question. If not, skip to the questions on Transfer Actions.
How will you set the Message Waiting Lights?	Analog port (DTMF)	<p>Form: Message Waiting Lights Configuration</p> <p>Field: Activation Method to Use</p>

Continued on next page

Table A-6. Telephone Functions Planning Form — Continued

Question	Answer	Action
Which port will you use for setting Message Waiting Lights?		Form: Message Waiting Lights Configuration Field: Channel
What command must the voice platform pass to the switch to start Message Waiting Light activity?		Form: Message Waiting Lights Configuration Field: Initiate ON Command
How many seconds must Dial Plan pause before dialing the Access Code, if required by the switch?		Form: Message Waiting Lights Configuration Fields: ON Access Code Pre
What is the touch-tone code that allows you to turn on Message Waiting Lights? (It is specified on the switch.)		Form: Message Waiting Lights Configuration Field: ON Access Code
How many seconds must Dial Plan pause after dialing the Access Code, if required by the switch?		Form: Message Waiting Lights Configuration Field: ON Access Code Post
What command must Dial Plan pass to instruct the voice platform to go off hook?		Form: Message Waiting Lights Configuration Field: Initiate OFF Command
How many seconds must Dial Plan pause before dialing the Access Code, if required by the switch?		Form: Message Waiting Lights Configuration Field: OFF Access Code Pre
What is the touch-tone code that allows you to turn off Message Waiting Lights? (It is specified on the switch.)		Form: Message Waiting Lights Configuration Field: OFF Access Code
How many seconds must Dial Plan pause after dialing the Access Code, if required by the switch?		Form: Message Waiting Lights Configuration Field: OFF Access Code Post

Continued on next page

Table A-6. Telephone Functions Planning Form — Continued

Question	Answer	Action
What series of flashes, pauses, and feature access codes do you use to initiate a transfer with an analog telephone?		<p>Form: Transfer Actions Configuration</p> <p>Field: Initiate Transfer</p>
Can the CONVERSANT ports provide call progress detection? If so, should any of the applications that use Dial Plan perform intelligent transfers?		<p>Form: Transfer Actions Configuration</p> <p>Field: Intelligent Transfer. If both answers are "yes," then this field should have an entry. Otherwise, leave it blank.</p>
What series of flashes, pauses, and feature access codes do you use with an analog telephone to bring the party on hold back to the transfer and drop yourself from the call?		<p>Form: Transfer Actions Configuration</p> <p>Field: Complete Transfer</p>

Continued on next page

Table A-6. Telephone Functions Planning Form — Continued

Question	Answer	Action
What series of flashes, pauses, and feature access codes do you use with an analog telephone to drop the conference attempt and reconnect the party on hold if the transfer attempt results in busy?		Form: Transfer Actions Configuration Field: Reconnect Caller Busy
What series of flashes, pauses, and feature access codes do you use with an analog telephone to drop the conference attempt and reconnect the party on hold if the transfer attempt results in no answer?		Form: Transfer Actions Configuration Field: Reconnect Caller No Answer
What series of flashes, pauses, and feature access codes do you use with an analog telephone to drop the conference attempt and reconnect the party on hold if the transfer attempt results in an error tone?		Form: Transfer Actions Configuration Field: Reconnect Caller General Error

Switch Configuration

B

This appendix describes the parameters you should enter for each switch. Use this appendix in conjunction with Chapter 2, "Getting Started".

Switch Configuration

Each switch has default settings that either can be installed as a package or entered manually. The following switches support Dial Plan:

- DEFINITY G3 — see "DEFINITY G3 Default Settings" on page B-2.

DEFINITY G3 Default Settings

This section contains tables with the default values for DEFINITY.

Switch Specific Settings

Table B-1 contains the default values for Switch Specific Settings.

Table B-1. Pre and Post Codes

Field	Value
Outside Access Code Pre	
Outside Access Code Post	N0020
Beginning Accounting Code Pre	
Beginning Accounting Code Post	
Equal Access Code Pre	
Equal Access Code Post	
Long Distance Access Code Pre	
Long Distance Access Code Post	
International Access Code Pre	
International Access Code Post	
Country Code Pre	
Country Code Post	
City/Area Code Pre	
City/Area Code Post	
Subscriber Number Pre	
Subscriber Number Post	
Termination Code Pre	
Termination Code Post	
Ending Accounting Code Pre	p0700
Ending Account Code Post	
OutPulse Code Pre	
OutPulse Code Post	

Function Specific Settings

This section contains the default values for Function Specific Settings.

Conference Actions

Table B-2 contains the default values for Conference Actions.

Table B-2. Conference Actions

Field	Value
Initiate Conference	f
Intelligent Conference	W0003
Complete Conference	f
Terminate Conference	h
Reconnect Caller Busy	ff
Reconnect Caller No Answer	ff
Reconnect Caller General Error	ff

Drop Actions

Table B-3 contains the default values for Drop Actions.

Table B-3. Drop Actions

Field	Value
Initiate Drop	N0050fN0050

Hold Actions

Table B-4 contains the default values for Hold Actions.

Table B-4. Hold Actions

Field	Value
Initiate Hold	f
Retrieve from Hold	N0050fN0050

Intelligent Actions

Table B-5 contains the default values for Intelligent Actions.

Table B-5. Intelligent Actions

Field	Value
Wait for Response	W0003

Make Call Action

Table B-6 contains the default values for the Make Call Action.

Table B-6. Make Call Action

Field	Value
Intelligent Make Call	W0005
OutPulse Code Pre	N0020
OutPulse Code Post	

Transfer Actions

Table B-7 contains the default values for Transfer Actions.

Table B-7. Transfer Actions

Field	Value
Initiate Transfer	f
Intelligent Transfer	
Complete Transfer	fh
Reconnect Caller Busy	ff
Reconnect Caller No Answer	ff
Reconnect Caller General Error	ff

Message Waiting Lights

Table B-8 contains the default values for Message Waiting Lights.

Table B-8. Message Waiting Lights Default Values

Field	Value
Activation Method	DTMF
Frequency in Seconds	2
Channel	0

Message Waiting Lights ON

Table B-9 contains the default values for Message Waiting Lights ON.

Table B-9. Message Waiting Lights ON Default Values

Field	Value
Initiate Command	o
Access Code Pre	
Access Code	*4
Access Code Post	N0020
Complete Command	N0020hN0020


Message Waiting Lights OFF

Table B-10 contains the default values for Message Waiting Lights OFF.

Table B-10. Message Waiting Lights OFF Default Values

Field	Value
Initiate Command	o
Access Code Pre	
Access Code	#4
Access Code Post	N0020
Complete Command	N0020hN0020

Intelligent Actions and Speech Energy



This appendix addresses advanced troubleshooting. It shows you what to do when the CONVERSANT cannot perform intelligent actions because it fails to detect speech energy.

Intelligent Actions and Speech Energy

The speech energy detection algorithm is intended primarily for detecting speech energy associated with answering the telephone. It may fail to detect short or quiet responses, however, because the person answering the telephone may not have sufficiently differentiated their voice from the background noise. Speech energy must be above a minimum level (expressed in dB) and below a maximum reference level for a continuous period of time (expressed in milliseconds). The default configuration for an AYC21 card is set to approximately the middle of the sensitivity range. If the CONVERSANT is experiencing poor speech energy detection performance, the AYC21 card has two parameters that control the sensitivity of these parameters. Use the following procedure to adjust the parameters:

1. If you are not already logged in, log into your system as root.
2. Enter **cd /vs/switches/digital/pkgs/t1def**
Each country supported by the package has a subdirectory.
3. Change to the directory for the country of the customer (For example, in the US, enter **cd US**).
4. Enter **vi d1Parms**
5. Modify the D1_E_THRESH parameter as needed.

⇒ **NOTE:**

This parameter controls the minimum volume of qualified speech energy.

D1_E_THRESH=-30 (less sensitive)

D1_E_THRESH=-36 (default setting)

D1_E_THRESH=-42 (more sensitive)

6. Modify the D1_E_MINTIME parameter as needed.

⇒ **NOTE:**


This parameter controls the minimum duration of qualified speech energy.

D1_E_MINTIME=500 (less sensitive)

D1_E_MINTIME=350 (default setting)

D1_E_MINTIME=200 (more sensitive)

7. Save the changes to the file.
8. Reload the AYC21 card with the new configuration.
9. Enter **cviss_menu** and select

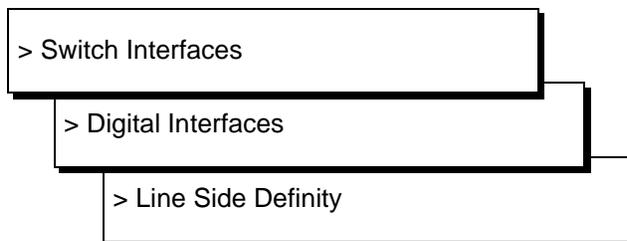

10. Change both parameters to the more sensitive settings.
11. Test the settings by making several calls to different people in the environment the customer will be using.

⇒ **NOTE:**

You may need to try several different values to find the best combination.

Index

A

accessing, 3-16
accounting code
 purpose of, 1-6
adjusting CONVERSANT parameters, 3-28
administration
 logging in, 2-1
 main menu, 2-3
 system, 3-1
Application Specific Planning Form, A-10
Application Specific Settings
 accessing, 3-2
 administering, 3-2
 defined, 2-4, 3-2
 field descriptions, 3-4
area codes
 See city/area codes
Area Codes and Prefixes
 accessing, 3-8
Area Specific Settings
 accessing, 3-8
 defined, 2-5, 3-2

B

backing up
 configuration, 2-8
Backup and Restore, 3-51
 accessing, 3-51
 defined, 2-8
 field descriptions, 3-52

C

changing an area code
 See city/area codes
city/area codes
 administering, 3-14
 changing, 2-5, 3-14
 including in Dial String, 1-5
compatibility
 data and configuration, 4-2
 with previous versions, 4-1
Conference Actions
 accessing, 3-31
 default values
 DEFINITY, B-3
 defined, 3-30

 field descriptions, 3-32
 overview, 3-31
conference calls
 troubleshooting, 7-5
configuration
 fixed format telephone numbers, 2-10
 planning, 2-8
 switch and telephone network information, 2-9
 variable format phone numbers, 2-10
configuration files, 6-3
configuring
 applications, 2-10
 Dial Plan, 3-1
 switches
 DEFINITY, B-2
constructing a Dial String, 1-9
CONVERSANT
 adjusting parameters, 3-28
 logging in, 2-1
Customer Assist
 interaction with Dial Plan
 defined, 1-1
 illustration, 1-2

D

databases
 corruption, 8-3
debug files
 example, 8-2
 location, 6-2
debugging
 instructions, 6-2
default settings
 applying, 3-7
 changing, 2-4
 packages, 4-1
Default Settings package, 5-7
 removing, 5-10
 troubleshooting, 7-2
DEFINITY
 configuring
 Function Specific Settings, B-3
 Switch Specific Settings, B-2
 documentation, xiv
Dial Plan, ix
 constructing, 1-9
 defined, 1-1
 function of, 1-8
 interaction
 voice platform application, 1-4, 1-9
 interaction with Customer Assist
 defined, 1-1
 illustration, 1-2
 operation, 1-2
 packages, 5-1

- purpose of, 1-1
- usage, 1-4
- Dial Plan Base package
 - installing, 5-5
 - removing, 5-10
 - troubleshooting, 7-2
- Dial String
 - components of, 2-6, 2-9
 - constructing, 1-2, 1-4
 - content
 - site-specific, 2-4
 - diagramed, 1-10
 - formatting, 3-25
- directories
 - major directories, 6-1
- Distant Long Distance
 - field descriptions, 3-26
- distant long distance number
 - defined, 1-10
 - formatting, 3-25
- documentation
 - CONVERSANT, xiii
- DPAdmin, 6-3
- Drop Actions
 - accessing, 3-34
 - default values
 - DEFINITY, B-3
 - defined, 3-34
 - field descriptions, 3-35
 - overview, 3-34
 - troubleshooting, 7-5

E

- error codes, 8-1
- executables, 6-1
- exit, 2-8
 - saving changes, 2-3
- external calls
 - adjusting CONVERSANT parameters, 3-28

F

- features
 - added, 4-2
 - changed, 4-2
- field descriptions
 - See Application Specific Settings, Switch Specific Settings, and Function Specific Settings
- function keys, 2-2
- Function Specific Settings
 - accessing, 3-30
 - defined, 2-7, 3-2, 3-28
 - field values, 3-28

G

- General Availability Release Version, 4-1
- General Dialing Related Questions Planning Form, A-2, A-4, A-6, A-9

H

- hard disk space requirements, 5-3
- help
 - on-line, 2-3
 - See also Related Resources
- Hold Actions
 - accessing, 3-35
 - default values
 - DEFINITY, B-3
 - defined, 3-35
 - field descriptions, 3-36
 - overview, 3-36
 - troubleshooting, 7-5

I

- inserting pauses
 - See pauses
- installation procedures
 - See installing
- installing, 5-1, 5-7
 - Default Settings package, 5-7
 - Dial Plan Base package, 5-5
 - instructions, 5-4
 - requirements
 - hardware, 5-2
 - software, 5-2
 - Spanlink Base package, 5-4
 - verifying, 5-9
- Intelligent Actions
 - accessing, 3-37
 - default values
 - DEFINITY, B-4
 - defined, 3-37
 - field descriptions, 3-39
 - overview, 3-38
 - troubleshooting, 7-5
- intelligent external calls
 - adjusting CONVERSANT parameters, 3-28
- intelligent mode
 - defined, 1-4
- inter-lata
 - See long distance number
- internal extension
 - components of, 1-14

- defined, 1-10
- international number
 - components of, 1-17
 - defined, 1-11
- Inter-Tel
 - documentation, xv
- intra-lata
 - See nearby long distance number
- INTUITY, xiii, xiv

L

- local number
 - components of, 1-14
 - defined, 1-10
 - formatting, 3-25
 - prefix lists, 3-12, 3-19
- Local Number Format, 3-25
 - field descriptions, 3-26
- log files, 8-1
 - directory, 6-1
 - example, 8-2
 - location, 6-2
 - maximum size, 6-2
- logging in
 - See administration
- long distance access code
 - purpose of, 1-5

M

- Make Call Actions
 - accessing, 3-39
 - default values
 - DEFINITY, B-4
 - defined, 3-39
 - field descriptions, 3-41
 - overview, 3-40
 - scenario, 1-6
 - troubleshooting, 7-3
- Message Waiting Lights
 - accessing, 3-42
 - default values
 - DEFINITY, B-5
 - defined, 3-42
 - field descriptions, 3-43
 - overview, 3-43
 - troubleshooting, 7-6

N

- navigating

- screens, 2-2
- Nearby Long Distance
 - field descriptions, 3-26
- nearby long distance number
 - components of, 1-15
 - defined, 1-10
 - formatting Dial String, 3-25
 - prefix lists, 3-13, 3-20
- Non-Toll Local Area Codes, 3-16
- Non-Toll Local Number Format, 3-25

O

- options, selecting
 - See function keys
- outside access code
 - purpose of, 1-5

P

- packages
 - Default Settings packages, 4-1
- packages in Dial Plan
 - See packages
- parameters
 - adjusting CONVERSANT parameters, 3-28
 - See Application Specific Settings, Switch Specific Settings, and Function Specific Settings
- pauses
 - field values, 3-23
 - inserting, 1-2, 1-6, 2-5
 - purpose of, 1-2
 - See also Switch Specific Settings
- planning for configuration
 - See configuration
- planning forms
 - defined, A-1
 - understanding, 2-9
- Pre and Post Codes
 - accessing, 3-22
 - defined, 3-21
 - field descriptions, 3-23
- prefix codes
 - See prefix lists
- prefix lists
 - adding or deleting, 3-14
 - adding or deleting prefixes, 3-14, 3-15
 - local telephone number, 3-12, 3-19
 - nearby long distance number, 3-13, 3-20
- prefixes
 - adding or deleting, 3-14

R

release notes, 4-1
removing, 5-1
 order, 5-9
requirements
 See installing
restoring
 configuration, 2-8

S

sbPeriodic, 6-3
scripts, 6-3
Select Defaults
 accessing, 3-49
 defined, 2-8, 3-49
 modifying, 3-50
selecting options
 See function keys
settings
 See Application Specific Settings, Switch Specific Settings, and Function Specific Settings
Spanlink Base package
 installing, 5-4
 removing, 5-11
speech energy
 detecting, C-1
speech energy detection algorithm, C-1
SpkDPlanDip, 6-3
SpkDPlanDip.cfg, 6-3
SpkDPlanRegConfig, 6-3
SpkDPlanRegister, 6-3
SpkDPlanRegister.dat, 6-3
switch configuration
 See configuring, switches
Switch Specific Settings, 3-21
 accessing, 3-21
 defined, 2-5, 3-2
Switch.cfg, 6-3
switches
 supported
 tested, 5-2
System Administrators, ix

T

telephone actions
 commands, 2-10
 field values, 2-7, 3-28
 types of, 1-9
Telephone Functions Planing Form, A-11

telephone number
 analyzing, 1-4
 determining type, 1-5
 diagramed, 1-10
trace
 channel, 7-9
 timestamping, 7-10
 TRIP or TWIP, 7-10
Transfer Actions
 accessing, 3-46
 default values
 DEFINITY, B-4
 defined, 3-45
 field descriptions, 3-47
 overview, 3-46
 troubleshooting, 7-4
troubleshooting
 DIP, 7-8
 isolating problems, 7-1
 running a trace, 7-9
 speech energy, C-1

U

upgrading
 data and configuration compatibility, 4-2
 procedures, 5-9
 process, 5-9
 restoring, 5-9

V

verifying installation
 See installing
version number
 General Availability, 4-1
voice platform application
 defined, 1-1