


**DATA SET 202C-TYPE
TRANSMITTER-RECEIVER
CONNECTIONS**

1. GENERAL

1.001 This addendum supplements Section 592-015-400, Issue 3. The attached page must be inserted in the section in accordance with filing instructions above.

1.002 This addendum is issued to revise Fig. 3. A new cord (D10P-61) is shown for ACU connections and information concerning ground and loop start is added to the notes.

Attached:
Page 5 dated March 1970, revised

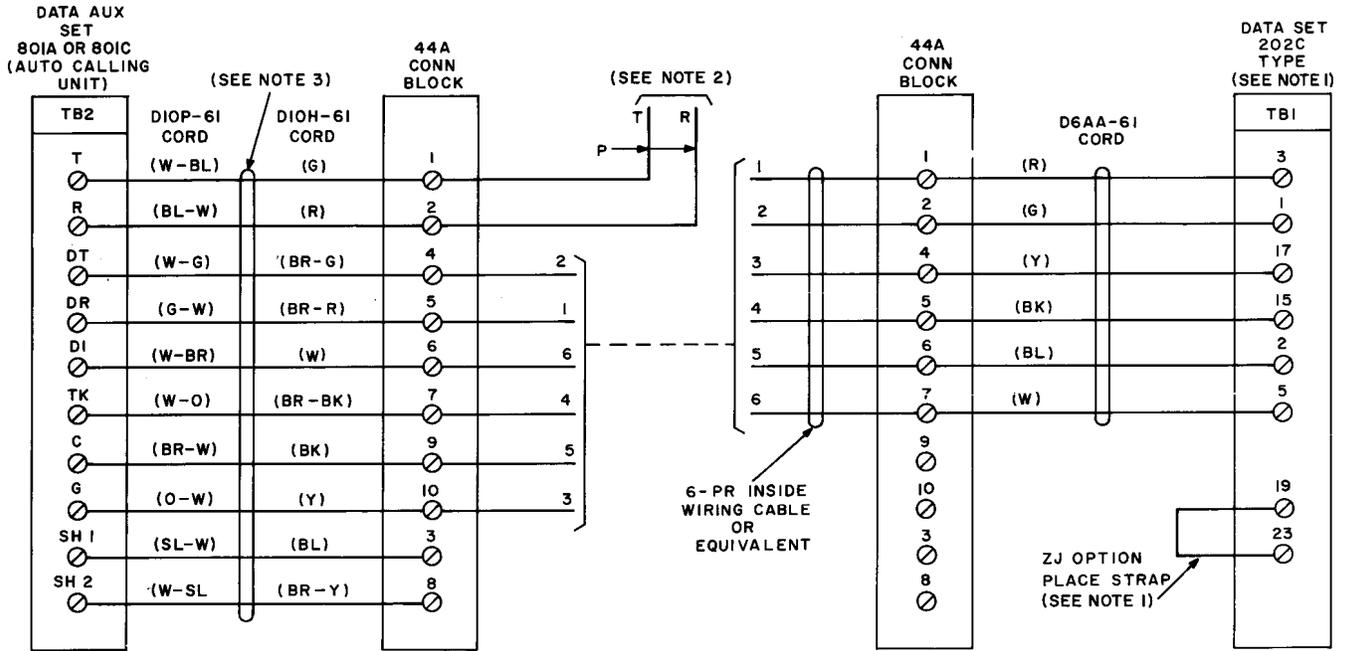

NOTES:

1. FOR GROUND START ACU, ADD DESIGNATION-DIAL TONE-IN SPARE 1 POSITION ON KEY DESIGNATION STRIP. STRAP IS STORED AT TBI 17 AND 20. THE BUTTON MUST BE NONLOCKING. THIS BUTTON AND THE ZJ STRAP ARE NOT REQUIRED WITH A LOOP START ACU.
2. WITH 801A-TYPE ACU, CONNECT T AND R TO CO OR PBX LINE ARRANGED FOR GROUND START OPERATION. WITH 801C-TYPE ACU, CONNECT T AND R TO CO OR PBX LINE ARRANGED FOR "TOUCH-TONE" DIALING. THE 801C-TYPE CAN BE USED ON EITHER LOOP OR GROUND START OPERATION.
3. THE DIOP-61 CORD REPLACES THE DIOH-61 CORD WHICH HAS BEEN MD'D.

Fig. 3—Two-Wire Switched Network Using Data Auxiliary Set 801-Type