

DIAL DICTATION TRUNK USED  
WITH KEY TELEPHONE SETS

1. GENERAL

1.01 This Section is issued to provide information for connecting Key Telephone Sets to a Dial Dictation Trunk.

1.02 This arrangement of the Dial Dictation Trunk allows normal control of the recording equipment when connected to a key telephone set.

1.03 No provision is made for dial tone as the connection is made directly by operating the key in the telephone set. No provision is made for dialing an attendant. If this feature is required, a ringing generator must be added.

1.04 A busy lamp is provided but it will be possible for another station to come in on the line. Exclusion can be provided as covered in the appropriate section of the BSP.

1.05 Fig. 1 is a drawing showing connections of key telephone sets to the Dial Dictation Trunk.

2. REFERENCES

SD-65788-01  
T -65788-11 and 12  
CD-65788-01  
SECTION 473-130-201 and SECTION 473-130-501


NOTE: Wiring Options. SD-65788-01 Options "X", "V", "Q", and "E". Installer will determine from subscriber whether T, R, or S option shall be used.

3. LIST OF EQUIPMENT

J-58827C, List 1, Dictation Trunk Rectifier, KS-15620 - List 14  
Box, Terminal, Cable GE-16  
Block, Connecting, No. 30C  
Adapter, 102C  
Mounting Apparatus, 16C  
Cover, 117A  
Key Telephone Unit 17B  
Diode 402B  
Capacitor 20MF 200V

FIG. 1

DIAL DICTATION TRUNK USED WITH KEY TELEPHONE SETS

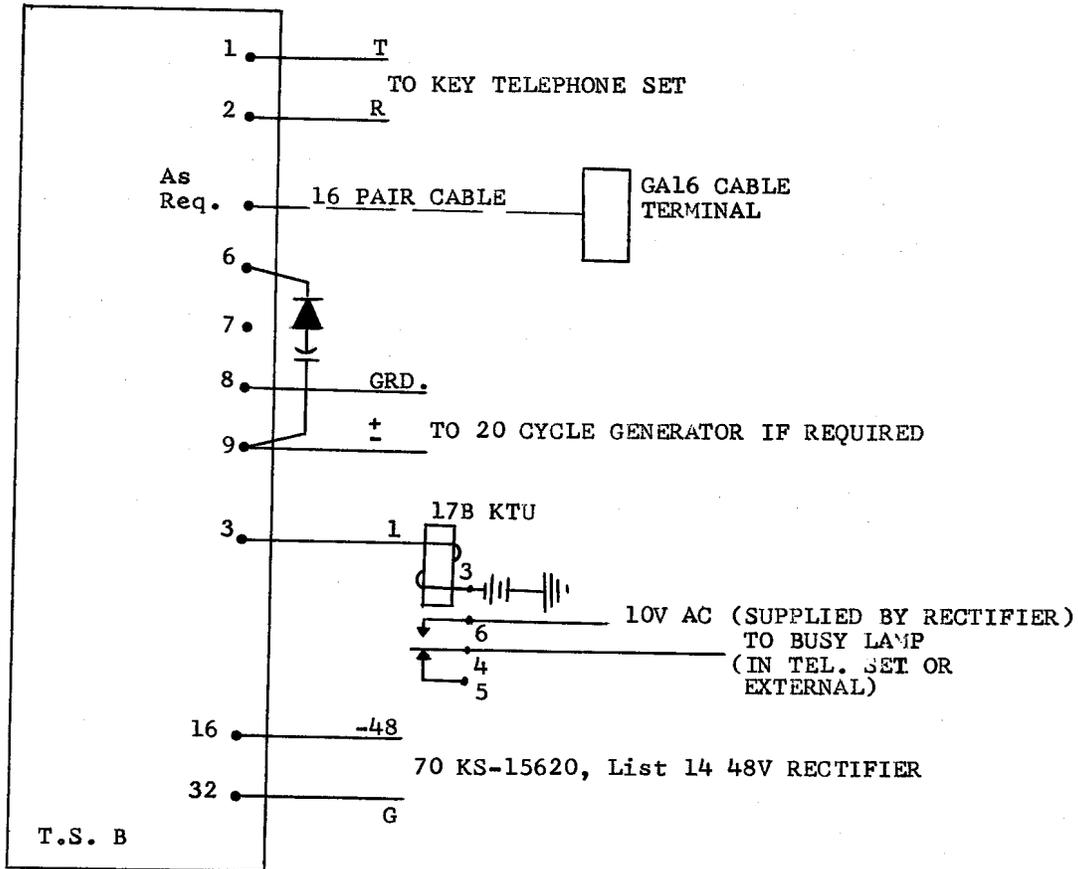

J58827C, List 1 DICTATION UNIT  
IN 16C APPARATUS MOUNTING

TARIFF ITEM  
DIVISION PLANT ENGINEER  
OKLAHOMA CITY, 6-30-67  
BY C.S.G. CE 6-7371  
DRAWING FILE DPE-218