


MULTIPLE LINE WIRE
B WIRE DEADEND

Contents	Page
1. General	1
2. Installation	1

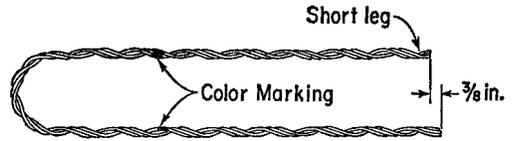

B Wire Deadend

1. GENERAL


1.01 The B Wire Deadend is used to deadend the support wire of multiple line wires. The insulation on the support wire must be removed before the deadend can be installed. The deadend does not require any special tools.

1.02 The B Wire Deadend consists of a three-wire set of spirally formed, class C galvanized, high strength steel wires. The inner surface of the bore is coated with grit to increase the holding power. The legs are unequal in length to facilitate unwrapping. The crossover and starting point is identified by a color marking. The deadends are furnished in the following sizes:

<u>Size</u>	<u>Color Marking</u>	<u>Nominal Length in Inches</u>
109	Black	11-5/8
120	Green	12-3/4

2. INSTALLATION

2.01 The B Wire Deadend is installed on the support wire of multiple line wires in the following manner:

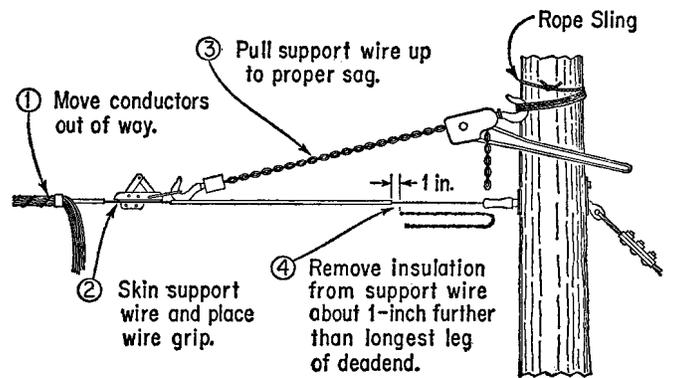

SECTION 624-030-111

