

## 76 C TEST SET DESCRIPTION AND MAINTENANCE AND ESTABLISHING TALK AND/OR CALLING CIRCUIT

### 1. GENERAL

1.001 This addendum supplements Section 634-200-501, Issue 4.

1.002 It is reissued to:

- Provide information about the use of the PR 2276 Simplex Test Set
- Change the title to reflect current title of AT&T Main Section

- Include the appropriate legend on Page 1 in accordance with AT&T's "Guidelines and Procedures for Safeguarding Information" and Pacific Company's System Instruction (SI) 178.

1.003 The Simplex Test Set is designed to allow cable conductor identification of working, "in use", lines without interference to the customer. This saves time by eliminating the need to constantly monitor circuits.

1.004 Fig. 31 illustrates the use of the Simplex with the 76C Set.

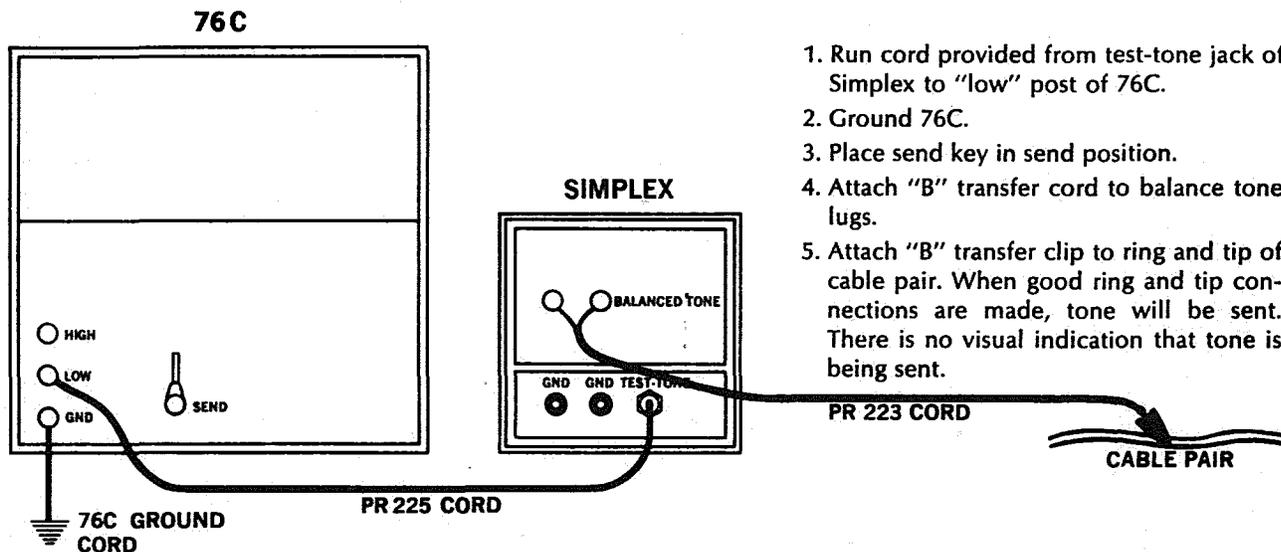


Fig. 31

1. Run cord provided from test-tone jack of Simplex to "low" post of 76C.
2. Ground 76C.
3. Place send key in send position.
4. Attach "B" transfer cord to balance tone lugs.
5. Attach "B" transfer clip to ring and tip of cable pair. When good ring and tip connections are made, tone will be sent. There is no visual indication that tone is being sent.