

DESK STANDS CONNECTIONS
 COMMON BATTERY


1. GENERAL

1.01 This addendum covers the method of connecting a sidetone desk stand to an anti-sidetone subscriber set for anti-sidetone use on individual lines without extensions.

1.02 No changes are required in the connections of sidetone desk stands and only a few changes in the connections to the anti-sidetone subscriber sets (bell boxes) as shown by the typical case (Fig. 1).

1.03 A sidetone desk stand, used with an anti-sidetone subscriber set to obtain the equivalent of an anti-sidetone circuit, should be connected as shown by the typical case in Fig. 1. Its use should be restricted to individual lines without extensions and only one low impedance or two high impedance ringing bridges are permitted on the line.

1.04 The 5A varistor is required only for the 52AB desk stand.

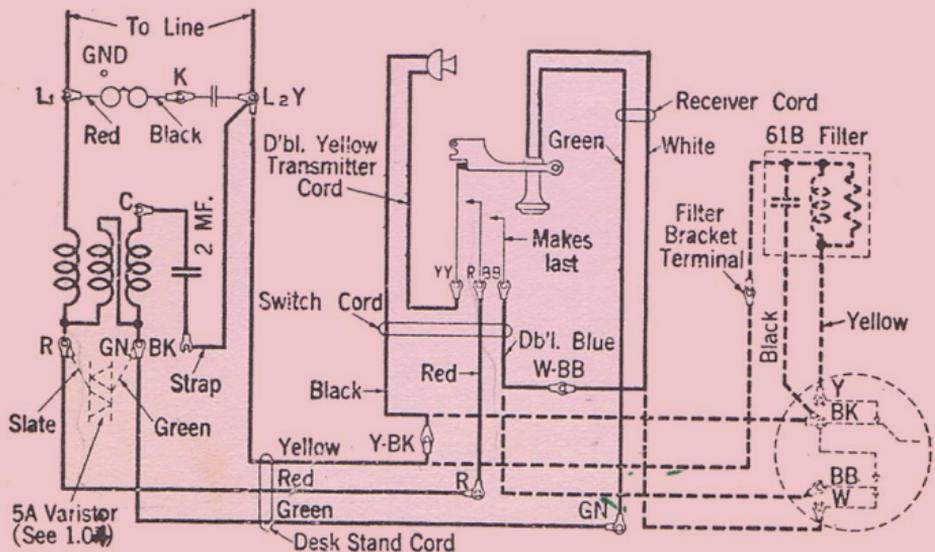

Note: If filter is not provided connect yellow lead from L2Y to Y of dial instead of to filter bracket terminal.

Fig. 1 — 51AL Sidetone Desk Stand For Anti-Sidetone Service ←
 (Manual and Dial)