



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines


Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.


About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

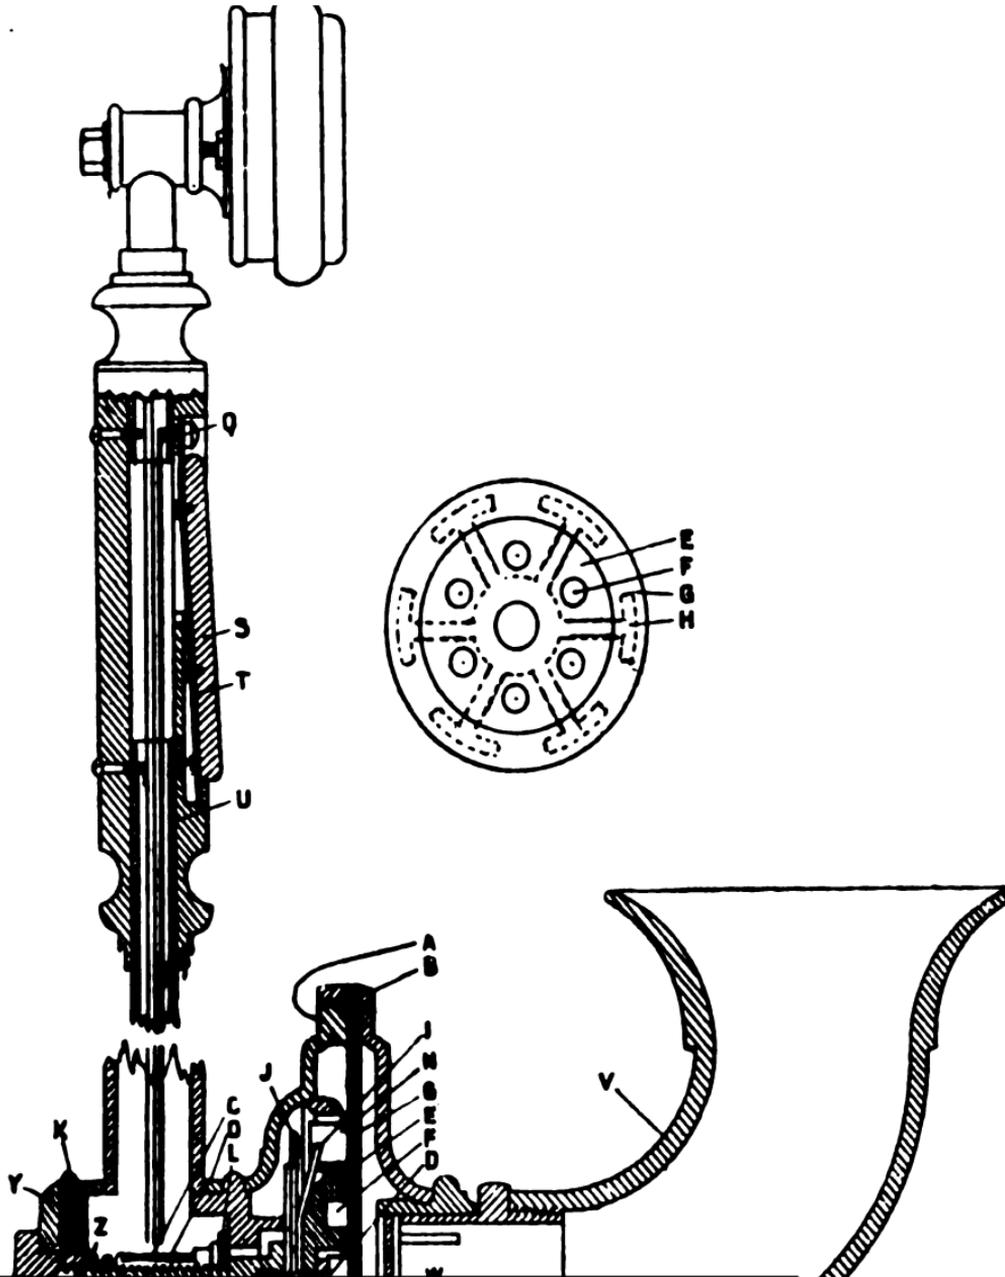

Field telephones for army use

Edward James Stevens



WEALE'S SCIENTIFIC & TECHNICAL SERIES.

CIVIL ENGINEERING & SURVEYING.

Civil Engineering. H. LAW & D. K. CLARK . . .	6/6
Pioneer Engineering. E. DOBSON	4/6
Iron Bridges of Moderate Span. H. W. PENDRED.	2/-
Iron and Steel Bridges & Viaducts. F. CAMPIN .	3/6
Constructional Steel & Ironwork. F. CAMPIN . .	3/6
Tubular & Girder Bridges. G. D. DEMPSEY . . .	2/-
Materials and Construction. F. CAMPIN	3/-
Sanitary Work. C. SLAGG	3/-
Roads & Streets. LAW, CLARK, & WALLIS-TAYLER .	6/-
Construction of Gasworks. S. HUGHES & H. O'CONNOR	6/-
Well-Sinking. J. G. SWINDELL & G. R. BURNELL . .	2/-
Drainage. G. D. DEMPSEY & D. K. CLARK	4/6

Library

of the

University of Wisconsin

Steam Boilers. R. ARMSTRONG	1/6
Steam and Machinery Management. M. P. BALE.	2/6
Steam and the Steam Engine. D. K. CLARK . . .	3/6
Steam Engine, Theory of. T. BAKER	1/6
Steam Engine. DR. LARDNER	1/6
Locomotive Engines. G. D. DEMPSEY & D. K. CLARK .	3/-
Locomotive Engine Driving. M. REYNOLDS . . .	3/6
Stationary Engine Driving. M. REYNOLDS . . .	3/6
Model Locomotive Engineer. M. REYNOLDS . . .	3/6
Modern Workshop Practice. J. G. WINTON . . .	3/6
Mechanical Engineering. F. CAMPIN	2/6
Details of Machinery. F. CAMPIN	3/-
Elementary Marine Engineering. J. S. BREWER . .	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MECHANICAL ENGINEERING, &c.—*contd.*

Sewing Machinery. J. W. URQUHART	2/-
Power of Water. J. GLYNN	2/-
Mechanism and Machines. T. BAKER & J. NASMYTH	2/6
Mechanics. C. TOMLINSON	1/6
Cranes and Machinery. J. GLYNN	1/6
Smithy and Forge. W. J. E. CRANE	2/6
Sheet-Metal Worker's Guide. W. J. E. CRANE	1/6
Elementary Electric Lighting. A. A. C. SWINTON	1/6

MINING & METALLURGY.

Mining Calculations. T. A. O'DONAHUE	3/6
Mineralogy. A. RAMSAY	3/6
Coal Mining. Sir W. W. SMYTH & T. F. BROWN	3/6
Metallurgy of Iron. H. BAUERMAN	5/-
Mineral Surveyor's Guide. W. LINTERN	3/6
Slate and Slate Quarrying. D. C. DAVIES	3/-
Mining and Quarrying. J. H. COLLINS	1/6
Subterraneous Surveying. T. FENWICK & T. BAKER	2/6
Mining Tools. W. MORGANS	2/6
Plates to ditto. 4to	4/6
Physical Geology. PORTLOOK & TATE	2/-
Historical Geology. R. TATE	2/6
The above 2 vols., bound together	4/6
Electro-Metallurgy. A. WATT	3/6

NAVIGATION, SHIPBUILDING, &c.

Navigation. J. GREENWOOD & W. H. ROSSER	2/6
Practical Navigation. GREENWOOD, ROSSER & LAW	7/-
Navigation and Nautical Astronomy. J. R. YOUNG	2/6
Mathematical & Nautical Tables. LAW & YOUNG	4/-
Masting and Rigging. R. KIPPING	2/-
Sails and Sailmaking. R. KIPPING	2/6
Marine Engines. R. MURRAY & G. CARLISLE	4/6
Naval Architecture. J. PEAKE	3/6
Ships, Construction of. H. A. SOMMERFELDT	1/6
Plates to ditto. 4to	7/6
Ships and Boats. W. BLAND	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

AGRICULTURE & GARDENING.

Fertilisers & Feeding Stuffs.	DR. B. DYER	net	1/-
Draining and Embanking.	PROF. J. SCOTT	.	1/6
Irrigation and Water Supply.	PROF. J. SCOTT	.	1/6
Farm Roads, Fences, and Gates.	PROF. J. SCOTT	.	1/6
Farm Buildings.	PROF. J. SCOTT	.	2/-
Barn Implements and Machines.	PROF. J. SCOTT	.	2/-
Field Implements and Machines.	PROF. J. SCOTT	.	2/-
Agricultural Surveying.	PROF. J. SCOTT	.	1/6
The above 7 vols., bound together			12/-
Farm Management.	R. S. BURN	.	2/6
Landed Estates Management.	R. S. BURN	.	2/6
Farming—Soils, Manures, and Crops.	R. S. BURN	.	2/-
Farming—Outlines—Farming Economy.	R. S. BURN	.	3/-
Farming—Cattle, Sheep, and Horses.	R. S. BURN	.	2/6
Farming—Dairy, Pigs, and Poultry.	R. S. BURN	.	2/-
Farming—Sewage & Irrigation.	R. S. BURN	.	2/6
The above 5 vols., bound together			12/-
Book-keeping for Farmers.	J. M. WOODMAN	.	2/6
Ready Reckoner for Land.	A. ARMAN	.	2/-
Miller's & Farmer's Ready Reckoner	.	.	2/-
Hay and Straw Measurer.	J. STEELE	.	2/-
Meat Production.	J. EWART	.	2/6
The Sheep.	W. C. SPOONER	.	3/6
Multurn-in-Parvo Gardening.	S. WOOD	.	1/-
Forcing Garden.	S. WOOD	.	3/6
Market and Kitchen Gardening.	C. W. SHAW	.	3/-
Kitchen Gardening.	G. M. F. GLENNY	.	1/6
Cottage Gardening.	E. HOBDAY	.	1/6
Garden Receipts.	C. W. QUIN	.	1/6
Potatoes: How to Grow.	J. PINK	.	2/-
Culture of Fruit Trees.	M. DU BREUIL	.	3/6
Tree Planter & Plant Propagator.	S. WOOD	.	2/-
Tree Pruner.	S. WOOD	.	1/6
Tree Planter, Propagator, & Pruner.	S. WOOD	.	3/6
Grafting and Budding.	C. BALTET	.	2/6
Bees for Pleasure & Profit.	G. G. SAMSON	net	1/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

FIELD TELEPHONES

FIELD TELEPHONES

FOR ARMY USE

INCLUDING AN ELEMENTARY COURSE IN
ELECTRICITY AND MAGNETISM

BY

LIEUT. E. J. STEVENS, (D.O.) R.A.
A.M.I.E.E.

INSTRUCTOR IN ELECTRICITY, ORDNANCE COLLEGE, WOOLWICH



LONDON

CROSBY LOCKWOOD AND SON
7, STATIONERS' HALL COURT, LUDGATE HILL

1908

D. VAN NOSTRAND COMPANY,
NEW YORK

**PRINTED BY
WILLIAM CLOWES AND SONS, LIMITED,
LONDON AND BECCLES**

130161
JUN 12 1909
TR
ST4

63575

PREFACE

THIS little book has been written with the object of meeting a need that has made itself felt in all branches of the Service, particularly since the Russo-Japanese war. The author has personally realised this need through the constant request from members of his classes for a book of notes on elementary theory and daily practice.

It has been his aim to include in this handbook the information that from his experience he knows to be really called for; and to explain the principles of Field Telephones both for commissioned and non-commissioned officers. It is hoped that those who have mastered the course of Electricity and Magnetism contained in the early chapters, will thoroughly understand the working of the various apparatus and readily appreciate the practical hints for field work.

The author's thanks are due to Mr. B. S. Cohen, A.M.I.E.E., who kindly corrected the manuscript, and to the International Electric Company and the British L.M. Ericsson Manufacturing Company for the loan of blocks.

E. J. S.

WOOLWICH,
June, 1908.

CONTENTS

	PAGE
CHAPTER I.	
BATTERIES	I
CHAPTER II.	
ELECTRICAL CIRCUITS	11
CHAPTER III.	
MAGNETISM	22
CHAPTER IV.	
INDUCTION	39
CHAPTER V.	
MICROPHONES AND RECEIVERS	50
CHAPTER VI.	
PORTABLE AND FIELD TELEPHONE SETS	71
APPENDIX.	
SELF-INDUCTION, INDUCTIVE CAPACITY, ETC.	106
INDEX	111

FIELD TELEPHONES

CHAPTER I BATTERIES

Simple Voltaic Cell

WHEN two different metals are placed in a solution which is capable of acting chemically on one of them, and joined

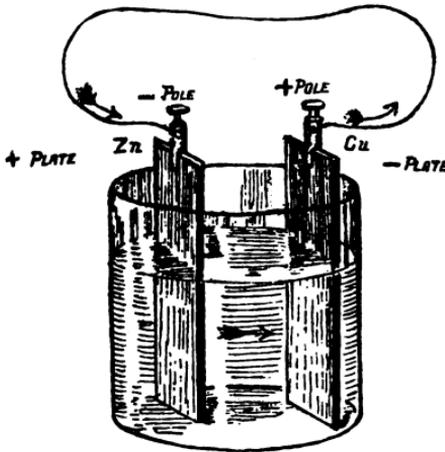


FIG. 1.

by a wire outside the liquid, a current of electricity is said to pass from one to the other inside the liquid, and back again by the outside wire, as shown in Fig. 1.

B.

If the plates are zinc (Zn) and copper (Cu) and the cell contains dilute sulphuric acid (H_2SO_4), then the current is said to flow from the zinc to the copper plate through the liquid, and from the copper plate to the zinc by the wire outside the liquid.

The circuit is made up of the interior and exterior, the former being the portion of the plates immersed in the liquid itself, and the latter the portion of the plates outside the liquid and the connecting wire.

The energy of the current is derived from the dissolving of the zinc, and so long as there is zinc to be acted upon by the liquid a current can be generated.

The point or terminal at which the wire makes connection with the copper plate is termed the positive pole, and that point at which connection is made to the zinc is termed the negative pole.

The conventional way of showing a cell is as in Fig. 2,

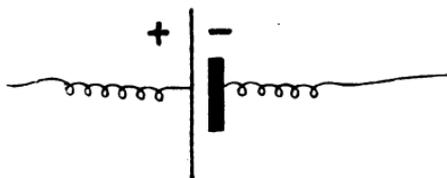


FIG. 2.

the zinc being represented by a short, thick line, and the copper by a longer and thinner line.

Defects

A simple cell of this description has two defects—local action and polarisation.

Local Action.—Commercial zinc being used for cells,

is not pure, it contains impurities such as iron, arsenic, or other alloys, and as soon as the plate is immersed in a solution that will act chemically upon it, a local current is generated between the zinc and impure metal (Fig. 3); this eats away the zinc to no purpose and also weakens the main current.



FIG. 3.

To overcome this the plate is amalgamated by first washing it in a weak solution of sulphuric acid, and, when clean, dipping it into or rubbing it over with mercury. The latter combines with the zinc, bringing pure zinc to the surface, thereby loosening the particles of foreign matter, which fall to the bottom of the cell. The mercury is not attacked by the acid, and continues to bring pure zinc to the surface, hence a surface of pure zinc is always offered to the liquid.

Polarisation.—The most troublesome defect is polarisation. This is a perceptible falling off in the current strength, and is caused by the bubbles of hydrogen gas, generated by the chemical action of the cell (when doing work), being deposited on the surface of the carbon or copper plate, whichever the cell contains. Gas is not a good conductor of electricity, and if allowed to accumulate will gradually cover the working surface of the plate, and therefore cause a falling off in current strength. The cell is then said to be polarised. This is practically overcome by using a substance rich in oxygen and placing it around the carbon or copper plate, either in a solid or liquid form; this is a “depolariser.”

The most common forms are

Binoxide of manganese (MnO_2)
Copper sulphate ($CuSO_4$)

The depolarising action is due to the hydrogen combining

with the oxygen in depolariser; the result is, water (H_2O) is formed. If a cell is kept working for any length of time, although it contains a depolariser, it will still polarise a little.

This is due to hydrogen being generated at a greater rate than the oxygen in depolariser can account for it. To overcome this, break the circuit for a minute or so to allow the oxygen to do its work.

Leclanché Cells

The Leclanché Cell is the most common form of cell to be met with, and is largely used for house bells and

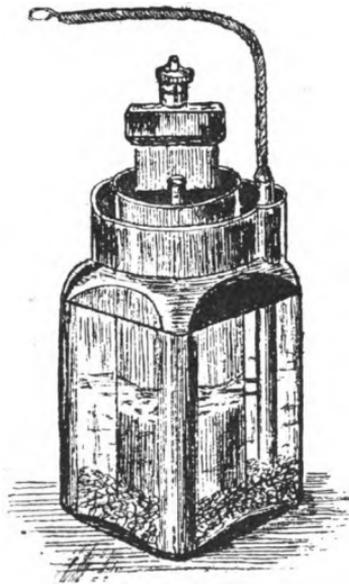


FIG. 4.


stationary telephones, its great advantage being its cheapness. The ordinary form consists of a glass vessel of the shape shown in Fig. 4. This contains a zinc rod with a copper wire soldered to it, forming the negative pole, also a carbon plate with a lead head shrunk on to it for the attachment of the terminal or positive pole.

The carbon plate stands inside a porous pot, which contains the depolariser (binoxide of manganese) in a granulated form, mixed with granulated carbon to make it a better conductor. The porous pot is sealed. The glass vessel is nearly filled with a saturated solution of

salammoniac (NH_4Cl), which is the exciter. This gradually percolates through the porous pot, until the whole is left about three-fourths full.

The action of the cell is as follows :—

The zinc combines with the chlorine of the salammoniac to form zinc chloride (ZnCl_2), which is dissolved in the solution ; the hydrogen being set free from the salammoniac robs the depolariser of some of its oxygen to form water, ammonia being also given off, as shown in the chemical formula—



The Agglomerate Leclanché.—This differs from the type just described in having no porous pot, the depolariser being agglomerated with carbon and pressed into blocks. The blocks thus formed are held to the carbon plate by indiarubber bands, usually provided with small holes for the zinc rod, to keep the latter from touching the blocks. In other respects the cell is the same as the previous one. The advantage of the agglomerate type is, that, being without a porous pot, there is less resistance or obstruction to the current before reaching the carbon.

The glass vessels of the Leclanché cells and porous pots should always have their tops coated with black tar varnish or paraffin wax to prevent the creeping action of the solution, which, if allowed, would creep up to the lead head on carbon plate and cause a local action to take place between it and the carbon. This would form lead chloride (a white substance), which would get under the lead head, and as it is a bad conductor of electricity, would cause a bad contact to be made between the lead and carbon. The junction of lead head and carbon plate, and zinc rod and wire, should also be treated with this varnish.

Dry Cell


Dry cells have of late years come extensively into use. They are greatly used for telephonic purposes, and portable telephones owe their present state of perfection to the introduction of dry cells.

There are various makes to be found, such as the Obach, E.C.C., Hellesen, etc., which are all modifications of the Leclanché.

Obach Cell

There are various sizes of Obach Cells.

They consist of a zinc plate which is either cylindrical

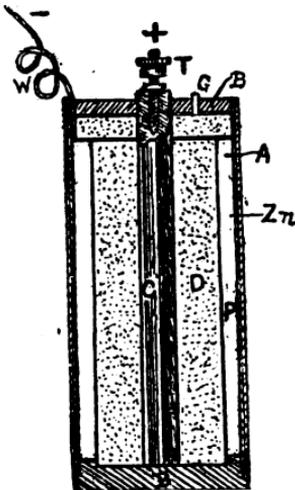

A, cardboard case; *B*, sealing compound; *C*, carbon rod; *D*, depolariser; *G*, glass tube; *P*, exciter; *T*, terminal; *W*, copper wire; *Zn*, zinc cylinder.

FIG. 5.

or rectangular in shape, in the centre of which stands a carbon rod; surrounding the carbon rod is the depolariser, made up in the form of a paste, consisting of binoxide of manganese, plum-bago and gum. Between the zinc plate and the depolariser is the exciter, which consists of plaster of Paris and flour saturated with salammoniac; this paste is pressed down to ensure its coming in contact with the zinc, a disc of paper is placed on the top, above this a layer of sawdust which allows for expansion and also absorbs moisture, a second paper disc, and the whole is then sealed with pitch, a small glass

tube being inserted to allow of the escape of gas that is generated.

A copper wire or a terminal soldered to the zinc forms the negative pole, and the terminal on the carbon stick the positive. The whole is inserted in a cardboard case, which entirely covers the zinc plate.

Arrangement of Cells

Generally speaking, cells may be arranged in two different ways.

When a battery consists of a number of cells, they may be arranged either in *series* or in *parallel*. To join cells in series (Fig. 6) the positive of one cell is connected to the



FIG. 6.

negative of the next, and so on. This leaves a free positive and negative, which are termed the poles of the battery.

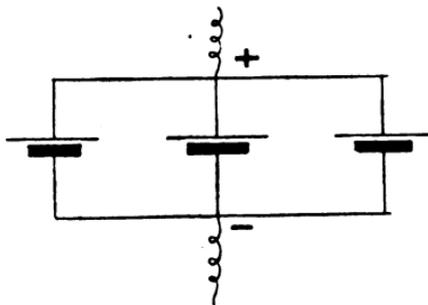


FIG. 7.

The plus sign denotes the positive, and the minus sign the negative pole of a battery.

To join cells in parallel (Fig. 7) all the positives

are joined together, and all the negatives in a similar manner.

The series method is nearly always employed. The advantage of this method is explained on p. 10.

Summary

Zn, Cu, H_2SO_4 , NH_4Cl , etc., are the chemical equivalents for the plate or liquid. That is, H_2SO_4 means that sulphuric acid contains two parts of hydrogen, one of sulphur, and four of oxygen. From this example the others can be readily seen.

The electromotive force, or electrical pressure, depends upon the material used and not upon the size of plates. Hence all Leclanché cells give the same electrical pressure.

A saturated solution of salammoniac is obtained by dissolving crystals of, or powdered, salammoniac in water until no more will dissolve.

Hot water will dissolve salammoniac much quicker than cold.

Don't pour the solution into a cell until it is cold.

Don't fill a Leclanché cell full, especially one that is sealed, as the liquid level has a tendency to rise when the cell is working. This will encourage the lead head and terminal to be attacked if they come in contact with it.

Don't allow the terminals of a cell to get dirty; they should always be bright.

Agglomerate means a mixture; agglomerate blocks being a mixture of carbon and binoxide of manganese.

Cells may fail, due to—

<i>Cause</i>	<i>Remedy</i>
Insufficient solution.	Pour in more.
Weak solution.	Empty and add fresh solution.
Too much salammoniac being added to solution, causing the plates to be covered with crystals.	Scrape off crystals and add a little water.

<i>Cause</i>	<i>Remedy</i>
White deposit between lead cap and carbon, caused by creeping of solution or by splashing.	Replace carbon rod or plate by a new one.
Depolariser exhausted, indicated by cell running down when under test.	Replace depolariser.

The electromotive force or pressure of all Leclanché and dry cells is approximately 1.5 volt.

Dry cells should always be kept in a cool place.

Don't allow the positive and negative poles of a cell to touch, or connect them together with a short piece of wire, more especially a dry cell.

Cells are tested by means of an instrument called a voltmeter, which indicates the pressure or voltage of a cell when it is connected to it.

A terminal is a brass connecting-nut for attaching a wire to.

Some instruments have a terminal marked +. This means that the positive only of the cell or battery should be connected to it.

When a dry cell is exhausted it cannot be refilled.

Leclanché cells are very cheap.

The price of a quart size, porous pot form, complete, is about 1s. 2d.

The internal resistance of a quart porous pot Leclanché is about 1 ohm, and the agglomerate type 0.6 ohm.

Obach dry and Leclanché cells are made at *Siemens Bros.' Works, Charlton, London, S.E.*

In hot climates it is not desirable to have the sal-ammoniac solution saturated.

Siebrosal, a specially prepared exciting salt, is prepared for use in Leclanché batteries in place of salammoniac. It

is considered better, and costs about 10*d.* a lb. tin. About 3 oz. is sufficient to make solution for a quart size cell. It can only be obtained from Siemens Bros.

Salammoniac can be bought in crystals or powdered. The latter is the best for cells. It is about 5*d.* a pound. About 7 oz. makes a saturated solution for a quart cell.

The price of an Obach dry cell, size P, is about 1*s.* 10*d.*; its dimensions being $2\frac{1}{4}$ in. square by $6\frac{1}{8}$ in. high; weight 2 lbs.

Obach cells are designated by letters.

Some Obach cells have a wire soldered on to the zinc plate instead of a terminal.

The Obach W size is specially adapted for use with motor cars and cycles as an ignition battery, price about 3*s.* each.

Don't carry an Obach dry cell with a negative wire connection by the wire. If you want to bend the wire, hold it firmly with one hand behind the point you wish to bend it from, and bend it with the other hand.

If the wire should break, cut the cardboard away a little at one side, and solder a fresh wire to the zinc plate.

Dry cells are not intended to be used on circuits that take more than 1 ampere; if so, only for short periods, as too much current would be taken from them, which would shorten their life.

A dry cell is practically useless for ordinary work when it gives less than 1 volt.

Cells should be joined in *series* when the external resistance is greater than the internal, and *vice versa*, in *parallel*. This enables you to get as much current as possible out of the battery.

Example.—Find what current flows from the battery, when connected in *series*, and then in *parallel*, with an external resistance of 1st, 100 ω ; 2nd, 1 ω . The battery consists of four cells, E.M.F. 1.5 volt, external resistance 1 ω each.

Work out after Chapter III. has been read.

CHAPTER II

ELECTRICAL CIRCUITS

Conductors

A CONDUCTOR is a substance that will convey or allow a current of electricity to pass freely through it. All metals are conductors, as also are some liquids, a few of the more metallic elements, such as carbon, and the earth.

Some metals will conduct better than others ; that is, they vary, in the obstruction which they offer to the current. Pure silver and copper offer the least obstruction of the metals.

The following are arranged according to their conducting power or conductivity :—

Pure silver	Platinoid
„ copper	Manganin
„ aluminium	Pure mercury
„ platinum	Carbon
„ iron	Dilute sulphuric acid
„ tin	(one-twelfth acid)
„ lead	Water
German silver	The earth

As copper is a good conductor, and being cheaper than silver, conducting wires are mostly made of it.

Insulators

An insulator is a substance that will not, under ordinary conditions, allow a current of electricity to pass through it. It therefore offers a great obstruction or resistance to the current, and is therefore the converse to a conductor.

The following are some insulators :—

Dry air	Earthenware
Ebonite	Glass
Indiarubber	Porcelain
Guttapercha	Black tar varnish
Paraffin wax	Paint
Dry cotton	Dry wood
Oiled silk	

Dry air is used as the insulator for uncovered telegraph wires, indiarubber being largely used for insulating electric light cables.

There is not a conductor that does not offer some resistance, neither is there an insulator that will entirely prevent a current from passing through it, if a very high pressure is applied. Under ordinary conditions, the pressure being small, the above insulators are considered perfect.

Resistance

The resistance of wires is found to depend upon the following :—

- (a) Material of which it is made,
- (b) Its length,
- (c) Its diameter,
- (d) Its temperature.

In the case of (a), a copper wire will conduct better

than one of iron; (*b*), it is proportional to its length; the longer the wire, the greater the resistance; (*c*) the thicker the wire, the smaller the resistance; (*d*) the resistance of metals increases with a rise of temperature, that of carbon and some liquids decrease.

The resistances of German silver, platinum, and manganin are practically unaffected by temperature.

Internal Resistance

The resistance of a cell is called internal resistance. The larger the plates, and the closer they are together, the smaller this resistance.

The Electric Circuit

The electric circuit consists of a battery, and the wires or instruments that may be connected between the poles, as in Fig. 8.

In the electric circuit there are three things to be considered.

Firstly, let us remember that the wires and cell offer a resistance to the flow of current.

Secondly, there is the pressure that is generated by the chemical action of the cell, resulting in the flow of an electric current. This current cannot overcome the resistance that is offered to it unless it has a pressure.

Thirdly, the pressure that urges the current through the resistance, and which is known as the electromotive force (E.M.F.), is also obtained due to the chemical action of the cell.




FIG. 8.

The Electrolytic Cell

Let S, Fig. 8A, represent a piece of silver connected to the positive pole of a battery, and D a platinum dish containing a solution of silver nitrate, the negative pole of the battery being connected to the dish D.




FIG. 8A.

When a current passes through the solution it decomposes it, causing it to obey the same law as the hydrogen and oxygen in the simple voltaic cell. In this case, the silver in the solution is deposited on the negative plate or dish D.

Current strength can be determined in this way, as the stronger the current the greater the deposit.

Units

In the ordinary affairs of life it is necessary to have units or standards of length, weight, time, etc., so also are units necessary for precise statement and calculation in electrical work.

The following are electrical units :—

Ampere.—The standard of current strength agreed upon is called the ampere, after a French scientist of that name. This current will cause a deposit of silver at the rate of 0.001118 gramme per second.

Ohm.—The practical unit of resistance is the ohm (called after Ohm, a German scientist), and is that amount of resistance offered by a column of pure mercury 106.3 centimetres long, and one square millimetre in cross section.

The ohm is usually denoted by the Greek letter ω (omega), thus 4ω means 4 ohms.

Volt.—The practical unit of electromotive force is the volt (called after Volta, the Italian scientist), and is that amount of force that will enable one ampere of current to overcome the resistance of one ohm.

Conductance

The conducting power, or conductance, is the reverse of resistance. If a wire has a resistance of 4ω , its conductance will be $\frac{1}{4}$.

The foregoing units were framed into a law by the German scientist Ohm, which he called Ohm's Law.

Ohm's Law

This states that the current flowing in a circuit is proportional to the electromotive force in volts, but is inversely proportional to the resistance in ohms.

That is	$C = \frac{\text{E.M.F.}}{R}$
therefore	$R = \frac{\text{E.M.F.}}{C}$
and	$\text{E.M.F.} = C \times R$

By means of this law, if we know any two of the above, the third can be determined.

Example.—A Leclanché cell, E.M.F. 1.5 volt, internal resistance 0.2ω , has connected to it a resistance of 4ω . What current is passing in the circuit?

As you are asked to find the current, the formula to be used is—

$$C = \frac{\text{E.M.F.}}{R}$$

R, the total resistance in the circuit, will be the internal plus the external resistance.

Therefore $C = \frac{1.5}{4.2} = 0.35 \text{ amp.}$

It will assist you if a sketch of the circuit is made as shown in Fig. 8.

In the above example, if we know the E.M.F. (1.5) and current (0.35 amp.), find the resistance that is being overcome.

The formula will be—

$$R = \frac{\text{E.M.F.}}{C} = \frac{1.5}{0.35} = 4.2 \omega$$

Example.—If in above example we know only the current (0.35 amp.) and the resistance (4.2 ω), find the E.M.F. that is being expended.

The formula will be—

$$\text{E.M.F.} = C \times R = 0.35 \times 4.2 = 1.5 \text{ volt nearly.}$$

These examples prove that the formula $C = \frac{E}{R}$ can be modified to $R = \frac{E}{C}$, etc.

Resistances in Series and Parallel

Wires can be connected up either in series or parallel.



FIG. 9.

When they are joined in series, as shown, the resistance

which will have to be overcome by a current entering at A and leaving at B, or the joint resistance, will be—

$$6 + 4 = 10\omega$$

When the same two wires are joined in parallel, to determine the joint resistance, multiply the two together and divide by their sum, thus—

$$\frac{6 \times 4}{6 + 4} = \frac{24}{10} = 2.4\omega$$

To determine the joint resistance of more than two unequal resistances in parallel.

Find the joint conductance by inverting the resistance




FIG. 10.

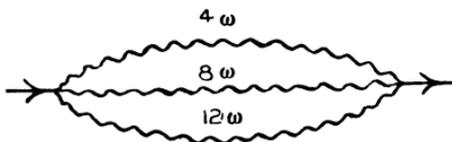


FIG. 11.

and adding them together, then invert the joint conductance, which will give the joint resistance—

$$\frac{1}{4} + \frac{1}{8} + \frac{1}{12} = \frac{6 + 3 + 2}{24} = \frac{11}{24} \text{ joint conductance}$$

$$\text{therefore the joint resistance} = \frac{24}{11} \text{ or } 2\frac{2}{11}\omega$$

To determine the joint resistance of any number of equal resistances in parallel, divide the resistance of one by the number in parallel—

$$\frac{20}{4} = 5\omega \text{ joint resistance}$$

or, in the case of cells of a similar type in parallel (Fig. 7):

C

If their internal resistance be 0.25ω and E.M.F. 1.5 volt each, then three cells connected in parallel would have a joint internal resistance of—

$$\frac{0.25}{3} = 0.08 \omega$$

The E.M.F. of this combination would only be 1.5 volt, as they are acting as one cell with their plates increased threefold in size. This has the advantage of decreasing the joint internal resistance, and the disadvantage of only giving the voltage as for one cell.

As cells are hardly ever connected this way in the

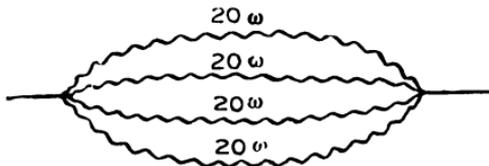


FIG. 12.

service, it will not be necessary to say any more here about it.

The reader will readily observe how much the joint resistance in a circuit can be reduced, if necessary, by joining the wires or resistance in parallel, thereby increasing the current.

Simple Circuit

In a simple circuit there is only one path for the current, therefore it is the same strength at any point of the circuit. In Fig. 8 the current at A will be the same strength as the current at B.

Compound Circuit

In a compound or parallel circuit, there is more than one path for the current to flow, as the resistances are in parallel. The path which has the smallest resistance will have the most current.




FIG. 13.

Metallic Circuit

A metallic circuit is one that is connected by a line and return wire.

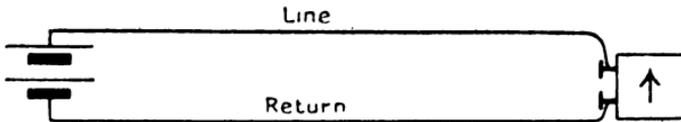


FIG. 14.

Earth Circuit

An earth circuit is one that utilises the earth instead of a return wire, an example being a field telephone or a telegraph circuit.

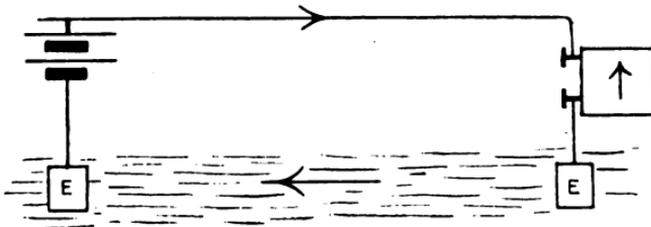


FIG. 15.

Short Circuit

A short circuit is caused by two wires making contact with each other, or the same piece of metal, thereby allowing the current to return without going to the instrument, as in Fig. 16.



FIG. 16.

Summary

The ampere is the unit of current.

„ volt „ „ „ pressure or E.M.F.

„ ohm „ „ „ resistance.

The Metric System is used in electrical measurement—

1 metre = 39.37 inches

1 centimetre = 1 hundredth of a metre

1 millimetre = 1 thousandth of a metre

1 milliampere = 1 thousandth of an ampere

1 millivolt = 1 thousandth of a volt

1 megohm = 1 million ohms

Potential means the power of doing work.

Potential difference (P.D.) means the difference of power or pressure between any two parts of a circuit.

In a simple circuit, the current is the same strength at any point of the circuit.

In Fig. 13, the joint resistance of the circuit is found by working out the resistance of the 2 and 4 ω wires in parallel and then adding the result to the 10 ω , as the latter is in series with the joint resistance of the former.

German silver consists of four parts copper to one of zinc and two of nickel.

Platinoid consists of 59 per cent. of copper

25.5 " " zinc

14 " " nickel

1.5 " " tungsten

Manganin consists of 84 per cent. of copper

12 " " manganese

4 " " nickel

CHAPTER III

MAGNETISM

Magnet

A **MAGNET** is anything that has the power of attracting or picking up pieces of iron or steel.

A lodestone is a certain hard black stone that is dug out of the earth, and will, if hung up from its middle by a thread, always set itself north and south. Such a stone was originally termed a "leading stone," from the fact that it was in early days used as a compass. It is an ore of iron, another name for it being magnetic oxide of iron.

If a bar of steel is rubbed with a lodestone, it will become magnetised, and if suspended will set itself north and south.

Steel bars or horseshoes treated in this way are termed artificial magnets, and are capable of attracting iron or steel.

Every magnet has two poles at which it will be found that the magnetic attraction is greatest. These are at the ends of a bar and horseshoe magnet.

We cannot obtain a magnet with only one pole ; for instance, if a steel bar magnet is broken into several pieces, each piece will exhibit a north and south pole.

Artificial magnets may be either bar, horseshoe, or ring shaped, as in Fig. 17.

A compound magnet is made by clamping together thin

pieces of steel that have previously been magnetised, to form a single magnet. It may take the shape of any of the above. Such a magnet is stronger than a single piece of steel of the same size.

If a piece of thin steel is magnetised and pivoted horizontally on a pin point, it will, as previously stated, point north and south. A very common example of this is the ordinary pocket compass.

When the north pole of a bar magnet is presented to

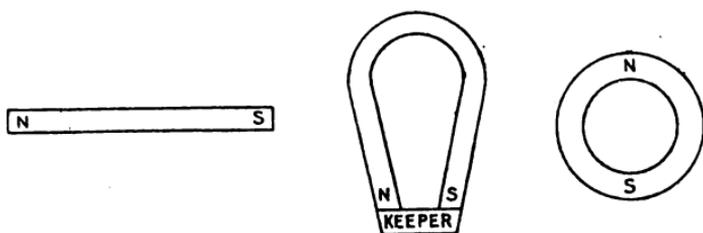


FIG. 17.

the north of a magnetic needle, it will be seen to be repelled. Such will also be the case if the south pole is presented to the south pole of needle.

But if the north pole of magnet is presented to the south of needle, or south pole of magnet to north of needle, the needle will be attracted.

First Law of Magnetism.—The facts stated above may be summed up as follows: Like poles repel, unlike poles attract.

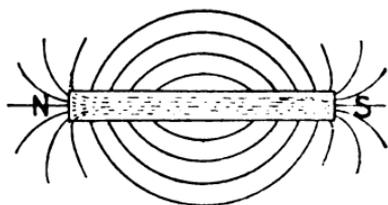


FIG. 18.

Magnetic Lines of

Force.—It has been previously stated that artificial magnets have the power of attracting iron or steel; this is due to

invisible lines of magnetic force that are said to leave the north pole, curve through the air to the south pole, and along the body of the magnet as in Fig. 18.

To obtain a good magnetic figure of a bar or horseshoe magnet, lay the magnet flat down on the table and place over it a sheet of glass, on top of the glass place a sheet of paper, then sprinkle iron filings through a pepper-box evenly all over, gently tapping the glass at the same time. The filings will be seen to arrange themselves along the lines of force.

Fig. 19 represents two north poles placed opposite to




FIG. 19.




FIG. 20.

each other, and Fig. 20 a north pole placed opposite a south pole.

Magnetic Field.—The space surrounding a magnet through which the lines of force pass is termed the magnetic field.

Once steel is magnetised it retains its magnetism, but iron is only a magnet so long as it is in a magnetic field.

If a steel magnet is let fall, or is heated, it will lose some of its magnetism. It can be demagnetised by bringing it to a red heat and allowing it to cool slowly.

Residual Magnetism.—When iron has once been magnetised it retains a small amount of magnetism, which is called residual, more especially if the iron is not very soft. This is more noticeable in large pieces of iron.

Magnetic Induction.—In Fig. 21, opposite the north pole of the bar magnet is a piece of soft iron. It will be seen that some of the lines of force enter the iron, and in doing so the iron becomes magnetised, that end nearest the north of magnet will, of course, exhibit south polarity.

This is called magnetisation by induction, the north pole always inducing a south pole at the end of the iron nearest to it.

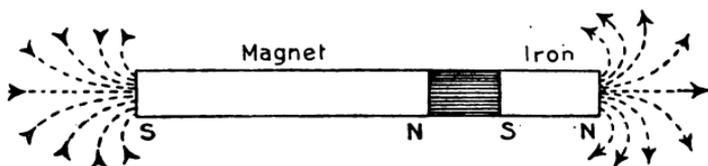


FIG. 21.

If the iron was near enough to the magnet it would be attracted to it and be magnetised, extending this pole as in Fig. 22.

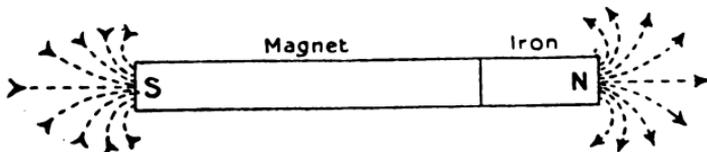


FIG. 22.

Magnetism of the Earth.—The reader will remember it was stated that if a magnetic needle was placed on a pivot, it would set itself towards the poles of the earth. This proves that the earth is a huge magnet, and gives out lines of force, which curve over its surface from pole to pole.

Besides the geographical north pole there is the magnetic north, which is, in Greenwich, about seventeen degrees west

of the geographical. It is to the magnetic north that a compass needle always points.

Summary

A lodestone is sometimes called magnetite.

In addition to steel and iron, nickel and cobalt are magnetic substances. Non-magnetic substances are silver, gold, brass, lead, etc.

Law of magnetic attraction and repulsion : Like poles repel, unlike poles attract.

The magnetism in a steel magnet is diminished, or perhaps destroyed, by rough handling or by extreme heat.

A pair of bar magnets should always be put away with unlike poles placed side by side, and an iron keeper across the poles. This enables the lines of force to go through the iron keeper instead of through the air; the path being easier lengthens the lives of the magnets.

Never place a magnet near a delicate electrical instrument, or you may spoil the instrument.

A piece of steel may be magnetised by stroking it, from end to end, with one pole of a strong permanent magnet. The stroking must be always in the same direction, not backwards and forwards.

Electro-magnetism

If a wire carrying a current is held near a pivoted

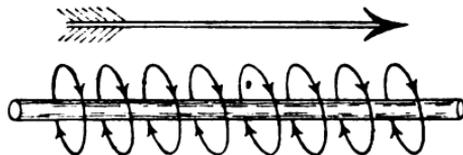


FIG. 23.

magnetic needle, the needle will be seen to be deflected.

This proves that the wire must give out lines of force, which act upon the needle. When a wire carries a current, whether it is insulated or not, it gives out circular lines of force throughout its length, as shown in Fig. 23. These lines of force disappear immediately the circuit is broken.

Next, let us consider the wire to be coiled, as in Fig. 24.



FIG. 24.

The field given out by the coil will be the same as a weak bar magnet, the ends exhibiting polarity.

If we insert a core of soft iron inside the coil, the iron will become strongly magnetised, due to the magnetic lines of force entering it, and the ends of the iron will exhibit polarity, as in Fig. 25. This is termed an electro-magnet.



FIG. 25.

As soon as the current ceases to flow the iron becomes demagnetised, as the wire no longer gives out lines of force.

Electro-magnets are made in various shapes and sizes, the most common form being the horseshoe type, although the one shown in Fig. 26, not actually resembling a horseshoe, is called by this name.

The various parts of an electro-magnet are :—

B, B' the bobbins of wire, C, C' the cores of iron, being

joined at the bottom by the yoke of iron. The cores are usually made to screw into the yoke, an armature of soft iron, which is attracted when the cores are magnetised.

When a current passes, the ends of C, C' become the poles of the electro-magnet, the lines of force passing from

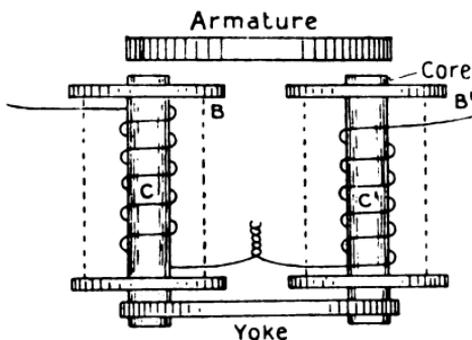


FIG. 26.

one pole to the other. If the armature is near enough it will be attracted to and held by the poles.

The electro-magnet is of great practical importance, and most electrical instruments are worked by this principle.

Trembling Bell

A very common application of the electro-magnet is in the ordinary electric bell. This, it will be seen, is caused to work by the magnetisation and demagnetisation of the electro-magnet.

In Fig. 27 T, T' are the terminals of the bell, to which the wires from the battery are connected through a bell push; M is an ordinary electro-magnet, one end of the coil C being connected to the terminal T, and the other to the

metal or framework of the electro-magnet. A is an iron armature to which is fixed a piece of flat spring D, which acts as a pivot at E; a metal hammer screws into its other end. Opposite this hammer is placed a metal gong G; at the back of the armature is fixed a flat spring S, which is bent so that it will just touch an adjusting screw p . The adjusting screw passes through a pillar P, which passes through to the back of the board, where a wire is connected from it to the other terminal T'.

If the positive of a battery is joined to T, and the negative through a bell push to T', the circuit will be as follows:—

From T around the electro-magnet coils (which are joined in series) to the frame, down the armature, from the flat spring S to adjusting screw p , to pillar P, back by the wire to terminal T', through the bell push to the negative.

Action.—As the circuit has just been traced and is found to be complete, the current will cause the iron of electro-magnet to become magnetised, the armature is attracted by the poles, and causes the hammer to strike the gong. The armature brings with it the flat spring S, which leaves the screw p ; this causes the circuit to be broken, and so demagnetises the electro-magnet, as no current is now passing. The magnet will therefore release the armature,

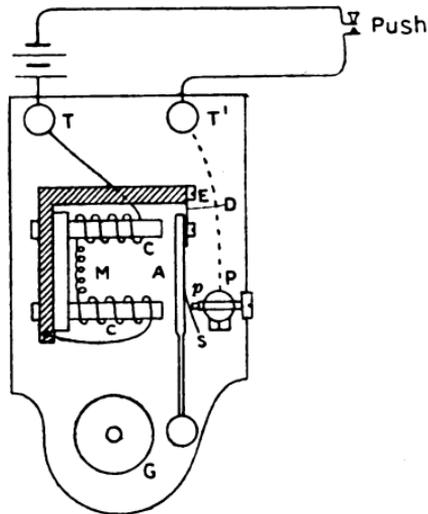


FIG. 27.

and allow the spring D to reassert itself and bring it back, as it was attracted against the pull of this spring. As soon as the spring S touches the screw p the circuit is again completed, and the same thing takes place. From this we can say that the bell is caused to ring due to the make and break of the circuit, causing magnetisation and demagnetisation of electro-magnet, and therefore attraction and release of armature.

Some bells have their coils wound on bobbins, and the bobbins slipped over the iron cores. The pole pieces are sometimes tipped with brass, to prevent the armature from sticking to them after the circuit is broken, due to residual magnetism.

To make it, or any trembling bell, act as a single-stroke bell, connect a wire from the frame to terminal T'. This cuts out or short circuits the adjusting screw, the circuit remaining closed when the armature is attracted, leaving the screw p , and is only broken by breaking the circuit at the bell push.

A buzzer is sometimes used instead of an electric bell.

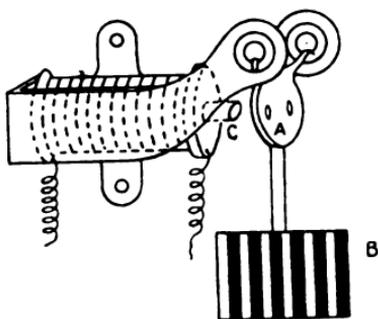


FIG. 28.

It differs from the bell in having no hammer and gong. The armature is much thinner, so that it will give a buzzing sound when it vibrates.

A common electro-magnet is used also in a simple relay, which is a form of electro-magnet, usually with a projecting piece on the armature,

that will, when attracted, touch a contact and close another independent circuit.

This type of electro-magnet is called a common or non-polarised. In another shape it is used for a house indicator, as in Fig. 28.

The action of this type of indicator is that when a current passes round the coils, the iron core C becomes magnetised and attracts the iron armature A; as soon as the circuit is broken by releasing the bell push, the core C demagnetises and releases the armature; as this is loosely supported it will act like a pendulum and swing for some time, which is indicated by the painted portion B showing through the glass door of case.

Fig. 28A represents the circuits of a house wired with a four-room indicator, bell, and battery. It will be seen that

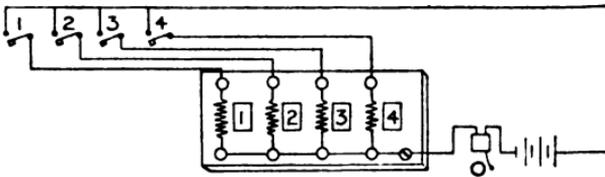


FIG. 28A.

when a push is pressed, that circuit is closed through its indicator, working it and also ringing the bell.

Polarised Electro-magnet.—A polarised electro-magnet is one that always has polarity, whether a current is passing or not. This is due to the presence of a permanent magnet.

Polarised Bell

The polarised or magneto bell consists of a] shaped permanent magnet M, on the south pole of which stands the yoke Y of an ordinary horseshoe-type electro-magnet, as in Fig. 29.

Under the north pole of the permanent magnet is an iron armature A, which is pivoted so that it can vibrate about its centre, just in front of the iron cores B. The hammer H is fixed to one side of the armature and moves with it, striking alternately the gong on either side.

The north pole of the magnet being over the centre of the armature A, makes it a magnet by induction, the middle having a south polarity, and the ends north. The yoke Y of the electro-magnet, standing on the south pole of the permanent magnet, has the effect of extending this south

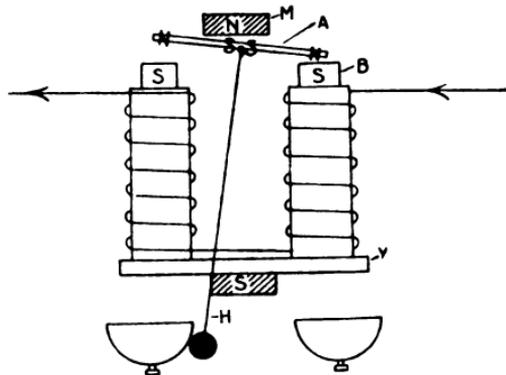


FIG. 29.

pole, as shown in Fig. 22, to the ends of the iron cores, which will exhibit a south polarity.

Action.—If a current enters the coils, say from the right side, it will have the effect of an ordinary common electro-magnet, that is, it will make one core a north, and the other a south pole. This effect will be to strengthen one core which has already a south pole, and weaken or neutralise the other core. The armature being attracted towards the left-side core, causing a blow to be struck on the right-side gong. If the current now enters by the

left side, the polarity due to the current will be reversed, causing the core that was previously strengthened to be weakened, and *vice versa*, so that the armature will now be attracted by the right core, and the left gong struck.

It will now readily be seen that the current must alternately enter, first by the right and then the left side of coils, to make this type of bell ring. The current used is called an alternating current, and is generated by a small magneto generator, to be described later. Some bells have two polarising magnets, but their action is similar.

Galvanometer

A galvanometer or detector is an instrument that is used to detect the presence of an electric current.

It has already been explained that a wire carrying a current gives out lines of magnetic force. It is on these that the action of a detector depends. If a coil of wire, as in Fig. 30, has pivoted inside it a magnetic needle *M*, when a current traverses the coil, the lines of force given out by it will act on the needle, and cause it to be deflected. Fixed to the same spindle, but at the other end of it, is a non-magnetic pointer that moves over a graduated scale. By this means the movement of the magnetic needle inside the coil is indicated on the scale.

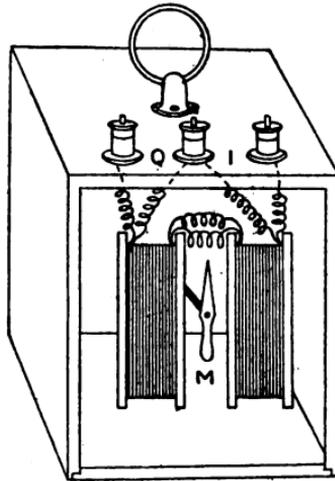


FIG. 30.

Fig. 30 represents a linesman's detector. This is known in the service as Detector Quantity and Intensity. It has two coils and three terminals; between the centre and one other is fixed the letter Q, to these the ends of the low resistance coil are connected; resistance about 0.2 ohm. Between the centre and the other is fixed the letter I, to these the ends of the high resistance coil, about 100 ohms, are connected. The low resistance Q coil consists of a few turns of thick wire wound from one terminal round one bobbin, then on to the other bobbin, and back to the centre terminal. The other coil is wound in a similar manner, but, having a much higher resistance, consists of a greater number of turns. The high resistance coil is used with a high resistance circuit, and *vice versa* the low resistance coil.

Summary

The reader will notice that the electro-magnet is by far the most useful electrical device, as nearly every instrument and machine depends for its action on it.

In winding an electro-magnet, if the coil comes off the core on the side nearest you, the winding on the other core should commence on the side farthest from you, as in Fig. 26, so that, if the cores were removed and put end on to each other, the winding would appear continuous.

To determine the polarity of an electro-magnet, a simple rule is as follows:—

Put down the letter S, mark the top part N, and the bottom S, thus ${}_sS^N$. This means that the top half of S being made in a *counter-clockwise* direction means north, and the bottom half being made *clockwise* means south. Therefore, if where the current enters an electro-magnet the winding takes a counter-clockwise direction, that end will have north polarity, and if it takes a clockwise direction it will be south.

Electro-magnets should be made of the softest iron, which is usually Swedish, well annealed after turning and filing has been finished.

The softer the iron the less chance it has of retaining magnetism.

The strength of an electro-magnet depends upon its ampere turns, *i.e.* the current passing through it multiplied by the number of turns of wire.

An electro-magnet that has to be used on a high resistance circuit (small current passing) should have a large number of turns of the wire on the coils (high resistance electro-magnet), as a weak current passing around the iron core a great many times will give a greater magnetic effect than a weak current passing around a few times, as would be the case if it were a low resistance electro-magnet. This also applies to the electric trembling bell.

If the circuit is a low resistance one, use a low resistance electro-magnet and a good battery.

Example.—If 3 amperes is sent around a coil having 20 turns, its strength will be $3 \times 20 = 60$ ampere turns.

Example.—If a current of $\frac{1}{5}$ of an ampere be sent round having 300 turns, its strength will be $\frac{1}{5}$ or $0.2 \times 300 = 60$ ampere turns; that is, the same as the first.

It will be understood from this, why an electro-magnet intended for use with weak currents is wound with many turns of fine wire, and why one for large currents has only a few turns of thick wire.

An electro-magnet has the following advantages:—

It can be actuated from a distance.

It can be demagnetised by breaking the circuit.

Its polarity can be reversed by reversing the direction of current.

Its strength can be increased up to a certain point

(saturation) by increasing the current, or the number of turns of wire on its cores.

Saturation means that a piece of iron can only be magnetised up to a certain strength, which depends upon the kind of iron, and its size.

Magnetic lines of force cannot be insulated, therefore it is immaterial whether the coils of an electro-magnet are wound directly on to the iron, or on to a bobbin, and then slipped over the iron. For convenience the latter method is usually employed.

A trembling or chattering bell often fails to act, due to the want of adjustment of the contact or adjusting screw.

A small screw is often to be seen on the side of the adjusting screw pillar. This is for clamping after it has been adjusted. Never try to adjust without loosening the clamping screw.

If a trembling bell becomes an annoyance, make it a single stroke as previously explained.

The resistance of the two coils of some first grade trembling bells is about 100 ohms.

The points of contact between spring at back of bell armature and the end of the adjusting screw should be tipped with platinum, if not, the metal gets burnt away due to the spark caused by the break of the circuit at this point. This would cause a faulty contact here.

All contact keys should be tipped with platinum ; it prevents this.

Some electric bells have the electro-magnet and armature combined under the gong. The electro-magnet in this form is not a horseshoe, but a single coil and iron core.

Electric indicators are either pendulum or replacement.

The pendulum is set swinging by being attracted

when the bell is rung, as the indicator magnet is in series with it.

In the replacement type the armature of indicator is attracted, and allows the indicator to fall. It has to be replaced mechanically.

There is an electrical replacement indicator which has to be replaced by pressing a push-button (usually fixed underneath) when the indicator falls; a relay is used with it.

Replacement indicators have the disadvantage of the attendants forgetting to replace them, causing extra wear on the stair carpet when they go to see where they are required.

A 6-hole pendulum indicator costs about 9s. (without bell).

A 6-hole replacement indicator costs about 12s. 6d. (without bell). Electric bells range from 1s. 9d. to about 21s. *Veritys, Ltd., King Street, Covent Garden, W.C.*

To ascertain by means of a detector if a wire or circuit is broken, place the detector in series with the circuit at any point; a deflection will be obtained if correct.

In testing a house-bell circuit for continuity, connect it in series, and close circuit by pressing bell push. This should give a deflection.

A bell push is usually a circular piece of wood, metal, or china, that contains two strips of metal to which the two wires of a bell circuit are connected. They are made to touch and complete the circuit by pressing a button on the face of the push.

The best sort of bell wire to use for ordinary house wiring is a number 20 or 22 S.W.G. plaited twin, and insulated with paraffin waxed cotton.

The wires should be coloured differently.

When stapling such a wire, always insert one leg of the staple between the wires. If the two wires are placed between the legs of staple, and the latter is driven home too far, it usually penetrates the insulation, causing a short circuit and a great deal of time to be wasted in locating.

CHAPTER IV

INDUCTION

THE induced current forms a very prominent part in the theory of modern electrical apparatus.

Magnetic Induction

It is best understood by means of a few practical experiments.

In Fig. 31, B is a hollow bobbin on which is wound cotton-covered copper wire. The inner and outer ends of the wire are connected respectively to the two binding screws. NS is a permanent magnet, G is a galvanometer, or current detector, which is connected in series with the coil by means of wires about a yard long, so as not to be too near the coil, and cause the magnet to affect it.

If now we plunge the magnet inside the coil north pole first, the galvanometer will be seen to deflect. When the needle comes to rest, withdraw the magnet rapidly; this will cause it to be deflected in the opposite direction. It will now be apparent that a current of electricity is induced in the coil, due to the lines of force given out by the magnet cutting it. This is called an induced current.

Repeat the experiment with the magnet south pole first; the direction of current will be reversed in each case.

If the magnet is moved about, either in or near the coil, the galvanometer will be affected. The same effect

will be observed if the magnet is stationary and the coil moved about. It must be remembered that it is only when there is a movement between the lines of force and the coil that we get an induced current.

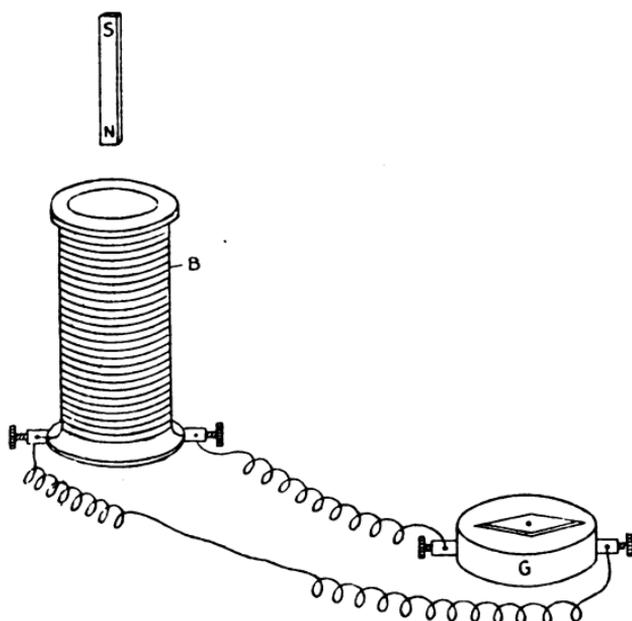


FIG. 31.

Electro-magnetic Induction

Let the bar magnet now be replaced by a coil P (Fig. 32), with a core of soft iron. Connected in series with it, is a battery and simple key. Place P inside the coil B.

If now the key be pressed a current will flow round the coil P, and will magnetise the iron core. The lines of force

which shoot out from the iron will, in their passage, cut the coil of wire B causing a current to be induced in it, which will be indicated by the galvanometer needle deflecting. If the current is kept flowing in the inside coil, the induced current will cease to flow and the needle come to rest, owing to there being no movement between the lines of force and coil. Now break the circuit at the key; this will give another kick in the galvanometer in the opposite direction to that when the key was pressed, due to the

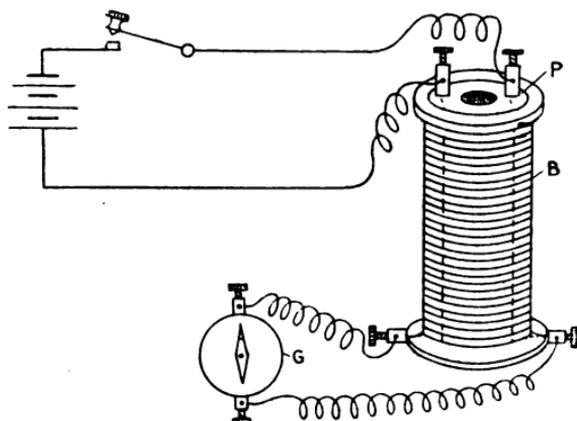


FIG. 32.

iron being magnetised. The lines of force this time, being withdrawn, cut the coil B in the opposite direction to when they were shot out.

If when the current in the coil P is once started its strength be either increased or decreased, each alteration will cause an alteration in the strength of the magnetic field, and any disturbance in the magnetic field will cause the wires of the coil B to be cut by the lines of force, thereby inducing a current in the latter.

It will now be seen that when the current is started in P, an induced current is obtained in one direction, and when it is stopped the induced current is in the opposite direction.

The current in the coil B is therefore an alternating current; that is, one that keeps changing its direction, and is induced in it if the circuit in P is made or broken, or if the current strength in P is altered as explained.

Induction Coil

Such an apparatus as shown in Fig. 32 is called an induction coil. It consists of two coils, the inside coil P is called the primary coil, and consists of a few turns of low resistance (large gauge) copper wire wound round a soft iron core, outside of this is the coil B, called the secondary coil, which consists of a great many more turns of high resistance (small gauge) copper wire.

The function of the induction coil is to transform a large current with a small pressure, into a small current with a large pressure. This means that if a current of say 5 amperes, with a pressure of 2 volts, was applied to the primary coil, the induced alternating current in the secondary coil might be something like 0.002 ampere, with a pressure of thousands of volts.

A rough rule for calculating the induced volts in the secondary coil is, that it is in proportion to the number of turns in the primary to the number in the secondary coil.

This means, for a coil having 100 turns in the primary and 10,000 in the secondary, for every volt applied to the primary coil, there will be induced in the secondary 100 volts, as the ratio of the windings is 1 to 100.

The induction coil plays a very prominent part in the

modern telephone, of which more will be said later. It also has many other applications, some of them being for X-ray work, wireless telegraphy, ignition purposes in motor cars and cycles, etc. The latter application being used by so many at the present time, I think a few words about a simple form of ignition will not be out of place here, and might benefit those who are interested.

In a motor car or cycle the primary coil is joined in series with a two-cell battery, and a contact cam that is

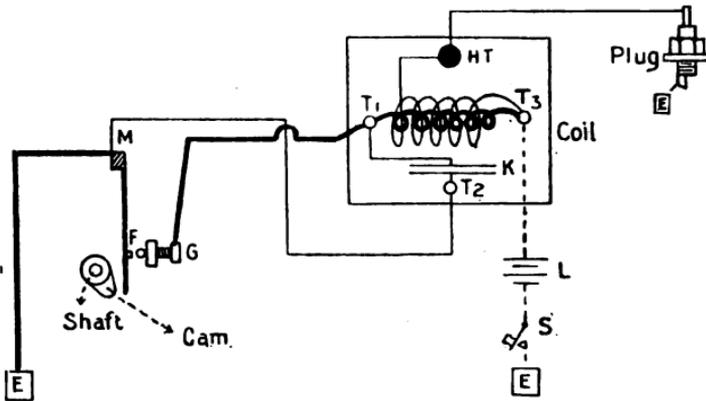


FIG. 33.

made to close the circuit by a rotating part of the engine, as in Fig. 33.

The rotating cam causes a momentary contact to be made in the primary circuit, which, as previously explained, will give a momentary induced current in the secondary coil. One end of the secondary coil is connected by an insulated wire to the sparking plug, which screws into the back of the combustion chamber, the other end of the secondary is usually common to one end of the primary coil, and this is, as shown in Fig. 33, connected to the battery,

then through a switch S, and earthed ; or, in other words, connected by a wire to the metal of engine under any convenient nut. Some primary circuits are earthed, as in Fig. 33.

Circuit.—The shaft, with cam attachment, is caused to rotate by the engine, which makes it complete the primary circuit at point FG, when the piston has just completed its compression stroke. This momentary contact will allow a current to flow from the battery, through the primary circuit, which will induce a momentary current in the secondary coil, leaving by HT, and flow to sparking plug, jump the air gap between the pins at end of plug to earth, through the switch S (which would be closed), and back to secondary coil at T₃.

The spark in the secondary circuit takes place across the sparking plug, igniting the petrol vapour, which forces the engine piston out.

The primary circuit is shown in thick lines, the secondary in thin, and that part common to both circuits dotted.

A modern form of induction coil is shown in Fig. 34. It is fitted with an automatic make-and-break device, which acts like the armature of a trembling bell, and is usually called an interrupter. Its functions are to make and break the circuit, so as to obtain the induced alternating current in the secondary coil. This is caused by a piece of iron on the interrupter being attracted by the end of the iron core which it is placed opposite to.

Condenser

In Fig. 34 a condenser will be seen connected between the two parts of the interrupter that make and break the

circuit. It consists of several sheets of tinfoil separated by sheets of paraffin wax or paraffined paper. Alternate strips of foil are connected together, so that they practically form two big sheets. A coil not fitted with a condenser will be seen to spark badly on the break of the circuit at the interrupter, which will in time fuzze the platinum points. Another disadvantage is, that so long as the spark lasts

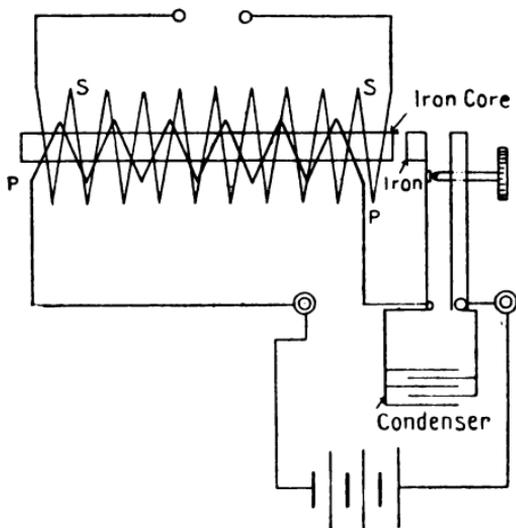


FIG. 34.

some current must be passing, hence the current falls off gradually instead of sharply, this means a falling-off in the E.M.F. induced in the secondary, as this depends on the rate at which the lines of force disappear from the circuit. To prevent this, the condenser is connected as shown.

Action of Condenser.—The current at break, instead of sparking across the contacts, rushes suddenly into the condenser and charges one set of plates with a positive

charge of statical or stationary electricity, the other plates having at the same time an equal negative charge. This, therefore, enables the primary current to stop quickly; but it does more than this; no sooner is the condenser charged than it discharges itself through the primary, sending a reverse current through it, and so further strengthening the E.M.F. induced in the secondary.

Magneto Generator

The magneto generator with polarised bell, is almost exclusively used for signalling purposes with modern telephones. It has the advantage of being self-contained, and more reliable than the bell operated by a battery, and will work through lines of high resistance, which would require a large battery if worked by a trembling bell.

It consists of several permanent horseshoe magnets *M*, held together by pole pieces of iron *P*, *P'*, which are fixed by screws, as shown in Fig. 35. This has the effect of concentrating the lines of force across the pole pieces, making them act as a single magnet. Fitting between the pole pieces, with just sufficient space to allow it to revolve freely, is the armature, which consists of an iron shuttle, *S*, wound with many turns of thin copper wire, one end of the winding being connected, as in Fig. 35, to a pin, *A*, fixed to the metal of the shuttle, the other end is connected to a pin which passes into the shuttle through an ebonite tube until it reaches another pin, *B*, which is also insulated from the metal of the shuttle. This means that one end of the coil is common to the metal, and the other is insulated from it. On the other end of the spindle is fixed a toothed pinion, which gears into a toothed wheel about five times its diameter, fixed to the spindle that carries the rotating

handle. When the handle rotates, the armature makes about five revolutions to one of the handle.

Action.—It has already been explained that when a coil of wire cuts lines of force, a current will be induced in the coil. If the armature is caused to rotate by turning the handle of the generator, it will move in a powerful magnetic field, as it is between the poles of the magnets, causing a current to be induced in the armature coils. The relative direction in which the lines of force

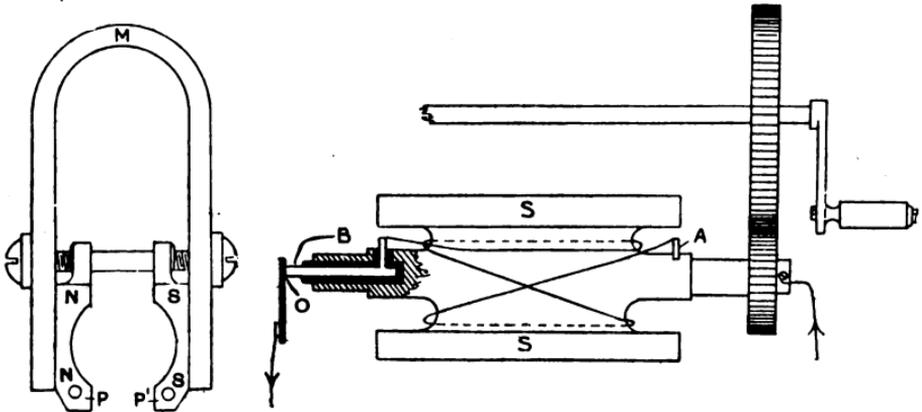


FIG. 35.

pass through the coil is reversed with each half-revolution, and therefore a complete revolution of the armature will cause two currents to be induced, alternating in direction. This current is conveyed from the armature by a wire being connected to the metal of the generator at any convenient point, and a rubbing contact being made by a piece of metal with the insulated end of armature at the point O. In the figure the armature is shown to a larger scale than the magnet to make it clearer.

This type of generator is always employed with a polarised bell (Fig. 29), and is usually connected in series with it, so that when the distant station is being called up the home bell will ring also.

Automatic Cut-Out.—When the home station is being called up, the current passing round the bell coils would also go through the armature windings, and as the resistance of some armatures are wound to 500 ohms; this would greatly reduce the current through the bell coils. To prevent this, automatic cut-outs are fixed to some generators to short circuit the armature when the handle is not turned, and allow the current to pass through the metal of generator instead.

Summary

An induced current is one that is caused by lines of force cutting a coil of wire. Sometimes the coil is stationary and the magnets are caused to move. An induction coil used in a telephone does not have an interrupter.

The induced current in the secondary of an induction coil is alternating. When the circuit is completed in the primary, it flows in one direction, and when it is broken, it flows in the opposite.

The iron core of an induction coil is usually made up of a bundle of iron wires. A core of this kind magnetises and demagnetises more readily than a solid core. It is termed a laminated core.

The primary coil has a low, and the secondary coil a high resistance.

An induction coil is usually rated by the length of spark that can be obtained from the ends of the secondary coil. Coils used for X-ray work usually give from 6 to 10 in. spark. Those used for wireless telegraphy are required to give a longer spark.

The platinum points of a coil interrupter require occasional attention. They get burnt away and require touching up lightly with a smooth file. Platinum is very expensive.

An induced current in the secondary can only be obtained by making and breaking the primary circuit, or by varying the current strength in it.

The greater the number of interruptions per second, the greater the induced E.M.F. Some large induction coils have separate interrupters that are driven by a small electric motor.

A good induction coil for ordinary telephone work has the following dimensions:—

Primary coil resistance 0·5 ohm, 180 turns of 24 mils. diameter (23 S.W.G.). Secondary wire, resistance 420 ohms with 4200 turns of wire 6 mils. diameter.

A mil. is equal to a thousandth of an inch.

A common form of telephone induction coil to be met with has a primary coil resistance of 1·5 ohm, and a secondary coil resistance of 25 ohms.

An interrupter is sometimes called a vibrator.

A small condenser is usually connected between the contact points of an interrupter.

A condenser is not required with an induction coil without an interrupter, such as a telephone induction coil.

A magneto generator used with a telephone generates from 50 to 70 volts, sometimes more.

Magneto generators are used in most of the modern telephones. They generate an alternating current, and are used for ringing a polarised bell.

A rough test for a magneto generator, is to place one finger on metal of generator and another on the insulated point of the armature; on turning the handle of the generator a slight shock should be felt, if correct.

CHAPTER V

MICROPHONES AND RECEIVERS

HAVING perused the foregoing chapters, the reader will find himself in a position to understand the working of a telephone.

Bell Telephone

The credit for the invention of the telephone is generally given to Professor Bell. Fig. 36 shows a section of a Bell telephone. It consists of a permanent magnet, NS, having fixed to N a pole piece of soft iron, around which is wound

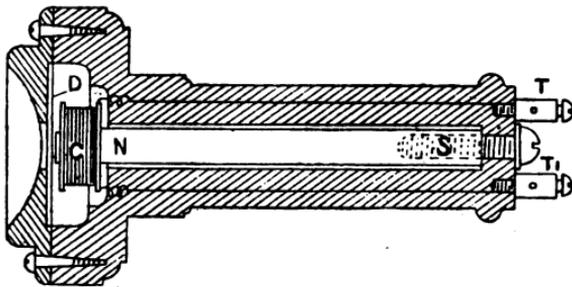


FIG. 36.

a coil of wire, C, the ends of the coil being brought to the two terminals, T, T₁. Opposite to the soft iron pole piece is placed an iron disc, D, held in position by the case, so as to be just clear of the pole piece.

Action.—This instrument was used to speak into, and to hear with ; that is, it was a transmitter and receiver combined. Let us consider two of these instruments connected up, as in Fig. 37, by means of a line and return wire.

If a person at A speaks into his telephone, the sound waves given off by the voice will impinge upon the disc, and cause it to vibrate. The vibrations of the disc will cause a disturbance in the lines of force given out by the iron pole piece ; this disturbance in the magnetic field will give rise to an induced current in the coil C, as the lines of

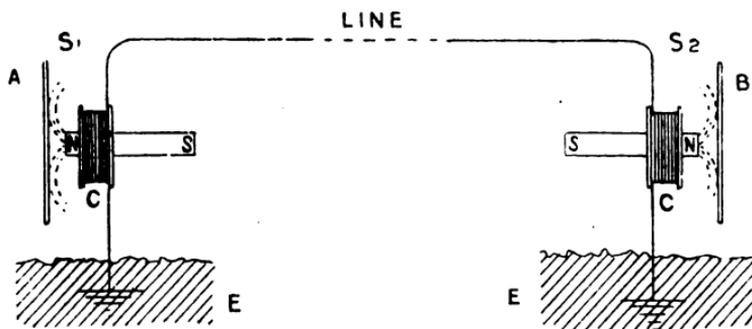


FIG. 37.

force continually being altered will cut this coil. The induced current is alternating, being in one direction when the disc moves backward, and in the opposite when it moves forward. It is conveyed by the line wire to the distant telephone B, passing round the coil C at that end, and back by the earth. This current either increases or decreases the strength of the magnetic field of the pole piece at B, according to its direction, which means that the disc at this end is pulled by a variable force, causing it to vibrate and give off air waves, which are converted into sounds by the ear of the listener.

The vibrations of the disc at B can be said to copy those at A, which are caused by speaking to the disc.

Hughes' Microphone

An improvement on the above was made by the introduction of a separate transmitting instrument and battery into the circuit, using the Bell telephone as a receiver only, as in Fig. 38.

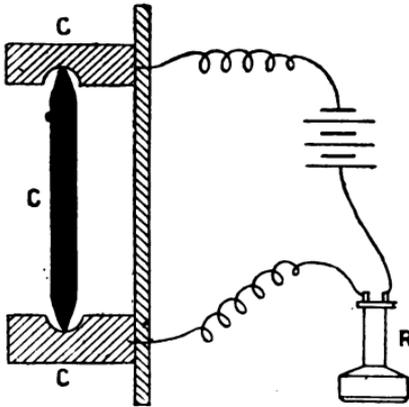



FIG. 38.

This transmitter, or microphone as it is usually called, consisted of a carbon pencil loosely held between two carbon supports, the whole being mounted on a thin deal sounding board, and joined in series with a battery and Bell receiver.

Action.—On talking to the sounding board, the sound waves acting on it, cause the loosely held carbon to vibrate in its supports, this upsets the steady current that would otherwise be flowing round the circuit, as the carbon sets up a variable resistance, causing a variable current to flow through the receiver. This variable current passing round the receiver coil, will result in a variable magnetic field, which will cause the disc to vibrate, these vibrations being converted into sounds by the ear of the listener.

The power of the telephone was further augmented, especially when used over long distances, by Edison, who introduced the induction coil into the circuit.

The microphone and battery were connected in series with the primary of the induction coil, and the line wires,

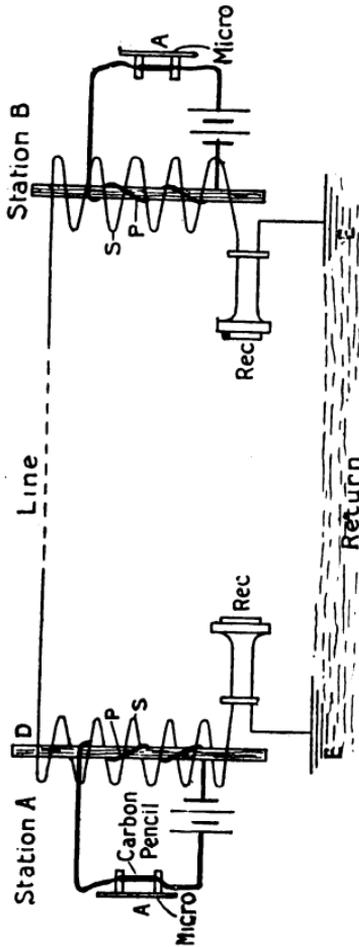

or line and earth, were joined in series with the secondary coil and receiver at each end, as shown in Fig. 39.

Action.—On talking into the microphone at station A,

the carbon vibrates, causing a variable resistance in the circuit, which gives rise to a variable current. As the current passes through the primary of induction coil, which has a core of iron, a variable magnetic field is given out by it, which will cut the secondary coil, inducing a current in it.

This induced current is alternating, and, as there are more turns in the secondary than in the primary, as explained on p. 42, it is a small current of high voltage, or potential, and leaves the coil say at D, goes by the line wire to the far station B, through the secondary coil and receiver, returning by earth through the home receiver, and back to where it started from. The alternating induced current passing through the receiver coil at B, sets the disc vibrating; these vibrations are converted into sounds by the ear of the listener. A similar action takes place when the microphone at B is spoken to.

It will be seen that the microphone, or primary circuit, as it is usually called, is a local circuit; the secondary circuit is common to both ends, through the line wires.

The circuits as explained above, represent the speaking circuits of a modern telephone, with the exception that a wire is sometimes employed as a return, and not the earth.

An advantage of the induction coil in a telephone is, that the induced secondary current, being of high voltage, will urge the small current through a very large line resistance to the distant station receiver, and as a receiver only requires a very small current to actuate its disc, this current is large enough to answer the purpose, hence the introduction of long-distance telephony. Also the percentage variation increases when a coil with low resistance primary is used.

Before proceeding further with the telephone, it will be advisable to investigate some of the modern microphones and receivers.

Microphones

Microphones can be divided into two classes, viz. (1) the Pencil Carbon and (2) the Granulated Carbon.

Pencil Microphone.—There are many types of pencil microphones to be met with, such as the Hughes, Gower, Ader, etc.

A very common form is the Ader. This is shown in Fig. 40, and consists of three carbon supports, B, between which are loosely held twelve carbon pencils, C. By

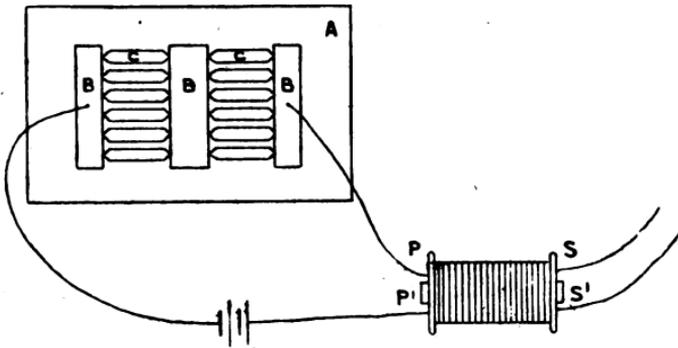


FIG. 40.

increasing the number of pencils, and joining them up in parallel in this way, the resistance is reduced and disagreeable sounds due to jars are lessened.

The carbon pencils are usually mounted on a thin pine sounding board, A.

The microphone in Fig. 40 is shown connected up to a two-cell battery and primary P, P', of an induction coil. S, S', are the ends of the secondary coil. This type of microphone has been extensively used in France.

Granulated Carbon Microphone.—These are the

most powerful type of transmitter, and their introduction has added greatly to the success of long-distance telephony.

The Solid Back.—This type of microphone was invented by a Mr. A. C. White, of America, and is considered very successful, being extensively used with some of the present-day telephones for desk use and those fixed to the wall.

It is shown in section in Fig. 41, and consists of a brass cell, A, with a screw cover, B, which clamps a small flexible

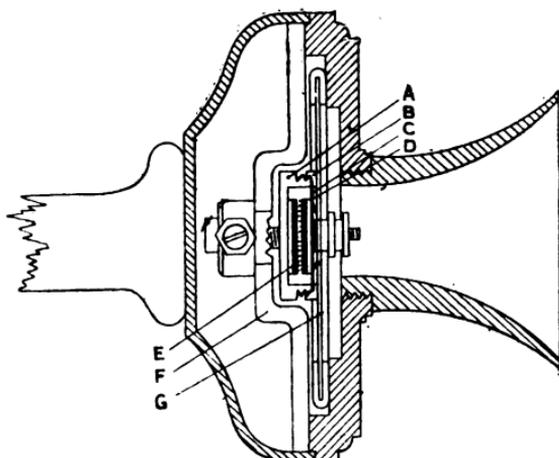



FIG. 41.

mica disc, C, on the face of which is fixed a thin carbon plate, D, which is a little smaller than the inside of the brass cell. Opposite to this is fixed another carbon plate, E. The brass cell is rigidly fixed to the bridge piece F by a screw. The mica disc is clamped by a screw to a large aluminium disc, G, fitted with indiarubber round its edges, and held in position by two flat steel springs (not shown), which are fastened to the casing. The space between the carbon plates D, E is filled with granulated carbon.

This type of microphone is said to be free from "packing," that is, the gradual settling down and consolidating of the carbon granules, making it act as an ordinary solid carbon conductor, instead of the loose contact upon which its sensitiveness depends. It is usually fixed to a moving arm for adjusting to the height of the operator. Its resistance is from 20 to 60 ohms.

The Ericsson. — This is considered to be a very successful microphone, and is extensively used in the service. It is usually fixed to a combined hand micro-receiver, as in Fig. 42. A description of the receiver portion will be given later. There are several forms to be met with, but Fig. 42 gives a sectional view of the latest. A and B comprise the aluminium case, which is made in two parts; passing into the back of the case A is a small steel bolt, C, the head of which has screwed into it the brass screw D, which holds in position a carbon block, E, that is recessed for the reception of the screw. The front face of this block has several holes drilled in it, into which tufts of felt, F, are fitted. When in position these tufts press against a carbon disc, G. A sleeve of soft felt, H, is fitted around the edge of the carbon block, and is made to press against the carbon disc by the heads of six bronze springs, I, which are all joined together at the centre, as shown in Fig. 42, which shows an end elevation of the carbon block. This spring fits into six recesses in the carbon block, which allows it to work freely.

The carbon block and springs are insulated from the frame A by the celluloid washers J, and the steel bolt C by an ebonite washer, K, at one end, and a leather washer, L, at the other. Rings of blotting paper, M, are used to clamp the carbon disc; they also hold in position a piece of oiled silk, N, which prevents moisture of the breath reaching the carbon disc. About five grains of granulated carbon

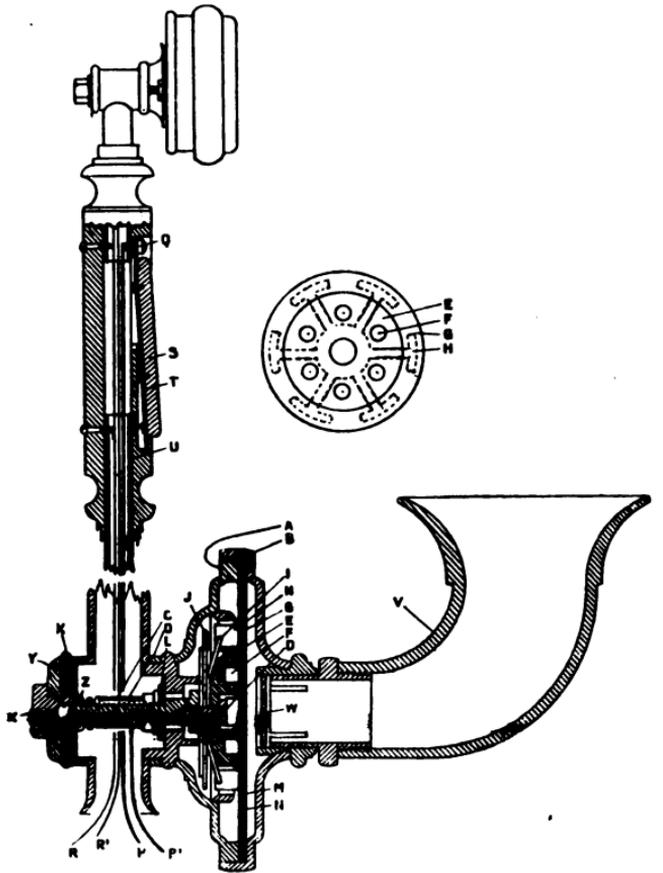

- | | | |
|------------------------------|-------------------------------|-------------------------------|
| <i>A</i> Aluminium case | <i>J</i> Celluloid washers | <i>S</i> Pressel switch |
| <i>B</i> Aluminium case | <i>K</i> Ebonite washer | <i>T</i> Metal strip |
| <i>C</i> Steel bolt | <i>L</i> Leather washer | <i>U</i> Metal frame |
| <i>D</i> Brass screw | <i>M</i> Paper rings | <i>V</i> Celluloid mouthpiece |
| <i>E</i> Carbon block | <i>N</i> Oiled silk | <i>W</i> Wire gauze |
| <i>F</i> Felt tufts | <i>O</i> Contact for wire | <i>X</i> Sleeve nut |
| <i>G</i> Carbon disc | <i>PP'</i> Primary wires | <i>Y</i> Metal washer |
| <i>H</i> Felt sleeve | <i>Q</i> Pressel switch pivot | <i>Z</i> Spiral spring |
| <i>I</i> Bronze star springs | <i>RR'</i> Receiver wires | |

FIG. 42.

are held in the recess between the back of the disc and the face of the carbon block.

The normal resistance of this microphone is about 100 ohms, and when working varies between 50 and 160 ohms.

It will be seen that there are four wires coming from it, two, R, R', are from the receiver, which would be connected to the secondary circuit of the telephone, and two, P, P', from the microphone to the primary circuit. The wire P' is connected to the steel bolt at O, and P to the pivot Q of a pressel switch, S; this switch has a strip of metal, T, extending throughout its length. U is the metal framework.

Circuit.—The microphone would be joined in series with a two-cell battery, and the primary of induction coil; therefore the current would enter by, let us say, P', and flow through C, D, E, G to the metal frame; the pressel switch S being pressed, it gets to T, Q, the wire P, and back through the other part of the primary circuit.

From this it will be seen that if a microphone has a pressel switch, it must always be pressed when speaking into it.

The microphone is shown enlarged for clearness.

Action.—When a current is passing through the microphone, if the mouthpiece is spoken into, the sound waves of the voice striking the carbon disc will cause it to vibrate, this will disturb the carbon granules, causing a variable resistance to be set up, which will vary the current in the circuit and give an induced current in the secondary coil, as was explained when talking to the pencil microphone on p. 54.

This type of microphone is very sensitive, hence its use with the majority of modern telephones.

The Hand Micro-telephone is very extensively used in

this country. It allows the user to adopt any convenient position, and as the primary circuit passes through the pressel switch, which is automatically broken as soon as it is released, this circuit is independent of the automatic switch hook or cradle. They are usually constructed of ebonite and aluminium, and are therefore very little heavier than an ordinary receiver.

Some of these microphones have carbon shot instead of granulated carbon. This type has recently been introduced into the service.

There is a similar form of Ericsson transmitter to this to be met with, but it differs in having an iron disc instead of carbon, and the inner face of the disc is fitted with a small metal dish, which has a number of indentations that project into the carbon granules when in position, making a good contact and preventing "packing."

Capsule Microphone.—The latest microphone to be met with is the capsule type. It is shown in Fig. 43. The advantage of this type is, that if it becomes defective, it is only necessary to replace the inner portion G, or capsule, by another.

These microphones are not only fitted to the hand-telephone sets, but are also fitted into detached microphone cases. The type shown consists of a metal case A, B, in two parts, the front portion A screwing into B, as shown. Inside the case is the capsule C, which has fixed at one end a metal contact, D, insulated from the case by insulation E. The metal contact has screwed into it a screw, F, the other end of which passes into a slot in the carbon block G, and screwing on to this end is a brass nut, H, which holds the carbon block in position. Granulated carbon is kept in position in front of the carbon block by a wrapping of flannel, I, and the carbon disc J; the latter being secured by the metal case of capsule being spun over it, as shown.

Wire gauze, *K*, is placed in the front of this, to prevent damage to the carbon disc, also a hinged cover, *L*, which should be opened when in use. Contact is made with the capsule by the contact point *M*, which is pressed forward

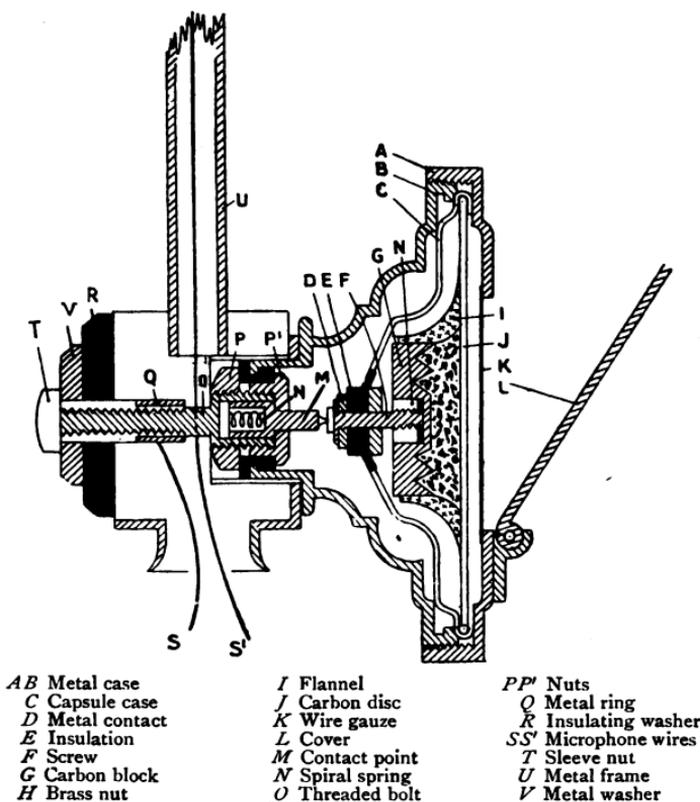


FIG. 43.

by the spiral spring *N*, that fits into a recess in the end of a threaded bolt, *O*. The contact point *M* is held in position by the two nuts *P*, *P'*. *Q* is a metal ring to which one of the

primary wires, S, is connected, the other wire, S', going to the pivot of pressel switch.

Circuit.—The current from the primary circuit will, let us say, enter by S, and pass through Q, O, M, D, F, G, through the granulated carbon to J, then to the metal casing which extends up to the pressel switch; the latter being pressed, the current will pass up the switch to the pivot, where the wire S' is connected, and back through the remaining part of the circuit.

The two wires that go to the receiver are not shown in figure.

Some of these microphones have a thin disc of mica placed in front of the carbon disc to protect it.

Receivers

There are many types of receivers to be met with, and their principle of construction is a modification of the Bell receiver, previously described.

Ader.—In this receiver A is a horseshoe permanent magnet, to the north and south poles of which are screwed L-shaped soft iron pole pieces B; these become magnetised, and extend the poles to the top of the vertical limb; over each limb is slipped a bobbin of fine wire. The coils C are joined in series, and the ends brought to two terminals, usually found on the outside of the receiver. Opposite the pole pieces a tinned iron disc, D, is placed and is kept from touching the pole pieces by a brass distance ring, E; another brass distance ring, E', is placed on top of the disc. The earpiece F is of ebonite, and into this is fitted a soft iron ring, G, its use being to concentrate the line of force given out by the magnet poles to the centre of the disc, making the receiver more sensitive. It is a special feature

in the Ader receiver. This type of receiver is not used very much in England now (Fig. 44).

Ring Magnet Receiver.—This type of receiver is very extensively used at the present day, and is nearly always found in the Hand Micro - telephone shown on p. 58. Fig. 45 shows this receiver, which consists of a compound flat steel ring magnet, magnetised across one of its diameters, NS. The L-shaped iron pole pieces are screwed to the magnetised ring at these points, thus extending the polarity to the top of the vertical limbs. Bobbins of wire are slipped over these, as in the Ader type, and there is also an iron disc with a paper distance ring on each side of it. The uppermost ring is sometimes

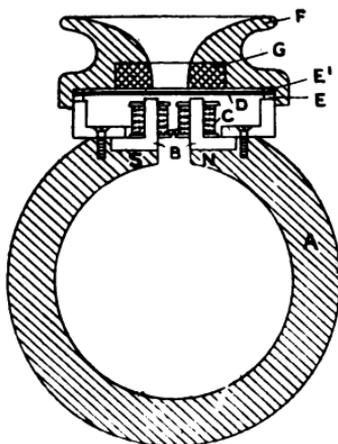


FIG. 44.




FIG 45.




FIG. 45A.

dispensed with, by having a ring formed in the ebonite

earpiece. It is enclosed in a metal case. The resistance of the receiver coils is usually about 120 ohms. This type of receiver is found in nearly all receivers of Hand Micro-telephones.

Gower Receiver.—This is an old form of receiver, and is still extensively used.

It differs chiefly in the shape of the magnet, which is semi-circular, as in Fig. 46. A type resembling this, is used in the service in the Telephone Sets Portable D. Mk. II.

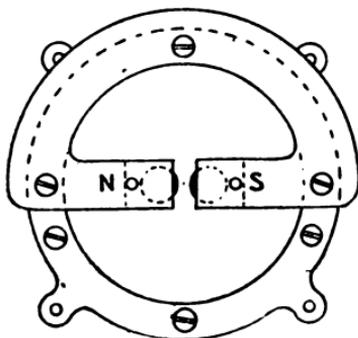


FIG. 46.

Head Receivers.—

These are ordinary ring magnet receivers, fitted into aluminium cases for lightness, with a spring, or a web

band fitted to them to fit over the head. They are used to allow the operator to have both hands free, the microphone in this case usually being fixed either to the body or a bracket.

Loud-speaking Receivers.—These consist of a large double-pole receiver, which has fixed to it a magnifying trumpet; their use being for communication between offices in the same building, so that messages can be given without using a call bell.

Before concluding this chapter I should like to add a few words about the theory of the receiver for the benefit of those who are desirous of becoming more conversant.

It has been proved by experiment that there is a relation between the strength of the magnet in the receiver and the size of the iron disc.

The relationship is as follows :—

(a) For a receiver with a given magnetic field there is a thickness of disc which gives a maximum effect.

(b) If the thickness of disc is known for a certain magnetic field, there is a certain diameter for the disc which gives the best result. The stronger the field the greater the diameter.

(c) The best result is also obtained when the magnet and coils are arranged so that the greatest number of lines of force pass through the coil in a direction at right angles to the plane of the coil, and in which these vary most with any movement of the disc.

Some receivers are fitted with an adjusting screw at the back, which will allow the magnet to be pushed nearer the disc should the sounds be indistinct.

The writer is invariably asked by students, why it is necessary to polarise the cores of receiver coils, or, in simple words, why is a permanent magnet required? It is explained theoretically as follows :—

The pull between the poles of the receiver and the iron disc varies as the square of the intensity of the magnetic force in the space between them. It will be seen, therefore, to get the greatest vibration in the disc, the intensity of the pull must vary as much as possible. Let H represent the strength of the field due to permanent magnet, and h that due to one of the speaking waves, then the pull on the disc will vary between $(H + h)^2$, when the current enters the magnet coil in such a direction as to further strengthen the field, and $(H - h)^2$ when the current enters by the opposite end of coil, which weakens the field.

The difference between these two, amounts to $4Hh$, which will represent the difference in pull on the disc.

If the permanent magnet was not there, the pull on

F

disc would vary between 0 and h^2 , and as h is a very small quantity (being due to the weak current passing round the receiver coil) its square would also be very small; in fact, very much less than $4Hh$, in which the large value H is included.

From this it will be seen that the intensity of action of a receiver is proportional to the strength of the permanent magnet within certain limits; therefore, it is important to see that the permanent magnet is kept up to strength.

It must be understood that the vibrations set up by the receiver disc are caused by the variations in the strength of the magnetic field. As the polarised pole pieces in the receiver exhibit a north and south polarity, due to the permanent magnet, this polarity will be increased in strength when the current passes through the coils in such a direction as to give it a similar polarity, and will be decreased in strength when the current enters by the other end of coil, which will try to reverse the polarity due to the permanent magnet.

Lightning Protectors

To prevent damage being done to the bell, armature of magneto generator, receiver and induction coil of a telephone, it is necessary to fit a telephone with a lightning protector or discharger, as all the above are wound with fine wire to a high resistance, and such coils are especially liable to damage by lightning. A lightning charge will, when the conditions of the circuit are favourable, spark across a comparatively great thickness of insulation, rather than pass through a large number of turns of wire. Most telephones are fitted with some form of discharger in which

a short spark gap, usually air, is arranged. If this is not done, and a line wire is struck by lightning, the charge is liable to spark across the insulation of the wire on the coils, and fuze the wire itself.

A common form of protector is shown in Fig. 47, and consists of two metal plates with saw teeth, connected to the two line terminals; fixed close to, but not touching, is a third metal plate, which has fitted to it a terminal for connecting an earth wire to. The distance apart of toothed and earth plates should not exceed the thickness of an ordinary receiver diaphragm (10 mils.), a piece of which can be kept and used as a gauge.

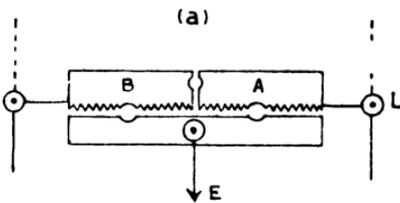


FIG. 47.




FIG. 47A.

If the lightning should strike the line wire L, instead of entering the telephone it will pass to the strip A, jump the air gap, and earth itself through the earth connection E.

Another form of protector that is largely used with indoor or stationary telephones, is shown in Fig. 47A, and consists of two circular metal plates, D, F, separated by a disc of mica, G, which is perforated with several small holes to provide an air gap. Each plate has a terminal fitted to it, D being connected to the line wire, and F to earth. Two of these would be required for a telephone, and are usually permanently fixed to them, as shown in Fig. 47A.

Summary

Carbon pencil microphones are not used to a great extent nowadays.

The primary or microphone circuit is local, and in a portable telephone never has more than two cells. If more than two are used, the carbon in microphone gets heated, and the working of the telephone is not so good.

If the receiver or hand-telephone rests on a switch hook or cradle, always replace it when conversation is finished.

When using a hand-telephone with pressel switch, if you are waiting for an answer, always release the switch; this saves the battery.

Don't forget to close pressel switch when talking, as this closes your microphone circuit; otherwise you will not be heard at the other end.

Solid back transmitters are mostly used with stationary telephones.

Granulated carbon transmitters are more sensitive than the pencil type.

Packing is a term given to granular carbon transmitters, when the granules are found to cling together. Tapping the case of microphone will often put this right.

Never open a granular carbon transmitter unless it is absolutely necessary. When doing so, open it carefully, and always have a sheet of paper underneath to catch the carbon.

It would be advisable to have a sectional diagram when replacing the parts, to avoid making a mistake. A metal or an insulating washer put in the wrong place will upset the working of it.

An ebonite washer is usually found at the pivot of a pressel switch; when replacing it, be careful not to put it between the metal of switch and the wire.

A granular microphone will work without an ebonite

mouthpiece, but it is better to have one, as it will practically shield it from other sounds.

If the case of a granular microphone is held together by screws, they should be kept tight; if loose, they will allow the granulated carbon to escape.

Cases containing capsule microphones are usually threaded and in two parts, which screw together.

The Bell receiver is still used with some telephones.

Ader receivers are not often met with now.

Always see that earpiece of a receiver is screwed home.

Some receivers have only one ring, the other being formed in the ebonite earpiece.

If the ring is removed from under the disc in the receiver the sounds will not be heard so distinctly.

If the disc is removed the sounds will not be heard at all, although the circuit will not be broken.

A receiver is always connected in the secondary circuit, and a microphone in the primary.

Always remember that the primary circuit is local, and consists of a two-cell battery, microphone, and primary of induction coil in series, and the secondary circuit consists of your own secondary of induction coil and receiver, joined in series with the receiver and secondary at the distant station, by means of the lines wire. Some telephones have the magneto bell also in this circuit. As explained later, this does not affect the working of the secondary circuit.

Receiver discs are always made of iron, sometimes they are coated with black enamel instead of being tinned; this is only to prevent rusting.

The ring magnet receiver is mostly to be met with in modern telephones. It is nearly always used in the Hand Micro-telephone. The magnet is usually compounded, that is, made up of a number of rings screwed together (for reason see p. 22).

An indiarubber ear-cushion is often fitted over a receiver to enable the sounds to be heard more distinctly. Being soft, it allows the ear to be buried in it and thus prevents external sounds from reaching it.

The hand micro-telephone is known in the service as Telephones Hand. There are various types of these, some of which will be explained later.

In a microphone, the space between carbon block and carbon disc should never be entirely filled with granulated carbon, or it will encourage "packing," and make it less sensitive.

Granulated carbon is sold for microphones.

The lead of a blacklead pencil, ground up, is a good temporary substitute for carbon.

Of the four wires that are connected to a hand-telephone, two go to the receiver, and the other two to the microphone. They are usually bound at their ends with different-coloured cotton.

To identify the wires in a hand-telephone, the two that give sounds in the receiver when touched between the poles of a cell, will be the receiver wires.

Ebonite is now made for receiver cases with canvas embedded in it, to render it practically unbreakable.

The following list of prices of telephone accessories may be of interest to some :—

Ring magnet receiver, 7s. 6d.

Granulated carbon microphone, 7s.

Hand micro-telephone, 21s. 6d.

As supplied by J. McMillan & Co., Glasgow.

Microphone capsule, 2s. 3d. each.

Telephone induction coils for long-distance work, 2s. 3d. each.

*As supplied by The International Electric Company,
Redcross Street, London.*

CHAPTER VI

PORTABLE AND FIELD TELEPHONE SETS

HAVING in the early part of Chapter V. dealt with the speaking circuits of a telephone with induction coil, it will only be necessary to add to this a magneto generator and polarised bell, and thus form a complete telephone set. Fig. 48 represents the circuits of a telephone thus arranged.

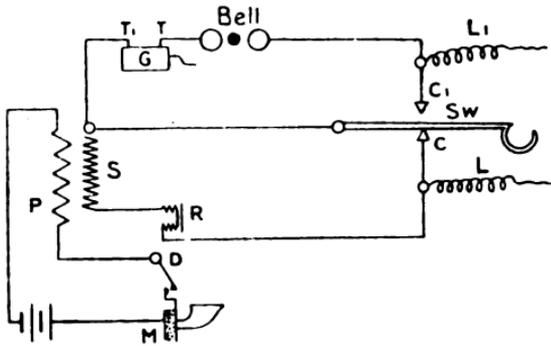


FIG. 48.

In tracing the circuits of a telephone, one must always bear in mind, if the hand-telephone or a receiver hangs on a switch hook, the call circuits will be traced with the switch hook in the Down position, and the secondary circuit with it in the Up position.

The circuits in Fig. 48 are as follows :—

Outgoing Call.—Turn handle of generator, and current will leave by T, through home bell B, out by L_1 to distant telephone, back by L to C, along metal of switch to T_1 .

Incoming Call.—In by, say, L_1 , through bell and generator, switch hook to C, and back by L.

Primary Circuit.—Close pressel switch D. From positive of battery through microphone carbons M to D, P, and back to negative of battery.

Secondary Circuit (Induced current).—From, say, bottom end of secondary coil S to receiver R, out by L to far station, back by L_1 to C_1 (the switch hook being Up) to top end of coil S.

Portable C. Telephone

Fig. 49 represents a telephone that is largely used in the service, and is known as "Telephone Sets Portable C."

It consists of a box containing two dry cells, a magneto generator, polarised bell, induction coil, testing plug, and a "Hand Telephone C." The cells are joined in series (as shown in Fig. 49A), and fit one in each corner at the back of the box. The Hand Telephone C. fits on a rest when not in use. It differs from the one shown on p. 58 by the pressel switch having an up and down contact, that is, it makes a contact in the released as well as the pressed position, thus doing away with a special switch for the bell or call circuit, as this circuit passes through the switch when it is in the up or released position as explained, in circuit diagram, Fig. 49A.

The generator handle and testing plug are carried, when not in use, by holders in the lid. The telephone is also

provided with three terminals, two for the line wires and one for an earth connection. Between the line terminals is fitted a common form of lightning discharger (explained on p. 67).



FIG. 49.

There are usually four distinct circuits in a telephone—

- (1) Outgoing call,
 - (2) Incoming call or reply,
 - (3) Primary circuit
 - (4) Secondary circuit
- } Speaking circuits.

It will be readily understood that the object of the generator, is to send the current to the distant telephone to ring its bell, therefore, when the home bell is being rung, it is not necessary for the incoming current to pass around

the armature coils of generator. To prevent this, a cut out is used, which short circuits the armature. It consists of a piece of clock spring, I, connected at one end to the metal

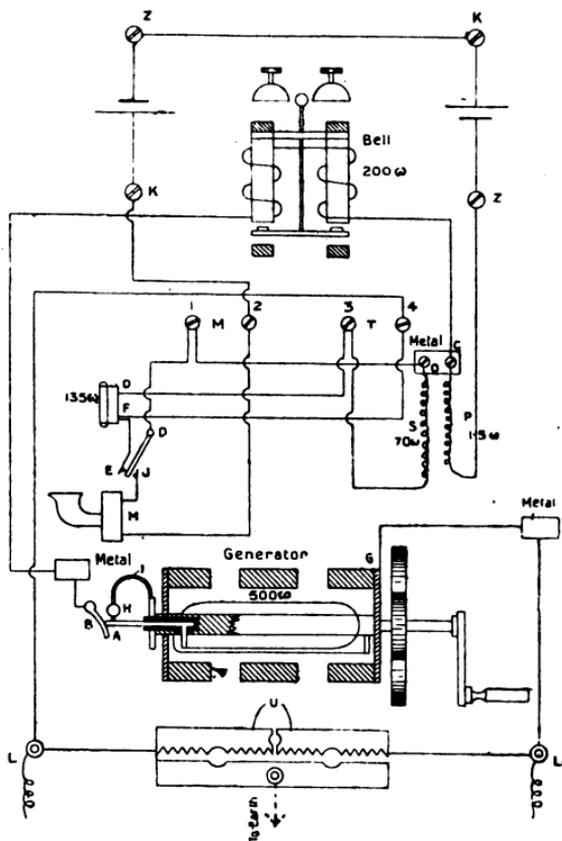


FIG. 49A.

of armature, and having fixed to it at the other end a metal weight, H, which, when at rest, touches a stud connected to the pin A. When a current entering the armature from the brush B gets to A, instead of going through the coils, it

goes to the metal weight H, to the clock spring I, and from it to the metal of generator, leaving this at G, and back by the other line wire.

When the armature is rotated, the short-circuit device is broken, as the rotary motion of the armature causes the clock spring to fly out, and the weight H to leave the stud.

The circuits can be traced on the diagram as follows:—

- (1) **Outgoing Call.**—From A to B, bell coils, C, Q, 1, D, E, F, 4, L, to the distant telephone bell, and back to L₁, to other end of generator G. (The home bell should also ring in this case.)
- (2) **Incoming Call.**—In by, say, L to 4, F, E, D, 1, Q, C, bell coils, B, A, H, I; through metal of generator to G, L₁, and back by the other line wire or earth return.
- (3) **Primary Circuit.**—From positive of battery to K, through microphone to J. The pressel switch being pressed, to D, 1, Q, C, primary coil P, Z to negative.
- (4) **Secondary Circuit.**—The induced current caused by talking into the microphone will leave the secondary coil, say at Q, to C, bell coils, B, A, H, I, G, L₁ to distant telephone receiver, back by L, 4, F, through receiver coil to O, 3, back to secondary coil.

Also trace circuits on key diagram.

The centre terminal is used for connecting an earth wire to.

When the telephone is used with a line and return wire, during stormy weather, if the wires be overhead ones, it would be advisable to connect a wire from the centre terminal to the earth. This will prevent damage being done to the instrument if they are struck by lightning, as the discharge would jump the air gap at discharger U, and earth itself.

If the earth terminal is used as a return, and the line wire is connected to L, the plug should be in right-hand hole.

For field work, using a wire laid on the ground and an earth return, it is usual to connect the line and earth wires directly to terminals L, L₁.

Rough Tests.—The rough tests for this instrument are as follows:—

- (a) **TO TEST THE BELL CIRCUIT.**—Turn handle of generator with line wires disconnected; bell should not ring. Insert plug between the two small brass strips U (or connect line terminals) and repeat; the bell should now ring loudly.
- (b) **TO TEST SPEAKING CIRCUITS.**—Place receiver to ear, close pressel switch D, insert plug between brass strips U. On blowing into microphone, or making and breaking pressel switch, sounds should be heard in receiver.

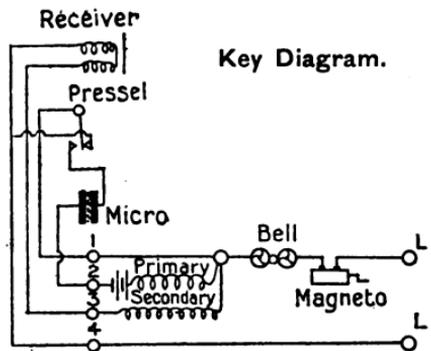


FIG. 50.

Tests in Detail.—If the bell fails to ring, it may be due to the pressel switch not making contact in the released position at the point E; look to this. If it still fails, it may be due to a mechanical fault at the generator, such as the rubbing contact at B not touching the armature, or the bell armature may be out of adjustment. To put either of these mechanical faults right, it will be necessary to open

the centre partition of the instrument, by disconnecting the battery wires at Z and K, and then removing the holding-down screws. As the top is a neat fit, it will require careful handling.

If sounds are not heard in receiver when applying test (b), it will prove a fault in either the primary or secondary circuit, or perhaps both.

To test the primary circuit for continuity, connect a current detector (low resistance coil) in series with it at any convenient point, say at battery; close pressel switch, when a deflection should be obtained in detector. If not, look carefully to the battery connections by removing the metal covers from the cell boxes, and then test each cell by connecting the detector (low resistance coil) between the positive and negative of each, when a hard-over deflection should be obtained; if not, the battery should be replaced by a new one. If the fault has not been detected, tap the microphone gently, as the carbons may have packed a little. If still undetected, trace out circuit carefully with a battery and detector in series, as explained on p. 93.

To test secondary circuit, join a two-cell battery and detector (high resistance coil) in series with the line terminals, L, L₁; plug should *not* be inserted. When the pressel switch is pressed a deflection should be obtained in detector. A deflection is also obtained when this switch is released; the current in this case flows round the bell circuit. It is the deflection when the switch is pressed that is wanted. If this is not obtained, short circuit the terminals 3 and 4 by a piece of wire or metal of any kind; if a deflection is now obtained, it proves the fault is in receiver or leads. Repeat by short circuiting on terminals at back of receiver; if no deflection, it proves a break in receiver leads. If there is a deflection, it proves a break inside receiver. If a fault is still on, open the middle partition,

and trace out circuit carefully, as explained on p. 93, with the aid of a circuit diagram.

The Ericsson Field Telephone, or, as it is known in the service, "Telephone Sets Portable D. Mk. I."

This is an extremely useful telephone for field work, and consists of a red vulcanite case, containing an induction coil, vibrator magnet, a two-cell dry battery, two small condensers,

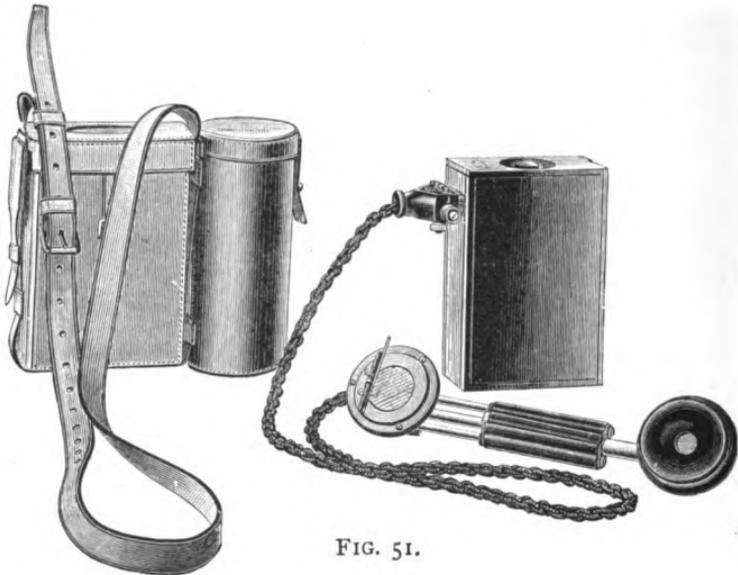


FIG. 51.

and a double spring push. Fig. 51 represents the instrument removed from its leather case and fitted with a telescopic hand micro-receiver (known as "Telephone Hand D" in the service) with four-way connecting cord, which terminates at one end with an ebonite plug fitted with three terminals. This plug fits into a recess in the side of the case as shown. A buzzer call is used instead of a generator and bell, as this has the advantage of overcoming a greater line resistance, and will, in fact, work through a broken line wire in contact

with the earth throughout. It can also be used as a telegraph instrument to send the message by the Morse code if speech is not clear. There are three line terminals, which are marked DL, CL, and E. For ordinary work, with a line wire and earth return, the line should be connected to DL, and the earth connection to E.

The Buzzer.—Before tracing the circuits of this telephone, it will be advisable to understand the action and use of the buzzer.

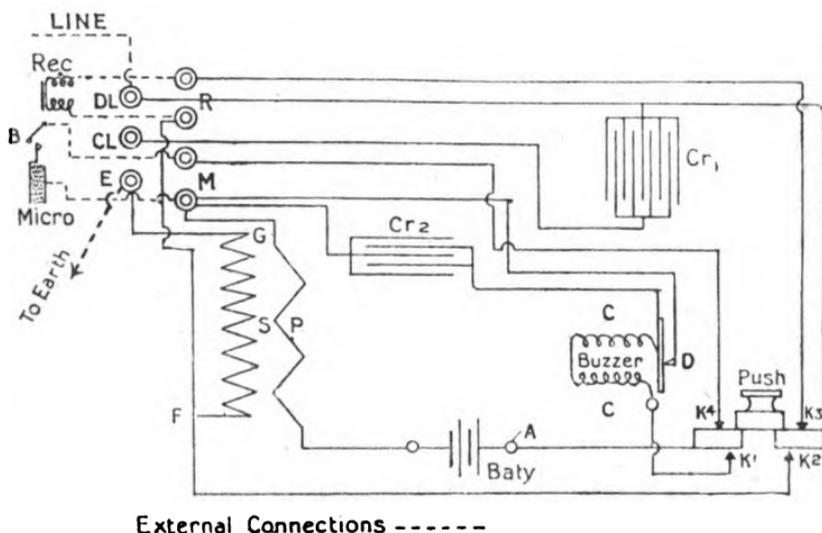


FIG. 52.

The attention of the distant station is called by hearing a buzzing sound in their receiver. This is due to the push of the home instrument being pressed, causing a current to pass round the buzzer coils C, C, as will be seen on tracing the call circuit, Fig. 52.

The action of the buzzer is similar to that of an electric trembling bell, only that the armature, being very thin, will

therefore give a buzzing sound when it vibrates. In the Ericsson and Portable D. telephones, the buzzer coil is in series with the primary of the induction coil, so that the armature vibrating will momentarily break the circuit, causing the iron core inside primary coil to be magnetised and demagnetised, inducing a current in the secondary coil, which reproduces in the far receiver the buzzing noise.

A small condenser, Cr_2 , is joined between the adjusting

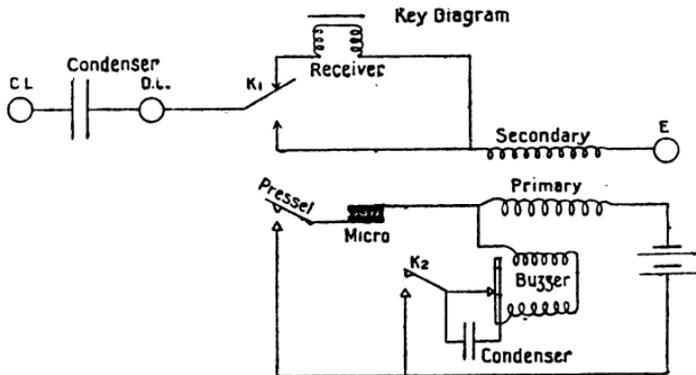


FIG. 53.

screw and the armature, chiefly to prevent sparking between these two contacts.

The seven terminals shown in Fig. 52 are connected to seven metallic connections on the seven-point ebonite plug, which is connected to the hand-telephone cord. When this is in position, the two terminals R are connected to the receiver, and the two marked M to the microphone, the other three being in contact with three terminals on the ebonite plug, and are used for connecting the line and earth wires to.

The circuits are as follows:—

Line Connections.—Earth wire to E, and line wire to DL.

Outgoing Call.—Press push, and current will flow from positive of battery to K_1 , C, C, D, M, P, to negative. This will induce a current in S, starting from F to K_2 , DL, out by line to distant telephone receiver, and back by earth to E, G.

Incoming Call.—In by DL, to K_3 , R, receiver coils, F, S, G, E, and back by earth.

Primary Circuit.—Close pressel switch B from positive of battery to K_4 , M, B, through carbons to P, and back to negative.

Secondary Circuit.—Induced current (caused by talking to microphone) starting from F, to R, through receiver coils to K_3 , DL, out by line, and returning by earth to E, to G.

It will be seen that the outgoing call buzz does not pass through the home receiver, as the push, when pressed, breaks the circuit to it at K_3 .

Also trace circuits on key diagram.

Rough Tests

- (a) TO TEST OUTGOING CALL CIRCUIT.—Press push, and place the ear near the side of telephone case, when the buzzer should be heard.
- (b) TO TEST SPEAKING CIRCUITS.—Connect the line and earth terminals (short-circuit line terminals) by a piece of wire. Close pressel switch. On blowing into microphone, or making and breaking pressel switch, sounds should be heard in receiver.

Tests in Detail

- (c) If the rough test (a) fails, remove cover of instrument, and press Key 1. If the buzzer magnet still fails, look to the adjusting screw D, and see that it is just touching the armature. If you think it requires adjusting, remove small screw-driver from inside of lid, and adjust it by slowly

G

turning the adjusting screw in the required direction, keeping Key 1 pressed all the time with the other hand.

This requires a very fine adjustment, also patience. If still at fault, test battery by putting it on to the Q coil of a detector, which should indicate a hard-over deflection if correct. If still undetected, trace out circuit carefully and look for a loose or broken connection.

When discovered, test by joining terminals DL and E by a short piece of wire; on pressing Key 1 a loud buzz should be heard in your receiver.

- (d) If test (b) fails, test primary circuit by connecting the Q coil of detector in series with this circuit, say at A; on closing pressel switch B a deflection should be obtained in detector; if not, trace out circuit carefully and locate.
- (e) If test (b) still fails, join two cells and I coil of detector in series with terminals DL and E (connect up to DL, and only make and break the circuit by touching the wire on E), when a deflection should be obtained. If not, remove the wires that you have connected to DL and E and touch them on the terminals R on plug. This should give a deflection, as it sends a current up the receiver cord to receiver and back. If not, touch on terminals at the back of receiver; if this is faulty it will prove a break inside receiver. Open and put right. If it is not faulty, trace out the rest of circuit carefully with detector and battery.

Tapping a Telegraph Wire

As a condenser will not work with a direct current, and as telegraph instruments are worked by a direct,

or battery, current, if we place in series with a line terminal of our telephone a condenser, it will be possible to utilise a telegraph wire for sending messages by telephone. The direct current passing along the wire to the far telegraph instrument, will not enter the telephones, on account of the condensers acting as a break to such a current; but the two instruments will be able to carry out conversation, as a telephone is operated by an alternating current, which will in no way affect the telegraph instruments, or indicate in any way that their wire is being used.

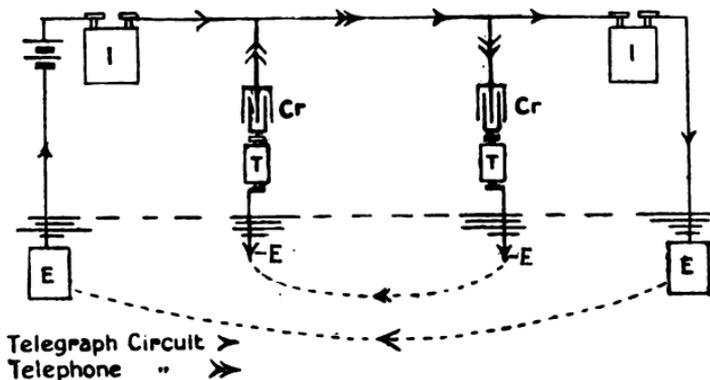


FIG. 54.

Fig. 54 represents a scheme of the above arrangement. T are the telephones, C the condensers (shown outside the instruments for clearness), and I the telegraph instruments, connected by a line wire and earth return.

To use the instrument at present being described in this way, connect the line wire to terminal CL, and earth connections to terminal E. On tracing the incoming or outgoing buzzer, and speaking currents, it will be seen (Fig. 52) that instead of their leaving or entering by DL,

it will be by CL, and in doing so must pass into the condenser in each case, and as these are alternating currents, they will pass through and round the rest of the circuit as before.

Telephone Sets Portable D. Mk. II.


This telephone is carried in a leather case, and consists of a red vulcanite case having a terminal at each end, one being for the line wire, and the other for the earth connection. It contains an induction coil, two-cell dry battery, a vibrator call magnet, two condensers, and a push for working the call circuit. The receiver and microphone are entirely separate, the former being carried in a leather case, and has a strap of webbing that fits over the top of the head, which is secured by a buckle, for holding the receiver securely to the ear when in use. The microphone is contained in a small aluminium case, which has a push button, and is of the capsule type.

The small condenser C_2 , Fig. 55, is connected between the adjusting screw and the iron of vibrator magnet, to prevent sparking between this screw and armature, when the latter vibrates. The condenser C_1 is connected in series with the line terminal L, and is always in circuit, the object being to enable a telegraph wire to be tapped (see p. 82), and do away with a special connection for this purpose. The talking and buzzer currents, being alternating, will pass through the condenser. The action of the buzzer is similar to that explained on p. 80. The Push 1 is found in the cover, and can be worked when it is in the leather case, as a piece of soft leather is fixed in the top of the case, which enables it to be pressed.

The receiver and microphone fit into separate leather pockets on the outside of the case.

The circuits are as follows :—

Outgoing Call.—Press Push 1 and the current will

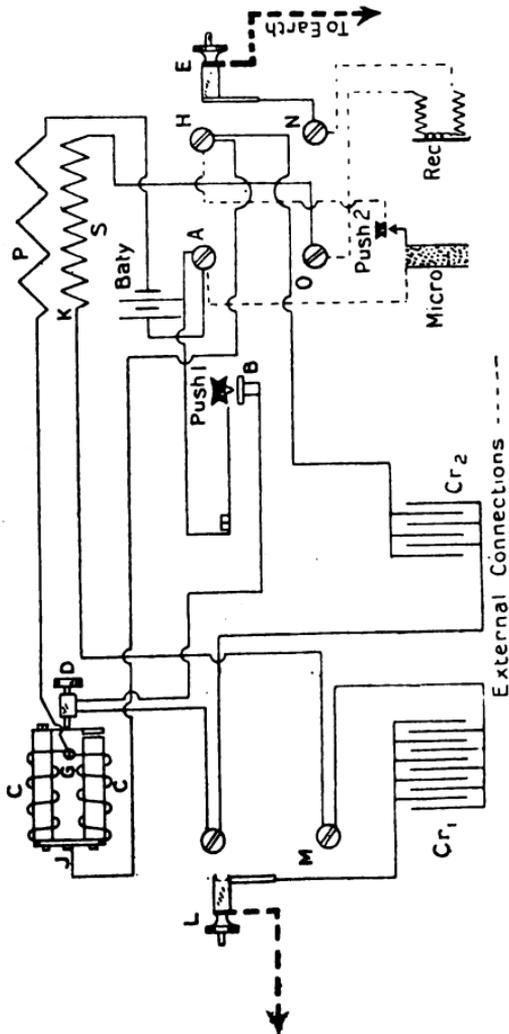

flow from positive of battery to A. Push 1, B, D, J,

enter both bobbins (in parallel) from metal of vibrator, uniting at G, through P, back to negative of battery. The armature vibrating will give a buzzing sound, and an induced current will be set up in the windings S of the secondary coil, due to the make and break of the circuit at the adjusting screw, as this current will pass through the primary P of the induction coil, and carry with it the buzz. The current induced in the secondary coil S will leave by, let us say, K, and flow to M, through C_{r1} to L, out to the far telephone receiver, and return by earth to E, N, receiver, O, and

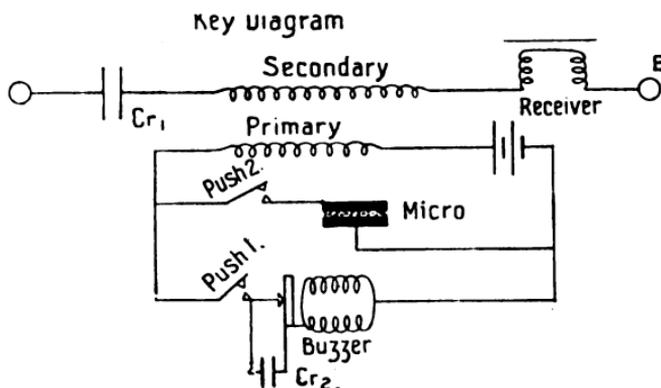


FIG. 56.

back to the secondary coil S. The home receiver will also buzz.

Incoming Call.—In by line L, C_{r1} , M, K, S, O, receiver coil, N, E, and return by earth. A buzz should be heard in receiver.

Speaking Circuits.—**PRIMARY.**—Press Push 2, and a current will leave positive of battery and flow to A. **MICROPHONE.**—Push 2, H, J, through vibrator coils to G, P, to negative of battery.

Secondary Circuit.—An induced current will be set

up in S, owing to a variable current passing through P, due to the microphone being spoken into. This induced current will flow from, say, K to M, Cr, L, line to the far telephone receiver, return by earth to E, N, receiver, O, back to the secondary coil S.

Rough Tests

- (a) **CALL CIRCUIT.**—Raise the instrument in case to the ear; press Push 1, and the buzzer should be heard. Join line terminals L and E by a piece of wire. On pressing Push 1, a loud buzzing should be heard in receiver.
- (b) **SPEAKING CIRCUITS.**—Press Push 2. On making and breaking Push 2, it should be heard in receiver.

Apply also to Key diagram (Fig. 56).

Tests in Detail.—If test (a) fails, remove cover of instrument and carefully inspect the adjusting screw of vibrator, to see that it is touching the armature. (This is the only mechanical fault likely to occur in this circuit.) It may require a little adjusting. If still out of order, test circuit for continuity by connecting a detector (low resistance coil) in series with this circuit at the battery. Press Push 1, when a deflection in detector should be seen; if not, test each cell separately by connecting them up to the detector (Q coil), when a hard-over deflection should be obtained, if in good condition. If the battery is not faulty, then there is a break in the circuit, which should be discovered by tracing. When discovered and put right, repeat (a).

- (c) If it still fails, join two cells in series with the L and E terminals, place the receiver to ear. On making and breaking the circuit, at say terminal L, a click should be heard in the receiver. (This is also testing the secondary circuit.) If not, touch the two wires from the two cells that you are using on to the terminals N and O, when the make and break

should be heard in receiver, as this tests receiver and cord; if not touch on receiver terminals. If now heard, it proves the receiver cord to be broken, if not, a disconnection inside receiver.

If the fault is not in receiver or cord, join a detector (I coil) in series with the two-cell battery that you are using and connect it to E and M, when a deflection should be obtained. If still at fault, trace out the remaining part of this circuit, with the aid of diagram, and locate thus—

- (d) If test (b) fails, test the primary circuit by connecting a detector (Q coil) in series with this circuit at the battery, or any other convenient point; press Push 2, when a deflection should be obtained in detector. If not, see that the front of microphone case is screwed up tightly, and hold it in a vertical position while pressing push. Slightly tap microphone and repeat. If still at fault, trace out the circuit carefully and look for a break.
- (e) SECONDARY CIRCUIT.—If test (c) has been applied and answers, this circuit must be correct, as it is common to both the outgoing part of call circuit and secondary. If it has not, and the fault is still on, apply it.

Concerning Portable C. Telephones

When calling up on the Portable C. telephone, always turn the handle rapidly; if not, the armature may fail to give out its current.

The quicker you turn the handle of a magneto generator, the higher the voltage generated.

To identify the wires of a Handle Telephone C., when disconnected from the box, touch the wires between the

poles of a single cell, until you find two that will give you clicks in the receiver with the pressel switch either pressed or released. They will be Nos. 3 and 4 (mark them at random). One of the discovered wires and one of the undiscovered wires should give sounds in the receiver with the pressel switch Released only. The previously discovered wire will be No. 3, and the other No. 1.

When using a Portable C. telephone with an earth return, if the line wire is connected to the left terminal and earth to middle terminal, the plug should be in right-hand hole of lightning protector.

If the line wire is connected to the right terminal and earth as before, the plug should be in left-hand hole. If two line wires are used, connect one to left and one to right line terminal (plug should not be inserted); also connect an earth wire to middle terminal, if working with overhead wires in the field in stormy weather.

The metal gongs of bell can be removed for cleaning by unscrewing the nuts on top. When replacing, be careful to tighten the nuts well.

When replacing or inserting a new battery into the Portable C. telephone, be careful to connect the centre terminal or positive pole of the cell to the terminal in box marked K, otherwise you may have your cells opposing each other.

If the centre partition is removed at any time, two bell-mouthed tubes will be seen coming up from generator bearings. These are lubricators.

The magnet pole pieces of some generators are copper coloured. They are iron, and are copper plated to prevent rusting. When removing any part of the telephone, be careful to note the procedure of taking to pieces, as this will facilitate the replacing of same.

The two cells in the telephone can be used for carrying out the "Tests in Detail" by disconnecting the wires from

the cells that go to the Z and K terminals nearest the front of box, and connecting them to the circuit under test.

Concerning Portable D. Telephones

To adjust the buzzer armature, press the buzzer key, and with the aid of a small screwdriver very carefully and slowly turn the adjusting screw until the armature gives off a buzz. When doing this, be careful to watch the armature to see that it is not bending, as if the screw is turned too much it will cause this, and upset the working of it. The screw should only just touch the armature. When properly adjusted it should give off a highly pitched note.

The adjusting of buzzer armature is a very careful operation, and when once adjusted should not be interfered with.

If the battery is nearly exhausted it will fail to work the buzzer. A two-cell battery should indicate not less than two volts on a voltmeter to work a buzzer properly.

The battery in the D. Mk. I. telephone consists of two cells joined in series inside the one casing, and therefore represents 3 volts.

The battery in the D. Mk. II. telephone consists of two separate cells joined in series.

Never allow the positive and negative wires of a cell or battery to touch each other. This considerably shortens the life of them.

Never remove the condensers unless it is absolutely necessary, as the wire connections are very apt to break off short at the point where they are connected to the tinfoil, rendering it very difficult to repair.

When removing screws, it is advisable to always place them on a sheet of paper, to prevent losing them.

Summary

The microphone is that part of a telephone that is spoken into.

Never use more than two cells for working the microphone circuit, otherwise you will heat the carbons, making them less sensitive.

Dry cells are always used with portable telephones, and should last at least twelve months.

A dry cell is of little use for telephone work when it indicates less than one volt.


Always keep the terminals of a telephone clean and dry.

Never press your finger or anything against the disc of a microphone; being carbon, and very thin, it will easily break.

When testing a circuit never touch the wire on the top of the terminal, as it is coated with lacquer, which is an insulator. Always touch the wire on the threaded bolt, or on the underneath part of terminal, where it grips the wire, as this part is not lacquered.

When using a screwdriver to remove small screws, be careful not to let it slip, as, the screw being brass, the head is easily cut off. Always press fairly hard on the screwdriver when turning it, especially when starting a screw.

A telephone induction coil is usually indicated thus—



The ends of the primary of an induction coil can be identified by being a little thicker than the ends of secondary. They should also come away near the middle of the coil, as the primary is the inside winding; they are usually a different colour to the secondary.

A practical way of identifying them is to join first one pair of ends, and then the other, in series with the Q coil of a detector and a single cell. The two that give the greatest deflection will be the primary.

The primary coil is always of a much lower resistance than the secondary. A common form of telephone induction coil has a primary resistance of about 1.5ω , and a secondary of about 25ω .

When receiving a message on a telephone, speech will be made clearer if you release your own pressel switch, as this does away with side tone in your own transmitter, caused by extraneous sounds reaching it. Don't forget to press it when you reply.

When using a Hand Micro-telephone, always hold it in a vertical position. If it is held on its back, you tend to break the circuit through it, by allowing the granulated carbon to fall back from the carbon disc.

A telephone receiver is a good substitute for a detector when testing a circuit. It should be joined in series as the detector would be, and a click should be heard in receiver every time the circuit is made and broken, if the circuit is correct.

A microphone can be made more sensitive sometimes by slightly tapping its case, as the granulated carbon sometimes packs or clings together. Carbon shot microphones are not as liable to packing, and are coming to the front a lot just now.

A carbon shot microphone only differs from a granulated carbon one, by having the granulated carbon replaced by carbon shot.

If a capsule microphone has its carbon plate broken, it cannot be replaced, as the metal case that holds it in position is spun over it. The capsule can be removed by unscrewing the front of the case. A disc of mica and wire

gauze is sometimes placed in front of the carbon disc to protect it from injury.

When connecting a wire to a terminal, always connect it

with a right-hand hook, thus



If a left-hand hook is used, there is a tendency to force the wire out, when screwing up the terminal.

To locate a fault in a circuit by means of a battery and detector in series, the test should be carried out as shown.

Connect positive to one end of circuit A, as shown.

When a contact is made

at B a deflection will be

obtained in detector, also

at C. When D is touched

there will be no deflection,

proving the break to be

between points C and D.

The wire may be broken,

and not the insulation ; this can be detected by bending

the suspected part in the hand, when it will at once present

itself.

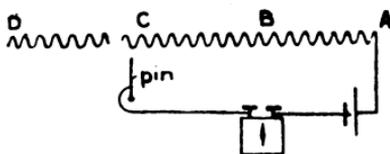


FIG. 57.

A convenient way of making contact with an insulated

wire is to take a turn or two of the wire from the detector

round an ordinary pin, then make contact by piercing the

insulation with the pin point. This avoids cutting the

insulation off the wire to be tested.

A pocket voltmeter will answer the purpose of a detector

for testing a circuit.

When tracing a circuit, for the circuit to be complete,

you must be able to get back to the starting-point.

If speech is very indistinct on the telephone, or if you

fail to make yourself heard, always resort to the buzzer,

and send the message by Morse. A message can usually be sent through a broken wire by this method.

The Morse alphabet on the buzzer is denoted by a short buzz representing a dot, and a long buzz a dash.

When talking into a telephone always talk slowly and distinctly, and in a moderate tone of voice, keeping your mouth about two or three inches from the microphone.

A copy of the message in writing, should always if possible be kept at both the sending and receiving stations. This will enable the culprit to be traced, if the message delivered is incorrect.

For testing a telephone battery, a pocket (watch type) voltmeter is of great value. Its scale should be graduated to at least three volts, then the two cells can be tested at once. If, when testing a two-cell battery, the reading is below two volts, test each cell again separately, perhaps only one of them is bad.

This type of voltmeter can be purchased from *Veritys, Ltd.*, from about 7s. 6d. ; they are largely used by motorists.

“Medhurst” Field Telephone

This instrument is carried in a leather case, and consists of a small ebonite frame, which contains the induction coil, buzzer, microphone, condenser, and necessary switches.

The microphone, *f*, is of the capsule type, its case, *h*, being screwed to the outside of the ebonite frame. The induction coil is of rather novel design, as one end of its iron core has secured to it a piece of iron, which is bent and brought around the outside of the coil, close to the other end of the core, and which, when magnetised, will have a north and south pole side by side. This arrangement enables the primary of the induction coil to act, and

take the place of a separate buzzer; an armature and adjusting screw being placed opposite the above-mentioned poles. There is a two-way switch, *k*, which, in one position, connects the battery to the buzzer circuit, and in the other to the speaking, or primary, circuit (Figs. 58, 59).

When signalling, the key *l* must be worked, and when speaking it must be pressed, and the switch *k* moved to speaking.

The condenser is connected to the line terminal, for use when tapping a telegraph circuit. It can be short circuited by a strip of metal, if necessary, as under some line conditions the condenser is better out of circuit. The battery, *q*, consists of two Obach dry cells, and is carried at one end of the leather case and covered with a leather flap. The line and earth terminals, L, E, are secured to the outside of leather case, and have connected to them, on the inside, two metal strips, *p*, that make rubbing contact with two similar strips fixed on the ebonite frame.

This enables the telephone to be removed from its case without disconnecting the line wires.


The switch *l*, when not pressed, short circuits the secondary of induction coil, causing the incoming call buzz to only pass round the receiver coils, which is an advantage.

The receiver, when not in use, rests on the leather flap that covers the cells.

Speaking from experience, excellent results have been obtained with this telephone. It was invented by Lieutenant Medhurst of the Australian Army, where it is greatly used.


To use this telephone, it is not necessary to remove it from its case; all that is necessary is to open the lid, and speak into the case.

Fig. 59 shows the telephone in its leather case, and

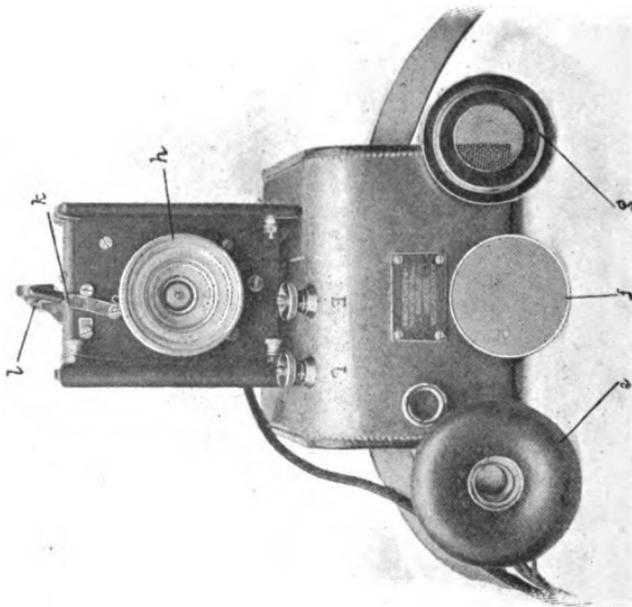

E, Earth terminal
g, Capsule case
h, Line terminal
k, Two-way switch
p, Metal strip
f, Ear cushion
l, Key

FIG. 58.

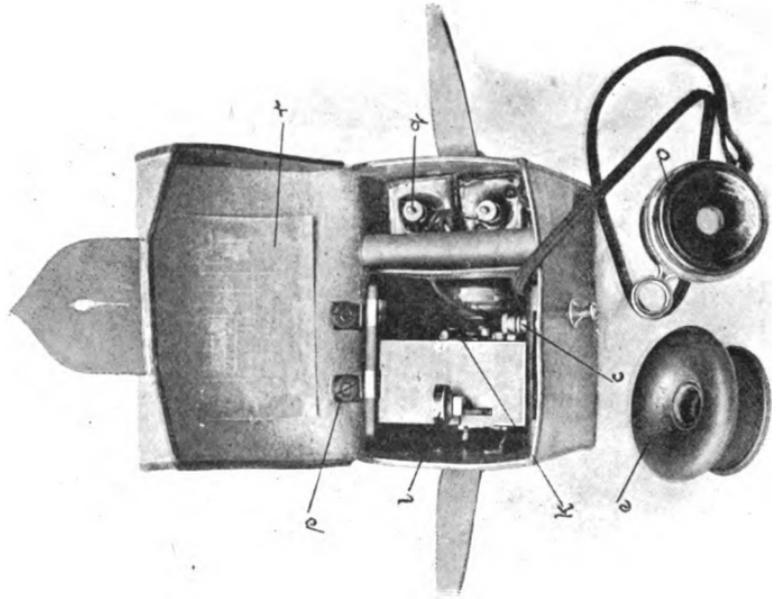

f, Microphone capsule
o, Receiver
q, Battery

FIG. 59.

Fig. 58 shows it removed from case, with microphone capsule removed.¹

Weight of this telephone, complete in leather case, $4\frac{1}{2}$ lbs.

It is made by the *International Electric Company*, 55, Redcross Street, London, E.C. Price, net, £3 10s. each.

Field Work

Earth Connections.—An earth connection should, if possible, always be made in damp soil.

A pool of water or pond is an excellent earth connection, if time and material will permit you to make use of it.

The best earth connection one can obtain, is a water or gas pipe, as they run under the earth for a great distance.

If the soil is very dry and a tree is handy, for preference use the tree by driving an earth rod or metal peg into it, as the sap will make a good connection.

Before making a joint in a wire, always be sure and remove the covering for about one and a half inches, then join the bared ends and insulate, if time permits, with rubber tape.

If transmission of speech at any time breaks down, or if it is not clear, immediately resort to the buzzer, and send the message by Morse code.

If you fail to get a reply from the far station, immediately apply the rough tests to your own telephone, to see if it is in working order.

Always call up on the buzzer.

If you know the wire to be broken, and time does not permit of your going in search of the fault, try and get through on the buzzer, as this will very often work through a broken wire.

Always be careful to close the pressel switch when speaking into the microphone of a Portable C. and D.

¹ For circuit diagram, see p. 110.

Mk. I. telephone, and press the button in the microphone case when using the D. Mk. II. telephone.

Cross Talk.—It is very difficult to prevent cross talk or signalling when using earth returns, and if not guarded against, might lead to some confusion. For instance, a brigade of artillery (three batteries) A, B, and C, are each equipped with a Portable D. telephone, and are in telephonic communication with their Brigade Commander, D, who is also using a Portable D. telephone. When D calls up A on the buzzer, B and C will also, although somewhat weaker than if connected directly to this circuit,

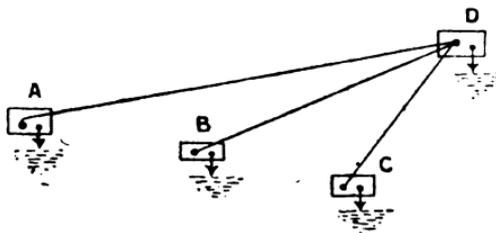


FIG. 60.

hear the buzz in their receiver (due to induction), and might, unless a prearranged code is determined upon, think the order was meant for them. This could be obviated by allowing the letter A to represent that battery, likewise B and C theirs; then, when D wished to send a message to A, he would, first of all, send the code letter A, and continue to do so until the battery A responded by sending this letter. The other two batteries, hearing this, would ignore it, and all other messages, unless preceded by their own code letter. If the brigade commander, to save time, wished to send his message to his three battery commanders, his telephone could send another code letter, which should be known by the battery telephonists to mean

that they are all to take the message, and, to let the telephonist at D know that they are ready, they should, immediately on hearing the signal, respond by sending their own code letter.

I have mentioned a letter and not a word as the code signal, to decrease, as much as possible, the time wasted in sending messages through.

The above is based on the assumption that the brigade commander is equipped with one telephone, with a three-way exchange attached, enabling him to speak to each or all at will, as used in the German army.

Using three separate telephones does not overcome this defect.

Cross talk can be partially overcome by keeping the line wires a good distance apart.

Crook sticks are used to place the wire on to trees, where they are available, to carry it across roads. If the wire cannot be hung clear of vehicles it should be buried in a shallow channel.

To tap a field telephone wire, connect a telephone receiver between the wire and earth, when the conversation will be heard.

Line Faults

There are usually two kinds of line faults when using field telephone wire with earth return, namely, a break and a short circuit. Both can very often be found by sending out a man to examine it, who should let the wire pass through his hand on the way. If it cannot be located in this way, apply the following tests:—

Break.—If you fail to hear the distant station, assuming that both telephones are in order, there is a break in the line somewhere. Connect the two-cell battery in your telephone directly between the line wire and earth, and proceed along the line with a detector, which should have

one of its terminals connected to an earth pin, and the other to an ordinary pin. Put the earth pin in the ground, and pierce the insulation of the wire at different places along the line, noting roughly the deflections. On obtaining no deflection, you will know that the fault lies between your present position and the point at which you last got a deflection, such as A and B in Fig. 61.

By a system of "bracketing" you can arrive at the exact spot, or by pulling on the wire between the two

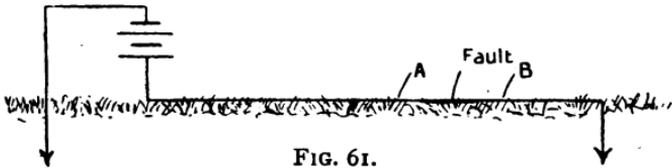


FIG. 61.

points mentioned; as the wire is broken the insulation will snap or stretch, and disclose the fault.

Short Circuit.—In the case of a short circuit, which would usually be caused by a wheel passing over a wire, pressing it into the earth and removing the insulation, or perhaps cutting the wire in two (as shown in Fig. 62), and pressing both ends into the earth.

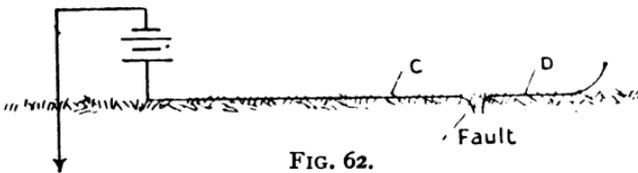


FIG. 62.

In this case the signals heard would be faint, especially if the ground is damp. The quickest way to locate this fault is to send a man out to examine it, passing the wire through his hand on the way. If the insulation is stripped, as a temporary measure, support the wire with stones to keep the defective part off the ground.

Joining a Wire.—To make a simple twist joint in a telephone wire, the insulation should be carefully cut off for about one inch and a half, and the wires scraped clean with a penknife or piece of emery cloth. Separate the wires if they are twisted together, and lay them side by side, then hold the ends at an angle to each other, and twist them by half turns, each end in succession, around each other four or five times, so that the turns lie close to each other. Care-



FIG. 63.

fully insulate it with a couple of layers of indiarubber tape. Fig. 63 represents a single wire joined in this way, but without the insulation.

Wire

Wire Gauge.—A cable or wire is usually designated by its standard wire gauge (S.W.G.) and the number of strands it contains.

Example.—A wire designated thus, $3/26$, means that it is made up of three wires, the S.W.G. of each being 26.

The Mil.—Another way of comparing wires is by their diameter in mils., a mil. being equal to a thousandth of an inch. This is done by means of a gauge, which is graduated in thousandths of an inch. It is worked by means of a fine screw, and can easily measure to half a mil. This is a service store.

To find the S.W.G. of a wire, a gauge plate is used, which has a number of slots around its edge, with the gauge of the slot stamped near it.

If a wire is to be gauged, take one of the strands and find the smallest slot that the wire will enter without force. This will be the gauge of that particular wire. Some wires are made up of a number of strands of different gauge. In this case, each wire should be gauged separately.

Field telephone wire usually consists of several fine steel wires, varying in number from five to twelve, and insulated with specially prepared paper and cotton, steel wire being used for strength.

Morse Alphabet

A	— — — — —	N	— — — — —
B	— — — — —	O	— — — — —
C	— — — — —	P	— — — — —
D	— — — — —	Q	— — — — —
E	— — — — —	R	— — — — —
F	— — — — —	S	— — — — —
G	— — — — —	T	— — — — —
H	— — — — —	U	— — — — —
I	— — — — —	V	— — — — —
J	— — — — —	W	— — — — —
K	— — — — —	X	— — — — —
L	— — — — —	Y	— — — — —
M	— — — — —	Z	— — — — —

Numerals

1	— — — — —	6	— — — — —
2	— — — — —	7	— — — — —
3	— — — — —	8	— — — — —
4	— — — — —	9	— — — — —
5	— — — — —	0	— — — — —

The Parlyphone

Domestic Telephone.—A cheap form of telephone has been introduced which enables any existing house electric bell circuit to be utilised as a telephone circuit, without upsetting the working of the former. There are

two types of instruments : One for use in the kitchen, which would be fitted near the bell, and one for use in the drawing, dining, or any other room that you might require it in.

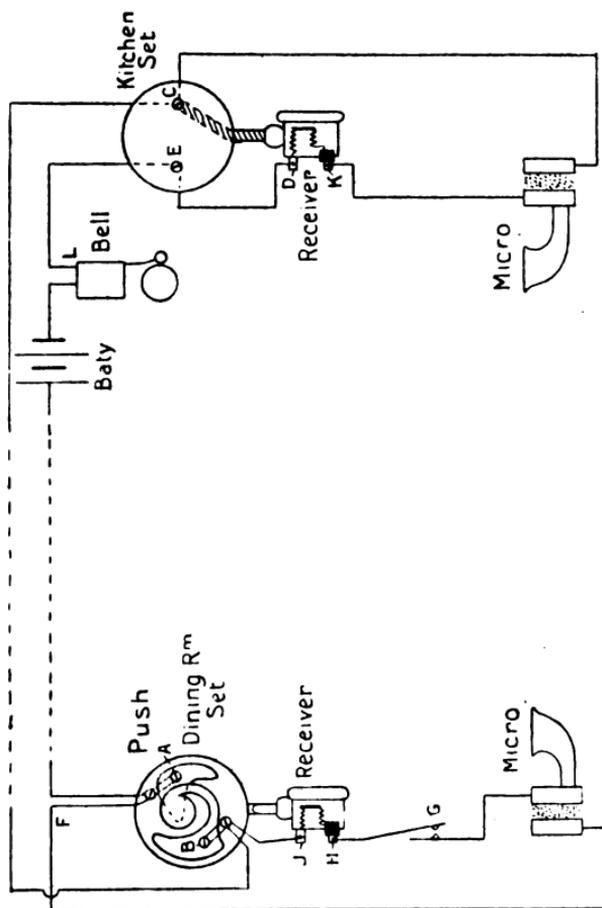


FIG. 64.

The latter type consists of an ordinary telephone receiver and microphone in series, the two wires coming from it are connected to the two springs of the bell push at

points A and B (see Fig. 64). Secured to the bell push is a hook for hanging it on, when not in use.

The kitchen type differs from the above by having a circular terminal block instead of a push, one of its terminals, C, having connected to it the metal hook that the telephone hangs on. It will also be noticed, on referring to the figure, that one of the receiver terminals is insulated from the case, and the other is common to it.

Circuit.—To call the kitchen, press push and the current will flow from positive of battery to A, B, C—as telephone is on hook, it gets from the hook to D, E—bell, to negative of battery. This rings bell.

To converse, remove telephone from hook, close pressel switch G, and a current will flow from positive of battery to A, F, through micro-carbons to G, H, receiver coils, J, B, C, through micro-carbons to K, receiver coils, E, bell coils (the current is now not strong enough to ring it), to negative of battery.

Action.—By talking into the microphone, the sound waves of the voice will cause the granulated carbons to vibrate, causing them to vary their contact with each other. This will vary the current in the circuit, and as it is a series circuit, will cause the magnetic field in the receiver to vary, which will vary its pull on the iron disc, causing it to vibrate. These vibrations are converted into sounds by the ear of the listener.

When conversation is finished, replace telephone on the hook.

The act of removing the kitchen telephone from its hook makes the current pass through its microphone and receiver; replacing it, short circuits microphone and receiver, as the current can get from C to hook, suspension ring to D, and away.

If the telephone is not on the hook at the kitchen end,

the bell will not ring, there being too much resistance in the circuit. It doesn't matter at the bell-push end, as the hook plays no part in the circuit, the current being made to go through the telephone at this end by pressing switch D. This should be released if you wish to ring the bell.

The two wires coming from the telephone of a drawing-room or dining-room set, usually terminate in a two-pin plug, and all that is necessary to connect this to the bell push, is to insert it into a socket provided for it in the push.

To instal a Parlyphone Set to an existing bell circuit, disconnect the wire going to bell at L (Fig. 64), connect this to terminal C, connect a fresh piece of wire from E to L.

To connect dining-room push, disconnect the two wires inside old push, and remove it. Take new push and connect the wires previously disconnected to points A and B.

It is immaterial whether a house is wired with an indicator or not, as the indicator will work just the same.

All the bell pushes in a house can be fitted with the dining-room type.

A good method to adopt is to let one ring of the bell represent "I want you," and two rings "Use the telephone."

It is advisable to wait a few seconds after you have rung the bell before commencing conversation, to give the bell armature time to stop vibrating, or else you will hear it in your receiver, causing speech to be indistinct. If speech is indistinct at any time, slightly tap microphone.

Parlyphones can be obtained from *Verity, Ltd., King Street, Covent Garden, W.C.* :—

Dining-room type, including push, list price,	<i>s.</i>	<i>d.</i>
from	8	0 each.
Kitchen type	7	0 "
Pushes	1	3 "

APPENDIX

SELF-INDUCTION—INDUCTIVE CAPACITY, ETC.

Induction

WHEN a current is started in a wire, circular lines of magnetic force (referred to on p. 26) are given out by the wire, whether it is insulated or not, and spread out through the air like sound waves, or the waves on the surface of water caused by dropping a stone into it, but at a very much greater velocity.

These circular magnetic lines of force will induce in the wire itself an E.M.F. in the opposite direction to the current causing it, tending to retard its flow. Should these lines of force encounter any other wire, they will also induce in it an E.M.F. to produce a current. On the stopping or weakening of the main or battery current, the lines of force will reverse their direction, as they will converge on the wire, causing an induced E.M.F. to be set up in the wire or wires, in the opposite direction to the first induced E.M.F.; its direction therefore is, in the case of the wire carrying the battery current, such, as to carry on the current after the circuit is broken.

From the above, it will be necessary to remember, that the induced current set up in the wire when the circuit is made, tends to impede the current causing it, and when the circuit is broken or the current decreased, tends to keep it flowing, and is termed "self-induction." The current induced in any other wires by the lines of force will be due to "induction."

If, instead of a straight wire, we consider it to be coiled into

a number of turns, this will greatly increase the self-induction, as the magnetic field of any one turn, will act upon every other turn in the coil. The self-induction can be further increased by winding the wire round soft iron, making an electro-magnet of it. This can be made evident by the vivid spark that is obtained, when a circuit containing an electro-magnet is broken. An electro-magnet therefore possesses inductance to a high degree, and will therefore offer great obstruction or *impedance* to rapidly varying or alternating currents, such as those given out and caused by talking into a telephone.

The unit of inductance is called the "Henry," and is the inductive effect caused, when the inducing current varies at the rate of 1 ampere per second, producing an E.M.F. of 1 volt. It is represented by the symbol "L."

Inductive Capacity

The statical inductive effects between wires vary according to the insulation between them ; from this it will be seen that the quality of the insulation which determines the intensity of statical induction between the wires, is termed its "inductive capacity." The inductive capacity of dry air is less than any other insulator, and is usually taken as unity.

The inductive capacity of	Resin is	.	.	.	1·7
"	"	"	Manilla paper	.	1·8 to 2·5
"	"	"	Paraffin paper	.	2·0
"	"	"	Raw indiarubber	.	2·0
"	"	"	Ebonite	.	2·3
"	"	"	Vulcanised indiarubber	.	2·5
"	"	"	Guttapercha	.	2·5
"	"	"	Glass	.	3·0
"	"	"	Mica	.	5·0

These values have to be carefully considered in the manufacture of telephone cables, and an insulation chosen which has the smallest inductive capacity, yet suitable for the case. Statical induction is very detrimental to telephone currents.

An example of this, is the large quantity of telephone cable now made which has the wires enclosed in loose paper tubes, depending principally for its insulation on the dry air between it and the paper tube.

Static Capacity

When a current flows through a wire, it charges every part of the surface of it with a static or stationary charge of electricity. This charge depends upon the surface area of the wire, how close it is to other wires, and the specific inductive capacity of the insulation intervening between the wires, and it has the effect of weakening the original current by abstracting from it, and also of weakening succeeding currents by opposing their growth. This is very detrimental on long lengths of cable, and it is on this account that speaking over more than a few miles of wire is not possible under ordinary conditions.

The capacity effect is small on overhead lines, the wires being wide apart and separated by air, which has the least inductive capacity.

The Condenser

Theoretically, a condenser consists of two conducting sheets, or plates of metal placed near each other, the space between them being filled with an insulating material. In order to get large sheets in a limited space, it is usual to interleave smaller sheets and connect alternate ones together; they are prevented from touching by sheets of paraffined paper or mica. Condensers used in telephones are made in this way, and consist of tinfoil sheets separated with paraffined paper. Fig. 65 represents a condenser of this form. The sheets of tinfoil are placed with their points projecting alternately; F are the even, and F' the odd numbers. They are joined together at the points where they project beyond the paper P.





FIG. 65.

The sheets of tinfoil are placed with their points projecting alternately; F are the even, and F' the odd numbers. They are joined together at the points where they project beyond the paper P.

Action.—In order to understand thoroughly the action of a condenser, it is necessary to have a knowledge of statical electricity, so that I intend here to give a practical explanation of it, when used with a telephone.

In some telephones a condenser is joined in series with one of the line terminals, L' , as in Fig. 66, an advantage of this being, that it can be used for tapping or utilising a telegraph wire without in any way interfering with its signals, as the latter uses a direct, or battery current, which will not enter the telephone, as the condenser acts as a break to such a current.

If a small alternating current generator (such as that used in a telephone) be connected to the line terminal LL' of a telephone with condenser (Cr , Fig. 66), on turning the handle of the

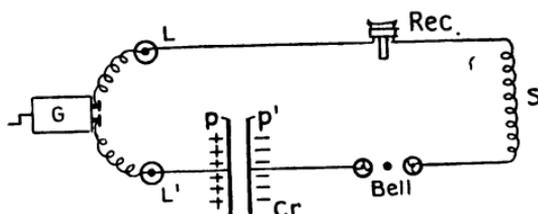

-FIG. 66.

generator, a current will first enter by, say, L' , and charge the plate P with a stationary charge of positive electricity; P' being in connection with the other terminal of the generator will have an equal but opposite, or negative charge, as shown. The next flow of current from the generator will enter by the terminal L , and charge the plate P' with a positive current; but, before this can take place, the positive charge on P has to discharge itself, and in doing so, passes through the bell coils, ringing the bell; when the current again enters by L' , as P' now has a positive charge, it will, before P can be given a positive charge, have to discharge itself and again ring the bell; so that as long as currents are altering their direction, they will also be passing to and fro from both condenser plates.

It will thus be seen that magneto-electric ringing currents may be readily transmitted through a condenser. If, instead of

a generator, another telephone be connected to LL' , the speaking current, being alternating, will actuate the condenser in the same way and, as they will flow through the receiver, speech will be heard. The more rapidly the current alternates, the more efficient is the condenser.

In an ordinary telephone magneto-generator, the current alters its direction about 20 times per second.

The alternations of a speech wave are about 800 per second.

The unit of statical electricity is named the "farad," and as this is too large for practical purposes, a sub-unit called the "microfarad" is used, it being one-millionth part of a farad.

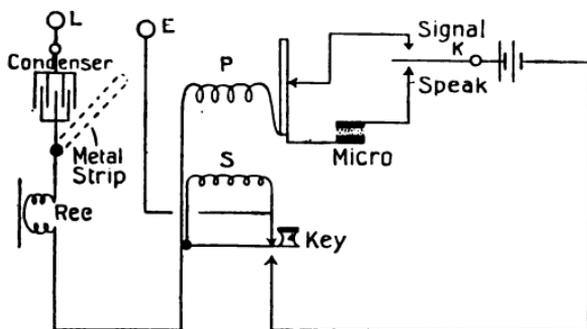


FIG. 67.—Circuit diagram of Medhurst telephone (see p. 94).

INDEX

AMPERE, 14
Appendix, 107

BELL, polarised, 32
— trembling, 28
Buzzer, 79

CELL, electrolytic, 14
— Leclanché, 4
— Leclanché agglomerate, 5
— Obach dry, 6
— simple voltaic, 1
Cells, arrangement of, 7
Circuits, compound, 19
— earth, 19
— metallic, 19
— short, 20
— simple, 18
Condenser, 44
— buzzer action of, 45
— speaking action of, 109
Conductance, 15
Conductors, 11
Cross talk, 98
Cut-out, automatic, 48

DETECTOR, linesman's,
34

EARTH connections, 97
Electric circuit, 13
Electro-magnet, polarised, 32
Electro-magnetism, 26

FIELD work, 97

GALVANOMETER, 33
German silver, 21

INDICATOR, 31
Induction, 107
— coil, 42
— electro-magnetic, 40
— magnetic, 39
Inductive capacity, 108
Insulators, 12

LIGHTNING protectors,
66
Line faults, 99
Local action, 2

MAGNET, 22
Magnetic field, 24

Magnetic induction, 25
 — lines of force, 23
 Magnetism, first law of, 23
 — of the earth, 25
 — residual, 24
 Magneto generator, 46
 Manganin, 21
 Microphone capsule, 60
 — Ericsson, 57
 — granulated carbon, 55
 — Hughes', 52
 — pencil, 55
 — solid back, 56
 Mil., the, 101

OHM, 14
 Ohm's law, 15

PARLYPHONE, the, 102
 Platinoid, 21
 Polarisation, 3
 Protectors, lightning, 66

RECEIVERS, Ader, 62
 — Gower, 64
 — Head, 64
 — loud-speaking, 64

Receivers, ring magnet, 63
 Resistance, 12
 — internal, 13

STATICAL capacity, 109

TELEGRAPH-WIRE tap-
 ping, 82
 Telephone, Bell, 50
 — domestic, 102
 — field, Medhurst, 94
 — portable "C.," 72
 — — "D. Mk. I.," 78
 — — "D. Mk. II.," 84
 — — Tests, 76

UNITS, electrical, 14

VOLT, 15

WIRE gauge, 101

CROSBY LOCKWOOD & SON'S

LIST OF WORKS

ON

CIVIL, MECHANICAL, MARINE AND ELECTRICAL ENGINEERING.

A Complete Catalogue of NEW and STANDARD WORKS on MINING and COLLIERY WORKING; ARCHITECTURE and BUILDING; The INDUSTRIAL ARTS, TRADES and MANUFACTURES; CHEMISTRY and CHEMICAL MANUFACTURES; AGRICULTURE, FARMING, GARDENING, AUCTIONEERING, LAND AGENCY, &c. Post Free on Application.

LONDON :
7, STATIONERS' HALL COURT, LUDGATE HILL, E.C.,
AND
121a, Victoria Street, Westminster, S.W.
1908.

LIST OF WORKS

ON

CIVIL, MECHANICAL, ELECTRICAL AND MARINE ENGINEERING.

AËRIAL NAVIGATION. A Practical Handbook on the Construction of Dirigible Balloons, Aërostats, Aëroplanes, and Aëromotors. By **FREDERICK WALKER, C.E.**, Associate Member of the Aëronautic Institute. With 104 Illustrations. Large Crown 8vo, cloth *Net 7/6*

AËRIAL OR WIRE-ROPE TRAMWAYS. Their Construction and Management. By **A. J. WALLIS-TAYLER, A.M.Inst.C.E.** With 87 Illustrations. Crown 8vo, cloth *7/6*

ALTERNATING CURRENTS, THE PRINCIPLES OF. By **E. T. LARNER, A.I.E.E.**, of the Engineering Department, G.P.O., London. With 69 Illustrations. Crown 8vo. *Nearly Ready.* Price about *4/6 Net*

COMPARISON OF CONTINUOUS AND ALTERNATING CURRENTS—SIMPLE HARMONIC MOTION—VECTORIAL REPRESENTATION—ALTERNATING CURRENT THEORY—CIRCUITS IN SERIES—CIRCUITS IN PARALLEL—ALTERNATING CURRENT POWER.

ARMATURE WINDINGS OF DIRECT CURRENT DYNAMOS. Extension and Application of a General Winding Rule. By **E. ARNOLD**, Engineer, Assistant Professor in Electro-Technics and Machine Design at the Riga Polytechnic School. Translated from the original German by **FRANCIS B. DR GRESS, M.E.**, Chief of Testing Department, Crocker-Wheeler Company. Medium 8vo, 120 pp., with over 140 Illustrations *Net 12/0*

BEAMS. EXPERIMENTS ON THEIR FLEXURE. Resulting in the Discovery of New Laws of Failure by Buckling. By **ALBERT E. GUV.** Medium 8vo, cloth *Net 9/0*

BLAST FURNACE CALCULATIONS AND TABLES FOR FURNACE MANAGERS AND ENGINEERS. Containing Rules and Formulæ for Finding the Dimensions and Output Capacity of any Furnace, as well as the regular Outfit of Stoves, Heating Surface, Volume of Air, Tuyere Area, &c., per ton of Iron per day of 24 hours. By **JOHN L. STEVENSON.** Fcap. 8vo, leather *Net 5/0*

BOILER AND FACTORY CHIMNEYS. Their Draught-Power and Stability. With a chapter on "Lightning Conductors." By **ROBERT WILSON, A.I.C.E.**, Author of "A Treatise on Steam Boilers," &c. Crown 8vo, cloth *3/6*

BOILER CONSTRUCTION. A Practical Handbook for Engineers, Boiler-Makers, and Steam Users. Containing a large Collection of Rules and Data relating to Recent Practice in the Design, Construction, and Working of all Kinds of Stationary, Locomotive, and Marine Steam-Boilers. By WALTER S. HUTTON, Civil and Mechanical Engineer. With upwards of 500 Illustrations. Fourth Edition, carefully Revised, and Enlarged. Medium 8vo, over 680 pages, cloth, strongly bound 18/0

HEAT, RADIATION, AND CONDUCTION—NON-CONDUCTING MATERIALS AND COVERINGS FOR STEAM-BOILERS—COMPOSITION, CALORIFIC-POWER AND EVAPORATIVE-POWER OF FUELS—COMBUSTION, FIRING STEAM-BOILERS, PRODUCTS OF COMBUSTION, ETC., CHIMNEYS FOR STEAM-BOILERS—STEAM BLAST—FORCED DRAUGHT—FEED-WATER—EFFECT OF HEAT ON WATER—EXPANSION OF WATER BY HEAT—WEIGHT OF WATER AT DIFFERENT TEMPERATURES—CONVECTION—CIRCULATION—EVAPORATION—PROPERTIES OF SATURATED STEAM—EVAPORATIVE POWER OF BOILERS—PRIMING, ETC.—WATER-HEATING SURFACES OF STEAM-BOILERS—TRANSMISSION OF HEAT—SMOKE TUBES—EVAPORATIVE POWER AND EFFICIENCY OF BOILERS—WATER-CAPACITY AND STEAM-CAPACITY OF BOILERS—FIRE-GRATES, FIRE BRIDGES, AND FIRE-BARS—POWER OF BOILERS—CYLINDRICAL SHELLS AND FURNACE-TUBES OF BOILERS, ETC.—TESTS OF MATERIALS—STRENGTH AND WEIGHT OF BOILER-PLATES—EFFECT OF TEMPERATURE ON METALS—RIVET HOLES—RIVETS—RIVETED JOINTS OF STEAM-BOILERS—CAULKING ENDS OF CYLINDRICAL SHELLS—STAYS FOR BOILERS, ETC.—STEAM GENERATORS—DESCRIPTION AND PROPORTIONS OF CORNISH, LANCASHIRE, AND OTHER TYPES OF STATIONARY BOILERS—BOILER-SETTING—MULTI-TUBULAR, LOCOMOTIVE, PORTABLE, MARINE, VERTICAL, AND WATER-TUBE BOILERS—SUPER-HEATERS—COST OF STEAM PRODUCTION—FURNACES FOR REFUSE-FUELS—DESTRUCTORS, ETC.—SAFETY-VALVES—STEAM PIPES—STOP-VALVES AND OTHER MOUNTINGS FOR BOILERS—FEED-PUMPS—STEAM PUMPS—FEED-WATER CONSUMPTION—INJECTORS—INCrustATION AND CORROSION—FEED-WATER HEATERS—EVAPORATORS—TESTING BOILERS—EVAPORATIVE PERFORMANCES OF STEAM BOILERS: STEAM-BOILER EXPLOSIONS, ETC.

"There has long been room for a modern handbook on steam boilers; there is not that room now, because Mr. Hutton has filled it. It is a thoroughly practical book for those who are occupied in the construction, design, selection, or use of boilers."—*Engineer*.

BOILERMAKER'S ASSISTANT. In Drawing, Templating, and Calculating Boiler Work, &c. By J. COURTNEY, Practical Boilermaker. Edited by D. K. CLARK, C.E. Eighth Edition. Crown 8vo, cloth 2/0

BOILERMAKER'S READY RECKONER. With Examples of Practical Geometry and Templating for the Use of Platers, Smiths, and Riveters. By John COURTNEY. Edited by D. K. CLARK, M.Inst.C.E. Crown 8vo, cloth 4/0

BOILERMAKER'S READY RECKONER & ASSISTANT, being the two previous mentioned volumes bound together in one volume. With Examples of Practical Geometry and Templating, for the Use of Platers, Smiths, and Riveters. By JOHN COURTNEY. Edited by D. K. CLARK, M.Inst.C.E. Fifth Edition, 480 pp., with 140 Illustrations. Crown 8vo, half bound 7/0

"No workman or apprentice should be without this book."—*Iron Trade Circular*.

BOILER MAKING AND PLATING. A Practical Handbook for Workshop Operations, including an Appendix of Tables. By JOSEPH G. HORNER, A.M.I.M.E. Second Edition. Thoroughly revised and enlarged. 380 pp., with 351 Illustrations. Crown 8vo, cloth [Just published. Net 9/0

BOILERS (STEAM). Their Construction and Management. By R. ARMSTRONG, C.E. Illustrated. Crown 8vo, cloth 1/6

BOILERS. Their Strength, Construction, and Economical Working. By R. WILSON, C.E. Fifth Edition. 12mo, cloth 2/0

BRIDGE CONSTRUCTION IN CAST AND WROUGHT

IRON. A Complete and Practical Treatise on, including Iron Foundations. In Three Parts.—Theoretical, Practical, and Descriptive. By WILLIAM HUBNER A.M.Inst.C.E., and M.Inst.M.E. Third Edition, revised and much improved, with 115 Double Plates (20 of which now first appear in this edition), and numerous Additions to the Text. In 2 vols., imp. 4to, half-bound in morocco **£8 16s. 6d.**

"In addition to elevations, plans, and sections, large scale details are given, which very much enhance the instructive work of these illustrations."—*Civil Engineer and Architect's Journal.*

BRIDGES AND VIADUCTS, IRON AND STEEL. A

Practical Treatise upon their Construction. For the use of Engineers, Draughtsmen, and Students. By FRANCIS CAMPIN, C.E. Crown 8vo, cloth **3/6**

BRIDGES (IRON) OF MODERATE SPAN: Their Con-

struction and Erection. By H. W. PENDRED. With 40 illustrations. Crown 8vo, cloth **2/0**

BRIDGES, OBLIQUE. A Practical and Theoretical Essay.

With 13 large Plates. By the late GEORGE WATSON BUCK, M.Inst.C.E. Fourth Edition, revised by his Son, J. H. WATSON BUCK, M.Inst.C.E.; and with the addition of Description to Diagrams for Facilitating the Construction of Oblique Bridges, by W. H. BARLOW, M.Inst.C.E. Royal 8vo, cloth **12/0**

"As a guide to the engineer and architect, on a confessedly difficult subject, Mr. Buck's work is unsurpassed."—*Building News.*

BRIDGES, TUBULAR AND OTHER IRON GIRDER.

Describing the Britannia and Conway Tubular Bridges. With a Sketch of Iron Bridges, &c. By G. D. DEMPSEY, C.E. Crown 8vo, cloth **2/0**

CALCULATOR (NUMBER, WEIGHT, AND FRACTIONAL).

Containing upwards of 250,000 Separate Calculations, showing at a Glance the Value at 422 Different Rates, ranging from $\frac{1}{12}$ th of a Penny to 20s. each, or per cwt., and £20 per ton, of any number of articles consecutively, from 1 to 470. Any number of cwt., qrs., and lbs., from 1 cwt. to 470 cwt. Any number of tons, cwt., qrs., and lbs., from 1 to 1,000 tons. By WILLIAM CHADWICK, Public Accountant. Fourth Edition, Revised and Improved. 8vo, strongly bound **18/0**

CALCULATOR (WEIGHT). Being a Series of Tables upon a

New and Comprehensive Plan, exhibiting at one Reference the exact Value of any Weight from 1 lb. to 15 tons, at 300 Progressive Rates, from 1d. to 168s. per cwt., and containing 186,000 Direct Answers, which, with their Combinations, consisting of a single addition (mostly to be performed at sight), will afford an aggregate of 10,266,000 Answers; the whole being calculated and designed to ensure correctness and promote despatch. By HENRY HARBEN, Accountant. Sixth Edition, carefully Corrected. Royal 8vo, strongly half-bound **£1 5s.**

CHAIN CABLES AND CHAINS. Comprising Sizes and Curves of Links, Studs, etc., Iron for Cables and Chains, Chain Cable and Chain Making, Forming and Welding Links, Strength of Cables and Chains, Certificates for Cables, Marking Cables, Prices of Chain Cables and Chains, Historical Notes, Acts of Parliament, Statutory Tests, Charges for Testing, List of Manufacturers of Cables, etc., etc. By THOMAS W. TRAILL, F.E.R.N., M.Inst.C.E., Engineer-Surveyor-in-Chief, Board of Trade, Inspector of Chain Cable and Anchor Proving Establishments, and General Superintendent, Lloyd's Committee on Proving Establishments. With numerous Tables, Illustrations, and Lithographic Drawings. Folio, cloth **£2 2s.**

CIVIL ENGINEERING. By HENRY LAW, M.Inst.C.E. Including a Treatise on Hydraulic Engineering by G. R. BURNELL, M.Inst.C.E. Seventh Edition, revised, with Large Additions on Recent Practice by D. KINNEAR CLARK, M.Inst.C.E. Crown 8vo, cloth **6/6**

CONDUCTORS FOR ELECTRICAL DISTRIBUTION. Their Materials and Manufacture, The Calculation of Circuits, Pole-Line Construction, Underground Working, and other Uses. By F. A. C. PERRINE, A.M., D.Sc.; formerly Professor of Electrical Engineering, Leland Stanford, Jr., University; M.Amer.I.E.E. Medium 8vo, 300 pp., fully illustrated, including Folding Plates and Diagrams. **Net 20/0**

CONTINUOUS RAILWAY BRAKES. A Practical Treatise on the several Systems in Use in the United Kingdom, their Construction and Performance. By M. REYNOLDS. 8vo, cloth. **9/0**

CRANES, the Construction of, and other Machinery for Raising Heavy Bodies for the Erection of Buildings, &c. By J. GLYNN, F.R.S. Crown 8vo, cloth **1/6**

CURVES, TABLES OF TANGENTIAL ANGLES AND MULTIPLES. For Setting-out Curves from 5 to 200 Radius. By A. BRAZELEY, M.Inst.C.E. 7th Edition, Revised. With an Appendix on the use of the Tables for Measuring up Curves. Printed on 50 Cards, and sold in a cloth box, waistcoat-pocket size **3/6**

"Each table is printed on a small card, which, placed on the theodolite, leaves the hands free to manipulate the instrument—no small advantage as regards the rapidity of work."—*Engineer.*

DRAINAGE OF LANDS, TOWNS AND BUILDINGS. By G. D. DEMPSEY, C.E. Revised, with large Additions on Recent Practice in Drainage Engineering by D. KINNEAR CLARK, M.Inst.C.E. Fourth Edition. Crown 8vo, cloth **4/6**

DYNAMIC ELECTRICITY AND MAGNETISM, ELEMENTS OF. A Handbook for Students and Electrical Engineers. By PHILIP ATKINSON, A.M., Ph.D. Crown 8vo, cloth, 417 pp., with 120 Illustrations **10/6**

DYNAMO BUILDING. HOW TO MAKE A DYNAMO. A Practical Treatise for Amateurs. By ALFRED CROFTS. Crown 8vo, cloth **2/0**

DYNAMO ELECTRIC MACHINERY. By SAMUEL SHELDON, A.M., Ph.D., Professor of Physics and Electrical Engineering at the Polytechnic Institute of Brooklyn, etc., assisted by HOBART MASON, B.S., E.E.

In two volumes (sold separately).

Vol. I.—DIRECT CURRENT MACHINES. Sixth Edition, Revised. 202 Illustrations *Net 12/0*

Vol. II.—ALTERNATING CURRENT MACHINES. Fifth Edition. With 184 Illustrations *Net 12/0*

DYNAMO MANAGEMENT. A Handybook of Theory and Practice for the Use of Mechanics, Engineers, Students, and others in Charge of Dynamos. By G. W. LUMMIS-PATERSON, Electrical Engineer. Third Edition, Revised. Crown 8vo, 260 pp., with 100 illustrations, cloth *4/6*

ELECTRICAL UNITS—MAGNETIC PRINCIPLES—THEORY OF THE DYNAMO—ARMATURES—ARMATURES IN PRACTICE—FIELD MAGNETS—FIELD MAGNETS IN PRACTICE—REGULATION DYNAMOS—COUPLING DYNAMOS—RUNNING DYNAMOS—FAULTS IN DYNAMOS—FAULTS IN ARMATURES—MOTORS.

"The book may be confidently recommended."—*Engineer.*

DYNAMO, MOTOR AND SWITCHBOARD CIRCUITS FOR ELECTRICAL ENGINEERS. A Practical Book dealing with the subject of Direct, Alternating and Polyphase Currents. By WILLIAM R. BOWKER, C.E., M.E., E.E. Medium 8vo, cloth. 109 Diagrams. *Net 6/0*

DYNAMO AND MOTOR CIRCUITS—STARTING AND STOPPING OF SAME—METHODS OF CHANGING DIRECTION OF ROTATION—SYNCHRONISM—PARALLELLING OF ALTERNATORS, ETC.—POLYPHASE CIRCUITS—POLYPHASE TRANSMISSION OF POWER—DIPHASE AND TRIPHASE CIRCUITS, ETC.—BOOSTERS—EQUALISERS—REVERSIBLE BOOSTERS—STORAGE BATTERIES—END-CELL SWITCHES, ETC.—ELECTRIC TRACTION MOTORS—SERIES—PARALLEL CONTROLLERS—CAR WIRING DIAGRAMS—MOTOR VEHICLE CIRCUITS—CANAL HAULAGE ROTARY CONVERTERS—SWITCHBOARD CIRCUITS, ETC.

DYNAMOS (ALTERNATING AND DIRECT CURRENT).

A Text-book on their Construction for Students, Engineer-Constructors and Electricians-in-Charge. By TYSON SEWELL, A.M.I.E.E., Lecturer and Demonstrator in Electrical Engineering at the Polytechnic, Regent Street, London, author of "The Elements of Electrical Engineering." 328 pp., with over 230 Illustrations. Large crown 8vo, cloth *Net 7/6*

FUNDAMENTAL PRINCIPLES OF DIRECT CURRENTS—THE MAGNETIC FIELD—THE PRODUCTION OF AN ELECTRO-MOTIVE FORCE—FUNDAMENTAL PRINCIPLES OF ALTERNATING CURRENTS—THE ALTERNATING MAGNETIC FIELD—THE CAPACITY OF THE CIRCUIT—BIPOLAR DYNAMO CONSTRUCTION—THEORY OF BIPOLAR MACHINES—BIPOLAR DYNAMO DESIGN—MULTIPOLAR DYNAMO CONSTRUCTION—MULTIPOLAR DYNAMO DESIGN—SINGLE PHASE ALTERNATORS—CONSTRUCTION OF ALTERNATORS—POLYPHASE ALTERNATORS—EXCITING, COMPOUNDING AND SYNCHRONISING OF ALTERNATORS.

EARTHWORK DIAGRAMS. Giving graphically the Cubic Contents for different Heights of Banks and Cuttings, either 66 ft. or 100 ft. Chains. By R. A. ERSKINE-MURRAY, A.M.Inst.C.E., and Y. D. KIRTON, A.M.Can.Soc.C.E. On a sheet in a roll.

[Just published. 5/0 Net, or mounted on card, Net 7/6]

These Diagrams or Scales have been designed with the intention of reducing the labour connected with the computation of earthwork quantities, and especially those of railways and roads. It has been found in the Authors' practice that they are much quicker, and at the same time as accurate and much more complete than most of the tables heretofore published.

EARTHWORK MANUAL. By ALEX. J. GRAHAM, C.E. With numerous Diagrams. Second Edition. 18mo, cloth *2/6*

EARTHWORK TABLES. Showing the Contents in Cubic Yards of Embankments, Cuttings, &c., of Heights or Depths up to an average of 80 feet. By JOSEPH BROADBENT, C.E., and FRANCIS CAMPIN, C.E. Crown 8vo, cloth **5/0**

EARTHWORK TABLES, HANDY GENERAL. Giving the Contents in Cubic Yards of Centre and Slopes of Cuttings and Embankments from 3 inches to 80 feet in Depth or Height, for use with either 66 feet Chain or 100 feet Chain. By J. H. WATSON BUCK, M.Inst.C.E. On a Sheet mounted in cloth case **3/6**

ELECTRIC LIGHT. Its Production and Use. By J. W. URQUHART. Crown 8vo, cloth **7/8**

ELECTRIC LIGHT FITTING. A Handbook for Working Electrical Engineers. By J. W. URQUHART. Crown 8vo, cloth **5/0**

ELECTRIC LIGHT FOR COUNTRY HOUSES. A Practical Handbook, including Particulars of the Cost of Plant, and Working. By J. H. KNIGHT. Crown 8vo, wrapper **1/0**

ELECTRIC LIGHTING. By ALAN A. CAMPBELL SWINTON, M.Inst.C.E., M.I.E.E. Crown 8vo, cloth **1/8**

ELECTRIC LIGHTING AND HEATING POCKET BOOK. Comprising useful Formulæ, Tables, Data, and Particulars of Apparatus and Appliances for the use of Central Stations, Engineers, Contractors, and Engineers-in-Charge. By SYDNEY F. WALKER, R.N., M.I.E.E., M.I.M.E., A.M.Inst.C.E., Etc. Fcap 8vo, 448 pp., 270 Diagrams, and 240 Tables. **Net 7/8**

DEFINITIONS—DIFFERENT UNITS EMPLOYED—LAWS OF ELECTRIC CIRCUITS—DIFFERENCES BETWEEN WORKING OF CONTINUOUS AND ALTERNATING CURRENTS—LAWS OF ELECTRO MAGNETIC AND ELECTRO-STATIC INDUCTION—ELECTRICITY GENERATORS—ACCUMULATORS—SWITCHBOARDS—SWITCHES, CIRCUIT-BREAKERS, ETC.—CABLES—METHODS OF INSULATION—SIZES AND INSULATION OF CABLES MADE BY LEADING MAKERS—CONDUITS—LEADING WIRES AND OTHER ACCESSORIES—MEASURING INSTRUMENTS OF ALL KINDS AND APPARATUS FOR TESTING LAMPS AND ACCESSORIES—APPARATUS FOR HEATING BY ELECTRICITY.

ELECTRIC SHIP-LIGHTING. A Handbook on the Practical Fitting and Running of Ships' Electrical Plant. By J. W. URQUHART. Crown 8vo, cloth **7/6**

ELECTRIC-WIRING, DIAGRAMS & SWITCH-BOARDS. By NEWTON HARRISON, E.E., Instructor of Electrical Engineering in the Newark Technical School. Crown 8vo, cloth **Net 5/0**

THE BEGINNING OF WIRING—CALCULATING THE SIZE OF WIRE—A SIMPLE ELECTRIC LIGHT CIRCUIT CALCULATED—ESTIMATING THE MAINS, FEEDERS, AND BRANCHES—USING THE BRIDGE FOR TESTING—THE INSULATION RESISTANCE—WIRING FOR MOTORS—WIRING WITH CLEATS, MOULDING AND CONDUIT—LAYING-OUT A CONDUIT SYSTEM—POWER REQUIRED FOR LAMPS—LIGHTING OF A ROOM—SWITCHBOARDS AND THEIR PURPOSE—SWITCHBOARDS DESIGNED FOR SHUNT AND COMPOUND-WOUND DYNAMOS—PANEL SWITCHBOARDS, STREET RAILWAY SWITCHBOARDS, LIGHTNING ARRESTERS—THE GROUND DETECTOR—LOCATING GROUNDS—ALTERNATING CURRENT CIRCUITS—THE POWER FACTOR IN CIRCUITS—CALCULATION OF SIZES OF WIRE FOR SINGLE, TWO AND THREE-PHASE CIRCUITS.

ELECTRICAL AND MAGNETIC CALCULATIONS. For the Use of Electrical Engineers and Artisans, Teachers, Students, and all others interested in the Theory and Application of Electricity and Magnetism. By A. A. ATKINSON, M.S., Professor of Physics and Electricity in Ohio University, Athens, Ohio. Crown 8vo, cloth *Net 9/0*

ELECTRICAL DICTIONARY. A Popular Encyclopædia of Words and Terms Used in the Practice of Electrical Engineering. By T. O'CONNOR SLOAN, A.M., E.M., Ph.D., Author of "Arithmetic of Electricity," "Electricity Simplified," "Electric Toy Making," etc. Third Edition, with Appendix. 690 pages and nearly 400 Illustrations. Large Crown 8vo, cloth *Net 7/6*

"The work has many attractive features in it, and is, beyond doubt, a well put together and useful publication. The amount of ground covered may be gathered from the fact that in the index about 5,000 references will be found."—*Electrical Review*.

ELECTRICAL ENGINEERING. A First-Year's Course for Students. By TYSON SEWELL, A.I.E.E., Lecturer and Demonstrator in Electrical Engineering at the Polytechnic, Regent Street, London. Fourth Edition, Revised, with additions. Large Crown 8vo, cloth. 466 pp., with 277 Illustrations [Just Published. *Net 5/0*

OHM'S LAW—UNITS EMPLOYED IN ELECTRICAL ENGINEERING—SERIES AND PARALLEL CIRCUITS—CURRENT DENSITY AND POTENTIAL DROP IN THE CIRCUIT—THE HEATING EFFECT OF THE ELECTRIC CURRENT—THE MAGNETIC EFFECT OF AN ELECTRIC CURRENT—THE MAGNETISATION OF IRON—ELECTRO-CHEMISTRY—PRIMARY BATTERIES—ACCUMULATORS—INDICATING INSTRUMENTS—AMMETERS, VOLTMETERS, OHMMETERS—ELECTRICITY SUPPLY METERS—MEASURING INSTRUMENTS, AND THE MEASUREMENT OF ELECTRICAL RESISTANCE—MEASUREMENT OF POTENTIAL DIFFERENCE, CAPACITY, CURRENT STRENGTH, AND PERMEABILITY—ARC LAMPS—INCANDESCENT LAMPS—MANUFACTURE AND INSTALLATION—PHOTOMETRY—THE CONTINUOUS CURRENT DYNAMO—DIRECT CURRENT MOTORS—ALTERNATING CURRENTS—TRANSFORMERS, ALTERNATORS, SYNCHRONOUS MOTORS—POLYPHASE WORKING—APPENDIX I, THE THREE WIRE SYSTEM—APPENDIX II, QUESTIONS AND ANSWERS.

"Distinctly one of the best books for those commencing the study of electrical engineering. Everything is explained in simple language which even a beginner cannot fail to understand."—*The Engineer*.

ELECTRICAL ENGINEERING (ELEMENTARY). In Theory and Practice. A Class Book for Junior and Senior Students and Working Electricians. By J. H. ALEXANDER. With nearly 200 Illustrations. Crown 8vo, cloth *Net 3/6*

FUNDAMENTAL PRINCIPLES—ELECTRICAL CURRENTS—SOLENOID COILS, GALVANO-METERS—VOLT-METERS—MEASURING INSTRUMENTS—ALTERNATING CURRENTS—DYNAMO ELECTRIC MACHINES—CONTINUOUS CURRENT DYNAMOS—INDUCTION, STATIC TRANSFORMERS, CONVERTERS—MOTORS—PRIMARY AND STORAGE CELLS—ARC LAMPS—INCANDESCENT LAMPS—SWITCHES, FUSES, ETC.—CONDUCTORS AND CABLES—ELECTRICAL ENERGY METERS—SPECIFICATIONS—GENERATION AND TRANSMISSION OF ELECTRICAL ENERGY—GENERATING STATIONS.

ELECTRICAL ENGINEERING. See ALTERNATING CURRENTS.

ELECTRICAL TRANSMISSION OF ENERGY. A Manual for the Design of Electrical Circuits. By ARTHUR VAUGHAN ABBOTT, C.E., Member American Institute of Electrical Engineers, Member American Institute of Mining Engineers, Member American Society of Civil Engineers, Member American Society of Mechanical Engineers, etc. Fourth Edition, entirely Re-Written and Enlarged, with numerous Tables, 16 Plates, and nearly 400 other Illustrations. Royal 8vo, 700 pages. Strongly bound in cloth *Net 3/0*

INTRODUCTION—THE PROPERTIES OF WIRE—THE CONSTRUCTION OF AERIAL CIRCUITS—GENERAL LINE WORK—ELECTRIC RAILWAY CIRCUITS—PROTECTION—THE CONSTRUCTION OF UNDERGROUND CIRCUITS—CONDUITS—CABLES AND CONDUIT CONDUCTORS—SPECIAL RAILWAY CIRCUIT—THE INTERURBAN TRANSMISSION LINE—THE THIRD RAIL—THE URBAN CONDUIT—ELECTRICAL INSTRUMENTS—METHODS OF ELECTRICAL MEASUREMENT—CONTINUOUS-CURRENT CONDUCTORS—THE HEATING OF CONDUCTORS—CONDUCTORS FOR ALTERNATING CURRENTS—SERIES DISTRIBUTION—PARALLEL DISTRIBUTION—MISCELLANEOUS METHODS—POLYPHASE TRANSMISSION—THE COST OF PRODUCTION AND DISTRIBUTION.

NOTE.—This Volume forms an indispensable Work for Electrical Engineers, Railway and Tramway Managers and Directors, and all interested in Electric Traction.

ELECTRICITY AS APPLIED TO MINING. By **ARNOLD LUPTON**, M.Inst.C.E., M.I.Mech.E., M.I.E.E., late Professor of Coal Mining at the Yorkshire College, Victoria University. Mining Engineer and Colliery Manager; **G. D. ASPINALL PARR**, M.I.E.E., A.M.I.Mech.E., Associate of the Central Technical College, City and Guilds of London, Head of the Electrical Engineering Department, Yorkshire College, Victoria University; and **HERBERT PERKIN**, M.I.M.E., Certificated Colliery Manager, Assistant Lecturer in the Mining Department of the Yorkshire College, Victoria University. Second Edition, Revised and Enlarged. Medium 8vo, cloth, 300 pp., with about 170 Illustrations *Net 12/0*

INTRODUCTORY—DYNAMIC ELECTRICITY—DRIVING OF THE DYNAMO—THE STEAM TURBINE—DISTRIBUTION OF ELECTRICAL ENERGY—STARTING AND STOPPING ELECTRICAL GENERATORS AND MOTORS—ELECTRIC CABLES—CENTRAL ELECTRICAL PLANTS—ELECTRICITY APPLIED TO PUMPING AND HAULING—ELECTRICITY APPLIED TO COAL CUTTING—TYPICAL ELECTRIC PLANTS RECENTLY ERECTED—ELECTRIC LIGHTING BY ARC AND GLOW LAMPS—MISCELLANEOUS APPLICATIONS OF ELECTRICITY—ELECTRICITY AS COMPARED WITH OTHER MODES OF TRANSMITTING POWER—DANGERS OF ELECTRICITY.

"The book is a good attempt to meet a growing want, and is well worthy of a place in the mining engineer's library."—*The Electrician*.

ELECTRICITY. A STUDENT'S TEXT-BOOK. By **H. M. NOAD**, F.R.S. 650 pp., with 470 Illustrations. Crown 8vo *9/0*

ELECTRICITY, POWER TRANSMITTED BY, AND APPLIED BY THE ELECTRIC MOTOR, including Electric Railway Construction. By **PHILIP ATKINSON**, A.M., Ph.D., author of "Elements of Static Electricity." Fourth Edition, Enlarged, Crown 8vo, cloth, 224 pp., with over 90 Illustrations *Net 9/0*

ELECTRO-PLATING AND ELECTRO-REFINING OF METALS. Being a new edition of Alexander Watt's "Electro-Deposition." Revised and Largely Re-written by **ARNOLD PHILIP**, Assoc. R.S.M., B.Sc., A.I.E.E., F.I.C., Principal Assistant to the Admiralty Chemist, formerly Chief Chemist to the Engineering Departments of the India Office, and sometime Assistant Professor of Electrical Engineering and Applied Physics at the Heriot-Watt College, Edinburgh. 700 pp., with numerous Illustrations. Large Crown 8vo, cloth *Net 12/6*

ENGINE-DRIVING LIFE. Stirring Adventures and Incidents in the Lives of Locomotive Engine-Drivers. By **MICHAEL REYNOLDS**. Third Edition. Crown 8vo, cloth *1/6*

ENGINEERING DRAWING. A WORKMAN'S MANUAL. By **JOHN MAXTON**, Instructor in Engineering Drawing, Royal Naval College, Greenwich. Eighth Edition. 300 Plates and Diagrams. Crown 8vo, cloth *3/6*

"A copy of it should be kept for reference in every drawing office."—*Engineering*.

ENGINEERING ESTIMATES, COSTS, AND ACCOUNTS.

A Guide to Commercial Engineering. With numerous examples of Estimates and Costs of Millwright Work, Miscellaneous Productions, Steam Engines and Steam Boilers; and a Section on the Preparation of Costs Accounts. By **A GENERAL MANAGER**. Second Edition. 8vo, cloth *12/0*

"The information is given in a plain, straightforward manner, and bears throughout evidence of the intimate practical acquaintance of the author with every phase of commercial engineering."—*Mechanical World*.

ENGINEERING PROGRESS (1863-6). By WM. HUMBER, A.M.Inst.C.E. Complete in Four Vols. Containing 148 Double Plates, with Portraits and Copious Descriptive Letterpress. Impl. 4to, half-morocco. Price, complete, **£12 12s.**; or each Volume sold separately at **£3 3s.** per Volume. *Descriptive List of Contents on application.*

ENGINEER'S AND MILLWRIGHT'S ASSISTANT. A Collection of Useful Tables, Rules, and Data. By WILLIAM TEMPLETON. Eighth Edition, with Additions. 18mo, cloth **2/6**

"A deservedly popular work. It should be in the 'drawer' of every mechanic."—*English Mechanic.*

ENGINEER'S HANDBOOK. A Practical Treatise on Modern Engines and Boilers, Marine, Locomotive, and Stationary. And containing a large collection of Rules and Practical Data relating to Recent Practice in Designing and Constructing all kinds of Engines, Boilers, and other Engineering work. The whole constituting a comprehensive Key to the Board of Trade and other Examinations for Certificates of Competency in Modern Mechanical Engineering. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works' Manager's Handbook for Engineers," &c. With upwards of 490 Illustrations. Sixth Edition, Revised and Enlarged. Medium 8vo, nearly 560 pp., strongly bound **18/0**

"A mass of information set down in simple language, and in such a form that it can be easily referred to at any time. The matter is uniformly good and well chosen, and is greatly elucidated by the illustrations. The book will find its way on to most engineers' shelves, where it will rank as one of the most useful books of reference."—*Practical Engineer.*

"Full of useful information, and should be found on the office shelf of all practical engineers."—*English Mechanic.*

ENGINEER'S, MECHANIC'S, ARCHITECT'S, BUILDER'S, ETC. TABLES AND MEMORANDA. Selected and Arranged by FRANCIS SMITH. Seventh Edition, Revised, including ELECTRICAL TABLES, FORMULÆ, and MEMORANDA. Waistcoat-pocket size, limp leather **1/6**

"The best example we have ever seen of 270 pages of useful matter packed into the dimensions of a card-case."—*Building News.*

ENGINEER'S YEAR-BOOK FOR 1908. Comprising Formulæ, Rules, Tables, Data and Memoranda in Civil, Mechanical, Electrical, Marine and Mine Engineering. By H. R. KEMPE, M. Inst. C.E., Electrician to the Post Office, Formerly Principal Staff Engineer, Engineer-in-Chief's Office, General Post Office, London, Author of "A Handbook of Electrical Testing," "The Electrical Engineer's Pocket-Book," &c. With 1,000 Illustrations, specially Engraved for the work. Crown 8vo, 950 pp., leather **[Just Published. 8/0]**

"Kempe's Year-Book really requires no commendation. Its sphere of usefulness is widely known, and it is used by engineers the world over."—*The Engineer.*

"The volume is distinctly in advance of most similar publications in this country."—*Engineering.*

ENGINEER'S POCKET COMPANION, and Practical Educator for Enginemen, Boiler Attendants, and Mechanics. By MICHAEL REYNOLDS. With 45 Illustrations and numerous Diagrams. Fifth Edition. Royal 18mo, strongly bound for pocket wear **3/6**

EXCAVATION (EARTH AND ROCK). A Practical Treatise, by CHARLES PRELINI, C.E. 365 pp., with Tables, many Diagrams and Engravings. Royal 8vo, cloth *Net 16/0*

FACTORY ACCOUNTS: their PRINCIPLES & PRACTICE.
A Handbook for Accountants and Manufacturers. By E. GARCKE and J. M. FELS. Crown 8vo, cloth *7/6*

FIRES, FIRE-ENGINES, AND FIRE BRIGADES. With a History of Fire-Engines, their Construction, Use, and Management. Hints on Fire-Brigades, &c. By C. F. T. YOUNG, C.E. 8vo, cloth, *£1 4s.*

FOUNDATIONS AND CONCRETE WORKS. With Practical Remarks on Footings, Planking, Sand and Concrete, Béton, Pile-driving, Caissons, and Cofferdams. By E. DOBSON. Crown 8vo *1/6*

FUEL, ITS COMBUSTION AND ECONOMY. Consisting of an Abridgment of "A Treatise on the Combustion of Coal and the Prevention of Smoke." By C. W. WILLIAMS, A.Inst.C.E. With extensive Additions by D. KINNEAR CLARK, M.Inst.C.E. Fourth Edition. Crown 8vo, cloth *3/6*

FUELS: SOLID, LIQUID, AND GASEOUS. Their Analysis and Valuation. For the use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., formerly Analytical and Consulting Chemist to the Great Eastern Railway. Fourth Edition. Crown 8vo, cloth *2/0*

GAS AND OIL ENGINE MANAGEMENT. A Practical Guide for Users and Attendants, being Notes on Selection, Construction, and Management. By M. POWIS BALE, M.Inst.C.E., M.I.Mech.E. Author of "Woodworking Machinery," &c. Second Edition. with an additional Chapter on Gas Producers. Crown 8vo, cloth *Net 3/6*

SELECTING AND FIXING A GAS ENGINE—PRINCIPLES OF WORKING, ETC.—FAILURES AND DEFECTS—VALVES, IGNITION, PISTON RINGS, ETC.—OIL ENGINES—GAS PRODUCERS—RULES, TABLES, ETC.

GAS ENGINEER'S POCKET-BOOK. Comprising Tables, Notes and Memoranda relating to the Manufacture, Distribution, and Use of Coal Gas and the Construction of Gas Works. By H. O'CONNOR, A.M.Inst.C.E. Third Edition, Revised. Crown 8vo, leather *Net 10/6*

"The book contains a vast amount of information."—*Gas World.*

GAS-ENGINE HANDBOOK. A Manual of Useful Information for the Designer and the Engineer. By E. W. ROBERTS, M.E. With Forty Full-page Engravings. Small Fcap. 8vo, leather *Net 3/6*

GAS-ENGINES AND PRODUCER-GAS PLANTS. A

Treatise setting forth the Principles of Gas Engines and Producer Design, the Selection and Installation of an Engine, the Care of Gas Engines and Producer-Gas Plants, with a Chapter on Volatile Hydrocarbon and Oil Engines. By R. E. MATHOT, M.E. Translated from the French. With a Preface by DUGALD CLERK, M.Inst.C.E., F.C.S. Medium 8vo, cloth, 310 pages, with about 150 Illustrations. *Net 12/0*

MOTIVE POWER AND COST OF INSTALLATION—SELECTION OF AN ENGINE—INSTALLATION OF AN ENGINE—FOUNDATION AND EXHAUST—WATER CIRCULATION—LUBRICATION—CONDITIONS OF PERFECT OPERATION—HOW TO START AN ENGINE—PRECAUTIONS—PERTURBATIONS IN THE OPERATION OF ENGINES—PRODUCER-GAS ENGINES—PRODUCER-GAS—PRESSURE GAS-PRODUCERS—SUCTION GAS-PRODUCERS—OIL AND VOLATILE HYDROCARBON ENGINES—THE SELECTION OF AN ENGINE.

GAS ENGINES. With Appendix describing a Recent Engine with Tube Igniter. By T. M. GOODEVE, M.A. Crown 8vo, cloth *2/6*

GAS MANUFACTURE, CHEMISTRY OF. A Practical

Manual for the Use of Gas Engineers, Gas Managers and Students. By HAROLD M. ROYLE, F.C.S., Chief Chemical Assistant at the Becton Gas Works. Demy 8vo, cloth. 340 pages, with numerous Illustrations and Coloured Plate [*Just published, Net 12/6*]

PREPARATION OF STANDARD SOLUTIONS—ANALYSIS OF COALS—DESCRIPTION OF VARIOUS TYPES OF FURNACES—PRODUCTS OF CARBONISATION AT VARIOUS TEMPERATURES—ANALYSIS OF CRUDE GAS—ANALYSIS OF LIME—ANALYSIS OF AMMONIACAL LIQUOR—ANALYTICAL VALUATION OF OXIDE OF IRON—ESTIMATION OF NAPHTHALIN—ANALYSIS OF FIRE-BRICKS AND FIRE-CLAY—ART OF PHOTOMETRY—CARBURETTED WATER GAS—APPENDIX CONTAINING STATUTORY AND OFFICIAL REGULATIONS FOR TESTING GAS. VALUABLE EXCERPTS FROM VARIOUS IMPORTANT PAPERS ON GAS CHEMISTRY, USEFUL TABLES, MEMORANDA, ETC.

"It should prove a useful book of instruction and reference both to students in the technical colleges and to practical engineers and managers in their daily duties."—*Scotsman*.

GAS WORKS. Their Construction and arrangement, and the Manufacture and Distribution of Coal Gas. By S. HUGHES, C.E. Ninth Edition. Revised, with Notices of Recent Improvements by HENRY O'CONNOR, A.M.Inst.C.E. Crown 8vo, cloth *6/0*

GEOMETRY. For the Architect, Engineer, and Mechanic. By E. W. TARN, M.A., Architect. 8vo, cloth *9/0*

GEOMETRY FOR TECHNICAL STUDENTS. By E. H. SPRAGUE, A.M.Inst.C.E. Crown 8vo, cloth *Net 1/0*

GEOMETRY OF COMPASSES. By OLIVER BYRNE. Coloured Plates. Crown 8vo, cloth *3/6*

HEAT, EXPANSION OF STRUCTURES BY. By JOHN KELLY, C.E. Crown 8vo, cloth *3/6*

HOISTING MACHINERY. Including the Elements of Crane Construction and Descriptions of the Various Types of Cranes in Use. By JOSEPH HORNER, A.M.I.M.E. Crown 8vo, cloth, with 215 Illustrations including Folding Plates *Net 7/6*

HYDRAULIC MANUAL. Consisting of Working Tables and Explanatory Text. Intended as a Guide in Hydraulic Calculations and Field Operations. By Lewis D'A. JACKSON. Fourth Edition, Enlarged. Large crown 8vo, cloth *16/0*

HYDRAULIC POWER ENGINEERING. A Practical Manual on the Concentration and Transmission of Power by Hydraulic Machinery. By G. CROVDON MARKS, A.M.Inst.C.E. Second Edition, Enlarged, with about 240 Illustrations. 8vo, cloth **Net 10/6**

SUMMARY OF CONTENTS:—PRINCIPLES OF HYDRAULICS—THE FLOW OF WATER—HYDRAULIC PRESSURES—MATERIAL—TEST LOAD—PACKING FOR SLIDING SURFACES—PIPE JOINTS—CONTROLLING VALVES—PLATFORM LIFTS—WORKSHOP AND FOUNDRY CRANES—WAREHOUSE AND DOCK CRANES—HYDRAULIC ACCUMULATORS—PRESSES FOR BALING AND OTHER PURPOSES—SHEET METAL WORKING AND FORGING MACHINERY—HYDRAULIC RIVETERS—HAND AND POWER PUMPS—STEAM PUMPS—TURBINES—IMPULSE TURBINES—REACTION TURBINES—DESIGN OF TURBINES IN DETAIL—WATER WHEELS—HYDRAULIC ENGINES—RECENT ACHIEVEMENTS—PRESSURE OF WATER—ACTION OF PUMPS, &c.

"Can be unhesitatingly recommended as a useful and up-to-date manual on hydraulic transmission and utilisation of power."—*Mechanical World*.

HYDRAULIC TABLES, CO-EFFICIENTS, & FORMULÆ.

For Finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. With New Formulæ, Tables, and General Information on Rain-fall, Catchment-Basins, Drainage, Sewerage, Water Supply for Towns and Mill Power. By JOHN NEVILLE, C.E., M.R.I.A. Third Edition, revised, with additions. Numerous Illustrations. Crown 8vo, cloth **14/0**

IRON AND METAL TRADES' COMPANION. For Expediently Ascertaining the Value of any Goods bought or sold by Weight, from 1s. per cwt. to 112s. per cwt., and from one farthing per pound to one shilling per pound. By THOMAS DOWNIE. Strongly bound in leather, 396 pp. **9/0**

IRON AND STEEL. A Work for the Forge, Foundry, Factory, and Office. Containing ready, useful, and trustworthy Information for Ironmasters and their Stock-takers; Managers of Bar, Rail, Plate, and Sheet Rolling Mills; Iron and Metal Founders; Iron Ship and Bridge Builders; Mechanical, Mining, and Consulting Engineers; Architects, Contractors, Builders, &c. By CHARLES HOARE, Author of "The Slide Rule," &c. Ninth Edition. 32mo, leather **6/0**

IRON AND STEEL CONSTRUCTIONAL WORK, as applied to Public, Private, and Domestic Buildings. By FRANCIS CAMPIN, C.E. Crown 8vo, cloth **3/6**

IRON & STEEL GIRDERS. A Graphic Table for facilitating the Computation of the Weights of Wrought Iron and Steel Girders, &c., for Parliamentary and other Estimates. By J. H. WATSON BUCK, M.Inst.C.E. On a Sheet **2/6**

IRON-PLATE WEIGHT TABLES. For Iron Shipbuilders, Engineers, and Iron Merchants. Containing the Calculated Weights of upwards of 150,000 different sizes of Iron Plates from 1 foot by 6 in. by $\frac{1}{2}$ in. to 10 feet by 5 feet by 1 in. Worked out on the Basis of 40 lbs. to the square foot of Iron of 1 inch in thickness. By H. BURLINSON and W H SIMPSON. 4to, half-bound **£1 5s.**

IRRIGATION (PIONEER). A Manual of Information for Farmers in the Colonies. By E. O. MAWSON, M.Inst.C.E., Executive Engineer, Public Works Department, Bombay. With Chapters on Light Railways by E. R. CALTHROP, M.Inst.C.E., M.I.M.E. With Plates and Diagrams. Demy 8vo, cloth *Net 10/6*
 VALUE OF IRRIGATION, AND SOURCES OF WATER SUPPLY—DAMS AND WEIRS—CANALS—UNDERGROUND WATER—METHODS OF IRRIGATION—SEWAGE IRRIGATION—IMPERIAL AUTOMATIC SLUICE GATES—THE CULTIVATION OF IRRIGATED CROPS, VEGETABLES, AND FRUIT TREES—LIGHT RAILWAYS FOR HEAVY TRAFFIC—USEFUL MEMORANDA AND DATA.

LATHE PRACTICE. A complete and Practical Work on the Modern American Lathe. By OSCAR E. PERRIGO, M.E., Author of "Modern Machine Shop Construction, Equipment, and Management," etc. Medium 8vo, 424 pp., 375 illustrations. Cloth *Net 12/0*

HISTORY OF THE LATHE UP TO THE INTRODUCTION OF SCREW THREADS—ITS DEVELOPMENT SINCE THE INTRODUCTION OF SCREW THREADS—CLASSIFICATION OF LATHES—LATHE DESIGN; THE BED AND ITS SUPPORTS—THE HEAD-STOCK CASTING, THE SPINDLE, AND SPINDLE-CONE—THE SPINDLE BEARINGS, THE BACK GEARS, AND THE TRIPLE-GEAR MECHANISM—THE TAIL STOCK, THE CARRIAGE, THE APRON, ETC.—TURNING RESTS, SUPPORTING RESTS, SHAFT STRAIGHTENERS, ETC.—LATHE ATTACHMENTS—RAPID CHANGE GEAR MECHANISM—LATHE TOOLS, HIGH-SPEED STEEL, SPEEDS AND FEEDS, POWER FOR CUTTING TOOLS, ETC.—TESTING A LATHE—LATHE WORK—ENGINE LATHES—HEAVY LATHES—HIGH-SPEED LATHES—SPECIAL LATHES—REGULAR TURRET LATHES—SPECIAL TURRET LATHES—ELECTRICALLY-DRIVEN LATHES.

LATHE-WORK. A Practical Treatise on the Tools, Appliances, and Processes employed in the Art of Turning. By PAUL N. HASLUCK. Eighth Edition. Crown 8vo, cloth *5/0*

"We can safely recommend the work to young engineers. To the amateur it will simply be invaluable"—*Engineer*.

LAW FOR ENGINEERS AND MANUFACTURERS.

See EVERY MAN'S OWN LAWYER. A Handybook of the Principles of Law and Equity. By a Barrister. Forty-fifth (1908) Edition, Revised and Enlarged, including Abstracts of the Legislation of 1906-7 of especial interest to Engineering Firms and Manufacturers, such as the Workmen's Compensation Act, 1906; the Prevention of Corruption Act, 1906; the Trades Disputes Act, 1906; the Census of Production Act, 1906; the New Companies Act, 1907; the Limited Partnerships Act, 1907; the Patents and Designs Act, 1907; and many other recent Acts. Large crown 8vo, cloth, 838 pages.

[Just published. *Net 6/8*

"No Englishman ought to be without this book."—*Engineer*.

"Ought to be in every business establishment and all libraries."—*Sheffield Post*.

"It is a complete code of English Law written in plain language, which all can understand. . . . Should be in the hands of every business man, and all who wish to abolish lawyers' bills."—*Weekly Times*.

"A useful and concise epitome of the law, compiled with considerable care."—*Law Magazine*.

LEVELLING, PRINCIPLES AND PRACTICE OF. Showing its Application to Purposes of Railway and Civil Engineering in the Construction of Roads; with Mr. TELFORD'S Rules for the same. By FREDERICK W. SIMMS, M.Inst.C.E. Ninth Edition, with LAW'S Practical Examples for Setting-out Railway Curves, and TRAUTWINE'S Field Practice of Laying-out Circular Curves. With 7 Plates and numerous Woodcuts. 8vo *8/8*

"The publishers have rendered a substantial service to the profession, especially to the younger members, by bringing out the present edition of Mr. Simms's useful work."—*Engineering*.

LOCOMOTIVE ENGINE. The Autobiography of an old Locomotive Engine. By ROBERT WEATHERBURN, M.I.M.E. With Illustrations and Portraits of GEORGE and ROBERT STEPHENSON. Crown 8vo, cloth. *Net 2/8*

LOCOMOTIVE ENGINE DEVELOPMENT. A Popular Treatise on the Gradual Improvements made in Railway Engines between 1803 and 1903. By CLEMENT C. STRETTON, C.E. Sixth Edition Revised and Enlarged. Crown 8vo, cloth Net **4/6**

LOCOMOTIVE ENGINE DRIVING. A Practical Manual for Engineers in Charge of Locomotive Engines. By MICHAEL REYNOLDS, M.S.E. Twelfth Edition. Crown 8vo, cloth, **3/6**; cloth boards **4/6**

LOCOMOTIVE ENGINES. A Rudimentary Treatise on. By G. D. DEMPSEY, C.E. With large Additions treating of the Modern Locomotive, by D. K. CLARK, M.Inst.C.E. With Illustrations. Crown 8vo, cloth **3/0**

LOCOMOTIVE (MODEL) ENGINEER, Fireman and Engine-Boy. Comprising a Historical Notice of the Pioneer Locomotive Engines and their Inventors. By MICHAEL REYNOLDS. Crown 8vo, cloth, **3/6**; cloth boards **4/6**

LOCOMOTIVES, THE APPLICATION OF HIGHLY SUPERHEATED STEAM TO. See STEAM.

MACHINERY, DETAILS OF. Comprising Instructions for the Execution of various Works in Iron in the Fitting Shop, Foundry, and Boiler Yard. By FRANCIS CAMPIN, C.E. Crown 8vo, cloth . . . **3/0**

MACHINE SHOP TOOLS. A Practical Treatise describing in every detail the Construction, Operation and Manipulation of both Hand and Machine Tools; being a work of Practical Instruction in all Classes of Modern Machine Shop Practice, including Chapters on Filing, Fitting and Scraping Surfaces; on Drills, Reamers, Taps and Dies; the Lathe and its Tools; Planers, Shapers and their Tools; Milling Machines and Cutters; Gear Cutters and Gear Cutting; Drilling Machines and Drill Work; Grinding Machines and their Work; Hardening and Tempering, Gearing, Belting, and Transmission Machinery; Useful Data and Tables. By W. H. VAN DERVOORT, M.E. Illustrated by 673 Engravings. Medium 8vo. **Net 21/0**

MAGNETOS FOR AUTOMOBILISTS: How made and How used. A handybook on their Construction and Management. By S. R. BOTTONE. Crown 8vo, cloth [Just Published. Net **2/0**

MARINE ENGINEERING. An Elementary Manual for Young Marine Engineers and Apprentices. By J. S. BREWER. Crown 8vo, cloth **1/6**

MARINE ENGINEER'S GUIDE to Board of Trade Examinations for Certificates of Competency. Containing all Latest Questions to Date, with Simple, Clear, and Correct Solutions; 302 Elementary Questions with Illustrated Answers, and Verbal Questions and Answers; complete Set of Drawings with Statements completed. By A. C. WANNAN, C.E., Consulting Engineer, and E. W. I. WANNAN, M.I.M.E., Certificated First Class Marine Engineer. With numerous Engravings. Fourth Edition, Enlarged. 500 pages. Large crown 8vo, cloth Net **10/6**

MARINE ENGINEER'S POCKET-BOOK. Containing latest Board of Trade Rules and Data for Marine Engineers. By A. C. WANNAN. Fourth Edition, Revised, Enlarged, and Brought up to Date. Square 18mo, with thumb index, leather **5/0**

MARINE ENGINES AND BOILERS. Their Design and Construction. A Handbook for the Use of Students, Engineers, and Naval Constructors. Based on the Work "Berechnung und Konstruktion der Schiffsmaschinen und Kessel," by Dr. G. BAUER, Engineer-in-Chief of the Vulcan Shipbuilding Yard, Stettin. Translated from the Second German Edition by E. M. DONKIN, and S. BRYAN DONKIN, A.M.I.C.E. Edited by LESLIE S. ROBERTSON, Secretary to the Engineering Standards Committee, M.I.C.E., M.I.M.E., M.I.N.A., &c. With numerous Illustrations and Tables. Medium 8vo, cloth **Net 25/-**

SUMMARY OF CONTENTS.—PART I.—MAIN ENGINES—DETERMINATION OF CYLINDER DIMENSIONS—THE UTILISATION OF STEAM IN THE ENGINE—STROKE OF PISTON—NUMBER OF REVOLUTIONS—TURNING MOMENT—BALANCING OF THE MOVING PARTS—ARRANGEMENT OF MAIN ENGINES—DETAILS OF MAIN ENGINES—THE CYLINDER—VALVES—VARIOUS KINDS OF VALVE GEAR—PISTON RODS—PISTONS—CONNECTING ROD AND CROSSHEAD—VALVE GEAR RODS—BED PLATES—ENGINE COLUMNS—REVERSING AND TURNING GEAR. PART II.—PUMPS.—AIR, CIRCULATING FEED, AND AUXILIARY PUMPS. PART III.—SHAFTING, RESISTANCE OF SHIPS, PROPELLERS—THRUST SHAFT AND THRUST BLOCK—TUNNEL SHAFTS AND PLUMBER BLOCKS—SHAFT COUPLINGS—STERN TUBE—THE SCREW PROPELLER—CONSTRUCTION OF THE SCREW. PART IV.—PIPES AND CONNECTIONS—GENERAL REMARKS, FLANGES, VALVES, &c.—UNDER WATER FITTINGS—MAIN STEAM, AUXILIARY STEAM, AND EXHAUST PIPING—FEED WATER, BILGE, BALLAST AND CIRCULATING PIPES. PART V.—STEAM BOILERS—FIRING AND THE GENERATION OF STEAM—CYLINDRICAL BOILERS.—LOCOMOTIVE BOILERS—WATER-TUBE BOILERS—SMALL TUBE WATER-TUBE BOILERS—SMOKE BOX—FUNNEL AND BOILER LAGGING—FORCED DRAUGHT—BOILER FITTINGS AND MOUNTINGS. PART VI.—MEASURING INSTRUMENTS. PART VII.—VARIOUS DETAILS—BOLTS, NUTS, SCREW THREADS, &c.—PLATFORMS, GRATINGS, LADDERS—FOUNDATIONS—SEATINGS—LUBRICATION—VENTILATION OF ENGINE ROOMS—RULES FOR SPARE GEAR. PART VIII.—ADDITIONAL TABLES.

"An excellent specimen of the best class of German technical handbooks; it is clear and systematic in arrangement; perfectly sound on theoretical matters; and very complete, detailed, and distinct in descriptions of construction and directions for calculations, with fully-detailed numerical and graphical examples."—*Engineer*.

"The book covers very completely the whole range of subjects embraced by the title. Dr. Bauer has produced a volume which forms a most useful and important addition to our practical text-books on marine engineering, and he has been most fortunate in securing translators and editor who have been able to place his views before English readers in such an eminently satisfactory form."—*Engineering*.

"... All who wish to know the principles on which this principal branch of science is based should be in possession of a copy of this work. There is nothing but solid matter in it."—*Marine Engineer*.

"The book is one of the best we have ever seen on the subject. It will be welcomed both by the designer and the student of marine engineering, and no marine engineer who wishes to be up-to-date can afford to be without it."—*Steamship*.

MARINE ENGINES AND STEAM VESSELS. By R. MURRAY, C.E. Eighth Edition, thoroughly Revised, with Additions by the Author and by GEORGE CARLISLE, C.E. Crown 8vo, cloth **4/6**

MASONRY DAMS FROM INCEPTION TO COMPLETION. Including numerous Formulae, Forms of Specification and Tender, Pocket Diagram of Forces, &c. For the use of Civil and Mining Engineers. By C. F. COURTNEY, M.Inst.C.E. 8vo, cloth **9/0**

MASTING, MAST-MAKING, AND RIGGING OF SHIPS. Also Tables of Spars, Rigging, Blocks; Chain, Wire, and Hemp Ropes, &c., relative to every class of vessels. By R. KIPPING. Crown 8vo, cloth **2/0**

MATERIALS AND CONSTRUCTION. A Theoretical and Practical Treatise on the Strains, Designing, and Erection of Works of Construction. By F. CAMPIN. Crown 8vo, cloth **3/0**

MATERIALS, A TREATISE ON THE STRENGTH OF.

By P. BARLOW, F.R.S., P. W. BARLOW, F.R.S., and W. H. BARLOW, F.R.S.
 Edited by WM. HUMBER, A.M.Inst.C.E. 8vo, cloth 18/0

"The standard treatise on that particular subject."—*Engineer*.

MATHEMATICAL TABLES. For Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms, by H. LAW, C.E. With Tables for Navigation and Nautical Astronomy. By Prof. J. R. YOUNG. Crown 8vo, cloth 4/0

MECHANICAL ENGINEERING. Comprising Metallurgy, Moulding, Casting, Forging, Tools, Workshop Machinery, Mechanical Manipulation, Manufacture of the Steam Engine, &c. By FRANCIS CAMPIN, C.E. Third Edition. Crown 8vo, cloth 2/6

MECHANICAL ENGINEERING TERMS. (Lockwood's Dictionary). Embracing terms current in the Drawing Office, Pattern Shop, Foundry, Fitting, Turning, Smiths', and Boiler Shops, &c. Comprising upwards of 6,000 Definitions. Edited by J. G. HORNER, A.M.I.M.E. Third Edition, Revised, with Additions. Crown 8vo, cloth *Net* 7/6

MECHANICAL ENGINEER'S COMPANION. Areas, Circumferences, Decimal Equivalents, in inches and feet, millimetres, squares, cubes, roots, &c.; Strength of Bolts, Weight of Iron, &c.; Weights, Measures, and other Data. Also Practical Rules for Engine Proportions. By R. EDWARDS, M.Inst.C.E. Fcap. 8vo, cloth 3/6

MECHANICAL ENGINEER'S POCKET-BOOK. Comprising Tables, Formulæ, Rules, and Data: A Handy Book of Reference for Daily Use in Engineering Practice. By D. KINNEAR CLARK, M.Inst.C.E., Sixth Edition, thoroughly Revised and Enlarged. By H. H. P. FOWLES, A.M.Inst.C.E., M.I.M.E. Small 8vo, 700 pp., Leather *Net* 6/0

MATHEMATICAL TABLES—MEASUREMENT OF SURFACES AND SOLIDS—ENGLISH WEIGHTS AND MEASURES—FRENCH METRIC WEIGHTS AND MEASURES—FOREIGN WEIGHTS AND MEASURES—MONEYS—SPECIFIC GRAVITY, WEIGHT, AND VOLUME—MANUFACTURED METALS—STEEL PIPES—BOLTS AND NUTS—SUNDRY ARTICLES IN WROUGHT AND CAST IRON, COPPER, BRASS, LEAD, TIN, ZINC—STRENGTH OF MATERIALS—STRENGTH OF TIMBER—STRENGTH OF CAST IRON—STRENGTH OF WROUGHT IRON—STRENGTH OF STEEL—TENSILE STRENGTH OF COPPER, LEAD, &c.—RESISTANCE OF STONES AND OTHER BUILDING MATERIALS—RIVETED JOINTS IN BOILER PLATES—BOILER SHELLS—WIRE ROPES AND HEMP ROPES—CHAINS AND CHAIN CABLES—FRAMING—HARDNESS OF METALS, ALLOYS, AND STONES—LABOUR OF ANIMALS—MECHANICAL PRINCIPLES—GRAVITY AND FALL OF BODIES—ACCELERATING AND RETARDING FORCES—MILL GEARING, SHAFTING, &c.—TRANSMISSION OF MOTIVE POWER—HEAT—COMBUSTION: FUELS—WARMING, VENTILATION, COOKING STOVES—STREAM—STREAM ENGINES AND BOILERS—RAILWAYS—TRAMWAYS—STEAM SHIPS—PUMPING STREAM ENGINES AND PUMPS—COAL GAS—GAS ENGINES, &c.—AIR IN MOTION—COMPRESSED AIR—HOT AIR ENGINES—WATER POWER—SPEED OF CUTTING TOOLS—COLOURS—ELECTRICAL ENGINEERING.

"It would be found difficult to compress more matter within a similar compass, or produce a book of 700 pages which should be more compact or convenient for pocket reference. . . . Will be appreciated by mechanical engineers of all classes."—*Practical Engineer*.

MECHANICAL ENGINEER'S REFERENCE BOOK. For Machine and Boiler Construction. By NELSON FOLEY, M.I.N.A. New Edition, Revised throughout and much Enlarged. To be issued in parts.

[In Preparation.]

"Mr. Foley is well fitted to compile such a work. The diagrams are a great feature of the work. It may be stated that Mr. Foley has produced a volume which will undoubtedly fulfil the desire of the author and become indispensable to all mechanical engineers."—*Marine Engineer*.

"We have carefully examined this work, and pronounce it a most excellent reference book for the use of marine engineers."—*Journal of American Society of Naval Engineers*.

MECHANICAL HANDLING OF MATERIAL. A

Treatise on the Handling of Material such as Coal, Ore, Timber, &c., by Automatic or Semi-Automatic Machinery, together with the Various Accessories used in the Manipulation of such Plant, and Dealing fully with the Handling, Storing, and Warehousing of Grain. By G. F. ZIMMER, A.M.Inst.C.E. 528 pages Royal 8vo, cloth, with 550 Illustrations (including Folding Plates) specially prepared for the Work *Net 25/0*

"It is an essentially practical work written by a practical man, who is not only thoroughly acquainted with his subject theoretically, but who also has the knowledge that can only be obtained by actual experience in working and planning installations for the mechanical handling of raw material."—*The Times*.

MECHANICS. Being a concise Exposition of the General Principles of Mechanical Science and their Applications. By C. TOMLINSON, F.R.S. Crown 8vo, cloth *1/6*

MECHANICS: CONDENSED. A Selection of Formulæ, Rules, Tables, and Data for the Use of Engineering Students, &c. By W. G. C. HUGHES, A.M.I.C.E. Crown 8vo, cloth *2/6*

MECHANICS OF AIR MACHINERY. By Dr. J. WIESBACH and PROF. G. HERRMANN. Authorized Translation with an Appendix on American Practice by A. TROWBRIDGE, Ph.B., Adjunct Professor of Mechanical Engineering, Columbia University. Royal 8vo, cloth *Net 18/0*

MECHANICS' WORKSHOP COMPANION. Comprising a great variety of the most useful Rules and Formulæ in Mechanical Science, with numerous Tables of Practical Data and Calculated Results for Facilitating Mechanical Operations. By WILLIAM TEMPLETON, Author of "The Engineer's Practical Assistant," &c., &c. Eighteenth Edition, Revised, Modernised, and considerably Enlarged by W. S. HUTTON, C.E., Author of "The Works' Manager's Handbook," &c. Fcap. 8vo, nearly 500 pp., with 8 Plates and upwards of 250 Diagrams, leather *6/0*

"This well-known and largely-used book contains information, brought up to date, of the sort so useful to the foreman and draughtsman. So much fresh information has been introduced as to constitute it practically a new book."—*Mechanical World*.

MECHANISM AND MACHINE TOOLS. By T. BAKER, C.E. With Remarks on Tools and Machinery by J. NASMYTH, C.E. Crown 8vo, cloth *2/6*

MENSURATION AND MEASURING. With the Mensuration and Levelling of Land for the purposes of Modern Engineering. By T. BAKER, C.E. New Edition by E. NUGENT, C.E. Crown 8vo, cloth *1/6*

METAL-TURNING. A Practical Handbook for Engineers, Technical Students, and Amateurs. By JOSEPH HORNER, A.M.I.Mech.E., Author of "Pattern Making," &c. Large Crown 8vo, cloth, with 488 Illustrations *Net 9/0*

SUMMARY OF CONTENTS:—INTRODUCTION—RELATIONS OF TURNERY AND MACHINE SHOP—SEC. I. THE LATH, ITS WORK, AND TOOLS—FORMS AND FUNCTIONS OF TOOLS—REMARKS ON TURNING IN GENERAL.—SEC. II. TURNING BETWEEN CENTRES—CENTRING AND DRIVING—USE OF STEADIES—EXAMPLES OF TURNING INVOLVING LINING-OUT FOR CENTRES—MANDREL WORK.—SEC. III. WORK SUPPORTED AT ONE END—FACE PLATE TURNING—ANGLE PLATE TURNING—INDEPENDENT JAW CHUCKS—CONCENTRIC, UNIVERSAL, TOGGLE, AND APPLIED CHUCKS.—SEC. IV. INTERNAL WORK—DRILLING, BORING, AND ALLIED OPERATIONS.—SEC. V. SCREW CUTTINGS AND TURRET WORK.—SEC. VI. MISCELLANEOUS—SPECIAL WORK—MEASUREMENT, GRINDING—TOOL HOLDERS—SPRIND AND FEEDS, TOOL STEELS—STEEL MAKERS' INSTRUCTIONS.

METRIC TABLES. In which the British Standard Measures and Weights are compared with those of the Metric System at present in Use on the Continent. By C. H. DOWLING, C.E. 8vo, cloth **10/6**

MILLING MACHINES; their Design, Construction, and Working. A Handbook for Practical Men and Engineering Students. By JOSEPH HORNER, A.M.I.Mech.E., Author of "Pattern Making," &c. With 269 Illustrations. Medium 8vo, cloth **Net 12/6**

LEADING ELEMENTS OF MILLING MACHINE DESIGN AND CONSTRUCTION—PLAIN AND UNIVERSAL MACHINES—ATTACHMENTS AND BRACINGS—VERTICAL SPINDLES MACHINES—PLANO-MILLERS OR SLABBING MACHINES—SPECIAL MACHINES—CUTTERS—MILLING OPERATIONS—INDEXING, SPIRAL WORK, AND WORM, SPUR, AND BEVEL GEARS, ETC.—SPUR AND BEVEL GEARS—FEEDS AND SPEEDS.

MOTOR CAR CATECHISM. Containing about 320 Questions and Answers Explaining the Construction and Working of a Modern Motor Car. For the Use of Owners, Drivers, and Students. By JOHN HENRY KNIGHT. Crown 8vo, with Illustrations. [Just Published. **Net 1/6**

THE PETROL ENGINE—TRANSMISSION AND THE CHASSIS—TYRES—DUTIES OF A CAR DRIVER—LAWS AND REGULATIONS.

MOTOR CARS FOR COMMON ROADS. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. 212 pp., with 76 Illustrations. Crown 8vo, cloth **4/8**

MOTOR VEHICLES FOR BUSINESS PURPOSES. A Practical Handbook for those interested in the Transport of Passengers and Goods. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. With 134 Illustrations. Demy 8vo, cloth **Net 9/0**

NAVAL ARCHITECT'S AND SHIPBUILDER'S POCKET BOOK. Of Formulae, Rules, and Tables, and Marine Engineer's and Surveyor's Handy Book of Reference. By CLEMENT MACKROW, M.I.N.A. Ninth Edition, Fcap., leather **Net 12/6**

SIGNS AND SYMBOLS, DECIMAL FRACTIONS—TRIGONOMETRY—PRACTICAL GEOMETRY—MENSURATION—CENTRES AND MOMENTS OF FIGURES—MOMENTS OF INERTIA AND RADII OF GYRATION—ALGEBRAICAL EXPRESSIONS FOR SIMPSON'S RULES—MECHANICAL PRINCIPLES—CENTRE OF GRAVITY—LAWS OF MOTION—DISPLACEMENT, CENTRE OF BUOYANCY—CENTRE OF GRAVITY OF SHIP'S HULL—STABILITY CURVES AND METACENTRES—SEA AND SHALLOW-WATER WAVES—ROLLING OF SHIPS—PROPULSION AND RESISTANCE OF VESSELS—SPEED TRIALS—SAILING, CENTRE OF EFFORT—DISTANCES DOWN RIVERS, COAST LINES—STEERING AND RUDDERS OF VESSELS—LAUNCHING CALCULATIONS AND VELOCITIES—WEIGHT OF MATERIAL AND GEAR—GUN PARTICULARS AND WEIGHT—STANDARD GAUGES—RIVETED JOINTS AND RIVETING—STRENGTH AND TESTS OF MATERIALS—BINDING AND SHEARING STRESSES—STRENGTH OF SHAFTING, PILLARS, WHEELS, &c.—HYDRAULIC DATA, &c.—CONIC SECTIONS, CATENARIAN CURVES—MECHANICAL POWERS, WORK—BOARD OF TRADE REGULATIONS FOR BOILERS AND ENGINES—BOARD OF TRADE REGULATIONS FOR SHIPS—LLOYD'S RULES FOR BOILERS—LLOYD'S WEIGHT OF CHAINS—LLOYD'S SCANTLINGS FOR SHIPS—DATA OF ENGINES AND VESSELS—SHIPS' FITTINGS AND TESTS—SEASONING PRESERVING TIMBER—MEASUREMENT OF TIMBER—ALLOYS, PAINTS, VARNISHES—DATA FOR STOWAGE—ADMIRALTY TRANSPORT REGULATIONS—RULES FOR HORSE-POWER, SCREW PROPELLERS, &c.—PERCENTAGES FOR BUTT STRAPS—PARTICULARS OF YACHTS—MASTING AND RIGGING—DISTANCES OF FOREIGN PORTS—TONNAGE TABLES—VOCABULARY OF FRENCH AND ENGLISH TERMS—ENGLISH WEIGHTS AND MEASURES—FOREIGN WEIGHTS AND MEASURES—DECIMAL EQUIVALENTS—USEFUL NUMBERS—CIRCULAR MEASURES—AREAS OF AND CIRCUMFERENCES OF CIRCLES—AREAS OF SEGMENTS OF CIRCLES—TABLES OF SQUARES AND CUBES AND ROOTS OF NUMBERS—TABLES OF LOGARITHMS OF NUMBERS—TABLES OF HYPERBOLIC LOGARITHMS—TABLES OF NATURAL SINES, TANGENTS—TABLES OF LOGARITHMIC SINES, TANGENTS, &c.

"In these days of advanced knowledge a work like this is of the greatest value. It contains a vast amount of information. We unhesitatingly say that it is the most valuable compilation for its specific purpose that has ever been printed. No naval architect, engineer, surveyor, seaman, wood or iron shipbuilder, can afford to be without this work."—*Nautical Magazine*.

NAVAL ARCHITECTURE. An Exposition of the Elementary Principles. By J. PEAKE. Crown 8vo, cloth **3/6**

NAVIGATION AND NAUTICAL ASTRONOMY, In Theory and Practice. By Prof. J. R. YOUNG. Crown 8vo, cloth **2/6**

"A very complete, thorough, and useful manual for the young navigator."—*Observatory*.

NAVIGATION, PRACTICAL. Consisting of the Sailor's Sea Book, by J. GREENWOOD and W. H. ROSSER; together with Mathematical and Nautical Tables for the Working of the Problems, by H. LAW, C.E., and Prof. J. R. YOUNG **7/0**

PATTERN MAKING. Embracing the Main Types of Engineering Construction, and including Gearing, Engine Work, Sheaves and Pulleys, Pipes and Columns, Screws, Machine Parts, Pumps and Cocks, the Moulding of Patterns in Loam and Greensand, Weight of Castings, &c. By J. G. HORNER, A.M.I.M.E. Third Edition, Enlarged. With 486 Illustrations. Crown 8vo, cloth **Net 7/6**

"A well-written technical guide, evidently written by a man who understands and has practised what he has written about."—*Builder*.

PATTERN MAKING. A Practical Work on the Art of Making Patterns for Engineering and Foundry Work, including (among other matter) Materials and Tools, Wood Patterns, Metal Patterns, Pattern Shop Mathematics, Cost, Care, &c., of Patterns. By F. W. BARROWS. Fully illustrated by Engravings made from Special Drawings by the Author. Crown 8vo, cloth. **Net 6/0**

PATTERN MAKERS and PATTERN MAKING—MATERIALS and TOOLS—EXAMPLES of PATTERN WORK—METAL PATTERNS—PATTERN SHOP MATHEMATICS—COST, CARE, and INVENTORY of PATTERNS—MARKING and RECORD of PATTERNS—PATTERN ACCOUNTS.

PIONEER ENGINEERING. A Treatise on the Engineering Operations connected with the Settlement of Waste Lands in New Countries. By E. DOBSON, M.Inst.C.E. Second Edition. Crown 8vo, cloth **4/6**

PNEUMATICS, Including Acoustics and the Phenomena of Wind Currents, for the use of Beginners. By CHARLES TOMLINSON, F.R.S. Crown 8vo, cloth **1/6**

PUMPS AND PUMPING. A Handbook for Pump Users. Being Notes on Selection, Construction, and Management. By M. POWIS BALE, M.Inst.C.E., M.I.Mech.E. Fifth Edition. Crown 8vo, cloth . **3/6**

"The matter is set forth as concisely as possible. In fact, condensation rather than diffuseness has been the author's aim throughout; yet he does not seem to have omitted anything likely to be of use."—*Journal of Gas Lighting*.

PUNCHES, DIES, AND TOOLS FOR MANUFACTURING IN PRESSES. By JOSEPH V. WOODWORTH. Medium 8vo, cloth. 482 pages with 700 Illustrations **Net 16/0**

SIMPLE BENDING AND FORMING DIES, THEIR CONSTRUCTION, USE AND OPERATION—INTRICATE COMBINATION, BENDING AND FORMING DIES, FOR ACCURATE AND RAPID PRODUCTION—AUTOMATIC FORMING, BENDING AND TWISTING DIES AND PUNCHES, FOR DIFFICULT AND NOVEL SHAPING—CUT, CARRY, AND FOLLOW DIES, TOGETHER WITH TOOL COMBINATIONS FOR PROGRESSIVE SHEET METAL WORKING—NOTCHING PERFORATING AND PIERCING PUNCHES, DIES AND TOOLS—COMPOSITE, SECTIONAL, COMPOUND AND ARMATURE DISK AND SEGMENT PUNCHES AND DIES—PROCESSES AND TOOLS FOR MAKING RIFLE CARTRIDGES, CARTRIDGE CASES OF QUICK-FIRING GUNS, AND NICKEL BULLET JACKETS—THE MANUFACTURE AND USE OF DIES FOR DRAWING WIRE AND BAR STEEL—PENS, PINS, AND NEEDLES, THEIR EVOLUTION AND MANUFACTURE—PUNCHES, DIES, AND PROCESSES FOR MAKING HYDRAULIC PACKING LEATHERS, TOGETHER WITH TOOLS FOR PAINT AND CHEMICAL TABLETS—DRAWING, RE-DRAWING, REDUCING, FLANGING, FORMING, REVERSING, AND CUPPING PROCESSES, PUNCHES AND DIES FOR CIRCULAR AND RECTANGULAR AND SHEET-METAL ARTICLES—BEADING, WIRING, CURLING AND SEAMING PUNCHES AND DIES FOR CLOSING AND ASSEMBLING OF METAL PARTS—JEWELLERY DIE-MAKING, EYE GLASS, LENS AND MEDAL DIES, AND CONSTRUCTION OF SPOON- AND FORK-MAKING TOOLS—DESIGN, CONSTRUCTION AND USE OF SUB-PRESSES AND SUB-PRESS DIES FOR WATCH AND CLOCK WORK AND ACCURATE PIERCING AND PUNCHING—DROP FORGING AND DIE SINKING, TOGETHER WITH MAKING OF DROP DIES, STEAM-HAMMER DIES, NUMBER-PLATE TOOLS AND DIES FOR BOLT MACHINES—METHODS, DESIGNS, WAYS, KINKS, FORMULAS AND TOOLS FOR SPECIAL WORK, TOGETHER WITH MISCELLANEOUS INFORMATION OF VALUE TO TOOL AND DIE MAKERS AND SHEET-METAL GOODS MANUFACTURERS—SPECIAL AND NOVEL PROCESSES, PRESSES AND FERDS FOR WORKING SHEET METAL IN DIES.

RECLAMATION OF LAND FROM TIDAL WATERS.

A Handbook for Engineers, Landed Proprietors, and others interested in Works of Reclamation. By A. BEAZLEY, M.Inst.C.E. 8vo, cloth. *Net* 10/6

"The work contains a great deal of practical and useful information which cannot fail to be of service to engineers entrusted with the enclosure of salt marshes, and to land-owners intending to reclaim land from the sea."—*The Engineer*.

REFRIGERATING AND ICE-MAKING MACHINERY.

A Descriptive Treatise for the Use of Persons Employing Refrigerating and Ice-Making Installations, and others. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Third Edition, Enlarged. Crown 8vo, cloth . . . 7/6

"May be recommended as a useful description of the machinery, the processes, and of the facts, figures, and tabulated physics of refrigerating."—*Engineer*.

REFRIGERATION AND ICE-MAKING POCKET BOOK.

By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Author of "Refrigerating and Ice-making Machinery," &c. Fourth Edition. Crown 8vo, cloth. *Net* 3/6

REFRIGERATION, COLD STORAGE, & ICE-MAKING :

A Practical Treatise on the Art and Science of Refrigeration. By A. J. WALLIS-TAYLER, A.M.Inst.C.E., Author of "Refrigerating and Ice-Making Machinery." 600 pp., with 360 Illustrations. Medium 8vo, cloth. *Net* 15/0

"The author has to be congratulated on the completion and production of such an important work and it cannot fail to have a large body of readers, for it leaves out nothing that would in any way be of value to those interested in the subject."—*Steamship*.

RIVER BARS. The Causes of their Formation, and their

Treatment by "Induced Tidal Scour"; with a Description of the Successful Reduction by this Method of the Bar at Dublin. By I. J. MANN, Assist. Eng. to the Dublin Port and Docks Board. Royal 8vo, cloth . . . 7/6

"We recommend all interested in harbour works—and, indeed, those concerned in the improvement of rivers generally—to read Mr. Mann's interesting work."—*Engineer*.

ROADS AND STREETS. By H. LAW, C.E., and D. K. CLARK,

C.E. Revised, with Additional Chapters by A. J. WALLIS-TAYLER, A.M.Inst.C.E. Seventh Edition. Crown 8vo, cloth . . . 6/0

"A book which every borough surveyor and engineer must possess, and which will be of considerable service to architects, builders, and property owners generally."—*Building News*.

ROOFS OF WOOD AND IRON. Deduced chiefly from the

Works of Robison, Tredgold, and Humber. By E. W. TARN, M.A., Architect. Fifth Edition. Crown 8vo, cloth . . . 1/6

SAFE RAILWAY WORKING. A Treatise on Railway Acci-

dents, their Cause and Prevention; with a Description of Modern Appliances and Systems. By CLEMENT E. STRETTON, C.E. Third Edition, Enlarged. Crown 8vo, cloth . . . 3/6

SAFE USE OF STEAM. Containing Rules for Unprofes-

sional Steam Users. By an ENGINEER. Eighth Edition. Sewed . 6d.

"If steam-users would but learn this little book by heart, boiler explosions would become sensations by their rarity."—*English Mechanic*.

SAILMAKING. By SAMUEL B. SADLER, Practical Sailmaker, late in the employment of Messrs. Ratsey and Lapthorne, of Cowes and Gosport. Second Edition. Revised and Enlarged. Plates. 4to, cloth **Net 12/6**

SAILOR'S SEA BOOK. A Rudimentary Treatise on Navigation. By JAMES GREENWOOD, B.A. With numerous Woodcuts and Coloured Plates. New and Enlarged Edition. By W. H. ROSSER. Crown 8vo, cloth **2/6**

SAILS AND SAIL-MAKING. With Draughting, and the Centre of Effort of the Sails. Weights and Sizes of Ropes; Masting, Rigging, and Sails of Steam Vessels, etc. By R. KIPPING, N.A. Crown 8vo, cloth **2/6**

SCREW-THREADS, and Methods of Producing Them. With numerous Tables and complete Directions for using Screw-Cutting Lathes. By PAUL N. HASLÜCK, Author of "Lathe-Work," etc. Sixth Edition. Waistcoat-pocket size **1/6**
 "Full of useful information, hints and practical criticism. Taps, dies, and screwing tools generally are illustrated and their action described."—*Mechanical World*.

SEA TERMS, PHRASES, AND WORDS; Technical Dictionary (French-English, English-French), used in the English and French Languages. For the Use of Seamen, Engineers, Pilots, Shipbuilders, Shipowners, and Shipbrokers. Compiled by W. PIRRIE, late of the African Steamship Company. F'cap. 8vo, cloth **5/0**

SHIPBUILDING INDUSTRY OF GERMANY. Compiled and Edited by G. LEHMANN-FELSKOWSKI. With Coloured Prints, Art Supplements, and numerous Illustrations throughout the text. Super-royal 4to, cloth **Net 10/6**

SHIPS AND BOATS. By W. BLAND. With numerous Illustrations and Models. Tenth Edition. Crown 8vo, cloth **1/6**

SHIPS FOR OCEAN AND RIVER SERVICE. Principles of the Construction of. By H. A. SOMMERFELDT. Crown 8vo **1/6**
ATLAS OF ENGRAVINGS to illustrate the above. Twelve large folding Plates. Royal 4to, cloth **7/6**

SMITHY AND FORGE. Including the Farrier's Art and Coach Smithing. By W. J. E. CRANE. Crown 8vo, cloth **2/6**

STATICS, GRAPHIC AND ANALYTIC. In their Practical Application to the Treatment of Stresses in Roofs, Solid Girders, Lattice, Bowstring, and Suspension Bridges, Braced Iron Arches and Piers, and other Frameworks. By R. HUDSON GRAHAM, C.E. Containing Diagrams and Plates to Scale. With numerous Examples, many taken from existing Structures. Specially arranged for Class-work in Colleges and Universities. Second Edition, Revised and Enlarged. 8vo, cloth **16/0**
 "Mr. Graham's book will find a place wherever graphic and analytic statics are used or studied."—*Engineer*.

STATIONARY ENGINE DRIVING. A Practical Manual for Engineers in Charge of Stationary Engines. By MICHAEL REYNOLDS, M.S.E. Seventh Edition. Crown 8vo, cloth, 3/6; cloth boards . 4/6

"The author is thoroughly acquainted with his subjects, and has produced a manual which is an exceedingly useful one for the class for whom it is specially intended."—*Engineering*.

STATIONARY ENGINES. A Practical Handbook of their Care and Management for Men-in-charge. By C. HURST. Crown 8vo. *Net* 1/0

STEAM: THE APPLICATION OF HIGHLY SUPER-HEATED STEAM TO LOCOMOTIVES. By ROBERT GARBE, Privy Councillor, Prussian State Railways. Translated from the German. Edited by LESLIE S. ROBERTSON, Secretary of the Engineering Standards Committee, M.Inst.C.E., M.I.Mech.E., M.Inst.N.A., etc. Demy 8vo. *[In the Press.*

STEAM AND THE STEAM ENGINE. Stationary and Portable. Being an Extension of the Treatise on the Steam Engine of Mr. J. SEWELL. By D. K. CLARK, C.E. Fourth Edition. Crown 8vo, cloth 3/6

"Every essential part of the subject is treated of competently, and in a popular style."—*Iron*.

STEAM AND MACHINERY MANAGEMENT. A Guide to the Arrangement and Economical Management of Machinery, with Hints on Construction and Selection. By M. POWIS BALE, M.Inst.M.E. Crown 8vo, cloth 2/6

"Gives the results of wide experience."—*Lloyd's Newspaper*.

STEAM ENGINE. A Practical Handbook compiled with especial Reference to Small and Medium-sized Engines. For the Use of Engine Makers, Mechanical Draughtsmen, Engineering Students, and users of Steam Power. By HERMAN HAEDER, C.E. Translated from the German with additions and alterations, by H. H. P. POWLES, A.M.I.C.E., M.I.M.E. Third Edition, Revised. With nearly 1,100 Illustrations. Crown 8vo, cloth *Net* 7/6

"This is an excellent book, and should be in the hands of all who are interested in the construction and design of medium-sized stationary engines. . . . A careful study of its contents and the arrangement of the sections leads to the conclusion that there is probably no other book like it in this country. The volume aims at showing the results of practical experience, and it certainly may claim a complete achievement of this idea."—*Nature*.

STEAM ENGINE. A Treatise on the Mathematical Theory of, with Rules and Examples for Practical Men. By T. BAKER, C.E. Crown 8vo, cloth 1/6

"Teems with scientific information with reference to the steam-engine."—*Design and Work*.

STEAM ENGINE. For the Use of Beginners. By Dr. LARDNER. Crown 8vo, cloth 1/6

STEAM ENGINE. A Text-Book on the Steam Engine, with a Supplement on GAS ENGINES and PART II. on HEAT ENGINES. By T. M. GOODEVE, M.A., Barrister-at-Law, Professor of Mechanics at the Royal College of Science, London; Author of "The Principles of Mechanics," "The Elements of Mechanism," etc. Fourteenth Edition. Crown 8vo, cloth . 6/0

"Professor Goodeve has given us a treatise on the steam engine, which will bear comparison with anything written by Huxley or Maxwell, and we can award it no higher praise."—*Engineer*.

"Mr. Goodeve's text-book is a work of which every young engineer should possess himself."—*Mining Journal*.

STEAM ENGINE (PORTABLE). A Practical Manual on its Construction and Management. For the use of Owners and Users of Steam Engines generally. By WILLIAM DYSON WANSBROUGH. Crown 8vo, cloth 3/6

"This is a work of value to those who use steam machinery. . . . Should be read by every one who has a steam engine, on a farm or elsewhere."—*Mark Lane Express*.

STEAM ENGINEERING IN THEORY AND PRACTICE.

By GARDNER D. HISCOX, M.E. With Chapters on Electrical Engineering. By NEWTON HARRISON, E.E., Author of "Electric Wiring, Diagrams, and Switchboards." 450 Pages. Over 400 Detailed Engravings. Net 12/6

HISTORICAL—STEAM AND ITS PROPERTIES—APPLIANCES FOR THE GENERATION OF STEAM—TYPES OF BOILERS—CHIMNEY AND ITS WORK—HEAT ECONOMY OF THE FEED WATER—STEAM PUMPS AND THEIR WORK—INCrustATION AND ITS WORK—STEAM ABOVE ATMOSPHERIC PRESSURE—FLOW OF STEAM FROM NOZZLES—SUPERHEATED STEAM AND ITS WORK—ADIABATIC EXPANSION OF STEAM—INDICATOR AND ITS WORK—STEAM ENGINE PROPORTIONS—SLIDE VALVE ENGINES AND VALVE MOTION—CORLISS ENGINE AND ITS VALVE GEAR—COMPOUND ENGINE AND ITS THEORY—TRIPLE AND MULTIPLE EXPANSION ENGINE—STEAM TURBINE—REFRIGERATION—ELEVATORS AND THEIR MANAGEMENT—COST OF POWER—STEAM ENGINE TROUBLES—ELECTRIC POWER AND ELECTRIC PLANTS.

STONE BLASTING AND QUARRYING. For Building and

other Purposes. With Remarks on the Blowing up of Bridges. By Gen. Sir J. BURGoyNE, K.C.B. Crown 8vo, cloth 1/6

STONE-WORKING MACHINERY. A Manual dealing with

the Rapid and Economical Conversion of Stone. With Hints on the Arrangement and Management of Stone Works. By M. POWIS BALE, M.Inst.C.E. Crown 8vo, cloth 9/0

"Should be in the hands of every mason or student of stonework."—*Colliery Guardian*.

STRAINS, HANDY BOOK FOR THE CALCULATION OF.

In Girders and Similar Structures and their Strength. Consisting of Formulae and Corresponding Diagrams, with numerous details for Practical Application, &c. By WILLIAM HUMBER, A. M.Inst.C.E., &c. Sixth Edition. Crown 8vo, with nearly 100 Woodcuts and 3 Plates, cloth 7/6

"We heartily commend this really handy book to our engineer and architect readers."—*English Mechanic*.

STRAINS ON STRUCTURES OF IRONWORK. With

Practical Remarks on Iron Construction. By F. W. SHEILDS, M.Inst.C.E. 8vo, cloth 5/0

SUBMARINE TELEGRAPHS. Their History, Construction,

and Working. Founded in part on WÜNSCHENDORFF'S "Traité de Télégraphie Sous-Marine," and Compiled from Authoritative and Exclusive Sources. By CHARLES BRIGHT, F.R.S.E., A.M.Inst.C.E., M.I.Mech.E., M.I.E.E. Super royal 8vo, nearly 800 pages, fully illustrated, including a large number of Maps and Folding Plates, strongly bound in cloth

Net £3 3s.

"Mr. Bright's interestingly written and admirably illustrated book will meet with a welcome reception from cable men."—*Electrician*.

SUPERHEATED STEAM, THE APPLICATION OF, TO LOCOMOTIVES. See STEAM.

SURVEYING AS PRACTISED BY CIVIL ENGINEERS

AND SURVEYORS. Including the Setting-out of Works for Construction and Surveys Abroad, with many Examples taken from Actual Practice. A Handbook for use in the Field and the Office, intended also as a Text-book for Students. By JOHN WHITELAW, Jun., A.M.Inst.C.E., Author of "Points and Crossings." With about 260 Illustrations. Second Edition. Demy 8vo, cloth **Net 10/6**

SURVEYING WITH THE CHAIN ONLY—SURVEYING WITH THE AID OF ANGULAR INSTRUMENTS—LEVELLING—ADJUSTMENT OF INSTRUMENTS—RAILWAY (INCLUDING ROAD) SURVEYS AND SETTING OUT—TACHEOMETRY OR STADIA SURVEYING—TUNNEL ALIGNMENT AND SETTING OUT—SURVEYS FOR WATER SUPPLY WORKS—HYDROGRAPHICAL OR MARINE SURVEYING—ASTRONOMICAL OBSERVATIONS USED IN SURVEYING—EXPLANATIONS OF ASTRONOMICAL TERMS—SURVEYS ABROAD IN JUNGLE, DENSE FOREST, AND UNMAPPED OPEN COUNTRY—TRIGONOMETRICAL OR GEODETIC SURVEYS.

"This work is written with admirable lucidity, and will certainly be found of distinct value both to students and to those engaged in actual practice."—*The Builder*.

SURVEYING, LAND AND ENGINEERING. For Students and Practical Use. By T. BAKER, C.E. Twentieth Edition, by F. E. DIXON, A.M.Inst.C.E. With Plates and Diagrams. Crown 8vo, cloth **2/0**

SURVEYING, LAND AND MARINE. In Reference to the Preparation of Plans for Roads and Railways; Canals, Rivers, Towns, Water Supplies; Docks and Harbours. With Description and Use of Surveying Instruments. By W. DAVIS HASKOLL, C.E. Second Edition, Revised with Additions. Large crown 8vo, cloth **9/0**

"This book must prove of great value to the student. We have no hesitation in recommending it, feeling assured that it will more than repay a careful study."—*Mechanical World*.

SURVEYING, PRACTICAL. A Text-book for Students Pre-

paring for Examinations or for Survey Work in the Colonies. By GEORGE W. USILL, A.M.Inst.C.E. Eighth Edition, thoroughly Revised and Enlarged by ALEX. BEAZLEY, M.Inst.C.E. With 4 Lithographic Plates and 360 Illustrations. Large crown 8vo, **7/6** cloth; or, on thin paper, leather, gilt edges, rounded corners, for pocket use **12/6**

ORDINARY SURVEYING—SURVEYING INSTRUMENTS—TRIGONOMETRY REQUIRED IN SURVEYING—CHAIN SURVEYING—THEODOLITE SURVEYING—TRAVERSING—TOWN-SURVEYING—LEVELLING—CONTOURING—SETTING OUT CURVES—OFFICE WORK—LAND QUANTITIES—COLONIAL LICENSING REGULATIONS—HYPSOMETER TABLES—INTRODUCTION TO TABLES OF NATURAL SINES, ETC.—NATURAL SINES AND CO-SINES—NATURAL TANGENTS AND CO-TANGENTS—NATURAL SECANTS AND CO-SECANTS.

"The first book which should be put in the hands of a pupil of civil engineering."—*Architect*.

SURVEYING TRIGONOMETRICAL. An outline of the

Method of Conducting a Trigonometrical Survey. For the Formation of Geographical and Topographical Maps and Plans, Military Reconnaissance. Levelling, &c., with Useful Problems, Formulae, and Tables. By Lieut.-General FROME, R.E. Fourth Edition, Revised and partly Re-written by Major-General Sir CHARLES WARREN, G.C.M.G., R.E. With 19 Plates and 115 Woodcuts, royal 8vo, cloth **16/0**

SURVEYING WITH THE TACHEOMETER. A Practical

Manual for the use of Civil and Military Engineers and Surveyors, including two series of Tables specially computed for the Reduction of Readings in Sexagesimal and in Centesimal Degrees. By NEIL KENNEDY, M.Inst.C.E., With Diagrams and Plates. Second Edition. Demy 8vo, cloth **Net 10/6**

"The work is very clearly written, and should remove all difficulties in the way of any surveyor desirous of making use of this useful and rapid instrument."—*Nature*.

SURVEY PRACTICE. For Reference in Surveying, Levelling, and Setting-out; and in Route Surveys of Travellers by Land and Sea. With Tables, Illustrations, and Records. By L. D'A. JACKSON, A.M.Inst.C.E. Second Edition. 8vo, cloth **12/6**

SURVEYOR'S FIELD BOOK FOR ENGINEERS AND MINING SURVEYORS: Consisting of a Series of Tables, with Rules, Explanations of Systems, and use of Theodolite for Traverse Surveying and plotting the work with minute accuracy by means of Straight Edge and Set Square only; Levelling with the Theodolite, Setting-out Curves with and without the Theodolite, Earthwork Tables, &c. By W. DAVIS HASKOLL, C.E. With numerous Woodcuts. Fifth Edition, Enlarged. Crown 8vo, cloth **12/0**

"The book is very handy; the separate tables of sines and tangents to every minute will make it useful for many other purposes, the genuine traverse tables existing all the same."—*Athenaeum*.

TECHNICAL TERMS, English-French, French-English: A Pocket Glossary; with Tables suitable for the Architectural, Engineering, Manufacturing, and Nautical Professions. By JOHN JAMES FLETCHER. Fourth Edition, 200 pp. Waistcoat-pocket size, limp leather **1/6**

"The glossary of terms is very complete, and many of the Tables are new and well arranged. We cordially commend the book."—*Mechanical World*.

TECHNICAL TERMS, Eng.-Spanish, Spanish-Eng: A Pocket Glossary of Engineering, Technical, Nautical and Mining Terms. By R. D. MONTEVERDE, B.A. (Madrid).
[In Preparation. Price about **2/0 Net**.

TELEPHONES: THEIR CONSTRUCTION, INSTALLATION, WIRING, OPERATION AND MAINTENANCE. A Practical Reference Book and Guide for Electricians, Wiremen, Engineers, Contractors, Architects, and others interested in Standard Telephone Practice. By W. H. RADCLIFFE and H. C. CUSHING, JR. 180 pages. With 125 Illustrations. Fcap 8vo, cloth [Just published. Net **4/6**

TELEPHONES: FIELD TELEPHONES FOR ARMY USE: INCLUDING AN ELEMENTARY COURSE IN ELECTRICITY AND MAGNETISM. By Lieut. E. J. STEVENS, D.O., R.A., A.M.I.E.E., Instructor in Electricity, Ordnance College, Woolwich. Crown 8vo, cloth. With Illustrations [Just Published. Net **2/0**

BATTERIES—ELECTRICAL CIRCUITS—MAGNETISM—INDUCTION—MICROPHONES AND RECEIVERS—PORTABLE AND FIELD TELEPHONE SETS—SELF-INDUCTION, INDUCTIVE CAPACITY, ETC.

TELEPHONY. See WIRELESS TELEPHONY and WIRELESS TELEGRAPHY.

TOOLS FOR ENGINEERS AND WOODWORKERS. Including Modern Instruments of Measurement. By JOSEPH HORNER, A.M.Inst.M.E., Author of "Pattern Making," &c. Demy 8vo, with 456 Illustrations Net **9/0**

SUMMARY OF CONTENTS:—INTRODUCTION—GENERAL SURVEY OF TOOLS—TOOL ANGLES.—SEC. I. CHISEL GROUP—CHISELS AND APPLIED FORMS FOR WOODWORKERS—PLANES—HAND CHISELS AND APPLIED FORMS FOR METAL WORKING—CHISEL-LIKE TOOLS FOR METAL TURNING, PLANING, &c.—SHEARING ACTION AND SHEARING TOOLS.—SEC. II. EXAMPLES OF SCRAPING TOOLS.—SEC. III. TOOLS—RELATING TO CHISELS AND SCRAPES—SAWS—FILES—MILLING CUTTERS—BORING TOOLS FOR WOOD AND METAL—TAPS AND DIES.—SEC. IV. PERCUSSIVE AND MOULDING TOOLS—PUNCHES, HAMMERS AND CAULKING TOOLS—MOULDING AND MODELLING TOOLS—MISCELLANEOUS TOOLS.—SEC. V. HARDENING, TEMPERING, GRINDING AND SHARPENING.—SEC. VI. TOOLS FOR MEASUREMENT AND TEST—STANDARDS OF MEASUREMENT—SQUARES, SURFACE PLATERS, LEVELS, BEVELS, PROTRACTORS, &c.—SURFACE GAUGES OR SCRIBING BLOCKS—COMPASSES AND DIVIDERS—CALIPERS, VERNIER CALIPERS, AND RELATED FORMS—MICROMETER CALIPERS—DEPTH GAUGES AND ROD GAUGES—SNAP CYLINDRICAL AND LIMIT GAUGES—SCREW THREAD, WIRE AND REFERENCE GAUGES—INDICATORS, ETC.

"As an all-round practical work on tools it is more comprehensive than any with which we are acquainted, and we have no doubt it will meet with the large measure of success to which its merits fully entitle it."—*Mechanical World*.

TOOTHED GEARING. A Practical Handbook for Offices, and Workshops. By J. HORNER, A.M.I.M.E. Second Edition, with a New Chapter on Recent Practice. With 184 Illustrations. Crown 8vo, cloth **6/0**

TRAMWAYS: THEIR CONSTRUCTION AND WORKING. Embracing a Comprehensive History of the System; with an exhaustive Analysis of the Various Modes of Traction, including Horse Power, Steam Cable Traction, Electric Traction, &c.; a Description of the Varieties of Rolling Stock; and ample Details of Cost and Working Expenses. New Edition, Thoroughly Revised, and Including the Progress recently made in Tramway Construction, &c. By D. KINNEAR CLARK, M.Inst.C.E. With 400 Illustrations. 8vo, 780 pp., buckram **28/0**

TRUSSES OF WOOD AND IRON. Practical Applications of Science in Determining the Stresses, Breaking Weights, Safe Loads, Scantlings, and Details of Construction. With Complete Working Drawings. By W. GRIFFITHS, Surveyor. Oblong 8vo, cloth **4/6**
 "This handy little book enters so minutely into every detail connected with the construction of roof trusses that no student need be ignorant of these matters."—*Practical Engineer*.

TUNNELLING. A Practical Treatise. By CHARLES PRELINI, C.E. With additions by CHARLES S. HILL, C.E. With 150 Diagrams and Illustrations. Royal 8vo, cloth **Net 16/0**

TUNNELLING, PRACTICAL. Explaining in detail the Setting-out the Works, Shaft-sinking, and Heading-driving, Ranging the Lines and Levelling underground, Sub-Excavating, Timbering and the Construction of the Brickwork of Tunnels. By F. W. SIMMS, M.Inst.C.E. Fourth Edition, Revised and Further Extended, including the most recent (1895) Examples of Sub-aqueous and other Tunnels, by D. KINNEAR CLARK, M.Inst.C.E. With 34 Folding Plates. Imperial 8vo, cloth **£2 2s.**

TUNNEL SHAFTS. A Practical and Theoretical Essay on the construction of large Tunnel Shafts. By J. H. WATSON BUCK, M.Inst.C.E., Resident Engineer, L. and N. W. R. With Folding Plates, 8vo, cloth **12/0**
 "Will be regarded by civil engineers as of the utmost value and calculated to save much time and obviate many mistakes."—*Colliery Guardian*.

WAGES TABLES. At 54, 52, 50, and 48 Hours per Week. Showing the Amounts of Wages from One quarter of an hour to Sixty-four hours, in each case at Rates of Wages advancing by One Shilling from 4s. to 55s. per week. By THOS. GARBUTT, Accountant. Square crown 8vo, half-bound **6/0**

WATER ENGINEERING. A Practical Treatise on the Measurement, Storage, Conveyance, and Utilization of Water for the Supply of Towns, for Mill Power, and for other Purposes. By CHARLES SLAGG, A.M.Inst.C.E. Second Edition. Crown 8vc, cloth **7/6**

WATER, POWER OF. As Applied to Drive Flour Mills and to give motion to Turbines and other Hydrostatic Engines. By JOSEPH GLYNN, F.R.S., &c. New Edition. Illustrated. Crown 8vo, cloth **2/0**

WATER SUPPLY OF CITIES AND TOWNS. By **WILLIAM HUMBER**, A.M.Inst. C.E., and M.Inst.M.E., Author of "Cast and Wrought Iron Bridge Construction," &c., &c. Illustrated with 50 Double Plates, 1 Single Plate, Coloured Frontispiece, and upwards of 250 Woodcuts, and containing 400 pp. of Text. Imp. 4to, elegantly and substantially half-bound in morocco Net 26 6s.

LIST OF CONTENTS:—I. HISTORICAL SKETCH OF SOME OF THE MEANS THAT HAVE BEEN ADOPTED FOR THE SUPPLY OF WATER TO CITIES AND TOWNS.—II. WATER AND THE FOREIGN MATTER USUALLY ASSOCIATED WITH IT.—III. RAINFALL AND EVAPORATION.—IV. SPRINGS AND THE WATER-BEARING FORMATIONS OF VARIOUS DISTRICTS.—V. MEASUREMENT AND ESTIMATION OF THE FLOW OF WATER.—VI. ON THE SELECTION OF THE SOURCE OF SUPPLY.—VII. WELLS.—VIII. RESERVOIRS.—IX. THE PURIFICATION OF WATER.—X. PUMPS.—XI. PUMPING MACHINERY.—XII. CONDUITS.—XIII. DISTRIBUTION OF WATER.—XIV. METERS, SERVICE PIPES, AND HOUSE FITTINGS.—XV. THE LAW AND ECONOMY OF WATER-WORKS.—XVI. CONSTANT AND INTERMITTENT SUPPLY.—XVII. DESCRIPTION OF PLATES.—APPENDICES, GIVING TABLES OF RATES OF SUPPLY, VELOCITIES, &c., &c., TOGETHER WITH SPECIFICATIONS OF SEVERAL WORKS ILLUSTRATED, AMONG WHICH WILL BE FOUND: ABERDEEN, BIDEFORD, CANTERBURY, DUNDEE, HALIFAX, LAMBETH, ROTHERHAM, DUBLIN, AND OTHERS.

"The most systematic and valuable work upon water supply hitherto produced in English, or in any other language. Mr. Humber's work is characterised almost throughout by an exhaustiveness much more distinctive of French and German than of English technical treatises."
—*Engineer.*

WATER SUPPLY OF TOWNS AND THE CONSTRUCTION OF WATER-WORKS. A Practical Treatise for the Use of Engineers and Students of Engineering. By **W. K. BURTON**, A. M. Inst. C.E., Consulting Engineer to the Tokyo Water-works. Third Edition, Revised. Edited by **ALLAN GREENWELL**, F.G.S., A.M.Inst.C.E., with numerous Plates and Illustrations. Super-royal 8vo, buckram. [Just published. 25/0

I. INTRODUCTORY.—II. DIFFERENT QUALITIES OF WATER.—III. QUANTITY OF WATER TO BE PROVIDED.—IV. ON ASCERTAINING WHETHER A PROPOSED SOURCE OF SUPPLY IS SUFFICIENT.—V. ON ESTIMATING THE STORAGE CAPACITY REQUIRED TO BE PROVIDED.—VI. CLASSIFICATION OF WATER-WORKS.—VII. IMPOUNDING RESERVOIRS.—VIII. EARTHWORK DAMS.—IX. MASONRY DAMS.—X. THE PURIFICATION OF WATER.—XI. SETTLING RESERVOIRS.—XII. SAND FILTRATION.—XIII. PURIFICATION OF WATER BY ACTION OF IRON, SOFTENING OF WATER BY ACTION OF LIME, NATURAL FILTRATION.—XIV. SERVICE OR CLEAN WATER RESERVOIRS—WATER TOWERS—STAND PIPES.—XV. THE CONNECTION OF SETTLING RESERVOIRS, FILTER BEDS AND SERVICE RESERVOIRS.—XVI. PUMPING MACHINERY.—XVII. FLOW OF WATER IN CONDUITS—PIPES AND OPEN CHANNELS.—XVIII. DISTRIBUTION SYSTEMS.—XIX. SPECIAL PROVISIONS FOR THE EXTINCTION OF FIRES.—XX. PIPES FOR WATER-WORKS.—XXI. PREVENTION OF WASTE OF WATER.—XXII. VARIOUS APPLIANCES USED IN CONNECTION WITH WATER-WORKS.

APPENDIX I. By **PROF. JOHN MILNE**, F.R.S.—CONSIDERATIONS CONCERNING THE PROBABLE EFFECTS OF EARTHQUAKES ON WATER-WORKS, AND THE SPECIAL PRECAUTIONS TO BE TAKEN IN EARTHQUAKE COUNTRIES.

APPENDIX II. By **JOHN DE RIJKE**, C.E.—ON SAND DUNES AND DUNE SANDS AS A SOURCE OF WATER SUPPLY.

"We congratulate the author upon the practical commonsense shown in the preparation of this work. . . . The plates and diagrams have evidently been prepared with great care, and cannot fail to be of great assistance to the student."—*Builder.*

WATER SUPPLY, RURAL. A Practical Handbook on the Supply of Water and Construction of Water works for small Country Districts. By **ALLAN GREENWELL**, A.M.Inst.C.E. and **W. T. CURRY**, A.M.Inst.C.E., F.G.S. With Illustrations. Second Edition, Revised. Crown 8vo, cloth 5/0

"The volume contains valuable information upon all matters connected with water supply. It is full of details on points which are continually before water-works engineers."—*Nature* c.

WELLS AND WELL-SINKING. By **J. G. SWINDELL**, A.R.I.B.A., and **G. R. BURNELL**, C.E. Revised Edition. Crown 8vo, cloth 2/0

WIRELESS TELEGRAPHY: ITS THEORY AND PRACTICE. A Handbook for the use of Electrical Engineers, Students, and Operators. By JAMES ERSKINE-MURRAY, D.Sc., Fellow of the Royal Society of Edinburgh, Member of the Institution of Electrical Engineers. Demy 8vo, 338 pages, with over 130 Diagrams and Illustrations. *Net 10/6*

ADAPTATIONS OF THE ELECTRIC CURRENT TO TELEGRAPHY—EARLIER ATTEMPTS AT WIRELESS TELEGRAPHY—APPARATUS USED IN THE PRODUCTION OF HIGH FREQUENCY CURRENTS—DETECTION OF SHORT-LIVED CURRENTS OF HIGH FREQUENCY BY MEANS OF IMPERFECT ELECTRICAL CONTACTS—DETECTION OF OSCILLATORY CURRENTS OF HIGH FREQUENCY BY THEIR EFFECTS ON MAGNETISED IRON—THERMOMETRIC DETECTORS OF OSCILLATORY CURRENTS OF HIGH FREQUENCY—ELECTROLYTIC DETECTORS—THE MARCONI SYSTEM—THE LODGE-MUIRHEAD SYSTEM—THE FESSENDEN SYSTEM—THE HOZIER-BROWN SYSTEM—WIRELESS TELEGRAPHY IN ALASKA—THE DE FOREST SYSTEM—THE FOULSEN SYSTEM—THE TELEFUNKEN SYSTEM—DIRECTED SYSTEMS—SOME POINTS IN THE THEORY OF JIGS AND JIGGERS—ON THEORIES OF TRANSMISSION—WORLD-WAVE TELEGRAPHY—ADJUSTMENTS, ELECTRICAL MEASUREMENTS AND FAULT FINDING—ON THE CALCULATION OF A SYNTONIC WIRELESS TELEGRAPH STATION—TABLES AND NOTES.

" . . . A serious and meritorious contribution to the literature on this subject. The Author brings to bear not only great practical knowledge, gained by experience in the operation of wireless telegraph stations, but also a very sound knowledge of the principles and phenomena of physical science. His work is thoroughly scientific in its treatment, shows much originality throughout, and merits the close attention of all students of the subject."—*Engineering*.

WIRELESS TELEPHONY IN THEORY AND PRACTICE.

By ERNST RUHMER. Translated from the German by J. ERSKINE-MURRAY, D.Sc., M.I.E.E., &c. Author of "A Handbook of Wireless Telegraphy." With an Appendix on Recent Advances by the Translator, and numerous Illustrations. Demy 8vo, cloth [*Just published. Net 10/6*]

WORKSHOP PRACTICE. As applied to Marine, Land, and Locomotive Engines, Floating Docks, Dredging Machines, Bridges, Ship building, &c. By J. G. WINTON. Fourth Edition, Illustrated. Crown 8vo, cloth **3/6**

WORKS' MANAGER'S HANDBOOK. Comprising Modern Rules, Tables, and Data. For Engineers, Millwrights, and Boiler Makers; Tool Makers, Machinists, and Metal Workers; Iron and Brass Founders, &c. By W. S. HUTTON, Civil and Mechanical Engineer, Author of "The Practical Engineer's Handbook." Seventh Edition, carefully Revised, and Enlarged. Medium 8vo, strongly bound **15/0**

STATIONARY AND LOCOMOTIVE STEAM-ENGINES, GAS PRODUCERS, GAS-ENGINES, OIL-ENGINES, ETC.—HYDRAULIC MEMORANDA: PIPES, PUMPS, WATER-POWER, ETC.—MILLWORK: SHAFTING, GEARING, PULLEYS, ETC.—STEAM BOILERS, SAFETY VALVES, FACTORY CHIMNEYS, ETC.—HEAT, WARMING, AND VENTILATION—MELTING, CUTTING, AND FINISHING METALS—ALLOYS AND CASTING—WHEEL-CUTTING, SCREW-CUTTING, ETC.—STRENGTH AND WEIGHT OF MATERIALS—WORKSHOP DATA, ETC.

"The volume is an exceedingly useful one, brimful with engineer's notes, memoranda, and rules, and well worthy of being on every mechanical engineer's bookshelf."—*Mechanical World*.

PUBLICATIONS OF THE ENGINEERING STANDARDS COMMITTEE.

MESSRS. CROSBY LOCKWOOD and SON, having been appointed OFFICIAL PUBLISHERS to the ENGINEERING STANDARDS COMMITTEE, beg to invite attention to the List given below of the Publications already issued by the Committee, and will be prepared to supply copies thereof and of all Subsequent Publications as issued.

THE ENGINEERING STANDARDS COMMITTEE is the outcome of a Committee appointed by the Institution of Civil Engineers at the instance of Sir John Wolfe Barry, K.C.B., to inquire into the advisability of Standardising Rolled Iron and Steel Sections.

The Committee as now constituted is supported by the Institution of Civil Engineers, the Institution of Mechanical Engineers, the Institution of Naval Architects, the Iron and Steel Institute, and the Institution of Electrical Engineers; and the value and importance of its labours—not only to the Engineering profession, but to the country at large—has been emphatically recognised by His Majesty's Government, who have made a liberal grant from the Public Funds by way of contribution to the financial resources of the Committee, and have placed at its disposal the services (on the several Sub-Committees) of public officials of the highest standing selected from various Government Departments.

The subjects already dealt with, or under consideration by the Committee, include not only Rolled Iron and Steel Sections, but Tests for Iron and Steel Material used in the Construction of Ships and their Machinery, Bridges and General Building Construction, Railway Rolling Stock, Underframes, Component Parts of Locomotives, Railway and Tramway Rails, Electrical Plant, Insulating Materials, Screw Threads and Limit Gauges, Pipe Flanges, Cement, etc.

These particulars will be sufficient to show the importance to the Trade and Industries of the Empire of the work the Committee has undertaken.

Reports already Published :—

1. **BRITISH STANDARD SECTIONS** (9 lists).—ANGLES, EQUAL AND UNEQUAL.—BULB ANGLES, TEES AND PLATES.—Z AND T BARS.—CHANNELS.—BEAMS. Net 1/0
2. **TRAMWAY RAILS AND FISH-PLATES.** Net 21/0
3. **REPORT ON THE INFLUENCE OF GAUGE LENGTH.**
By Professor W. C. UNWIN, F.R.S. Net 2/6
4. **PROPERTIES OF STANDARD BEAMS.**
(Included in No. 6.) Net 1/0
5. **STANDARD LOCOMOTIVES FOR INDIAN RAILWAYS.** Net 10/6
6. **PROPERTIES OF BRITISH STANDARD SECTIONS.**
Diagrams, Definitions, Tables, and Formulæ. Net 5/0
7. **TABLES OF COPPER CONDUCTORS AND THICKNESSES OF DI-ELECTRIC.** Net 2/6
8. **TUBULAR TRAMWAY POLES.** Net 5/0
9. **BULL-HEADED RAILWAY RAILS.** Net 10/6
10. **TABLES OF PIPE FLANGES.** Net 2/6
11. **FLAT-BOTTOMED RAILWAY RAILS.** Net 10/6
12. **SPECIFICATION FOR PORTLAND CEMENT.** Net 2/6
13. **STRUCTURAL STEEL FOR SHIPBUILDING.** Net 2/6

[P.T.O.]

**PUBLICATIONS OF THE ENGINEERING
STANDARDS COMMITTEE—(continued).**

- | | | |
|-----|---|-----------------|
| 14. | STRUCTURAL STEEL FOR MARINE BOILERS. | <i>Net 2/6</i> |
| 15. | STRUCTURAL STEEL FOR BRIDGES AND
GENERAL BUILDING CONSTRUCTION | <i>Net 2/6</i> |
| 16. | SPECIFICATIONS AND TABLES FOR TELEGRAPH
MATERIALS. | <i>Net 10/6</i> |
| 17. | INTERIM REPORT ON ELECTRICAL MACHINERY. | <i>Net 2/6</i> |
| 19. | REPORT ON TEMPERATURE EXPERIMENTS ON
FIELD COILS OF ELECTRICAL MACHINES. | <i>Net 5/0</i> |
| 20. | BRITISH STANDARD SCREW THREADS. | <i>Net 2/6</i> |
| 21. | BRITISH STANDARD PIPE THREADS. | <i>Net 2/6</i> |
| 22. | THE EFFECT OF TEMPERATURE ON INSULATING
MATERIALS. | <i>Net 5/0</i> |
| 23. | STANDARDS FOR TROLLEY GROOVE AND WIRE. | <i>Net 1/0</i> |
| 24. | MATERIAL USED IN THE CONSTRUCTION OF
RAILWAY ROLLING STOCK. | <i>Net 10/6</i> |
| 25. | ERRORS IN WORKMANSHIP. Based on Measurements
carried out by the National Physical Laboratory. | <i>Net 10/6</i> |
| 26. | SECOND REPORT ON LOCOMOTIVES FOR INDIAN
RAILWAYS | <i>Net 10/6</i> |
| 27. | STANDARD SYSTEMS FOR LIMIT GAUGES.
(Running Fits) | <i>Net 2/6</i> |
| 28. | NUTS, BOLT-HEADS, AND SPANNERS. | <i>Net 2/6</i> |
| 29. | INGOT STEEL FORGINGS FOR MARINE PUR-
POSES. | <i>Net 2/6</i> |
| 30. | INGOT STEEL CASTINGS FOR MARINE PUR-
POSES | <i>Net 2/6</i> |
| 31. | STEEL CONDUITS FOR ELECTRICAL WIRING. | <i>Net 2/6</i> |
| 32. | STEEL BARS (for use in automatic Machines). | <i>Net 2/6</i> |
| 33. | CARBON FILAMENT GLOW LAMPS. | <i>Net 5/0</i> |
| 34. | WHITWORTH, FINE, AND PIPE THREADS. (Mounted
on Card and varnished.) | <i>Net 6s.</i> |
| 35. | COPPER ALLOY BARS (for use in Automatic Machines). | <i>Net 2/6</i> |
| 36. | STANDARDS FOR ELECTRICAL MACHINERY.
and Report | <i>Net 1/0</i> |
| 37. | CONSUMERS ELECTRIC SUPPLY METERS (Motor
Type for Continuous and Single-Phase Circuits) | <i>Net 2/6</i> |
| 38. | LIMIT GAUGES FOR SCREW THREADS. | <i>Net 1/0</i> |
| 39. | COMBINED REPORTS ON SCREW THREADS (con-
taining Nos. 20, 28, 38) | <i>Net 3/6</i> |

**London : Crosby Lockwood & Son,
7, STATIONERS' HALL COURT, LUDGATE HILL, E.C.,
and 121A, Victoria Street, Westminster, S.W.**

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MATHEMATICS, ARITHMETIC, &c.

Geometry, Descriptive. J. F. HEATHER	2/-
Practical Plane Geometry. J. F. HEATHER.	2/-
Analytical Geometry. J. HANN & J. R. YOUNG.	2/-
Geometry. Part I. (Euclid, Bks. I.—III.) H. LAW	1/6
Part II. (Euclid, Books IV., V., VI., XI., XII.). H. LAW	1/6
Geometry, in 1 vol. (Euclid's Elements)	2/6
Plane Trigonometry. J. HANN	1/6
Spherical Trigonometry. J. HANN	1/-
The above 2 vols., bound together	2/6
Differential Calculus. W. S. B. WOOLHOUSE	1/6
Integral Calculus. H. COX	1/-
Algebra. J. HADDON	2/-
Key to ditto	1/6
Book-keeping. J. HADDON	1/6
Arithmetic. J. R. YOUNG	1/6
Key to ditto	1/6
Equational Arithmetic. W. HIPSLEY	1/6
Arithmetic. J. HADDON	1/6
Mathematical Instruments. HEATHER & WALMISLEY	2/-
Drawing & Measuring Instruments. J. F. HEATHER	1/6
Optical Instruments. J. F. HEATHER	1/6
Surveying & Astronomical Instruments. J. F. HEATHER	1/6
The above 3 vols., bound together	4/6
Mensuration and Measuring. T. BAKER	1/6
Slide Rule, & How to Use it. C. HOARE	2/6
Measures, Weights, & Moneys. W. S. B. WOOLHOUSE	2/6
Logarithms, Treatise on, with Tables. H. LAW	3/-
Compound Interest and Annuities. F. THOMAN	4/-
Compendious Calculator. D. O'GORMAN	2/6
Mathematics. F. CAMPIN	3/-
Astronomy. R. MAIN & W. T. LYNN	2/-
Statics and Dynamics. T. BAKER	1/6
Superficial Measurement. J. HAWKINGS	3/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

89081502445



B89081502445A

SCIENTIFIC & TECHNICAL SERIES.**BUILDING & ARCHITECTURE.**

Building Estates. F. MAITLAND	2/-
Science of Building. E. W. TARN	3/6
Building, Art of. E. DOBSON and J. P. ALLEN	2/-
Book on Building. Sir E. BECKETT	4/6
Dwelling Houses, Erection of. S. H. BROOKS	2/6
Cottage Building. C. B. ALLEN	2/-
Acoustics of Public Buildings. Prof. T. R. SMITH	1/6
Practical Bricklaying. A. HAMMOND	1/6
Practical Brick Cutting & Setting. A. HAMMOND	1/6
Brickwork. F. WALKER	1/6
Brick and Tile Making. E. DOBSON	3/-
Practical Brick & Tile Book. DOBSON & HAMMOND	6/-
Carpentry and Joinery. T. TREDGOLD & E. W. TARN	3/6
Atlas of 35 plates to the above	6/-
Handrailing, and Staircasing. G. COLLINGS	2/6
Circular Work in Carpentry. G. COLLINGS	2/6
Roof Carpentry. G. COLLINGS	2/-
Construction of Roofs. E. W. TARN	1/6
Joints used by Builders. J. W. CHRISTY	3/-
Shoring. G. H. BLAGROVE	1/6
Timber Importer's & Builder's Guide. R. E. GRANDY	2/-
Plumbing. W. P. BUCHAN	3/6
Ventilation of Buildings. W. P. BUCHAN	3/6
Practical Plasterer. W. KEMP	2/-
House-Painting. E. A. DAVIDSON	5/-
Elementary Decoration. J. W. FACEY	2/-
Practical House Decoration. J. W. FACEY	2/6
Gas-Fitting. J. BLACK	2/6
Portland Cement for Users. H. FAIJA & D. B. BUTLER	3/-
Limes, Cements, & Mortars. G. R. BURNELL	1/6
Masonry and Stone Cutting. E. DOBSON	2/6
Arches, Piers, and Buttresses. W. BLAND	1/6
Quantities and Measurements. A. C. BEATON	1/6
Complete Measurer. R. HORTON	4/-
Superficial Measurement. J. HAWKINGS	3/6
Light, for use of Architects. E. W. TARN	1/6
Hints to Young Architects. WIGHTWICK & GUILLAUME	3/6
Dictionary of Architectural Terms. J. WEALE	5/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

109
C.M.
WEAL

Ar
Ar
Ar
Ar
Vit
Gr

Di
Pa
Gr
Pe
Gl
M
Pi

C
C
G
S
G
H
C

Practical Organ Building.	W. E. DICKSON	2/6
Coach Building.	J. W. BURGESS	2/6
Brass Founder's Manual.	W. GRAHAM	2/-
French Polishing and Enamelling.	R. BITMEAD	1/6
House Decoration.	J. W. FACEY	5/-
Letter-Painting Made Easy.	J. G. BADENOCH	1/6
Boot and Shoemaking.	J. B. LENO	2/-
Mechanical Dentistry.	C. HUNTER	3/-
Wood Engraving.	W. N. BROWN	1/6
Laundry Management		2/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

89081502445



b89081502445a