

**QWEST Communications  
International Inc.  
Technical Publication**

**Integrated T-1 Service**

## NOTICE

Technical Publication 77397 *QWEST Integrated T-1* provides information about Digital Switched Service and the various ways which it can be integrated with other QWEST services. The Integrated T-1 (IT1) interface to the customer is a Digital Signal Level 1 (DS1) Channel at 1.544 Mbit/s transmission rate. Pub 77397 is intended to be used with Technical Publication 77375, *1.544 Mb/s Channel Interfaces*.

QWEST reserves the right to revise this document for any reason, including but not limited to, conformity with standards promulgated by various governmental or regulatory agencies; utilization of advances in the state of the technical arts; or to reflect changes in the design of equipment, techniques, or procedures described or referred to herein.

Liability to anyone arising out of use or reliance upon any information set forth herein is expressly disclaimed, and no representation or warranties, expressed or implied, are made with respect to the accuracy or utility of any information set forth herein.

This document is not to be construed as a suggestion to any manufacturer to modify or change any of its products, nor does this publication represent any commitment by QWEST to purchase any specific products. Further, conformance to this publication does not constitute a guarantee of a given supplier's equipment and/or its associated documentation.

Ordering information for QWEST Publications can be obtained from the Reference Section of this document.

If further information is required, please contact:

QWEST Communications International Inc.  
Manager – New Services Planning  
700 W. Mineral Ave. MN-F15.15  
Littleton, CO 80120  
(303) 707-7107  
(303) 707-9497 Fax #  
E-mail: [jhsmit2@qwest.com](mailto:jhsmit2@qwest.com)

COMMENTS on PUB 77397

PLEASE TEAR OUT AND SEND YOUR COMMENTS/SUGGESTIONS TO:

QWEST Corporation  
Manager – New Services Planning  
700 W. Mineral Ave. MN-F15.15  
Littleton, CO 80120  
(303) 707-7107  
(303) 707-9497 Fax #  
E-mail: jhsmit2@qwest.com

Information from you helps us to improve our Publications. Please take a few moments to answer the following questions and return to the above address.

Was this Publication valuable to you in understanding The technical parameters of our service?	YES _____ NO _____
Was the information accurate and up-to-date?	YES _____ NO _____
Was the information easily understood?	YES _____ NO _____
Were the contents logically sequenced?	YES _____ NO _____
Were the tables and figures understandable and helpful	YES _____ NO _____
Were the pages legible?	YES _____ NO _____

If you answered NO to any of the questions and/or if you have any other comments or suggestions, please explain:

---

---

---

(Attach additional sheet, if necessary)

Name \_\_\_\_\_ Date \_\_\_\_\_

Company \_\_\_\_\_

Address \_\_\_\_\_

Telephone Number \_\_\_\_\_

E-Mail \_\_\_\_\_

## CONTENTS

Chapter and Section	Page
1. Introduction.....	1-1
1.1 General.....	1-1
1.2 Reason for Reissue.....	1-1
1.3 Scope.....	1-1
1.4 Document Organization.....	1-1
2. Overview of QWEST Integrated T-1.....	2-1
2.1 Service Description.....	2-1
2.2 Network Architecture.....	2-3
2.3 Availability.....	2-4
2.4 Benefits.....	2-5
3. Network Channel/Network Channel Interface Codes.....	3-1
3.1 Network Channel (NC) Codes.....	3-1
3.1.1 General.....	3-1
3.1.2 Format.....	3-1
3.2 Network Channel Interface (NCI) Codes.....	3-2
3.2.1 General.....	3-2
3.2.2 Format.....	3-2
4. Options Available on QWEST Integrated T-1 Service.....	4-1
4.1 Introduction.....	4-1
4.2 Frame Formats.....	4-1
4.2.1 Superframe (SF).....	4-1
4.2.2 Extended Superframe (ESF) - General.....	4-2
4.3 Compatible Network Channel Interface (NCI) Codes.....	4-2
4.4 NCI Code Function.....	4-2
4.4.1 NCI Codes with CO Multiplexing.....	4-3
4.5 Protocol Codes - CS and DU.....	4-4
4.5.1 Protocol Option Codes - Master List.....	4-5
5. Services Offered on QWEST IT1.....	5-1
5.1 Advanced and Basic Voice Channel.....	5-1
5.1.1 Advanced Voice Channel.....	5-1
5.1.2 Basic Voice Channel.....	5-2
5.2 Basic ISDN 2B+D (SLS).....	5-2
5.3 Basic Dedicated Digital Data Channel.....	5-3
5.4 Frame Relay Dedicated Digital Data Channel.....	5-4

**CONTENTS (Continued)**

<b>Chapter and Section</b>	<b>Page</b>
6. Definitions.....	6-1
6.1 Acronyms .....	6-1
6.2 Glossary .....	6-2
7. References.....	7-1
7.1 American National Standards Institute Documents .....	7-1
7.2 AT&T Documents.....	7-1
7.3 Telcordia Documents.....	7-1
7.4 QWEST Technical Publications .....	7-1
7.5 Ordering Information .....	7-2
7.6 Trademarks.....	7-3

**Figures**

2-1 Network Interface of Integrated T-1.....	2-1
2-2 General Integrated T-1 Design.....	2-2
2-3 IT1 with 1/0 DCS Architecture.....	2-3
2-4 IT1 with Channel Bank Architecture .....	2-4
3-1 Format Structure for NC Codes.....	3-1
3-2 Format Structure for NCI Codes.....	3-2

**Tables**

3-1 NCI Impedance Values .....	3-3
4-1 Codes for Customer Premises to CO Channel with a CO Multiplexer .....	4-3
4-2 DS1 Network Channel Codes Available with SRS .....	4-4
4-3 DS1 Protocol Option Codes.....	4-5
5-1 NC Codes for Ordering Advanced Voice Channel.....	5-1
5-2 NC Codes for Ordering Basic Voice Channel.....	5-2
5-3 NC Codes for Ordering Basic ISDN 2B+D (SLS) .....	5-3
5-4 NC Codes for Ordering Basic Dedicated Digital Data Channel .....	5-3
5-5 NC Codes for Ordering Frame Relay Dedicated Digital Data Channel .....	5-4

## CONTENTS

<b>Chapter and Section</b>	<b>Page</b>
1. Introduction.....	1-1
1.1 General.....	1-1
1.2 Reason for Reissue.....	1-1
1.3 Scope .....	1-1
1.4 Document Organization.....	1-1

## 1. Introduction

### 1.1 General

Technical Publication 77397 *QWEST Integrated T-1* provides information about Integrated T-1 (IT1) Service and the various ways which it can be integrated with other QWEST services. The Integrated T-1 interface to the customer is a Digital Signal Level 1 (DS1) Channel at a 1.544 Mbit/s transmission rate. PUB 77397 is intended to be used with Technical Publications 77375, *1.544 Mbit/s Channel Interfaces*, and 77200 *QWEST DS1 Service and QWEST DS1 Rate Synchronization Service*.

### 1.2 Reason for Reissue

To show QWEST Communications International Inc. as the owner of this publication and the one to contact concerning the content.

### 1.3 Scope

This publication describes the Integrated T-1 Service and defines different available options when ordering Integrated T-1. The publication also provides the Network Channel (NC) and Network Channel Interface (NCI) codes and their definitions associated with IT1 options. The document also includes other services that can be integrated with IT1 and the NC and NCI code combinations to assist customers in ordering the service(s).

### 1.4 Document Organization

This publication is organized as follows:

- Chapter 1    **Introduction** - provides the purpose and general information about this document.
- Chapter 2    **Overview of QWEST Integrated T-1** - describes the service and its architecture.
- Chapter 3    **Network Channel/Network Channel Interface Codes** - illustrates compatible NC and NCI code combination tables for ordering the services described in the chapter.
- Chapter 4    **Options Available on QWEST Integrated T-1 Service** - provide a general explanation and architecture for IT1 Service.
- Chapter 5    **Services Offered on QWEST IT1** - illustrates brief discussion of services offered with IT1 and compatible NC and NCI code combination tables for ordering the services described in the chapter.
- Chapter 6    **Definitions**
- Chapter 7    **References**

## CONTENTS

<b>Chapter and Section</b>	<b>Page</b>
2. Overview of QWEST Integrated T-1 .....	2-1
2.1 Service Description .....	2-1
2.2 Network Architecture .....	2-3
2.3 Availability .....	2-4
2.4 Benefits.....	2-5

### Figures


2-1 Network Interface of Integrated T-1.....	2-1
2-2 General Integrated T-1 Design.....	2-2
2-3 IT1 with 1/0 DCS Architecture.....	2-3
2-4 IT1 with Channel Bank Architecture .....	2-4

## 2. Overview of QWEST Integrated T-1

This chapter provides an overview of QWEST Private Line Transport Integrated T-1 (IT1) service. IT1 Service is a high capacity, high performance information channel designed to perform multiple functions. It is a dedicated, end-to-end digital transport service designed for full duplex, point-to-point transmission at 1.544 Mbit/s. It consists of 24 Digital Signal Level 0 (DS0) channels (64kb/s each) which can be utilized to provide different services.

IT1 Service offers digital transport within QWEST's territory. The network links the population centers of this vast geographic region together to provide virtually unlimited service to subscribers wherever they reside or do business. This service can offer increased value to subscribers because it provides security, reliability, protection, and rate stability.

A description of the Network Interface (NI) may assist the reader to understand IT1 design. It is the point of demarcation on the end-user's (EU) premises at which QWEST's responsibility for the provision of service ends. Figure 2-1 gives a pictorial representation of the Network Interface.

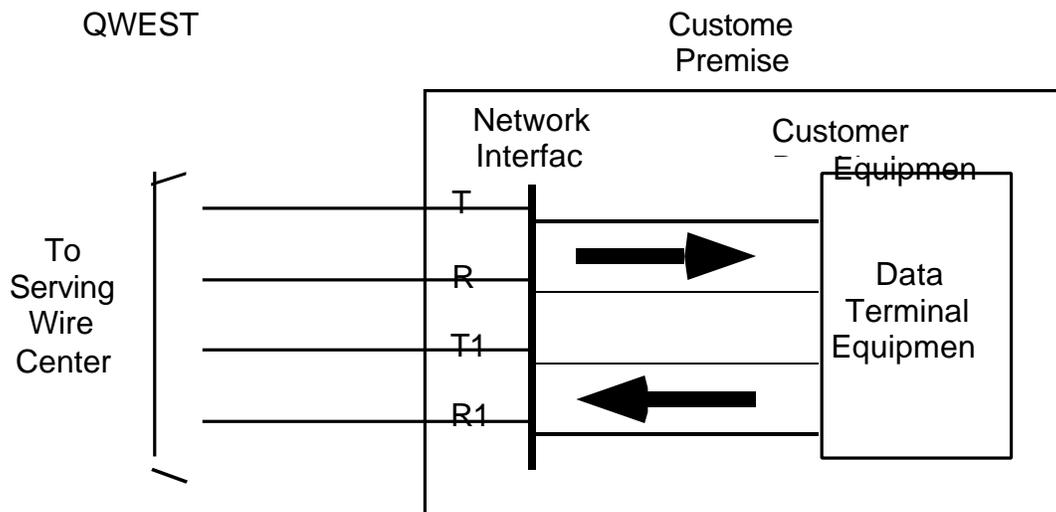

**Figure 2-1** Network Interface of Integrated T-1

### 2.1 Service Description

Integrated T-1 is a two point digital intrastate/intralata dedicated (private line) service which utilizes Digital Signal 1 (DS1) facilities. DS1 provides a channel that transmits a digital signal at the rate of 1.544 Mbit/s between the customer premises and QWEST's Wire Center. This DS1 channel at the Network Interface is also referred to as a Digital High Capacity Channel. The service allows customers to "channelize" the DS1 into twenty-four channels using their Customer Provided Equipment (CPE). The CPE for


example may include a Private Branch Exchange (PBX), D4 type channel bank, CODEC equipment or a router. Figure 2-2 describes the general IT1 design.

Customers who own a Multiplexer may purchase IT1 that will include from one to twenty-four voice and data channels. These channels can be utilized for different services at the customer's discretion.

A combination of up to 24 channels are used to transport voice, and/or data applications such as Advanced Voice Channel, Basic Voice Channel, Basic ISDN 2B+D (SLS), Basic Dedicated Digital Data Channel, and Frame Relay Dedicated Digital Data Channel. A description of these services is given in Chapter 5.

These channels can be used to provide facilities for modem pools, file transfer, distance learning applications, imaging, LAN/WAN interconnections, video arrangements, voice tie lines and voice/data multiplexing on a single DS1 facility.

The voice and data services available and Network Channel/Network Channel Interface (NC/NCI) codes for ordering are discussed in Chapter 5.

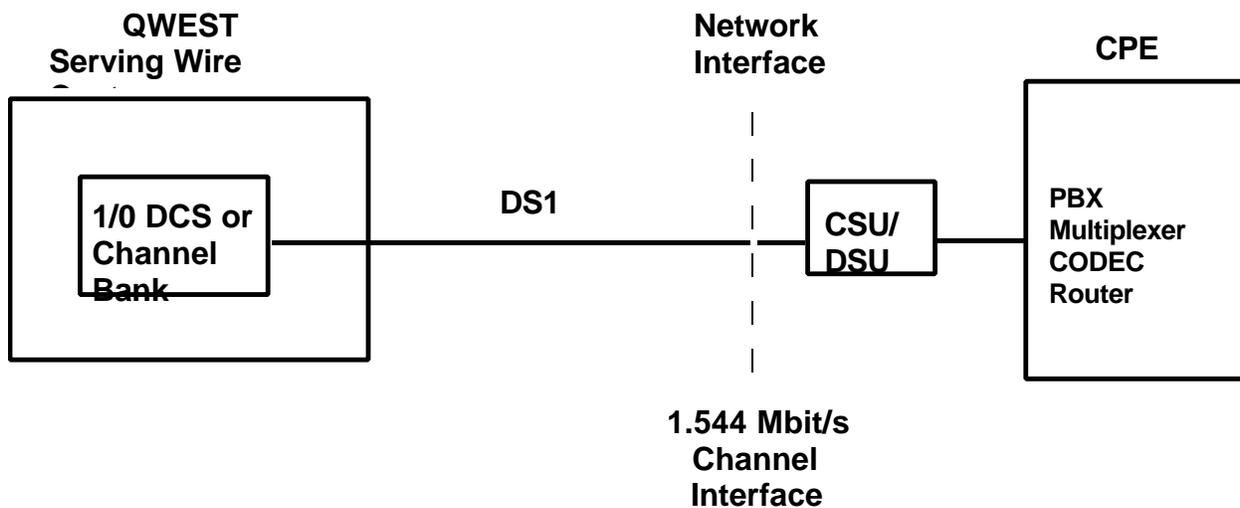

**Figure 2-2** General Integrated T-1 Design

## 2.2 Network Architecture

The customer specifies the number of voice and data channels required for different services (e.g., Advanced Voice Channel, Basic Voice Channel, Basic Dedicated Digital Data Channel, Frame Relay Dedicated Digital Data Channel, Basic ISDN 2B+D (SLS), etc.) Advanced Voice Channels terminate on the Trunk side of the switch, Basic Voice Channels terminate on the line side of the switch using a multiplexer. The multiplexer may be a 1/0 Digital Cross-Connect System (DCS) machine or a channel bank. Frame Relay Dedicated Digital Data Channel Service is directed to a Frame Relay Switch.

The architecture used to provide service to the customer is at QWEST's discretion and is dependent on the facilities available at the Central Office (CO). The network architectures, which use the 1/0 DCS solution, are shown in Figure 2-3. In locations where it is not possible to provide IT1 through a 1/0 DCS, the service will be provisioned via channel banks as shown in Figure 2-4.


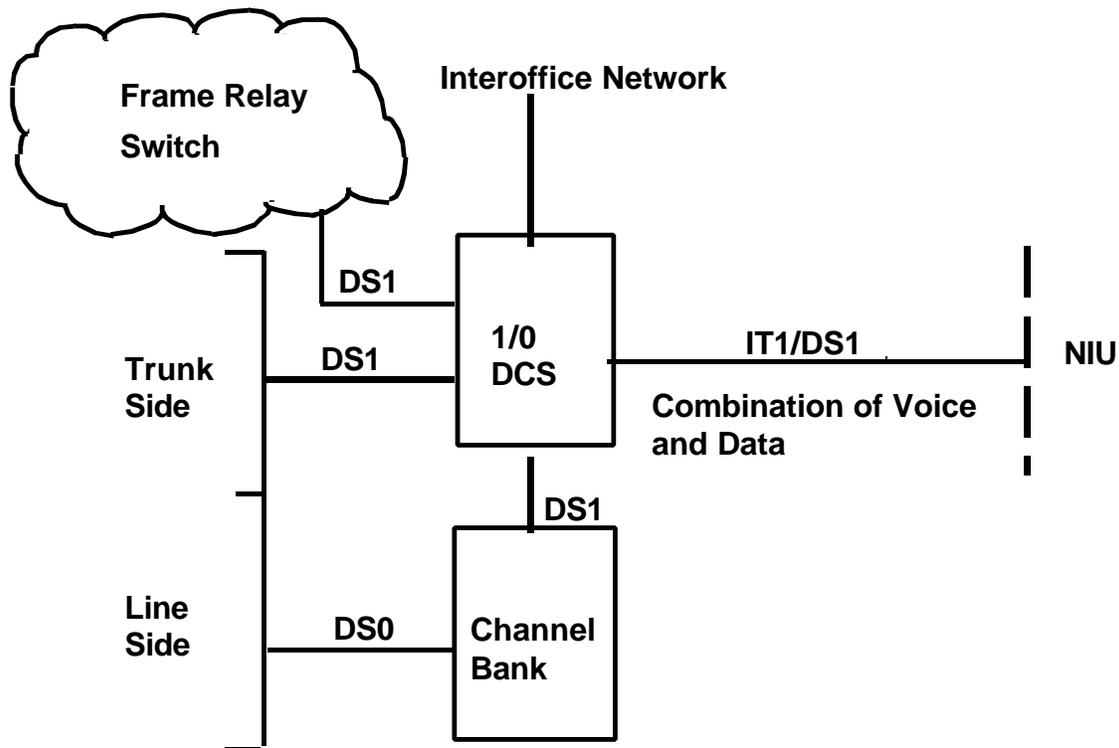


Figure 2-3 IT1 with 1/0 DCS Architecture

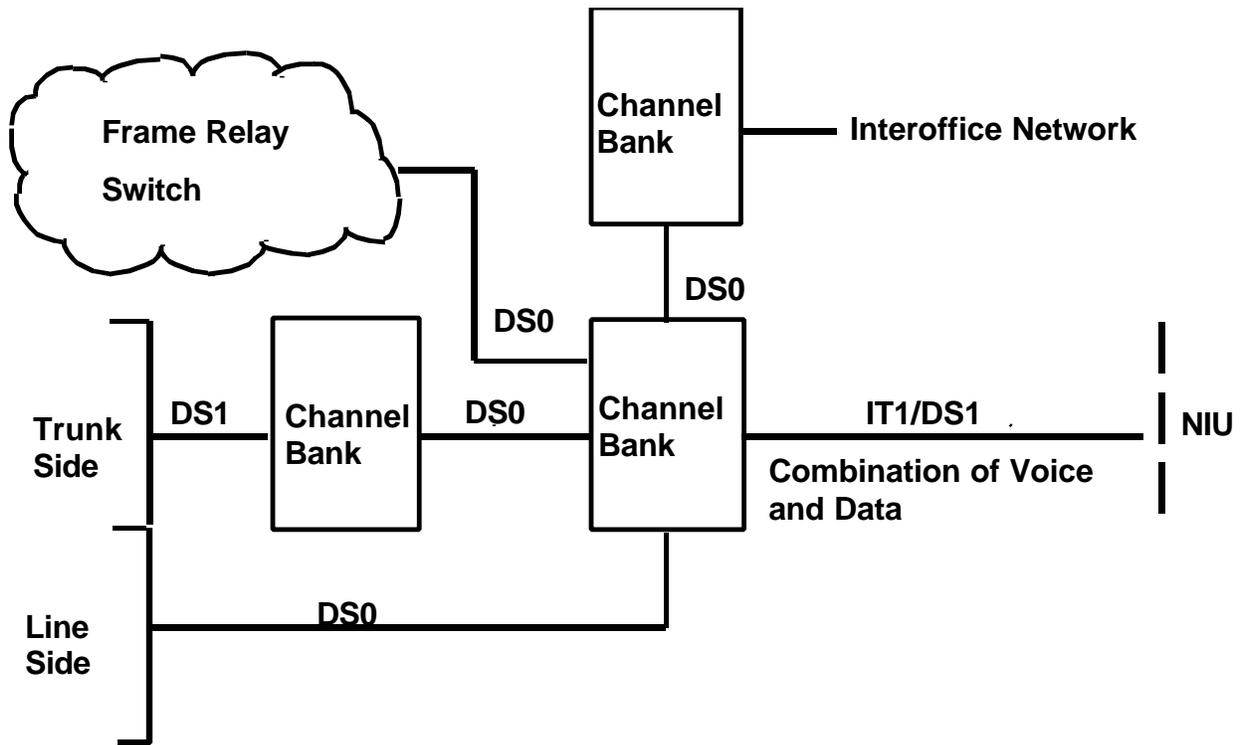

**Figure 2-4** IT1 with Channel Bank Architecture

### 2.3 Availability

The voice channel which may be ordered on IT1 Service, is provided from either a QWEST analog or digital switch, thereby making the service available across the QWEST 14 state region.

Availability of the Frame Relay Dedicated Digital Data channel is limited to specific metropolitan locations. Availability of the ISDN Basic Rate Access Link is also subject to the type of switch in the serving QWEST Central Office.

Customers may refer to the Local Exchange and Network Services Tariff from their state's Public Utilities Commission Office for the IT1 offering and pricing information.

## 2.4 Benefits

Integrated T-1 offers many benefits to each potential customer who:

- Currently owns a digital PBX
- Plans to purchase a new digital PBX or grow their existing PBX
- Wants to save capital expense up front on the purchase of a new PBX
- Wants the reliability and low error rate of digital transmission
- Wants precision timing for call accounting software
- Uses dial-up data
- Requires 56 or 64 kb/s transmission
- Wants to update to current technology
- Needs a reduce loss level on trunks
- Needs Digital Data Service in addition to voice channels
- Wants QWEST's 800 Service to be used with IT1
- Wants Fractional Frame Relay
- Wants to aggregate DS0
- Wants a variety of services on one DS1 pipe at a reduced cost
- Needs secured, reliable, protected and rate stabilized service

## CONTENTS

<b>Chapter and Section</b>	<b>Page</b>
3. Network Channel/Network Channel Interface Codes .....	3-1
3.1 Network Channel (NC) Codes .....	3-1
3.1.1 General.....	3-1
3.1.2 Format .....	3-1
3.2 Network Channel Interface (NCI) Codes .....	3-2
3.2.1 General.....	3-2
3.2.2 Format .....	3-2
<b>Figures</b>	
3-1 Format Structure for NC Codes.....	3-1
3-2 Format Structure for NCI Codes.....	3-2
<b>Tables</b>	
3-1 NCI Impedance Values .....	3-3

### 3. Network Channel/Network Channel Interface Codes

#### 3.1 Network Channel (NC) Codes

##### 3.1.1 General

Network Channel (NC) codes are a part of the Bellcore COMMON LANGUAGE<sup>®</sup> code set. The NC code is used to identify a channel used with the service. This section identifies the available channels and their NC codes.

##### 3.1.2 Format

An NC code is a four-character code with two data elements:

- Channel Code
- Optional Feature Code

The format is illustrated in Figure 3-1.

Network Channel Code				
Data Element	Channel Code		Optional Feature Code	
Character Position	1	2	3	4
Character Key	X	X	X or -	X or -

X = Alphanumeric  
 - = Hyphen

**Figure 3-1** Format Structure for NC Codes

The **Channel Code** (character positions 1 and 2) is a two-character alpha or alphanumeric code that describes the channel service in an abbreviated form. The channel code will frequently, but not always, be specified as the service code of the special service circuits or the transmission grade of the message trunk circuit. The NC channel code field is always filled.

The **Optional Feature Code** (character positions 3 and 4) is a two-character alpha or alphanumeric or hyphen code that represents the option codes available for each channel code. Varying combinations of this code will allow the customer to enhance the technical performance of the requested channel, or to further identify the type of service. It is also used to specify options such as conditioning, effective 4-wire, multiplexing, etc. The NC optional code field is always filled.

Further information about NC Codes may be found in ANSI T1.223-1997, *Information Interchange — Structure and Representation of Network Channel (NC) and Network Channel Interface (NCI) Codes for the North American Telecommunications System*.

### 3.2 Network Channel Interface (NCI) Codes

#### 3.2.1 General

Network Channel Interface (NCI) codes are a part of the COMMON LANGUAGE<sup>®</sup> code set. The NCI code is used to identify a network interface of a service in our mechanized systems.

#### 3.2.2 Format

An NCI code is a maximum twelve-character code that consists of five (5) data elements:

- Total Conductors
- Protocol
- Impedance
- Protocol Options
- Transmission Level Point(s) (TLP) - not required for this digital service.

The first three fields are required. The last two are optional. The format is illustrated in Figure 3-2.

**Network Channel Interface Code**

Total Conductors		Protocol		I m p e d a n c e	D e l i m i t e r	Protocol Options			D e l i m i t e r	TLP Level	
										T r a n s m i t	R e c e i v e
1	2	3	4	5	6	7	8	9	10	11	12
N	N	A	A	X	•	X	X	X	•	X or -	X or -

- A = Alpha
- N = Numeric
- X = Alphanumeric
- = Delimiter (normally a period)
- = Hyphen

**Figure 3-2** Format Structure for NCI Codes

**Total Conductors** (character positions 1 and 2) is a two-character numeric code that represents the total number of physical conductors (e.g., wires or fibers) required at the interface.

**Protocol** (character position 3 and 4) is a two-character alpha code that defines requirements for the interface regarding signaling/transmission.

**Impedance** (character position 5) is a one-character alpha or numeric code representing the nominal reference impedance that will terminate the channel for the purpose of evaluating transmission performance. Values are listed in Table 3-1.

**Table 3-1** NCI Impedance Values

Impedance in Ohms (Character Position 5)			
Data Value	Code	Data Value	Code
110	0	124	7
150	1	Variable	8
600	2	100	9
900	3 *	Fiber	F
1200	4	Radio	Z
135	5	50 Coaxial	C
75	6		

\* Except for interface code 04DD3, the impedance character 3, when used with a 4-wire voice-frequency path at the POT, denotes a historical customer (IC) provided transmission termination rather than a 900 ohm impedance. Such terminations were provided by customers in accordance with FCC Docket No. 20099 settlement Agreement and by Automatic Transmission Test and Control Circuit used in the previous provisioning process.

**Protocol Options** (character positions 7, 8, and 9) is a one to three-character alpha, numeric, or alphanumeric code that describes additional features (e.g., bit rate or bandwidth) on the Protocol to be used. It is an optional field that is always left justified.

## CONTENTS

Chapter and Section	Page
4. Options Available on QWEST Integrated T-1 Service.....	4-1
4.1 Introduction.....	4-1
4.2 Frame Formats.....	4-1
4.2.1 Superframe (SF).....	4-1
4.2.2 Extended Superframe (ESF) - General.....	4-2
4.3 Compatible Network Channel Interface (NCI) Codes.....	4-2
4.4 NCI Code Function.....	4-2
4.4.1 NCI Codes with CO Multiplexing.....	4-3
4.5 Protocol Codes - CS and DU.....	4-4
4.5.1 Protocol Option Codes - Master List.....	4-5

### Tables

4-1 Codes for Customer Premises to CO Channel with a CO Multiplexer .....	4-3
4-2 DS1 Network Channel Codes Available with SRS .....	4-4
4-3 DS1 Protocol Option Codes.....	4-5

## 4. Options Available on QWEST Integrated T-1 Service

### 4.1 Introduction

In the North American hierarchy of digital bit-rates, 1.544 Mbit/s is defined as *Digital Signal level 1*, the short form of which (*DS1*), is being used throughout this document. IT1 will utilize *Digital Signal level 1* (DS1) for signal transport. Since transmission is digital from end-to-end, the signal is clean and pure; free of crosstalk, amplified noise and distortion. Network control centers in major cities throughout the QWEST territory ensure exacting standards of reliability 24 hours a day, seven days a week.

A number of optional enhancements are available with IT1 service. Some of these are CO Multiplexing, Clear Channel Capability, Extended Superframe, Customer Controlled Reconfiguration, Synchronization, etc. There are a number of applications available on an IT1 channel. Some examples of situations where IT1 can be applied are Disaster Recovery, Improved Front-End Processor Performance, Centralized Data Processing, High Speed Host to Host Channel Networking, Inter-PBX Voice Communications, Integrated Voice/Data, Video Transmissions Applications, etc.

IT1 channel interface options include a choice of *frame format* and *line code* of the digital signal. Each of these have service quality implications. Terminal equipment at both ends of an IT1 channel must use the same line code and must use compatible frame formats. Vendors of End-User (EU) customer equipment will usually include recommendations that describe the interface characteristics to be ordered from QWEST. The vendors' option list will be based on the features available in their equipment. Not all terminal equipment or *Network Channel Terminating Equipment* (NCTE) have equal capabilities so some options should be considered before equipment is selected.

An overview of these options/applications can be obtained from QWEST's Technical Publication 77375, *1.544 Mbit/s Channel Interfaces*.

### 4.2 Frame Formats

All IT1 frame formats include a repeated reference-sequence of bits (frame-bits) that enclose transmitted user data, providing the ability for receivers of the signal to identify byte and frame boundaries for demultiplexing the data. Some frame formats not only provide this elementary synchronizing function, but also provide optional enhancements that greatly improve the ability of the customer to monitor the quality of the signal being transported. Frame formats and their advantages and disadvantages are discussed below.

#### 4.2.1 Superframe (SF)

The *Superframe* (SF) frame format is also known as *D4* framing. Because of its age, it is the most widely used DS1 frame format. One Superframe consists of 12 DS1 frames. The SF *frame pattern* is 12 bits in length, and one bit of the pattern is transmitted sequentially as the 1st bit of each DS1 frame. The SF format has a limited ability to measure the performance of the DS1.

#### 4.2.2 Extended Superframe (ESF) - General

There are multiple versions of the *Extended Superframe* (ESF) format. In all versions, the extended superframe is 24 DS1 frames in length, and the ESF frame pattern is only 6 bits in length. Since there is one "frame-bit" per DS1 frame, this leaves 18 for other purposes, allowing for enhanced performance monitoring.

In all ESF versions, the 18 bits per ESF that are not needed to synchronize the equipment, are time-shared (time division multiplexed) to provide:

- Channel for the transmission of a CRC-6 (6 bit Cyclic Redundancy Check) value, and
- A 4 kbit/s data link.

#### 4.3 Compatible Network Channel Interface (NCI) Codes

Electrical signal specifications at an Interface are encoded into *NCI codes*. Customers provide a *Network Channel Interface (NCI) code* to QWEST to advise the Engineer of the specific technical requirements at a Network Interface.

This section provides compatibility information for the IT1 NCI codes that may be used at an IT1 interface with QWEST. Not all Interfaces are available with all QWEST services. Other Technical Publications or Service Publications discuss the services that may be available using interfaces disclosed in this publication.

#### 4.4 NCI Code Function

Optional NCI coding for IT1 interfaces provides the following:

- Frame format - several options
  - Superframe (SF)
  - ANSI Extended Superframe (ESF)
  - Non-ANSI ESF
- Line code - two options
  - Alternate Mark Inversion (AMI)
  - Binary 8 Zero Substitution (B8ZS)

It is recommended that the customer should order B8ZS for their IT1 if any of the DS0 channels require clear channel capability such as Digital Data Service (DDS) or ISDN Basic Rate/Single Line Service.

#### 4.4.1 NCI Codes with CO Multiplexing

Central Office Multiplexing gives flexibility to DS1 and DS0 services with its ability to multiplex a number of lower bit rate channels into a higher bit rate channel or to perform the reverse. DS1 multiplexing includes DS1 to analog (voice band signals) and DS1 to DS0 (digital data signals). Table 4-1 shows the NCI code with CO Multiplexing.

**Table 4-1** Codes for Customer Premises to CO Channel with a CO Multiplexer

Equipment Frame Format and Line Code	NC Code see note	NCI at End-User premises
Frame Format= SF Line Code= AMI	H C - G	04DU9.BN or BX
Frame Format= SF Line Code= B8ZS	H C Z G	04DU9.DN or DX
Frame Format= ANSI ESF Line Code= AMI	H C D G	04DU9.1KN or 1KX
Frame Format= ANSI-ESF Line Code= B8ZS	H C E G	04DU9.1SN or 1SX
Frame Format=non-ANSI ESF Line Code= AMI	H C F G	04DU9.CN or CX
Frame Format=non-ANSI ESF Line Code= B8ZS	H C G G	04DU9.SN or SX

**NOTE:** In Column B, the NC code 4th character G has the following multiplexer (MUX) type definitions:

G = QWEST CO DS1 to voice and digital data mux.

The following Table provides a listing of available DS1 Network Channel codes that additionally have a Shared Ring Service (SRS) service option.

**Table 4-2** DS1 Network Channel Codes Available with SRS

Equipment Frame Format and Line Code	NC Code DS1 Premium on SRS	NCI at End- User premises
Frame Format= SF Line Code= AMI	H C P G	04DU9.BN or BX
Frame Format= SF Line Code= B8ZS	H C T G	04DU9.DN or DX
Frame Format= ANSI-ESF Line Code= AMI	H C U G	04DU9.1KN or 1KX
Frame Format= ANSI-ESF Line Code= B8ZS	H C V G	04DU9.1SN or 1SX
Frame Format=non-ANSI ESF Line Code= AMI	H C W G	04DU9.CN or CX
Frame Format=non-ANSI ESF Line Code= B8ZS	H C Y G	04DU9.SN or SX

#### 4.5 Protocol Codes - CS and DU

Protocol Code *DU* denotes the interface between QWEST and End-User equipment at an End-User premises. It is commonly called an *Access Interface*. Protocol Option codes, discussed later, provide two interface options: a *Conventional Interface* and a *Digital Signal Level 1 Cross-Connect (DSX-1) Interface*.

Protocol Code *CS* provides a signal that conforms to DSX-1, which is part of the North American digital hierarchy for the cross-connect of digital signals. *CS* also denotes that the channel terminates on a QWEST Digital Cross-Connect System (DCS).

### 4.5.1 Protocol Option Codes - Master List

IT1 terminal equipment varies in its frame format and line code capability, so not every Protocol Option code is available for every service. Table 4-2 lists the Protocol Option codes that may be used with QWEST DS1 channels. Additionally, the table provides the Option Code suffix for selection of the End-User premises Conventional and DSX-1 interfaces.

**Table 4-3 DS1 Protocol Option Codes**

Permissible End-User Premises Interface, Protocol Option Codes		Permissible Carrier Premises Interface, Protocol Option Codes	
Code	Meaning	Code	Meaning
BN	SF / AMI / Conventional interface / CSU power = no	15	SF with AMI
BX	SF / AMI / DSX-1 interface		
CN	non-ANSI ESF / AMI / Conventional interface / CSU power = no	15K	non-ANSI ESF with AMI
CX	non-ANSI ESF / AMI / DSX-1 interface		
DN	SF / B8ZS / Conventional interface / CSU power = no	15B	SF with B8ZS
DX	SF with B8ZS / DSX-1 interface		
SN	non-ANSI ESF / B8ZS / Conventional interface / CSU power = no	15S	non-ANSI ESF with B8ZS
SX	non-ANSI ESF / B8ZS / DSX-1 interface		
1KN	ANSI ESF / AMI / Conventional interface / CSU power = no	1K	ANSI ESF with AMI
1KX	ANSI ESF / AMI / DSX-1 interface		
1SN	ANSI ESF / B8ZS / Conventional interface / CSU power = no	1S	ANSI ESF with B8ZS
1SX	ANSI ESF / B8ZS / DSX-1 interface		

AMI= Bipolar Alternate Mark Inversion line code: ref. - ANSI T1.102-1993 or ANSI T1.403-1995

B8ZS= Binary, 8 zero substitution line code: ref. - ANSI T1.102-1993 or ANSI T1.403-1995

ESF= Extended Superframe frame format: ANSI ESF - Format only: ref. ANSI T1.403-1995

Non-ANSI ESF - Format only: ref. AT&T PUB 54016 and similar proprietary documents

SF= Superframe frame format: Format only: ref. Bellcore GR-54-CORE

## CONTENTS

Chapter and Section	Page
5. Services Offered on QWEST IT1 .....	5-1
5.1 Advanced and Basic Voice Channel .....	5-1
5.1.1 Advanced Voice Channel .....	5-1
5.1.2 Basic Voice Channel.....	5-2
5.2 Basic ISDN 2B+D (SLS) .....	5-2
5.3 Basic Dedicated Digital Data Channel .....	5-3
5.4 Frame Relay Dedicated Digital Data Channel .....	5-4

### Tables

5-1 NC Codes for Ordering Advanced Voice Channel.....	5-1
5-2 NC Codes for Ordering Basic Voice Channel.....	5-2
5-3 NC Codes for Ordering Basic ISDN 2B+D (SLS) .....	5-3
5-4 NC Codes for Ordering Basic Dedicated Digital Data Channel .....	5-3
5-5 NC Codes for Ordering Frame Relay Dedicated Digital Data Channel .....	5-4

## 5. Services Offered on QWEST IT1

As mentioned in Chapter 2, combinations of up to 24 voice and data channels are used for voice, and/or data applications on a single DS1 pipe. These applications are Advanced Voice Channel, Basic Voice Channel, Basic ISDN 2B+D (SLS), Basic Dedicated Digital Data Channel, and Frame Relay Dedicated Digital Data Channel. These services are briefly discussed below.

### 5.1 Advanced and Basic Voice Channel

Advanced and Basic Voice Channel provide channels on IT1 service which transmits a digital signal at the rate of 1.544 Mbit/s between the customer premises and QWEST's serving wire center switch. The customer can assign any number of these channels to the line side or the trunk side of QWEST's central office switch. The two terminations within the switch, the line interface unit versus the trunk interface unit, determine the channel options, i.e., Advanced Voice Channel, Basic Voice Channel.

#### 5.1.1 Advanced Voice Channel

The option of terminating the channels into the trunk unit of the switch is called an Advanced Voice Channel. The customer should order this service if their equipment requires trunk side features such as Direct Inward Dial (DID), Direct Outward Dial (DOD) or 2 way DID.

**Table 5-1** NC Codes for Ordering Advanced Voice Channel

<b>NC Code</b>	<b>Voice Grade Channel Service</b>	<b>Technical Performance</b>
UDGT	Advanced Trunk	Direct Inward Dial (DID) Trunk
UDGY	Advanced Trunk	Direct Outward Dial (DOD) Trunk with Answer Supervision
UDGM	Advanced Trunk	2-Way DID/DOD Trunk with Answer Supervision

### 5.1.2 Basic Voice Channel

For the Basic Voice Channel, QWEST terminates the channels into the line unit of the switch using a multiplexer. The customer provided equipment (CPE) derives the twenty-four 64 Kb/s channels within the IT1.

The customer should order the Basic Voice Channel if their equipment requires line side features such as Caller ID.

**Table 5-2** NC Codes for Ordering Basic Voice Channel

NC Code	Voice Grade Channel Service	Technical Performance
UCGF	Voice Line Transmission Characteristics & CO Switching	Loop Start, DTMF, & 2-Way
UCGR	Voice Line Transmission Characteristics & CO Switching	Loop Start, DTMF, & In-Only (Terminate Only)
UCGU	Voice Line Transmission Characteristics & CO Switching	Loop Start, DTMF, & Out-Only (Originate Only)
UDGG	Voice Trunk Transmission Characteristics & CO Switching	Ground Start, DTMF, & 2-Way
UDGS	Voice Trunk Transmission Characteristics & CO Switching	Ground Start, DTMF & In-Only (Terminate Only)
UDGV	Voice Trunk Transmission Characteristics & CO Switching	Ground Start, DTMF & Out-Only (Originate Only)

Advanced and Basic Voice Channels are also referred as Advanced and Basic Digital Switched Services respectively in QWEST's Technical Publications. QWEST's Technical Publication 77319, *QWEST Digital Switched Service* can also be consulted for the appropriate NC/NCI codes to order these services.

### 5.2 Basic ISDN 2B+D (SLS)

The Basic ISDN 2B+D (SLS) service utilizes three consecutive DS0 channels on the IT1 to provide two primary 64 kb/s or B channels that can be used simultaneously and independently to carry any combination of voice, data, image or video calls. It also provides a third, secondary 16 kb/s or D channel for low to moderate-speed data communications.

The two B channels are transported as independent, byte-oriented 64 kb/s channels, without regard for time relationships between the two channels. The D channel carries signaling and routing information for B channels as well as customer data packets.

This service is transported on the IT1 facility using a sequential 3 DS0 counting method as described in TR-NWT-000397, *ISDN Basic Access Transport System Requirements*. This counting method assigns two sequential timeslots for the B channels with the D channel assigned to the third sequential timeslot. This multiplexing method restricts assignment of the first "B" channel to timeslots 1-22 of the IT1 facility.

**Table 5-3** NC Code for Ordering Basic ISDN 2B+D (SLS)

Network Channel Code	Description
UB - -	ISDN

### 5.3 Basic Dedicated Digital Data Channel

The Basic Dedicated Digital Data Channel Service provides channels with the capability of transmitting digital data. The available data rate for IT1 service is 56 and 64 kbit/s. The 64 kbit/s data rate may not be available in all jurisdictions. The service provides synchronous serial data between two End-Users or between an End-User and another carrier. QWEST provides timing for this service through facilities to the End-User on the received bit stream. The Basic Dedicated Digital Data Channel is only available between locations connectable through compatible digital facilities. Table 5-4 gives compatible NC and NCI codes for 56 and 64 kb/s services.

**Table 5-4** NC Code for Ordering Basic Dedicated Digital Data Channel

NC Code	Characteristics
XH- -	56kb/s (Point to Point; No Options)
XD- -	64kb/s; Available only with DS1 Clear Channel Capability (CCC)

\* Not available in all jurisdictions.

QWEST's Technical Publication 77204, *QWEST Digital Data Service, Product Description, Application, and Interface Combinations* may also be consulted for the appropriate NC/NCI codes for additional services.

In order to provide near broadcast quality video either Basic ISDN 2B+D (SLS) or Basic Dedicated Digital Data Channel can be used. The number of channels required for video depends on the quality of video. It is recommended that consecutive channels be used for this type of service. CPE should be equipped to accommodate the loss of synchronization between multiple channels.

#### 5.4 Frame Relay Dedicated Digital Data Channel

QWEST's Frame Relay Dedicated Digital Data Channel employs "fast packets" technology with access speed of 56 kb/s and 64 kb/s to provide high-speed connection oriented data transfer service. Cells and Frames are considered "fast packets". Cells have a fixed length of 53 octets while a frame is considered to be variable size. This service is useful for applications such as Local Area Network (LAN) and file transfer that includes short burst of data with variable bandwidth. The frame relay service has less overhead than X.25 protocol which results in less processing for the nodes translating in less time delay and increased throughput.

Frame Relay Dedicated Digital Data Channels utilizes Permanent Virtual Circuits (PVC) to establish connection between customer locations to provide higher speed and lower time delay than traditional packet-switching technologies. Since there are multiple physical dedicated lines, multiple logical connections can be established on a single Frame Relay Service (FRS) Access Link giving the user flexibility of simultaneous data transfer applications. QWEST's Technical Publication 77372, *Frame Relay Service* may also be consulted for the appropriate NC/NCI codes for ordering these services.

Enhancements to the QWEST Frame Relay Dedicated Digital Data Channel Service include the support for fractional port access within an IT1 Service. The signal characteristics and the physical NI described in QWEST Technical Publication 77372 are also applicable for the fractional Frame Relay Dedicated Digital Data Channel. It provides the capability for the QWEST IT1 subscribers to access a QWEST FRS via 56/64 kbit/s channels provisioned within IT1. The fractional port access speeds supported are (Nx56) kbit/s or (Nx64) kbit/s, where N equals 1 to 23. Multiple fractional access circuits may be established on a single IT1. The NC Codes for ordering Frame Relay Dedicated Digital Data Channel are given in Table 5-5.

**Table 5-5** NC Codes for Ordering Frame Relay Dedicated Digital Data Channel

Network Channel Code	Description
XH-R	Digital Packet 56kb/s
XD-R	Digital Packet 64kb/s

Fractional Frame Relay Dedicated Digital Data Channel is available only in Frame Relay Service Areas that have a Frame Relay Node collocated with 1/0 Digital Cross-Connect System (DCS).

## CONTENTS

<b>Chapter and Section</b>	<b>Page</b>
6. Definitions.....	6-1
6.1 Acronyms .....	6-1
6.2 Glossary .....	6-2

## 6. Definitions

### 6.1 Acronyms

AMI	Alternate Mark Inversion
ANSI	America National Standards Institute
B8ZS	Bipolar with 8 Zero Substitution
Bellcore	Bell Communications Research, Inc.
CO	Central Office
CPE	1) Customer Provided Equipment 2) Customer Premises Equipment
CRC-6	6 bit Cyclic Redundancy Check
CSU	Channel Service Unit
DCS	Digital Cross-Connect System
DDS	Digital Data Service
DID	Direct Inward Dialing
DOD	Direct Outward Dialing
DS1	Digital Signal Level 1 (1.544 Mbit/s)
DS0	Digital Signal Level 0 (64 kbit/s) (1 voice channel)
DSU	1) Digital Service Unit 2) Data Service Unit
DSX-1	Digital Signal Level 1 Cross-Connect
ESF	Extended Super Frame
EU	End-User
FCC	Federal Communications Commission
FRS	Frame Relay Service
IC/IEC	Interexchange Carrier
ISDN	Integrated Services Digital Network
IT1	Integrated T-1
kbit/s	kilobits per second (1,000 bit/s)
LAN	Local Area Network
Mbit/s	Megabit per Second
NC	Network Channel
NCI	Network Channel Interface
NCTE	Network Channel Terminating Equipment

NI	Network Interface
NIU	Network Interface Unit
PBX	Private Branch Exchange
SF	Superframe Format
SLS	Single Line Service
SRS	SONET Ring Service
TLP	Transmission Level Point
POT	Point Of Termination
PVC	Permanent Virtual Circuit
WAN	Wide Area Network

## 6.2 Glossary

### Bits/second (bit/s)

Bits per second, e.g., 1200 bit/s. In data transmission, it is the number of binary zero and one bits transmitted in 1 second. Modern terminology uses "bit/s" e.g., 1200 bit/s.

### Channel

An electrical or photonic, in the case of fiber optic based transmission systems, communications path between two or more points of termination.

### CODEC

Equipment that converts an analog signal into a digital signal (binary format) and which may compress the information content so that less band width is required for transmission compared to the original signal format. Conversely, the decoder part converts the digital signal back into an analog signal and may provide for expansion of the signal.

### Customers

Denotes any individual, partnership or corporation who subscribes to the services provided by QWEST customers are divided into two distinct and separate categories: (1) carriers, who provide interexchange services for hire for others, and (2) end-users, who request services only for their own use.

### Customer Interface

The interface with a customer at a point of termination.

### **Customer Premises**

Denotes a building or portion(s) of a building occupied by a single customer or end-user either as a place of business or residence. Adjacent buildings and the buildings on the same continuous property occupied by the customer and not separated by a public thoroughfare are also considered the customer's premises.

### **Customer Premises Equipment (CPE)**

All telecommunication equipment located at a customer's location.

### **Customer Provided Equipment (CPE)**

Equipment owned and maintained by the customer and located on their side of the End-User Point of Termination (EU-POT) network interface.

### **Digital Hierarchy Level**

The level in the digital hierarchy. The levels and the respective bit rates are:

<u>Level</u>	<u>Bit Rate</u>
DS0	64.0 kbit/s
DS1	1.544 Mbit/s

### **Integrated Services Digital Network (ISDN)**

A network providing or supporting a range of telecommunications services that provides digital connections between End-Users.

### **Local Area Network**

Network permitting the interconnection and intercommunication of a group of computers, primarily for the sharing of resources such as data storage devices and printers.

### **Megabit per Second (Mbit/s)**

One million (1,000,000) bits per second

### **Network Channel (NC) Code**

The Network Channel (NC) code is an encoded representation used to identify both switched and non-switched channel services. Included in this code set are customer options associated with individual channel services, or feature groups and other switched services.

### **Network Channel Interface (NCI) Code**

The Network Channel Interface (NCI) code is an encoded representation used to identify five (5) interface elements located at a Point of Termination (POT) at a central office or at the Network Interface at a customer location. The Interface code elements are: Total Conductors, Protocol, Impedance, Protocol Options, and Transmission Level Points (TLP). (At a digital interface, the TLP element of the NCI code is not used.)

### **Network Interface (NI)**

The point of demarcation on the customer's premises at which QWEST's responsibility for the provision of service ends.

### **Service Code (A COMMON LANGUAGE<sup>®</sup> code set)**

A coded designation by which a particular Special Service Circuit may be identified. This designation must be unique, in a form that is readable and understandable, and be acceptable for both manual and mechanized procedures. [Special Service, as used by COMMON LANGUAGE<sup>®</sup>, may be called "Private Line", "Private Line Transport", "Switched Specials", "Dedicated Access", "Special Access", etc. in various tariffs and technical publications. Special Service is actually: COMMON LANGUAGE<sup>®</sup> Circuit Identification - Special Service, (abbreviated CLCI<sup>™</sup> - S/S).]

## CONTENTS

<b>Chapter and Section</b>	<b>Page</b>
7. References.....	7-1
7.1 American National Standards Institute Documents .....	7-1
7.2 AT&T Documents.....	7-1
7.3 Telcordia Documents.....	7-1
7.4 QWEST Technical Publications .....	7-1
7.5 Ordering Information .....	7-2
7.6 Trademarks.....	7-3

## 7. References

### 7.1 American National Standards Institute Documents

ANSI T1.102-1993 *Digital Hierarchy - Electrical Interfaces.*

ANSI T1.223-1997 *Information Interchange — Structure and Representation of Network Channel (NC) and Network Channel Interface (NCI) Codes for the North American Telecommunications System.*

ANSI T1.403-1995 *Network-to-Customer Installation - DS1 Metallic Interface.*

### 7.2 AT&T Documents

PUB 54016 *Requirements for Interfacing Digital Terminal Equipment to Services Employing the Extended Superframe Format.* September 1989.

### 7.3 Telcordia Documents

GR-54-CORE *DS1 High-Capacity Digital Service End User Metallic Interface Specifications.* Issue 1, December 1995.

GR-499-CORE *Transport Systems Generic Requirements (TSGR): Common Requirements.* Issue 1, December 1995.

SR-STIS-000307 *NC/NCI Code Dictionary.* Issue 8, April 1997.

TR-NWT-000397 *ISDN Basic Access Transport System Requirements.* Issue 3, December 1993.

### 7.4 QWEST Technical Publications

PUB 77200 *QWEST DS1 Service and QWEST DS1 Rate Synchronization Service.* Issue F, September 2001

PUB 77204 *QWEST Digital Data Service, Product Description, Application, and Interface Combinations.* Issue E, September 2001

PUB 77319 *QWEST Digital Switched Service.* Issue E, July 2001

PUB 77372 *Frame Relay Service.* Issue H, December 2000

PUB 77375 *1.544 Mbit/s Channel Interfaces.* Issue E, September 2001

## 7.5 Ordering Information

All documents are subject to change and their citation in this document reflects the most current information available at the time of printing. Readers are advised to check status and availability of all documents.

Those who are not QWEST employees may order;

American National Standards Institute (ANSI) documents from:

American National Standards Institute  
Attn: Customer Service  
11 West 42nd Street  
New York, NY 10036  
Phone: (212) 642-4900  
Fax: (212) 302-1286

ANSI has a catalog available which describes their publications.

AT&T documents from:

AT&T Customer Information Center  
PO Box 19901  
Indianapolis, IN 46219  
Phone: (800) 432-6600

Telcordia documents from:

Telcordia Customer Relations  
8 Corporate Place, PYA 3A-184  
Piscataway, NJ 08854-4156  
Fax: (908) 336-2559  
Phone: (800) 521-CORE (2673) (U.S. and Canada)  
Phone: (908) 699-5800 (Others)  
Web: [www.telcordia.com](http://www.telcordia.com)

QWEST Technical Publications from:

<http://www.qwest.com/techpub>

Employees of QWEST Communications International Inc. may order publications by submitting form RG 31-0033 to:

Central Distribution Center (CDC)  
1005 17th St., S-30  
Denver, CO 80202  
Phone: (303) 896-9446  
Fax: (303) 965-8652

Most QWEST publications are available to QWEST employees on the company network (E\*MEDIA). Call the (303) 624-4796 or email: [emedial@qwest.com](mailto:emedial@qwest.com) for further information.

## 7.6 Trademarks

COMMON LANGUAGE® Registered Trademark of Telcordia.

QWEST® Registered Trademark of QWEST Communications  
International Inc.