



# Asus Zenbook UX31E Speaker Replacement

This guide will show you how to replace the speaker in your Zenbook UX31E.

Written By: Zachary Somerscales




## INTRODUCTION

If your audio is distorted, replace the speaker component to get fresh, clear sound.

### TOOLS:

- [iFixit Opening Tools](#) (1)
- [T4 Torx Screwdriver](#) (1)

## Step 1 — Back Cover

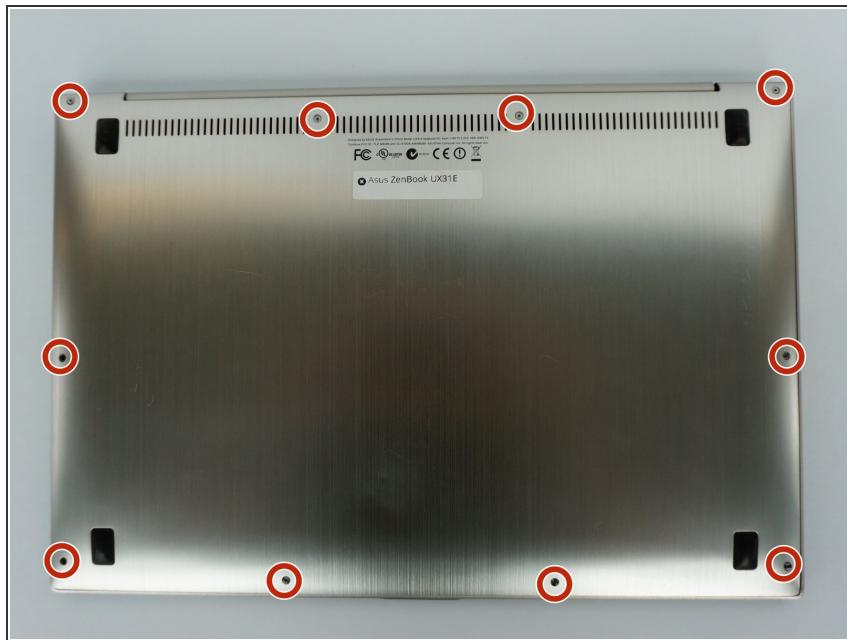

- Using a T4 Torx screwdriver, remove the ten screws at the marked locations.


*(i)* Place the screws into a container as to not lose them.

## Step 2





- Using your iFixit Opening Tool, carefully slide it between the back panel.
- Lift the back plate of your ASUS ZenBook UX31E and place it to the side.

## Step 3 — Speaker

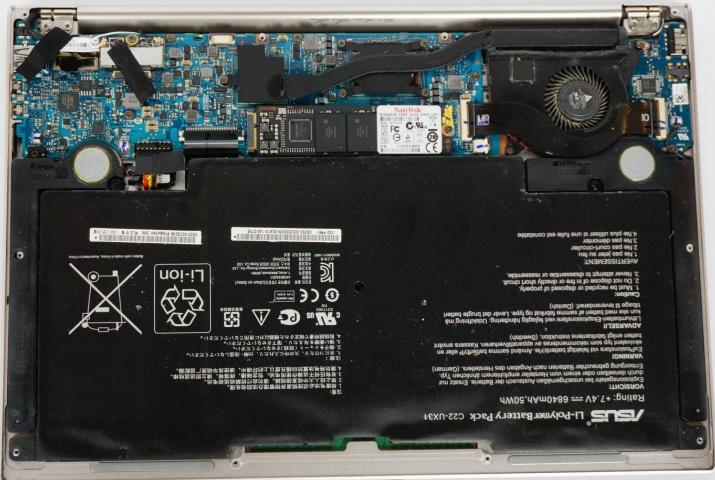



- Use the plastic opening tool to pry the backing of the laptop
- Remove bottom panel of laptop

## Step 4

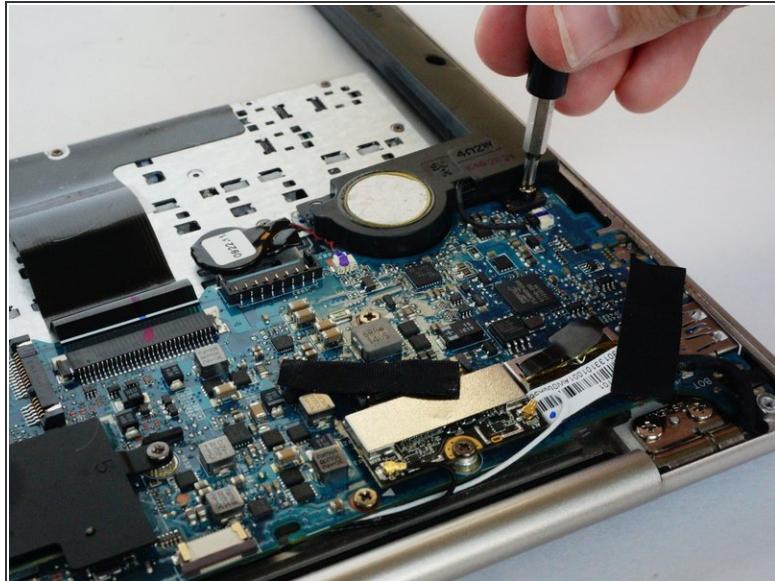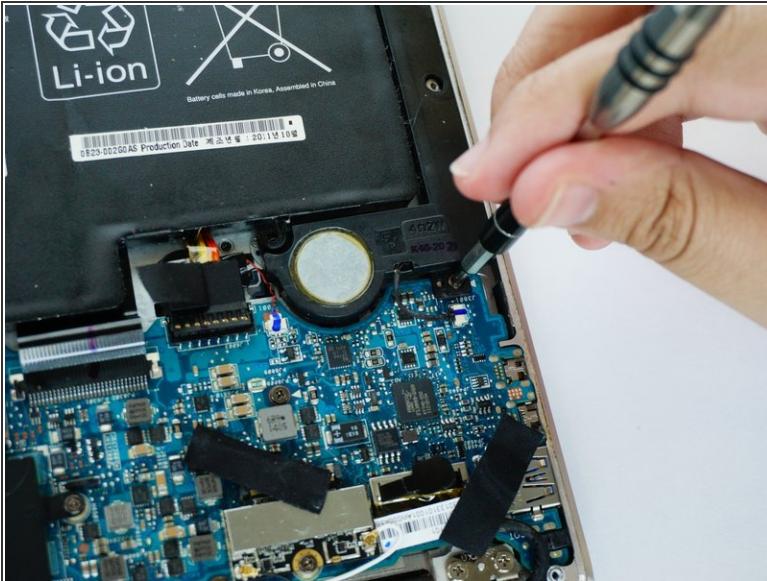

- Remove the screw connecting the speaker component to the motherboard using the screwdriver.

## Step 5

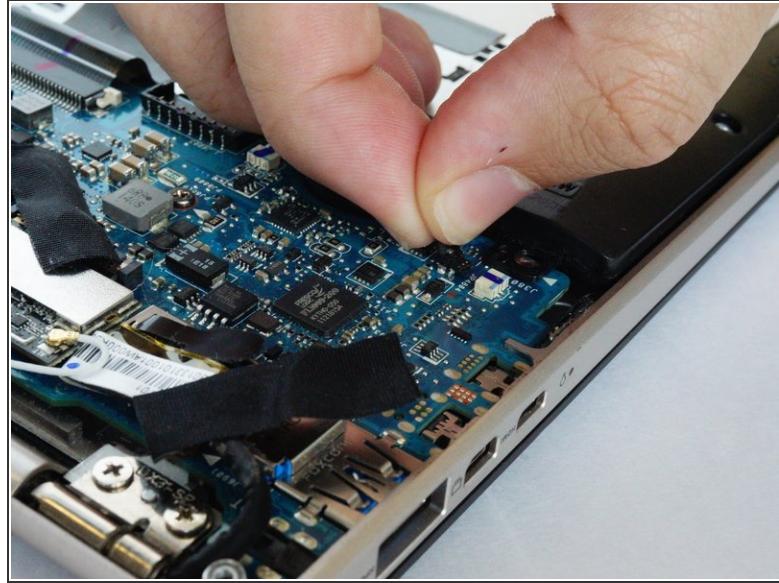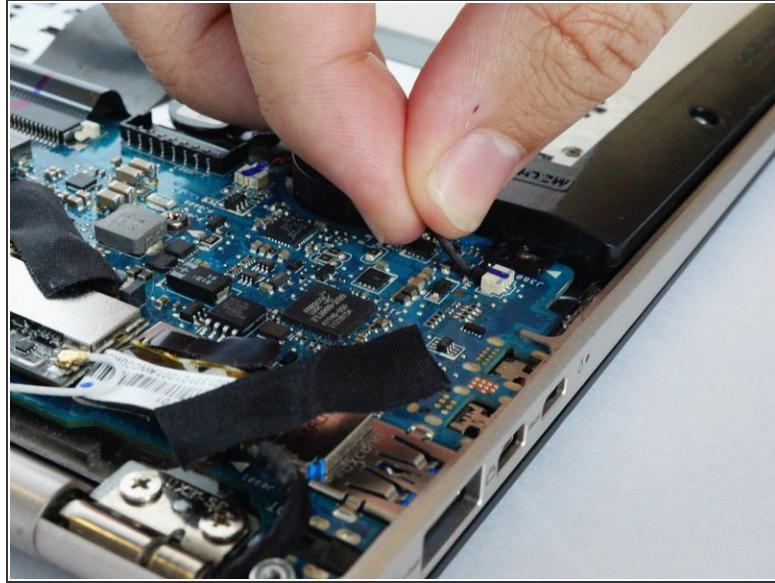

- Disconnect the sound cable from the motherboard.

## Step 6



- Using the plastic opening tool, pry the speaker component from the computer.

To reassemble your device, follow these instructions in reverse order.