



Bose Soundlink III Battery Replacement

Replace the battery of your Bose Soundlink III.

Written By: Dakoda Sanders




INTRODUCTION

If your SoundLink III exhibits significantly decreased battery life or no longer takes a charge, you may need a new battery. In this guide, you will learn how to open up your Bose Soundlink III and replace the battery.

TOOLS:

- [Metal Spudger \(1\)](#)
- [Spudger \(1\)](#)
- [Phillips #2 Screwdriver \(1\)](#)

Step 1 — Battery

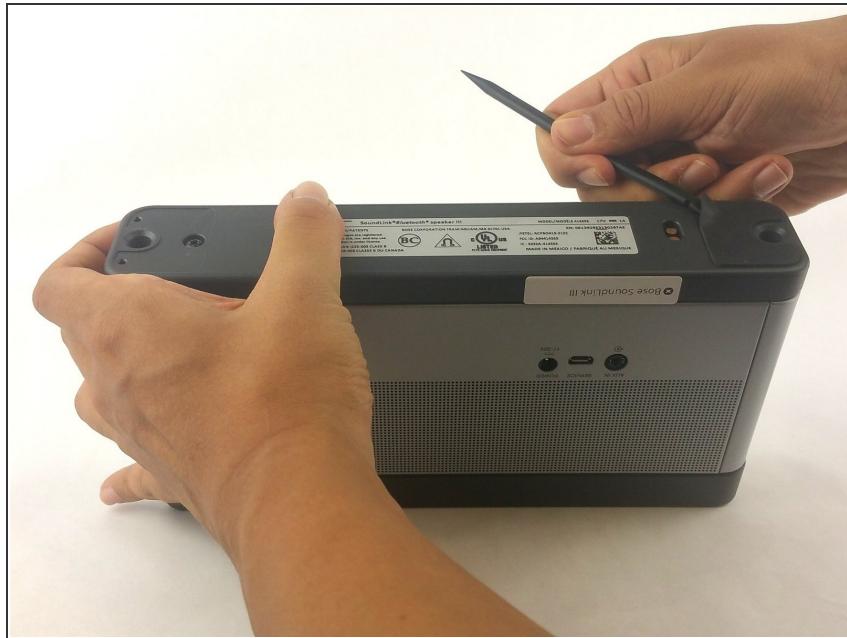

- Use a spudger to pry the rubber pads off of the bottom panel of the SoundLink.

 The rubber pads should have enough adhesive to stick when you reassemble them at the end. If not, however, you may need your own adhesive.

Step 2




- Remove the two 12.5 mm screws using a Phillips #2 screwdriver.
 These screws may be difficult to remove. If necessary, use a lever for extra torque.
- Remove the bottom panel.

Step 3



- Flip the rear panel back to allow access to the SoundLink's battery.

Step 4

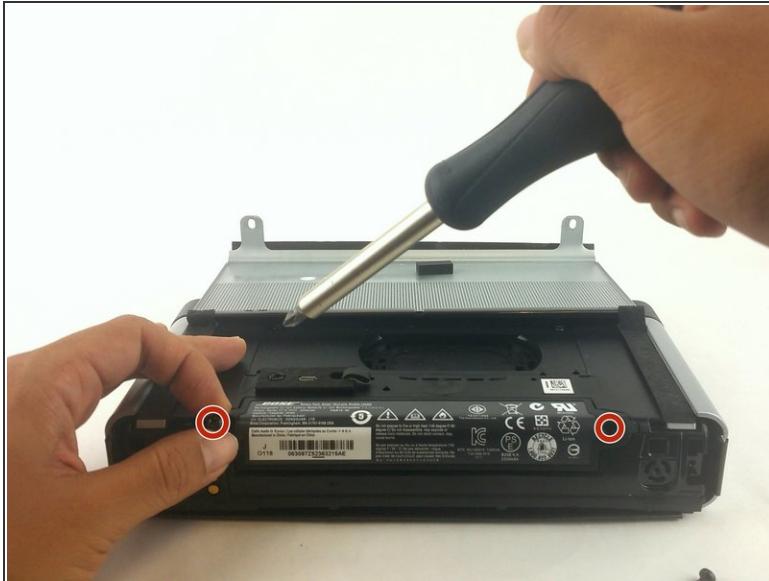

- Remove the two 12.5 mm Phillips #2 screws from the sides of the battery.

To reassemble your device, follow these instructions in reverse order.