



# Energizer Power and Play Wireless Charging System for Wii Batteries Replacement



The batteries included in the packs are prone to failure and leaking. This guide will show you how to replace the batteries with better quality rechargeables.

Written By: Arcane Scroll



# INTRODUCTION

The batteries included in the packs are prone to failure and leaking. This guide will show you how to replace the batteries with better quality rechargeables.

<div> <b>TOOLS:</b></div> <div><ul style="list-style-type: none"><li>• <a href="#">Phillips #0 Screwdriver</a> (1)</li></ul></div>	<div><div></div> <b>PARTS:</b></div> <div><ul style="list-style-type: none"><li>• <a href="#">Rechargeable AAA Batteries</a> (2) <i>800mAh or higher</i></li></ul></div>
---	---

## Step 1 — Energizer Power and Play Induction Charging Battery Pack



- Remove battery pack from the Wii Remote and locate the two screws between the batteries. Remove these and put them aside.
- ⓘ The batteries used by the factory are underpowered 600mAh rechargeables. I highly recommend replacing them with at least 850mAh ones, the higher the better.

## Step 2



- Pull out the battery from the case. It should slide out easily.

### Step 3



- Using your fingernail or a small screwdriver, carefully separate the two halves of the battery casing. These aren't glued and should separate with little effort.

### Step 4




- Remove the two batteries, noting their orientation.
- Clean up any leaking battery acid and/or corrosion.
- ⓘ Out of the dozen or so battery packs I have repaired, every single one had failed due to corrosion. This occurred even in units that were just a few months old.

## Step 5



- Once the contacts and compartment are clean, insert your new rechargeable batteries.

## Step 6

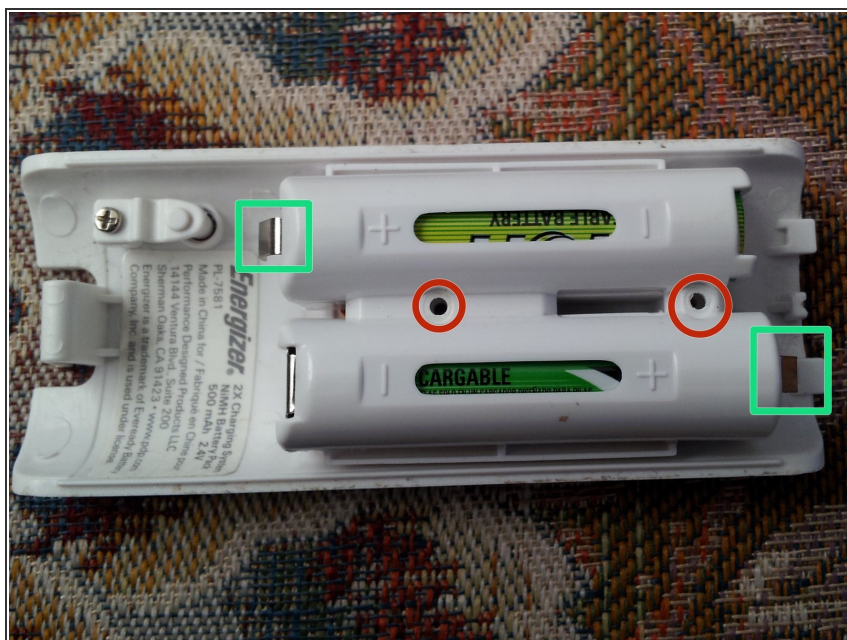

- Re-insert the screws. The battery pack will only fit in one direction.
- While you are at it, clean the outer contacts and bend them out a little. This can help eliminate remotes having poor battery life.

You should now have a working battery pack. Insert back into the Wii Remote and place on the charger. Allow it to get a good full initial charge in order to extend your battery life.

Enjoy your "non-reparable" repaired induction charging system.