



# HP 7 1800 Speaker Replacement

Replace the speaker in your HP 7 1800 to get back to listening to your favorite tunes.

Written By: Todd Dobrozdavic




## INTRODUCTION

This guide will aid you in the replacement of your HP 7 1800 speaker. It requires beginning soldering skills.

### TOOLS:

- [Spudger](#) (1)
- [Portable Soldering Iron](#) (1)
- [Tweezers](#) (1)


## Step 1 — Remove the back panel

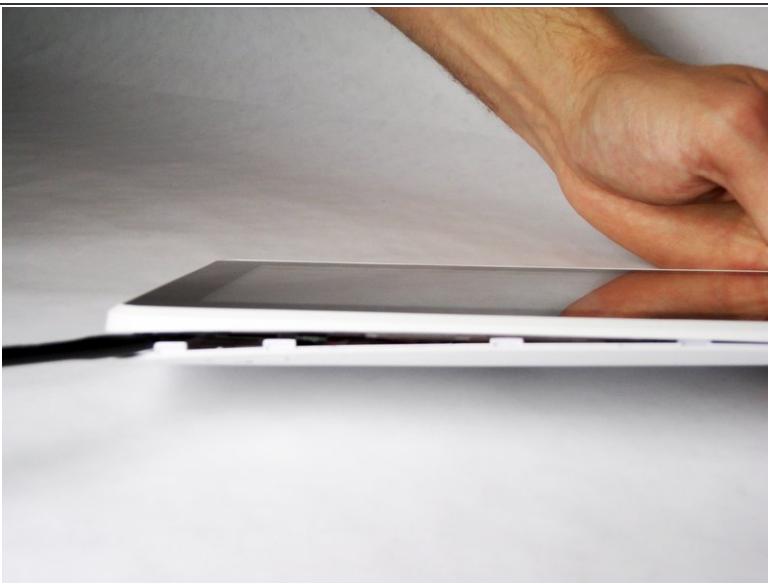

- Carefully insert a Spudger into one of the corners of the tablet.
- Slide the Spudger along the edge popping the tabs out along the way.

 Be careful not to break the tabs.

## Step 2 — Remove the battery

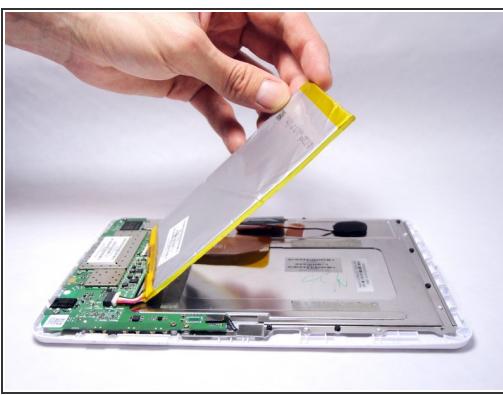


- Slide the Spudger under the battery to lift it off the adhesive.
- Gently pull the cable connection from the motherboard using tweezers.

## Step 3 — Desolder the speaker wires



- Desolder the two leads of the speaker wire that are connected to the motherboard.

## Step 4 — Remove the speaker

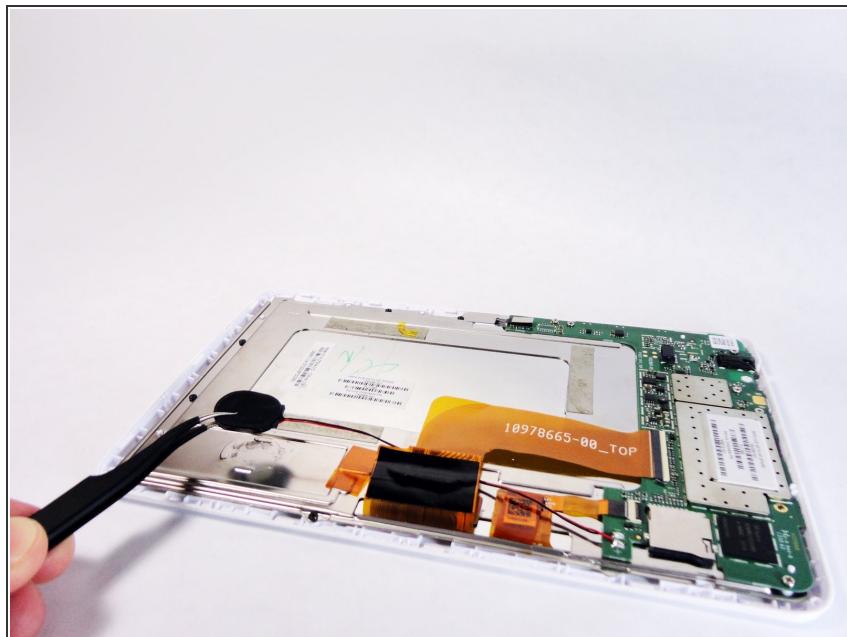

- Using tweezers, gently pull the speaker off of the metal plate.

*(i)* The speaker is held onto the metal plate with light adhesive. It will require a little force to peel off.

To reassemble your device, follow these instructions in reverse order.