




HP Pavilion Touchsmart 11z-e000 RAM Replacement

This guide will demonstrate how to replace the memory module of the laptop. Upgrading memory (RAM) may improve computer performance.

Written By: Daniel

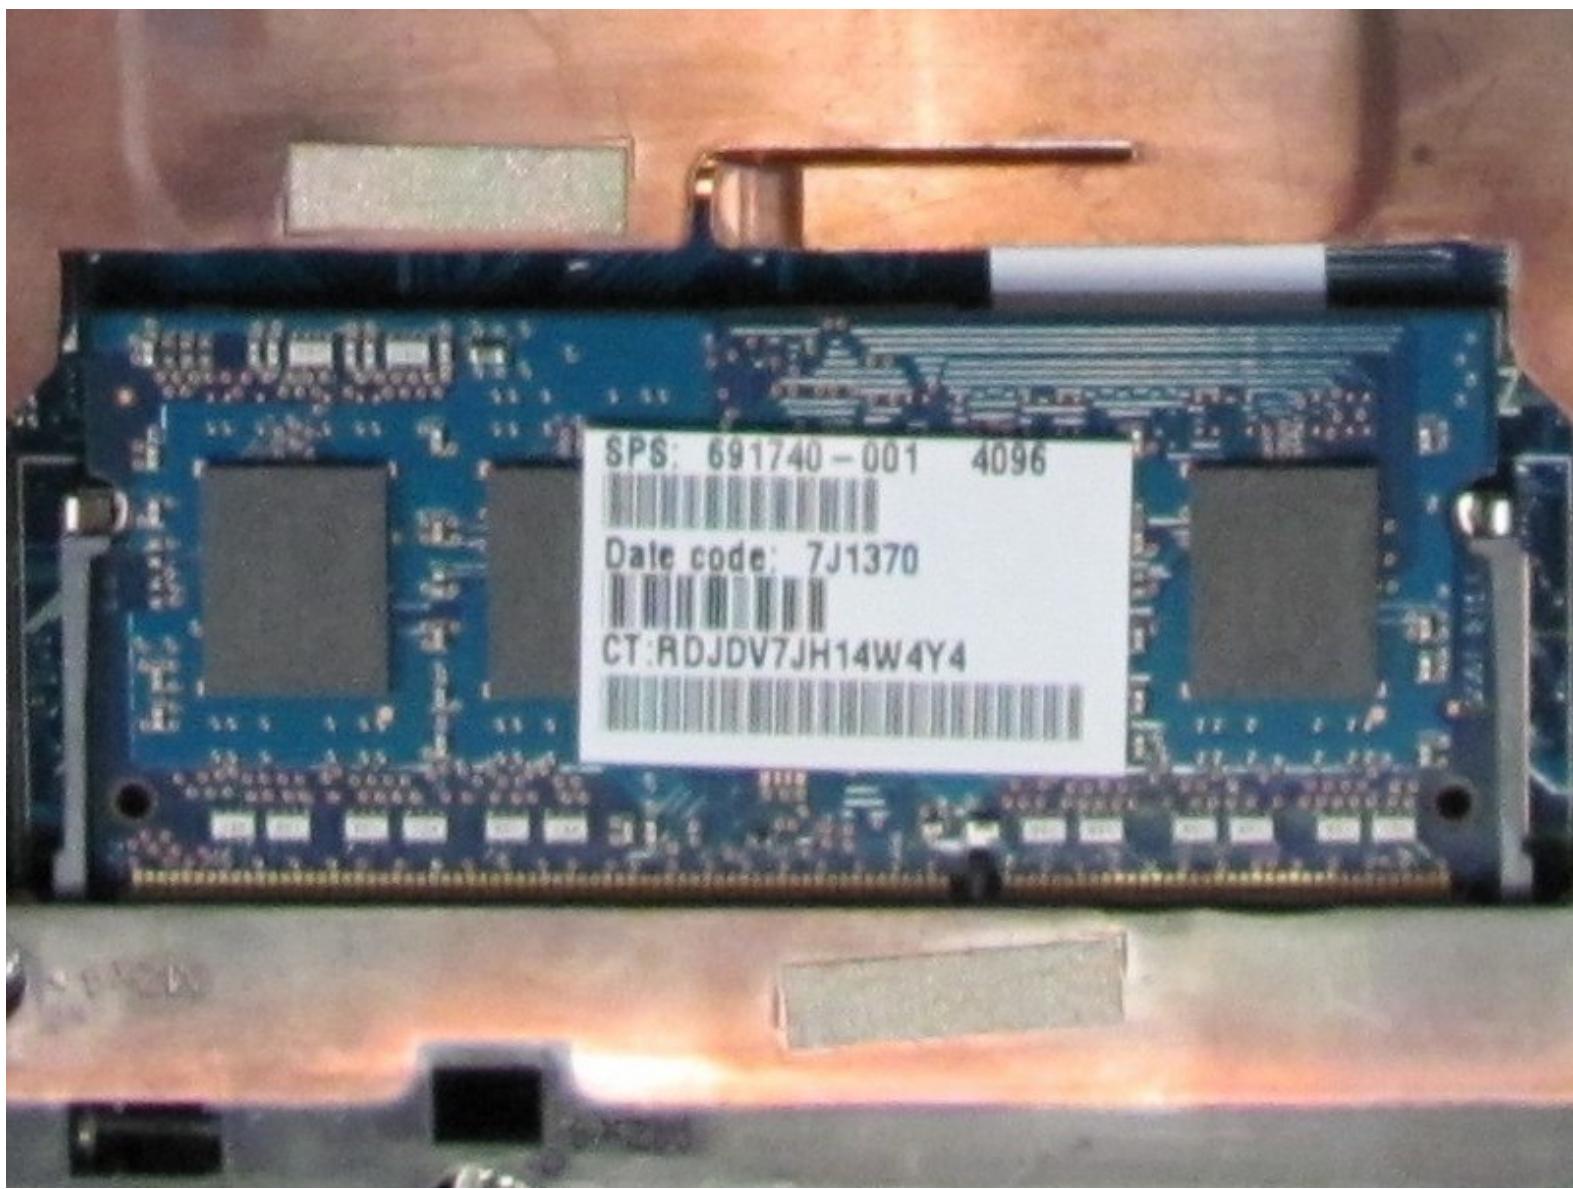

This document was generated on 2019-09-24 02:47:30 PM (MST).

INTRODUCTION

Memory, commonly known as RAM, is largely responsible for the speed of a computer, as it allows data to be read and written. Improving your computer's RAM may increase speed and allow your computer to run more programs simultaneously. The HP Pavilion TouchSmart 11z-e000 comes with 4gb of RAM. Typical RAM sizes range from 4gb-16gb. This laptop has one memory module slot which allows it to be upgraded to 8gb.

TOOLS:

- [iFixit Opening Tools \(1\)](#)

Step 1 — Battery




- Remove battery by pushing the two tabs and pulling the battery outwards slowly but firmly.

Step 2 — RAM




- Slide a spudger under the outer plastic cover of the laptop
- Pull off the plastic cover of the laptop.

Step 3

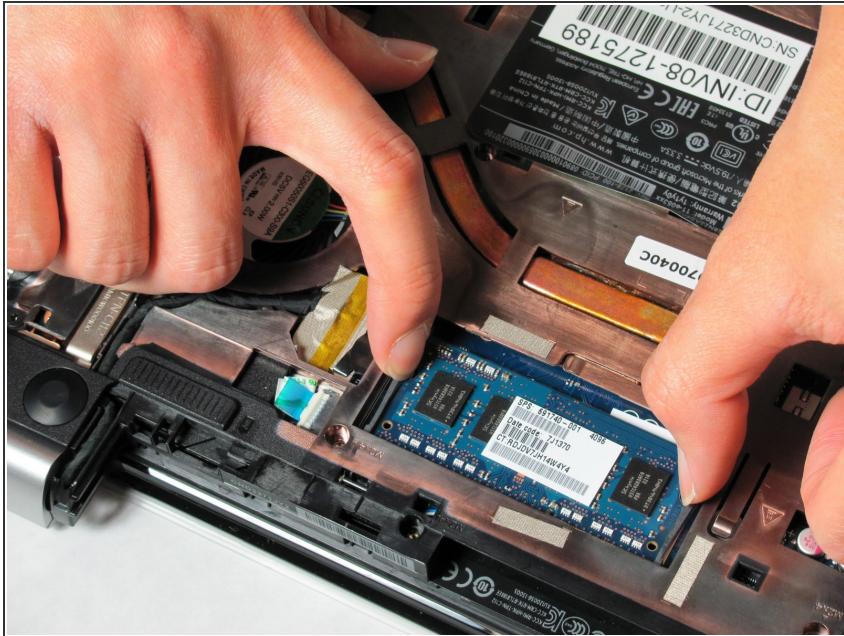

- Push both tabs outward to release the memory module

Step 4

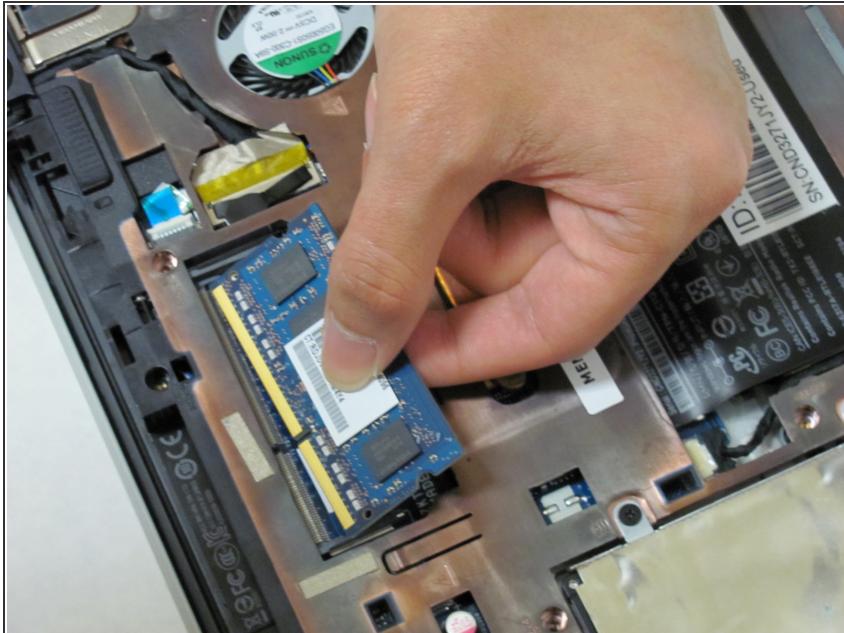

- Grasp the memory module by the edge and pull gently to remove it

To reassemble your device, follow these instructions in reverse order.