



Hover-1 Coast Board Battery Replacement

In this guide you will replace the battery that propels the Hover-1 Coast forward and backwards.

Written By: Jace Oppenlander



INTRODUCTION

In order for your Hover-1 Coast to be used for its intended purpose you must have a functioning battery. This procedure is fairly easy to accomplish and key to using the board to its full potential.

TOOLS:


- [Phillips #1 Screwdriver](#) (1)
- [Probe and Pick Set](#) (1)
- [Spudger](#) (1)

Step 1 — Board Battery




- To remove the battery on the Hover-1 Coast, you must uncover the screws on the top of the board.
- Using a pick tool, puncture the grip tape and expose the screws.
- Loosen all four 1" screws using a Phillips #1 screwdriver.

Step 2

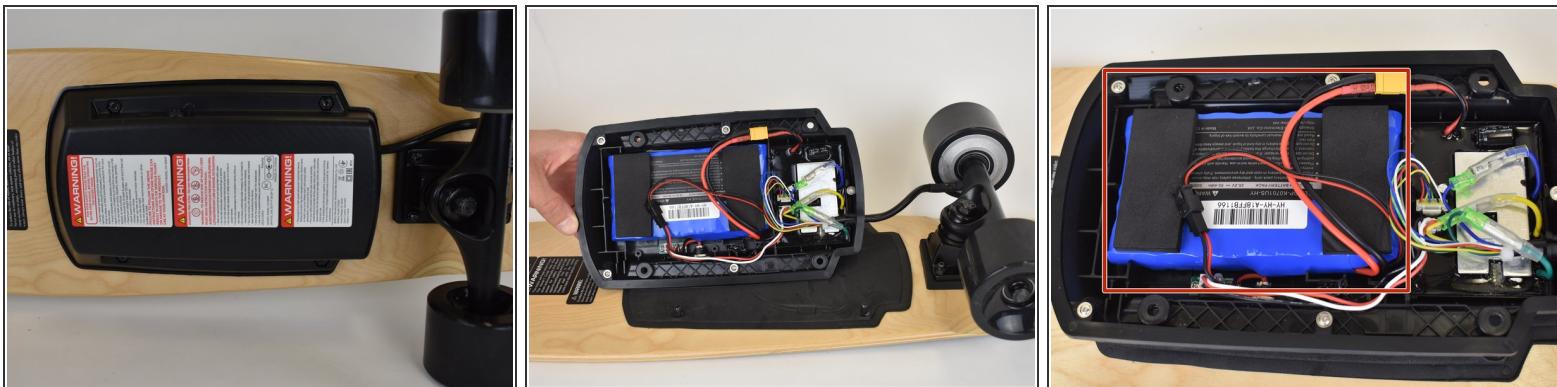


- Now pull the black protective cover off the board.
- Locate the battery.

Step 3

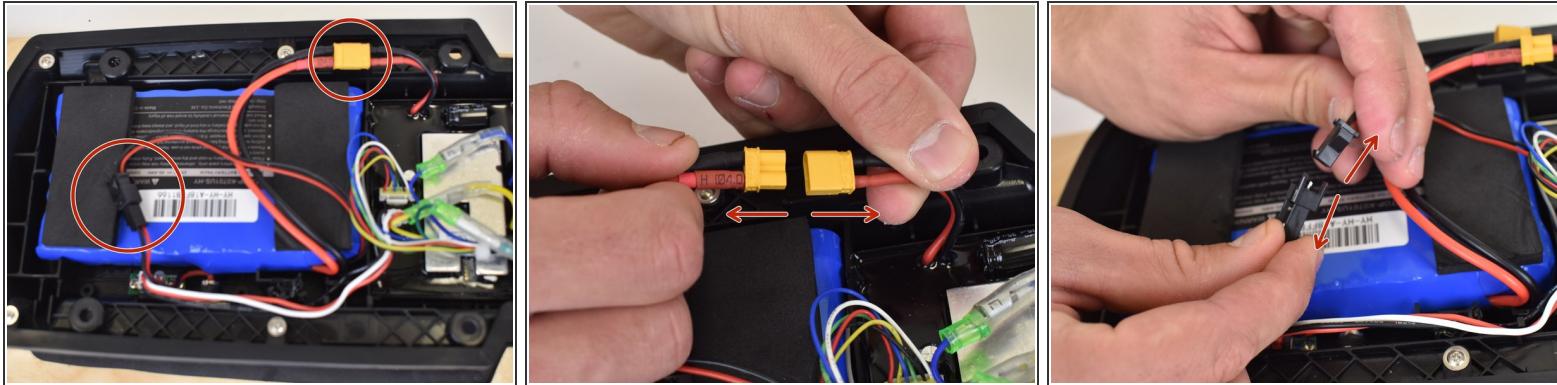

- The battery is connected by these two sets of wires.
- Remove the yellow wire first by pulling the two wires gently in opposite directions.
- Now pull apart the black wire by gently pulling the two wires in opposite directions.

Step 4

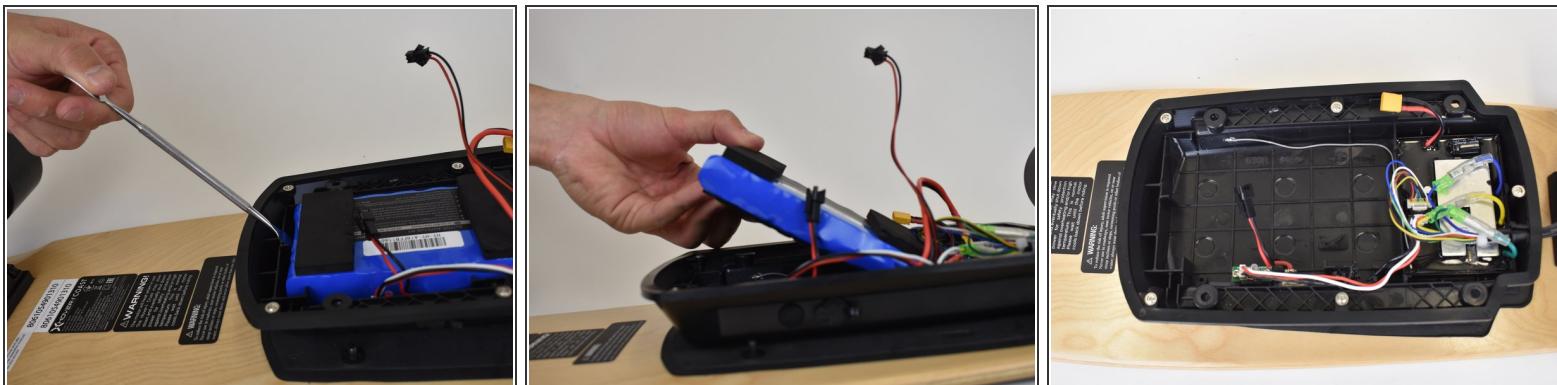

- Once the battery has been disconnected, gently pry the battery upward.

⚠ It is important to use a plastic opening tool to avoid puncturing the battery.

- Once the battery is freed, remove it with your hands.

(i) The battery is glued to the case and will require some effort to remove.

To reassemble your device, follow these instructions in reverse order.