




# Onda VI10 Speaker Replacement

This guide will teach you how to remove the speakers for the Onda VI10.

Written By: Carlos Diaz

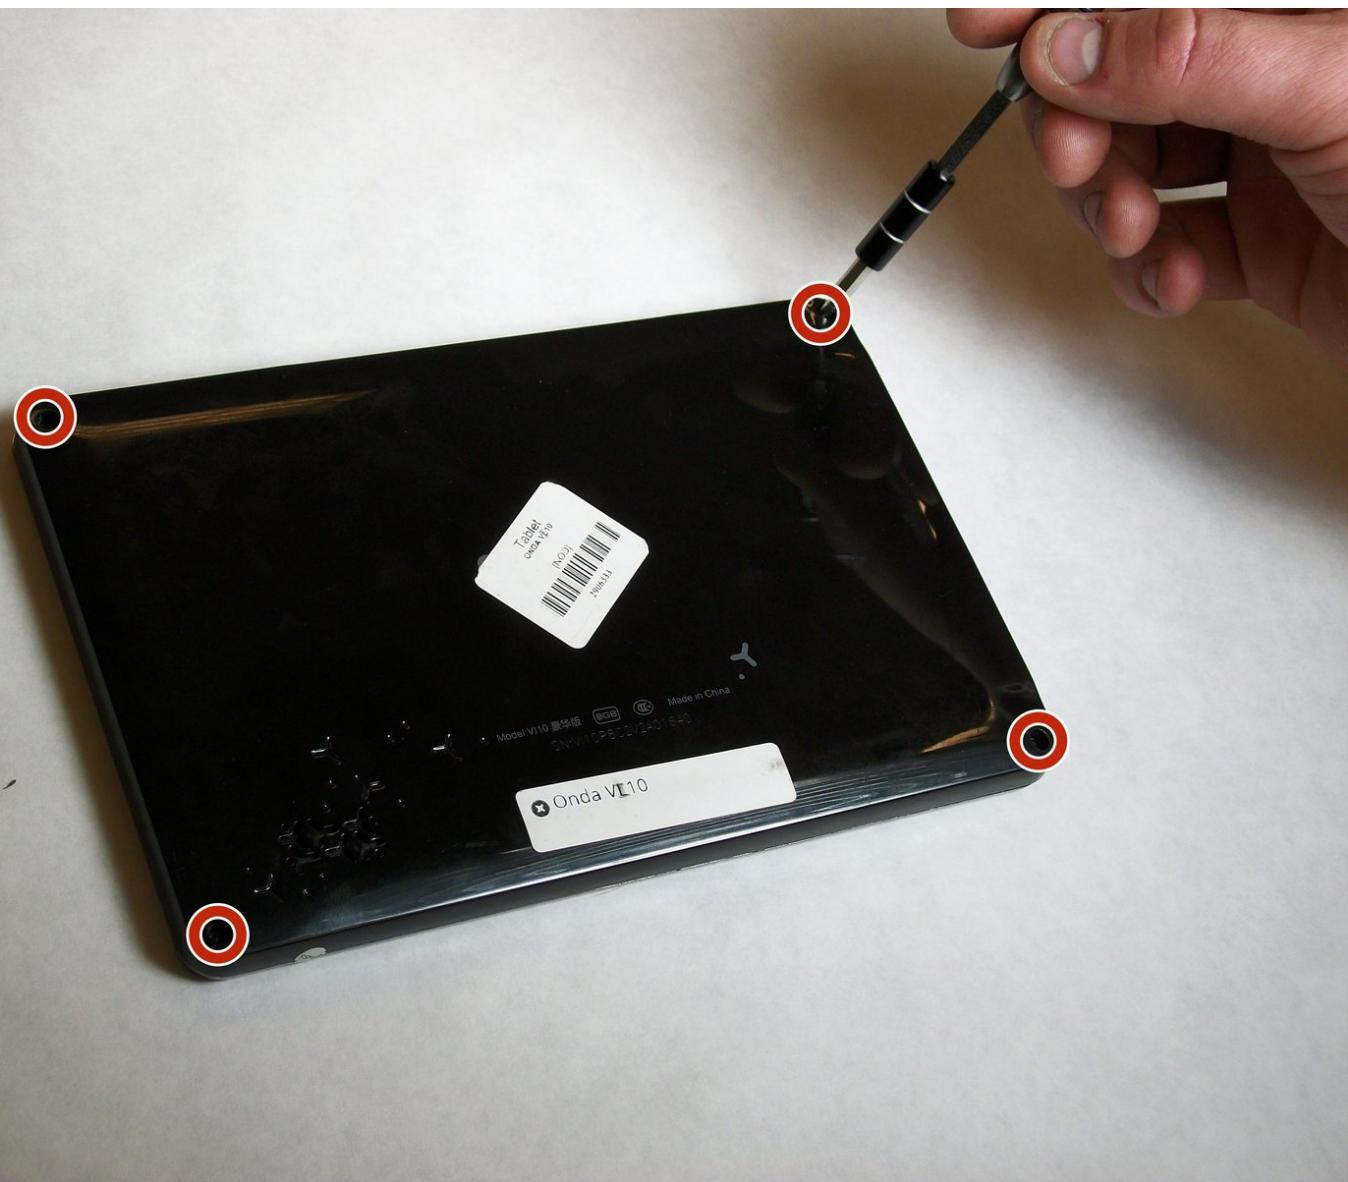


## INTRODUCTION

This guide will teach you how to remove the speakers for the Onda VI10.

### TOOLS:

- **Soldering Iron** (1)
- **Phillips #0 Screwdriver** (1)

## Step 1 — Speaker

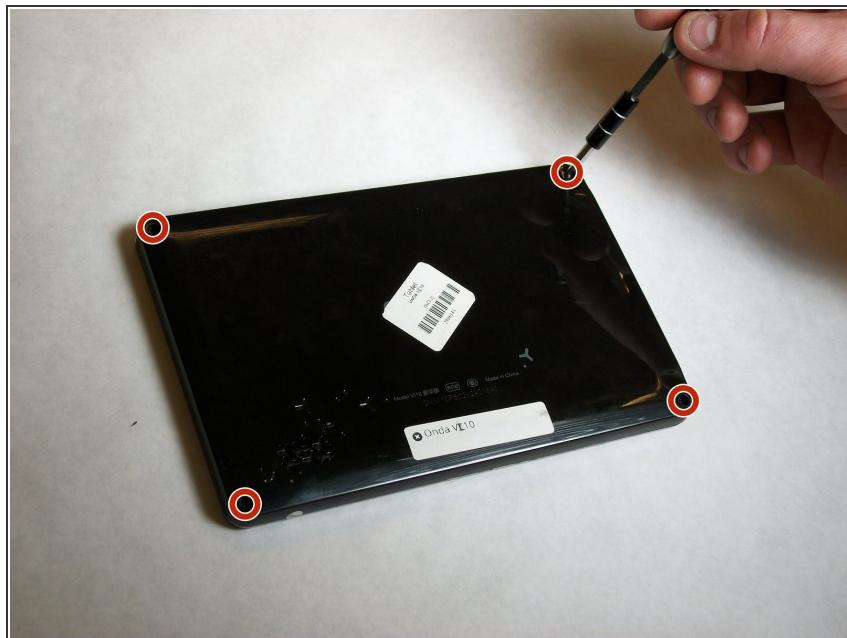

- Use a number 0 screw driver to remove the four screws.

## Step 2



- Power Button on the side should be pointing outward.
- Note: This is so the ribbon cables inside are not damaged.

## Step 3



- Locate the black and red speaker wires going back to the mother board.


*(i)* Note: Speaker wires may run underneath the battery wires.

## Step 4



- Carefully remove the speaker cables from the retaining tabs using a thin metal spudger.

## Step 5

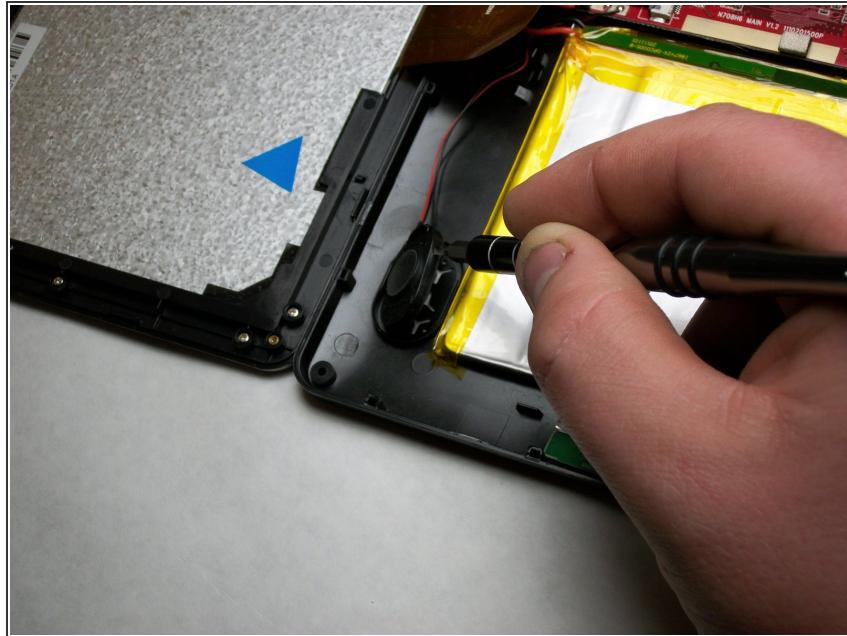

- Pry the speaker out of its molding using a thin metal spudger

## Step 6



- Desolder the two speaker wires from the motherboard using a soldering iron.

 Caution: Soldering Iron is extremely hot.

To reassemble your device, follow these instructions in reverse order.