



Remington S5500 Power Supply Cable Removal

This guide will show you how to effectively remove the power supply cable of the Remington S5500 safely.

Written By: Benjamin Yohe



This document was generated on 2019-09-22 12:14:05 PM (MST).

INTRODUCTION


Two tools required for the completion of this task include a PH1 screwdriver, and a prying tool.

All screws on this device are 10mm (0.393 in).

TOOLS:


- [Phillips #1 Screwdriver \(1\)](#)
- [Prying and Opening Tool Assortment \(1\)](#)

Step 1 — Power Supply Cable

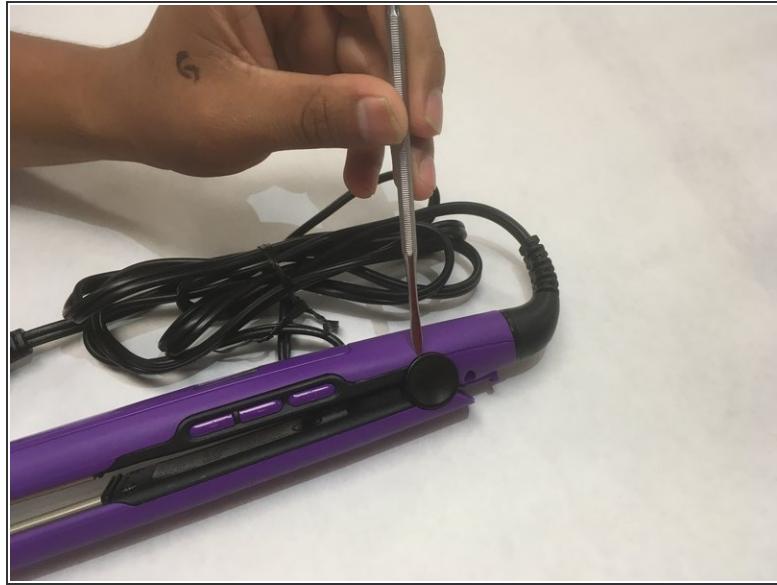

- Place the prying tool in between the hair straightener and the aligning cap.
- Push forwards on the prying tool to pop off the aligning cap.


Step 2

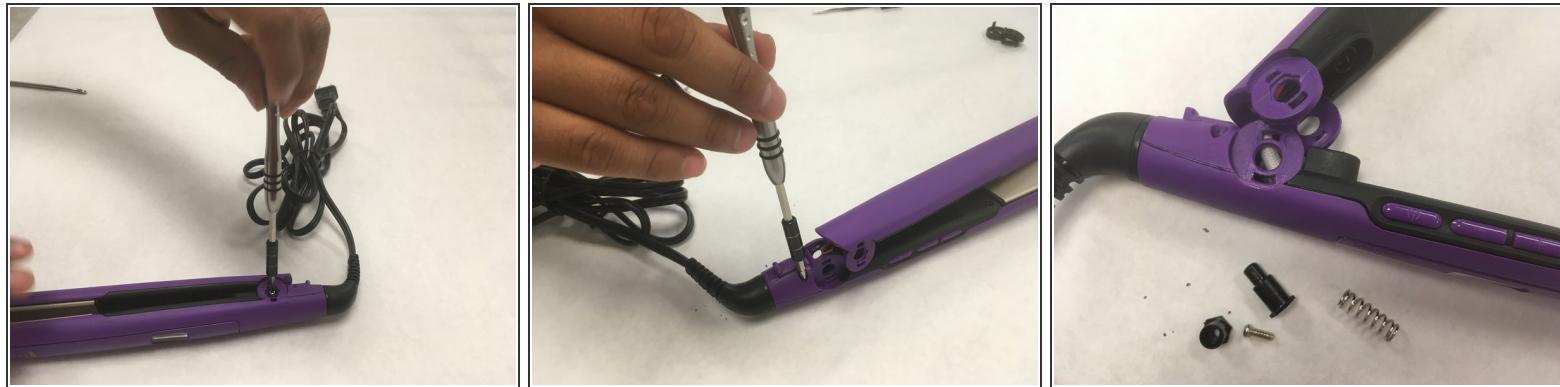

- Remove the screws with the Phillips #1 screwdriver located underneath the aligning cap, one on each side of the straightener.
- Use the prying tool to remove the aligning rods after the removal of the screws.
- Gently separate each half of the hair straightener.

⚠ The spring located in the middle of this mechanism may pop out and can get lost very easily. Try to separate the two components slowly.

Step 3

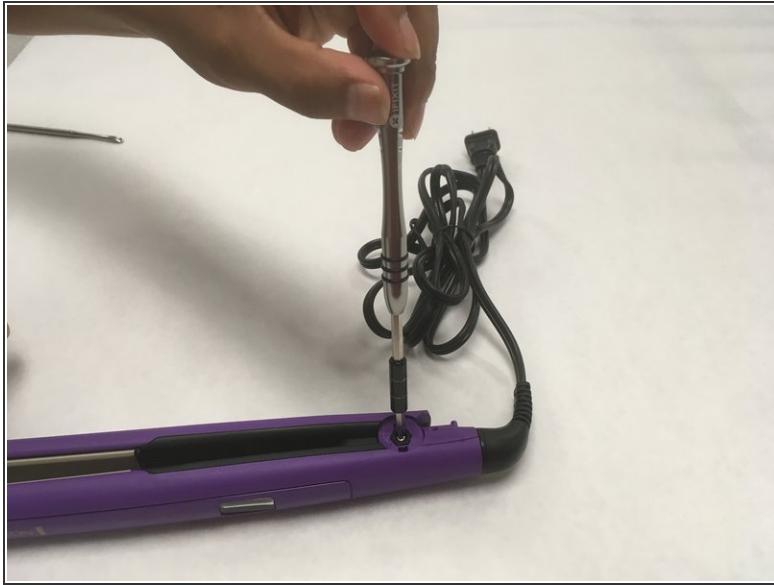

- After the hair straightener is separated, use a Phillips #1 screwdriver to remove the two screws located on the lower half of the straightener.
- Use the prying tool to remove the hinge cover.

Step 4



- Pull upwards while pulling outwards to disconnect the wire from the housing.

To reassemble your device, follow these instructions in reverse order.