



Samsung Alias 2 Logic Board Replacement

This is a guide to replacing the logic board of a Samsung Alias 2 cellular phone.

Written By: Chris



INTRODUCTION

This guide tells you how to remove a faulty logic board and install a new one.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery



- push down the back cover of the phone, then take it out.

Step 2



- Remove the battery.


Step 3 — Logic Board



- Remove the (4) 4.2 mm screws from the four corners of the battery slot.

Step 4



- Use plastic opening tools to peel off plastic Verizon logo tab from the top of the back outside.
-  Note: The tab is stuck on there with glue, this is alright, just peel it off.

Step 5




- Remove the (3) newly uncovered 4.3 mm screws.

Step 6




- Remove the back outside casing using the plastic opening tool.
- ⚠ Warning: Do Not lose the buttons on the side of the phone, as they will come off of the phone when you remove the back outside casing.

Step 7

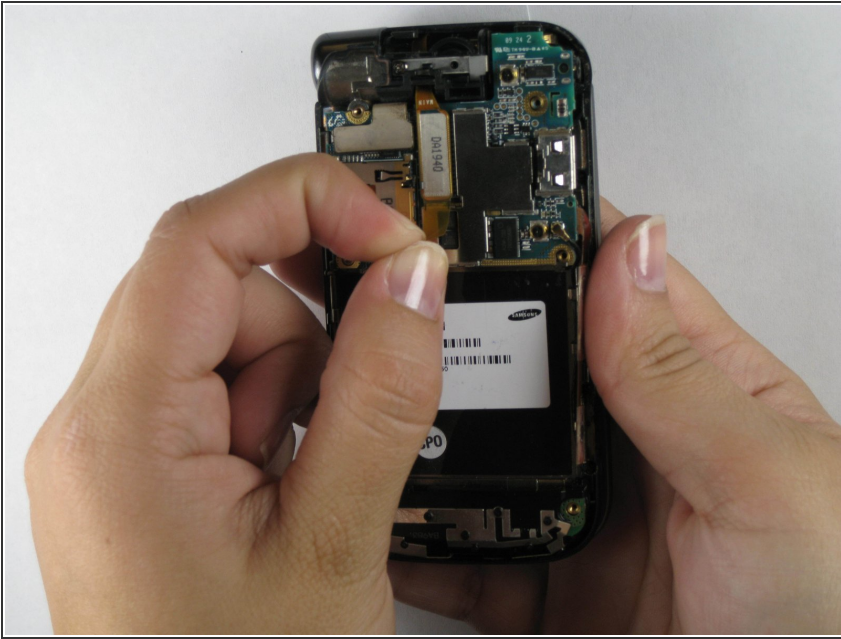


- Pull up on the yellow tab.

Step 8

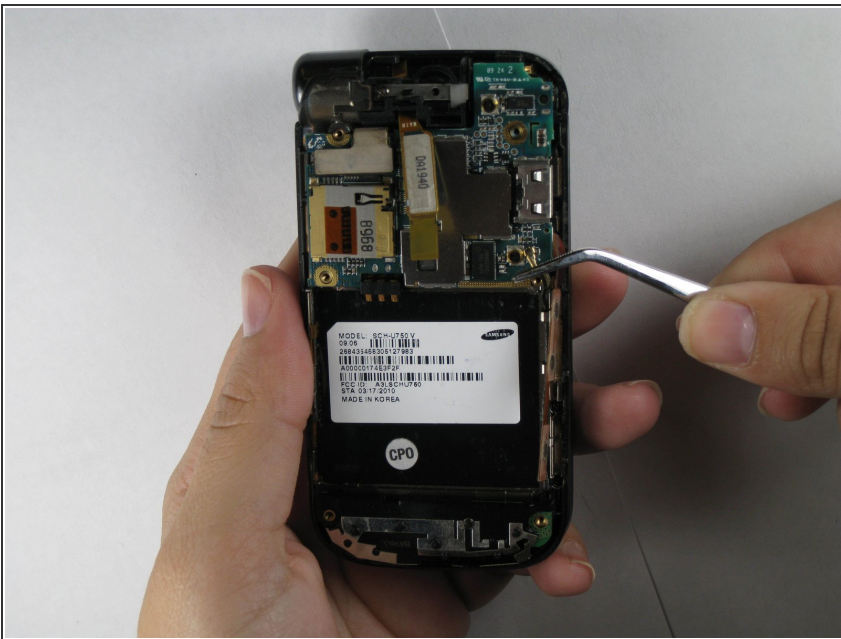

- Disconnect connecting cord using tweezers.

Step 9

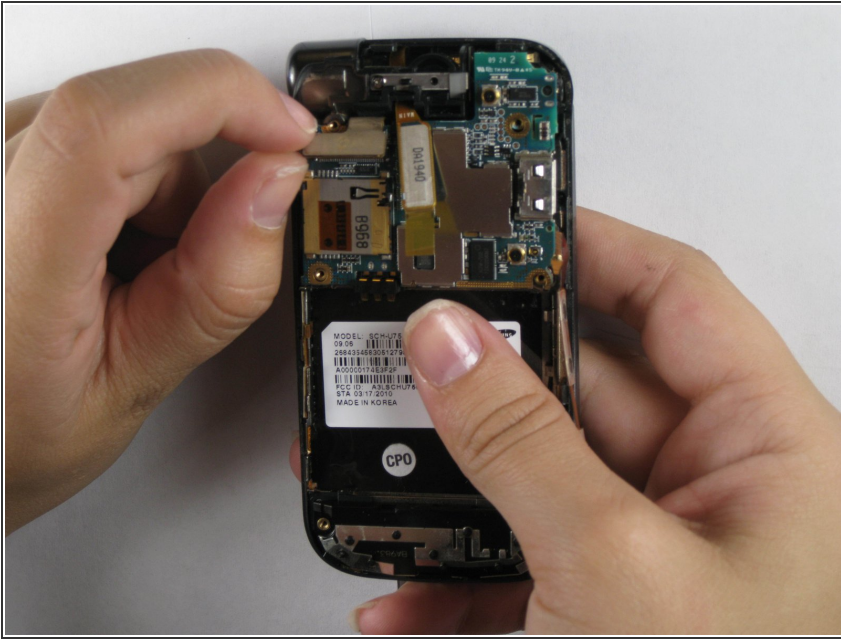

- Disconnect rectangular ribbon.

Step 10



- Remove logic board.

To reassemble your device, follow these instructions in reverse order.