




Unbranded UB-15MS10 Battery Replacement

Replacing your dying or dead battery to bring power back to your Unbranded UB-15MS10 tablet.

Written By: Evan Peterson

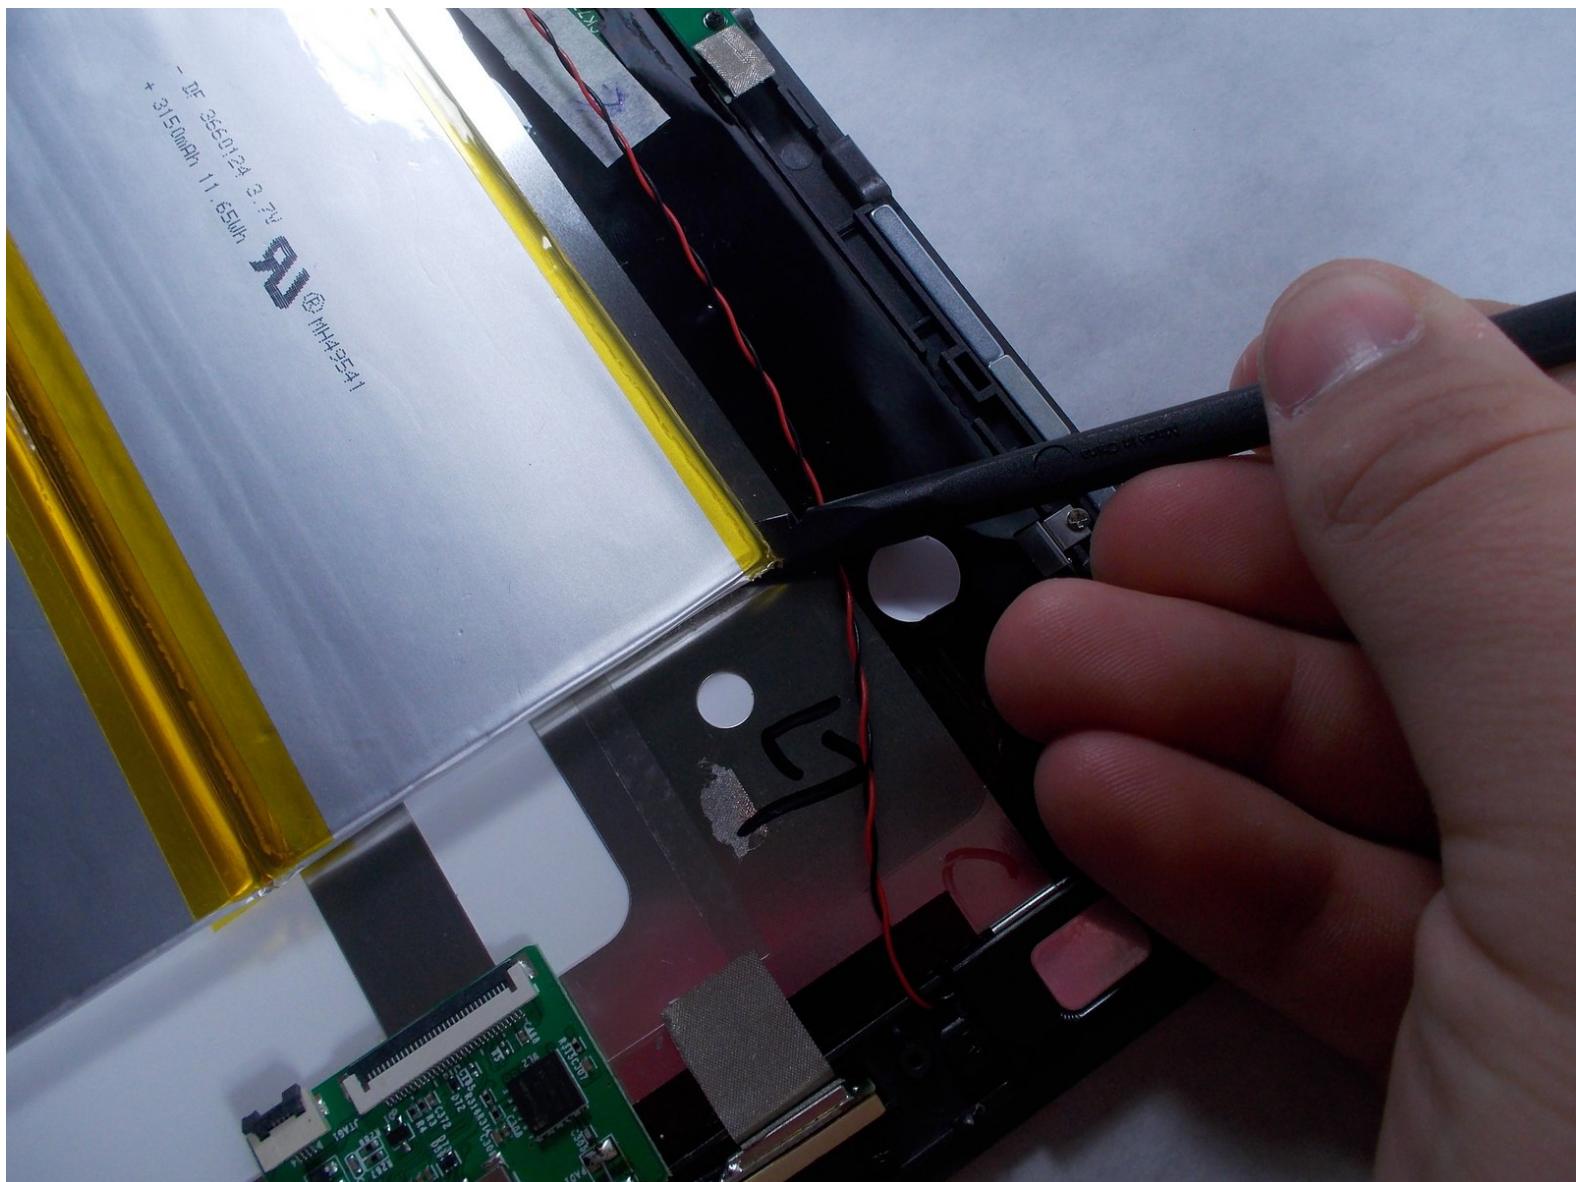

INTRODUCTION

Because the battery is glued in place, removing the battery from the device must be done carefully as to not damage the device. Do not damage the battery during replacement as sufficient damage will cause the battery to leak hazardous material onto you, as well the device.


TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [Portable Soldering Iron](#) (1)

PARTS:

- [Unbranded UB-15MS10 Tablet Replacement Internal Tablet Battery](#) (1)

Step 1 — Battery

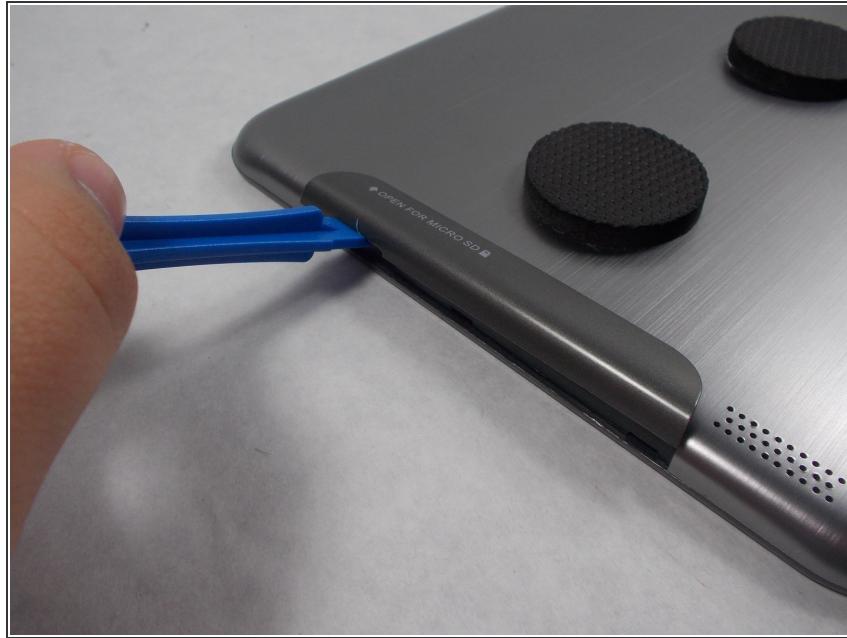

- Use an opening tool to pry off the lid of the memory card compartment.

Step 2



- Use a Phillips #00 Screwdriver to unscrew the two 1.2mm screws within the compartment. This allows the device to be opened.

Step 3




- Insert opening tools to partially pry open the cover.

Step 4



- With the cover being partially held open, slide a spudger around the seam to pry off the cover.

Step 5

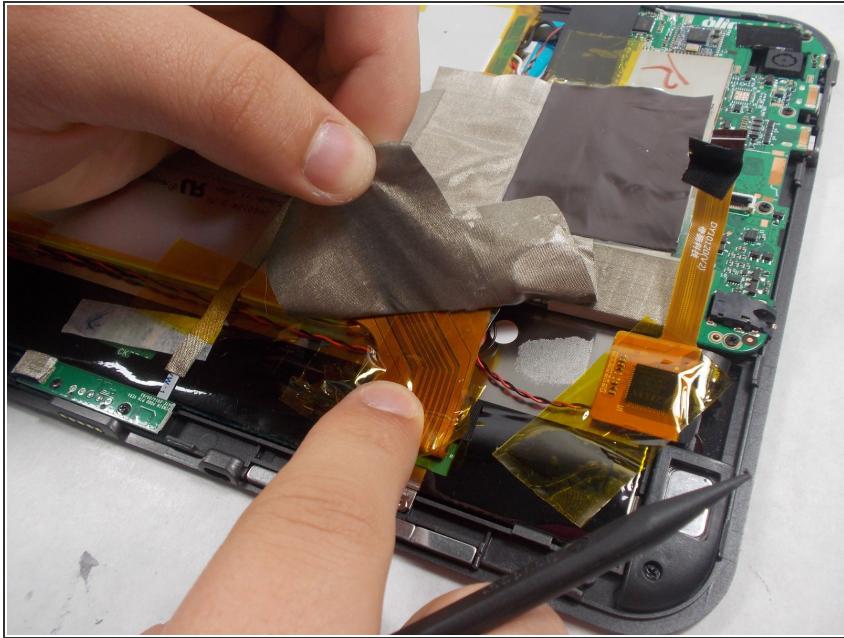


- Remove the tape that is holding the battery in place.

Step 6




- Cut the wires connecting the battery to the device shown in the picture.

Step 7

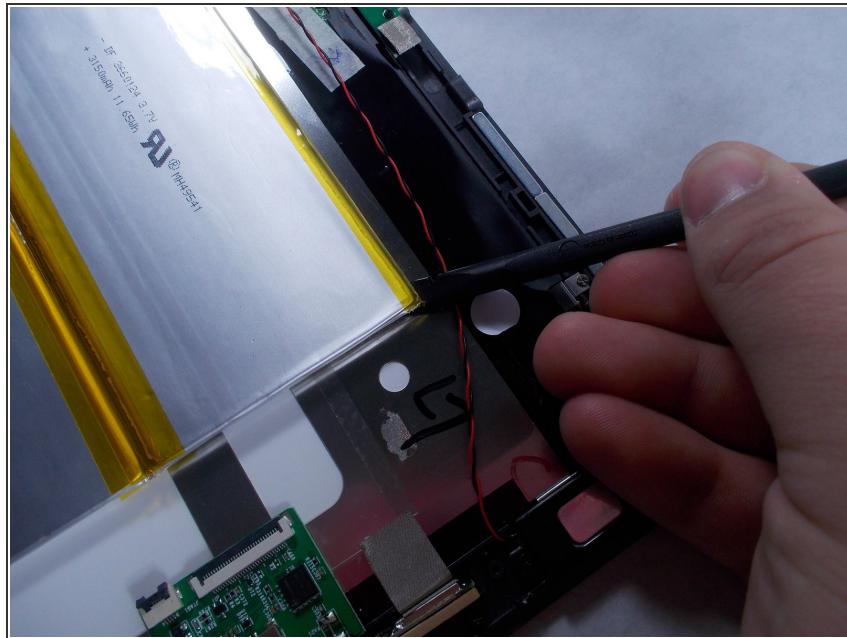

- Carefully remove the battery, making sure that all wires are disconnected.

Step 8

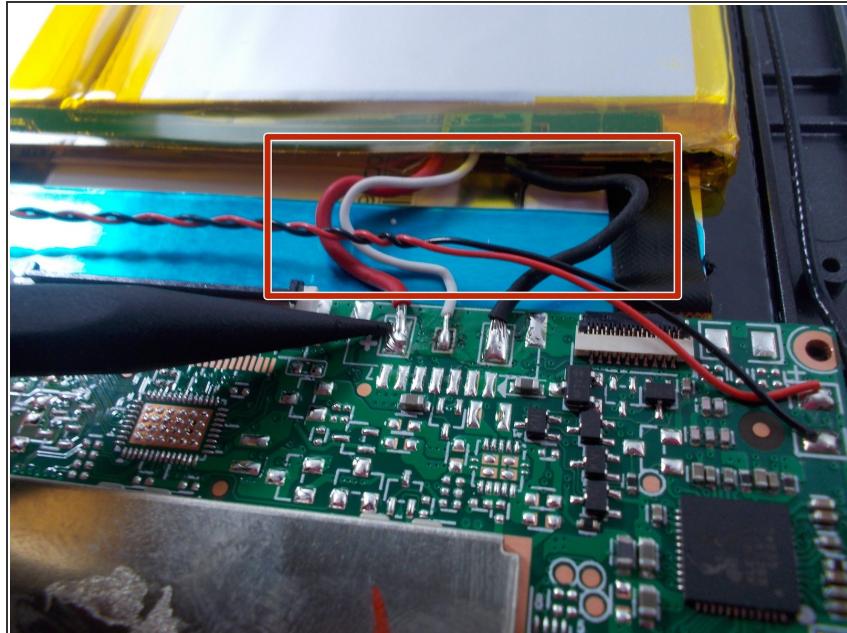

- Splice the new battery with the red, white and black wires connected to the motherboard.

To reassemble your device, follow directions 1-7 in reverse order.