



iVIEW-754TPC Battery Replacement

Use this repair guide to replace the battery on the iVIEW-754TPC.

Written By: calvin



INTRODUCTION

Is your device no longer holding a charge? Use this guide to replace a faulty or worn out battery.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [Soldering Iron](#) (1)
- [Tweezers](#) (1)


Step 1 — Rear Panel



(i) Before disassembling your tablet, make sure it is powered off.

- Use plastic opening tool to release the clips holding the device together. The clips will take a small amount of pressure to release. Once you have the plastic opening tool inserted, use a twisting action to release the clips. Start from bottom of device and work all the way around.




Step 2 — Remove Battery

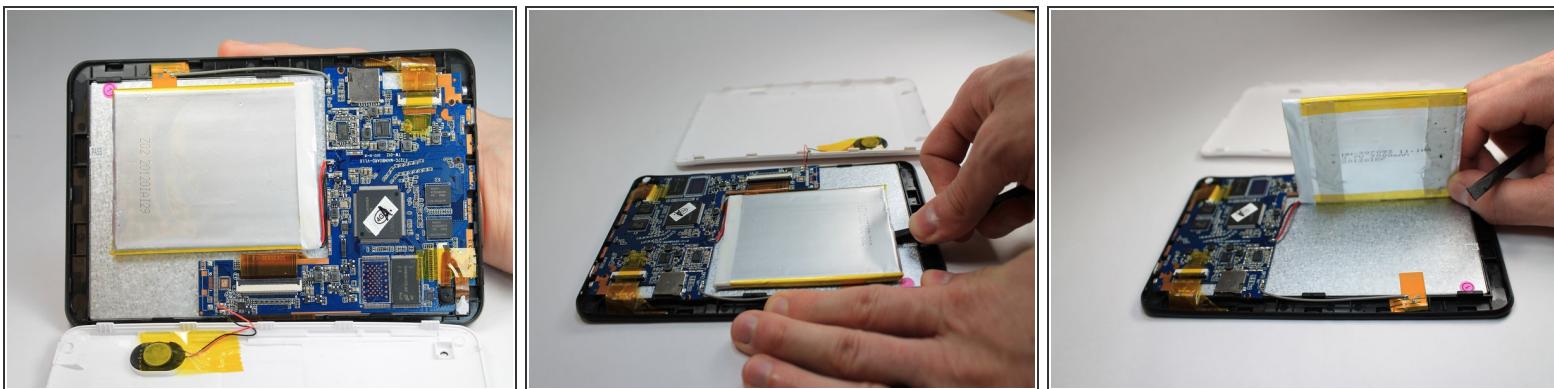

- Use flat side of the spudger to get under battery and use pressure to release from glue. Do this all the way around battery until it comes off.

(i) At this point do not attempt to fully remove the battery as it is still attached to the logic board.

Step 3 — Desolder wires

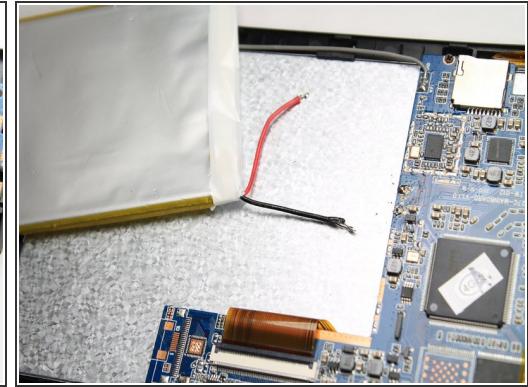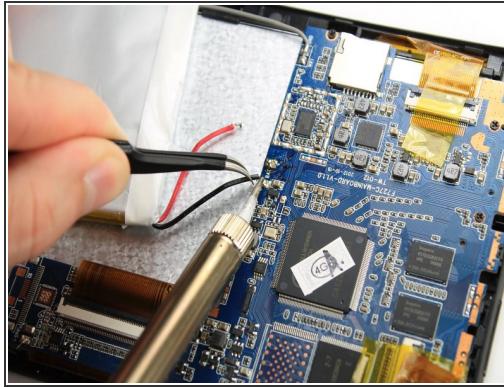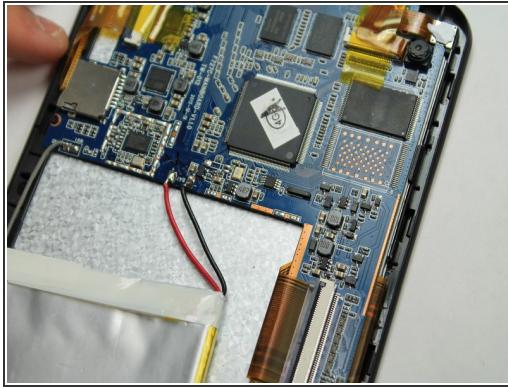

- Once battery is off, the wires will still be connected to motherboard. You will need to desolder the wires.
- Using the soldering tool, use the heat to melt the connection. As you do this, pull on the wires with a tweezer until wires comes off.

 To ease reassembly, take note of which wire goes to the negative and positive terminals.

To reassemble your device, follow these instructions in reverse order.