

A-554230


ISSUE

A-554230

ENGR. H.G. REIMELS	HGR	RM
DRAWN M.M. FALOR	CH.S.	RM
ISSUE	1-29-62	CHW
ENGR. W.P. SPICK	RM	
DRAWN R.M. FOLEY	RM	RM
3-9-62		ISSUE-1

NOTES:

1. CONNECTIONS BETWEEN THE SPRINGS AND THE TERMINALS SHALL BE MADE WITH "H" WIRE, P465781, 22 GA, SINGLE, BLACK.
2. ALL CONNECTIONS SHALL BE SOLDERED PER SPEC 50016, METHOD C.
3. WIRING SHALL HAVE SUFFICIENT SLACK TO PERMIT KEY UNIT TO BE REVERSED.
4. FOR INFORMATION PERTAINING TO "W" AND "Y". SEE REQUIREMENTS EXCEPTION 17B ON A-165729, SHEET 7, < 29B ON LA-850016-6A >.
5. KEY UNIT VIEWED FROM TOP OF KEY.
6. < > INDICATES BTL INFORMATION, WHEN THERE IS CORRESPONDING WECO INFORMATION, IT SHALL BE USED FOR MANUFACTURING PURPOSES.

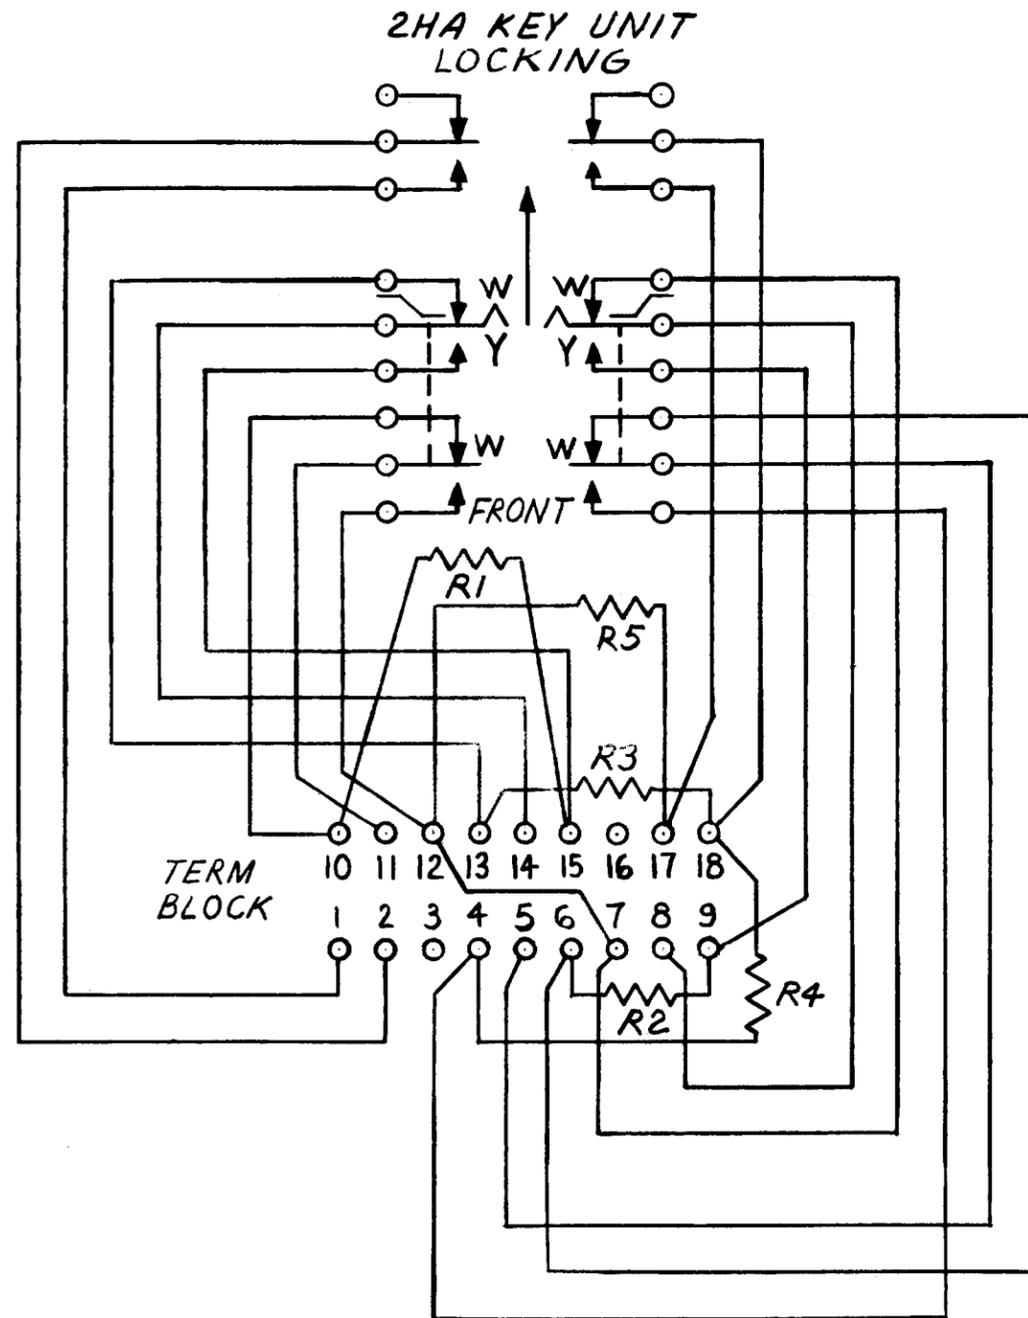

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
 TO 2 DECIMAL PLACES ± AS ANGLES ±
 TO 3 DECIMAL PLACES ±
 FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 16,003, PART 2, SECTION 227.

DWG. SIZE
2S

6017AP KEY	A-166605
USED ON	DWG

DIAGRAM OF CONNECTIONS
 SCALE: NONE

WESTERN ELECTRIC COMPANY, INC.
 ENGINEER OF MANUFACTURE
 -BELL TELEPHONE LABORATORIES-
 INCORPORATED-

C D S	A-554230	SHEET
	NO. OF SHEETS PER SET	-SEE SHEET 1