
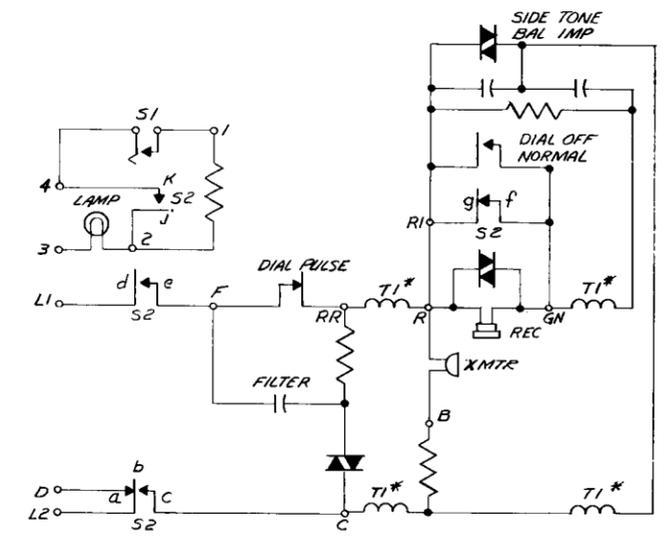


FOR GEN INFO ON SYMBOLS AND NOTES REFER TO MFR STD 16003 PART 2 SECT 2

A-579182
 DATE 12-9-58
 ISSUE 1
 1-2-59

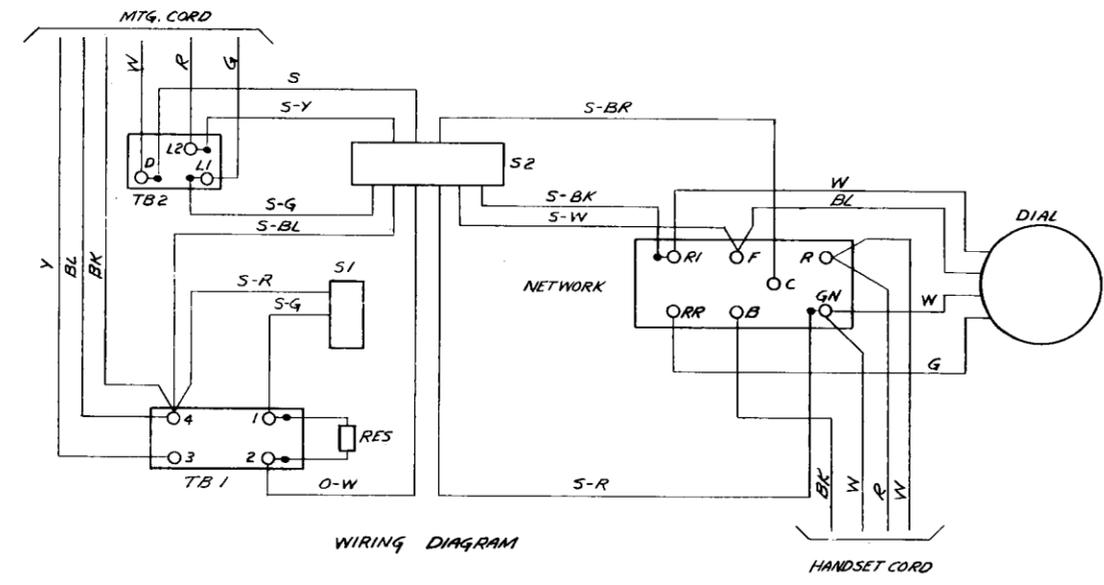

CONNECTIONS

TABLE A
TELEPHONE SET WITH EIA AUXILIARY RINGER

CLASS OF SERVICE	CONNECTIONS AT AUXILIARY RINGER										CONNECTIONS AT TELEPHONE SET						
	LINE			TRANS-FORMER		MTG. CORD					MTG. CORD						
	RING	TIP	GND	1	2	R	G	Y	BL	W	BK	R	G	Y	BL	W	BK
BRIDGED Δ	5	6	2	2	4	5	6	2	4	3	4	L2	L1	3	4	D	4
RING PARTY Δ	5	6	2	2	4	5	6	2	4	3	4	L2	L1	3	4	D	4
TIP PARTY EXC DMR	5	6	2	2	4	6	5	2	4	3	4	L2	L1	3	4	D	4
TIP PARTY DMR	5	6	2	2	4	6	5	2	1	3	4	L2	L1	3	B	D	4
TIP PARTY AT	5	6	2	2	4	6	5	2	1	3	4	L2	L1	3	B	D	4

TABLE B
TELEPHONE SET WITHOUT RINGER

CLASS OF SERVICE	CONNECTIONS AT 42A CONNECTING BLOCK										CONNECTIONS AT TELEPHONE SET						
	LINE			TRANS-FORMER		MTG. CORD					MTG. CORD						
	RING	TIP	GND	1	2	R	G	Y	BL	W	BK	R	G	Y	BL	W	BK
BRIDGED Δ	R	G	Y	Y	B	R	G	Y	B	R	B	L2	L1	3	4	D	4
RING PARTY Δ	R	G	Y	Y	B	R	G	Y	B	R	B	L2	L1	3	4	D	4
TIP PARTY EXC DMR	R	G	Y	Y	B	R	G	Y	B	R	B	L2	L1	3	4	D	4
TIP PARTY DMR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
TIP PARTY AT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Δ CONNECTIONS FOR BRIDGED AND RING PARTIES ARE FOR FLAT AND MESSAGE RATE SERVICE.
 * TIP PARTY DIAL MESSAGE RATE AND AUTOMATIC TICKETING SERVICES ARE UNAVAILABLE WHEN TELEPHONE SET IS NOT ASSOCIATED WITH AN AUXILIARY RINGER

- NOTES:
- WHEN THE HANDSET IS REMOVED FROM CRADLE, CONTACT S₁ BREAKS LAST.
 - IN WIRING DIAGRAM CONNECTIONS LABELED * SHALL BE SOLDERED PER (X-524) WE 5001G METHOD C.
 - SET TO BE WIRED AS SHOWN IN WIRING DIAGRAM (BRIDGED, RING PARTY, TIP PARTY EXCEPT DIAL MESSAGE RATE)
 - CIRCUIT SCHEMATIC REFERENCE DESIGNATIONS MARKED * ARE SHOWN ON 495 TYPE NETWORK ASSEMBLY DRAWING.

701B TEL SET A-579180
 USED ON DWG

701 TYPE TELEPHONE SETS
 WIRING DIAGRAM & SCHEMATIC

SCALE ~
 WESTERN ELECTRIC CO, INC
 ENGINEER OF MANUFACTURE

ITEM	PRICE	NAME	REQ
6			
5			
4			
3			
2			
1			

STOCK LIST
 DIMENSIONS UP TO AND INCLUDING 72 INCHES EXPRESSED IN INCHES.
 NON-LIMITED DIMENSIONS, OTHER THAN SIZE OF RAW MATERIAL, SHALL BE HELD WITHIN FRACTIONAL DECIMAL.

65

SDS
 A-579182

A-579182

8