




NOTES:

- ITEM NUMBERS REFERRED TO ARE SHOWN IN STOCK LIST OF BASE AND COMPONENT ASSEM., P-13E616.
- ALL SOLDERING SHALL BE IN ACCORDANCE WITH 50016, METHOD C.
- PT-LEADS FURNISHED WITH COMPONENT.
- COMPONENT OF D-200E CORD.
- ITEM 15 OF DIAL ASSEMBLY, P-13E618.

ISSUE 1 2-16-61
 REDESIGNED DUE TO EXTENSIVE CHANGES.
 ISSUE 2 4-20-61
 CHANGED COLOR OF LEADS TO AGREE WITH CHANGES MADE ON LEAD ASSEMBLIES
 P-13E618-771, ISS. 3 & P-13E619-816, ISS. 2: COLOR OF ITEM 19 WAS BRN 39; THE R-Y, 20 LEAD FROM TERM. 1 OF 21 TO TERM. 1 OF 12 WAS FROM TERM. 1 OF 12 TO TERM. 13 OF 122; BRN WAS 39. ADDED NOTE 4 & 5. RE: COLOR OF LEADS FROM THE CORD TO TS1 & TS2.
 ISSUE 3 1-11-61
 ADDED 3A TEL CONSOLE TO TITLE BOX (SEE ABOVE CORD) ADDED MFR DISC FOR GIZA TEL CON (353427 DC)
 ISSUE 4 2-15-62

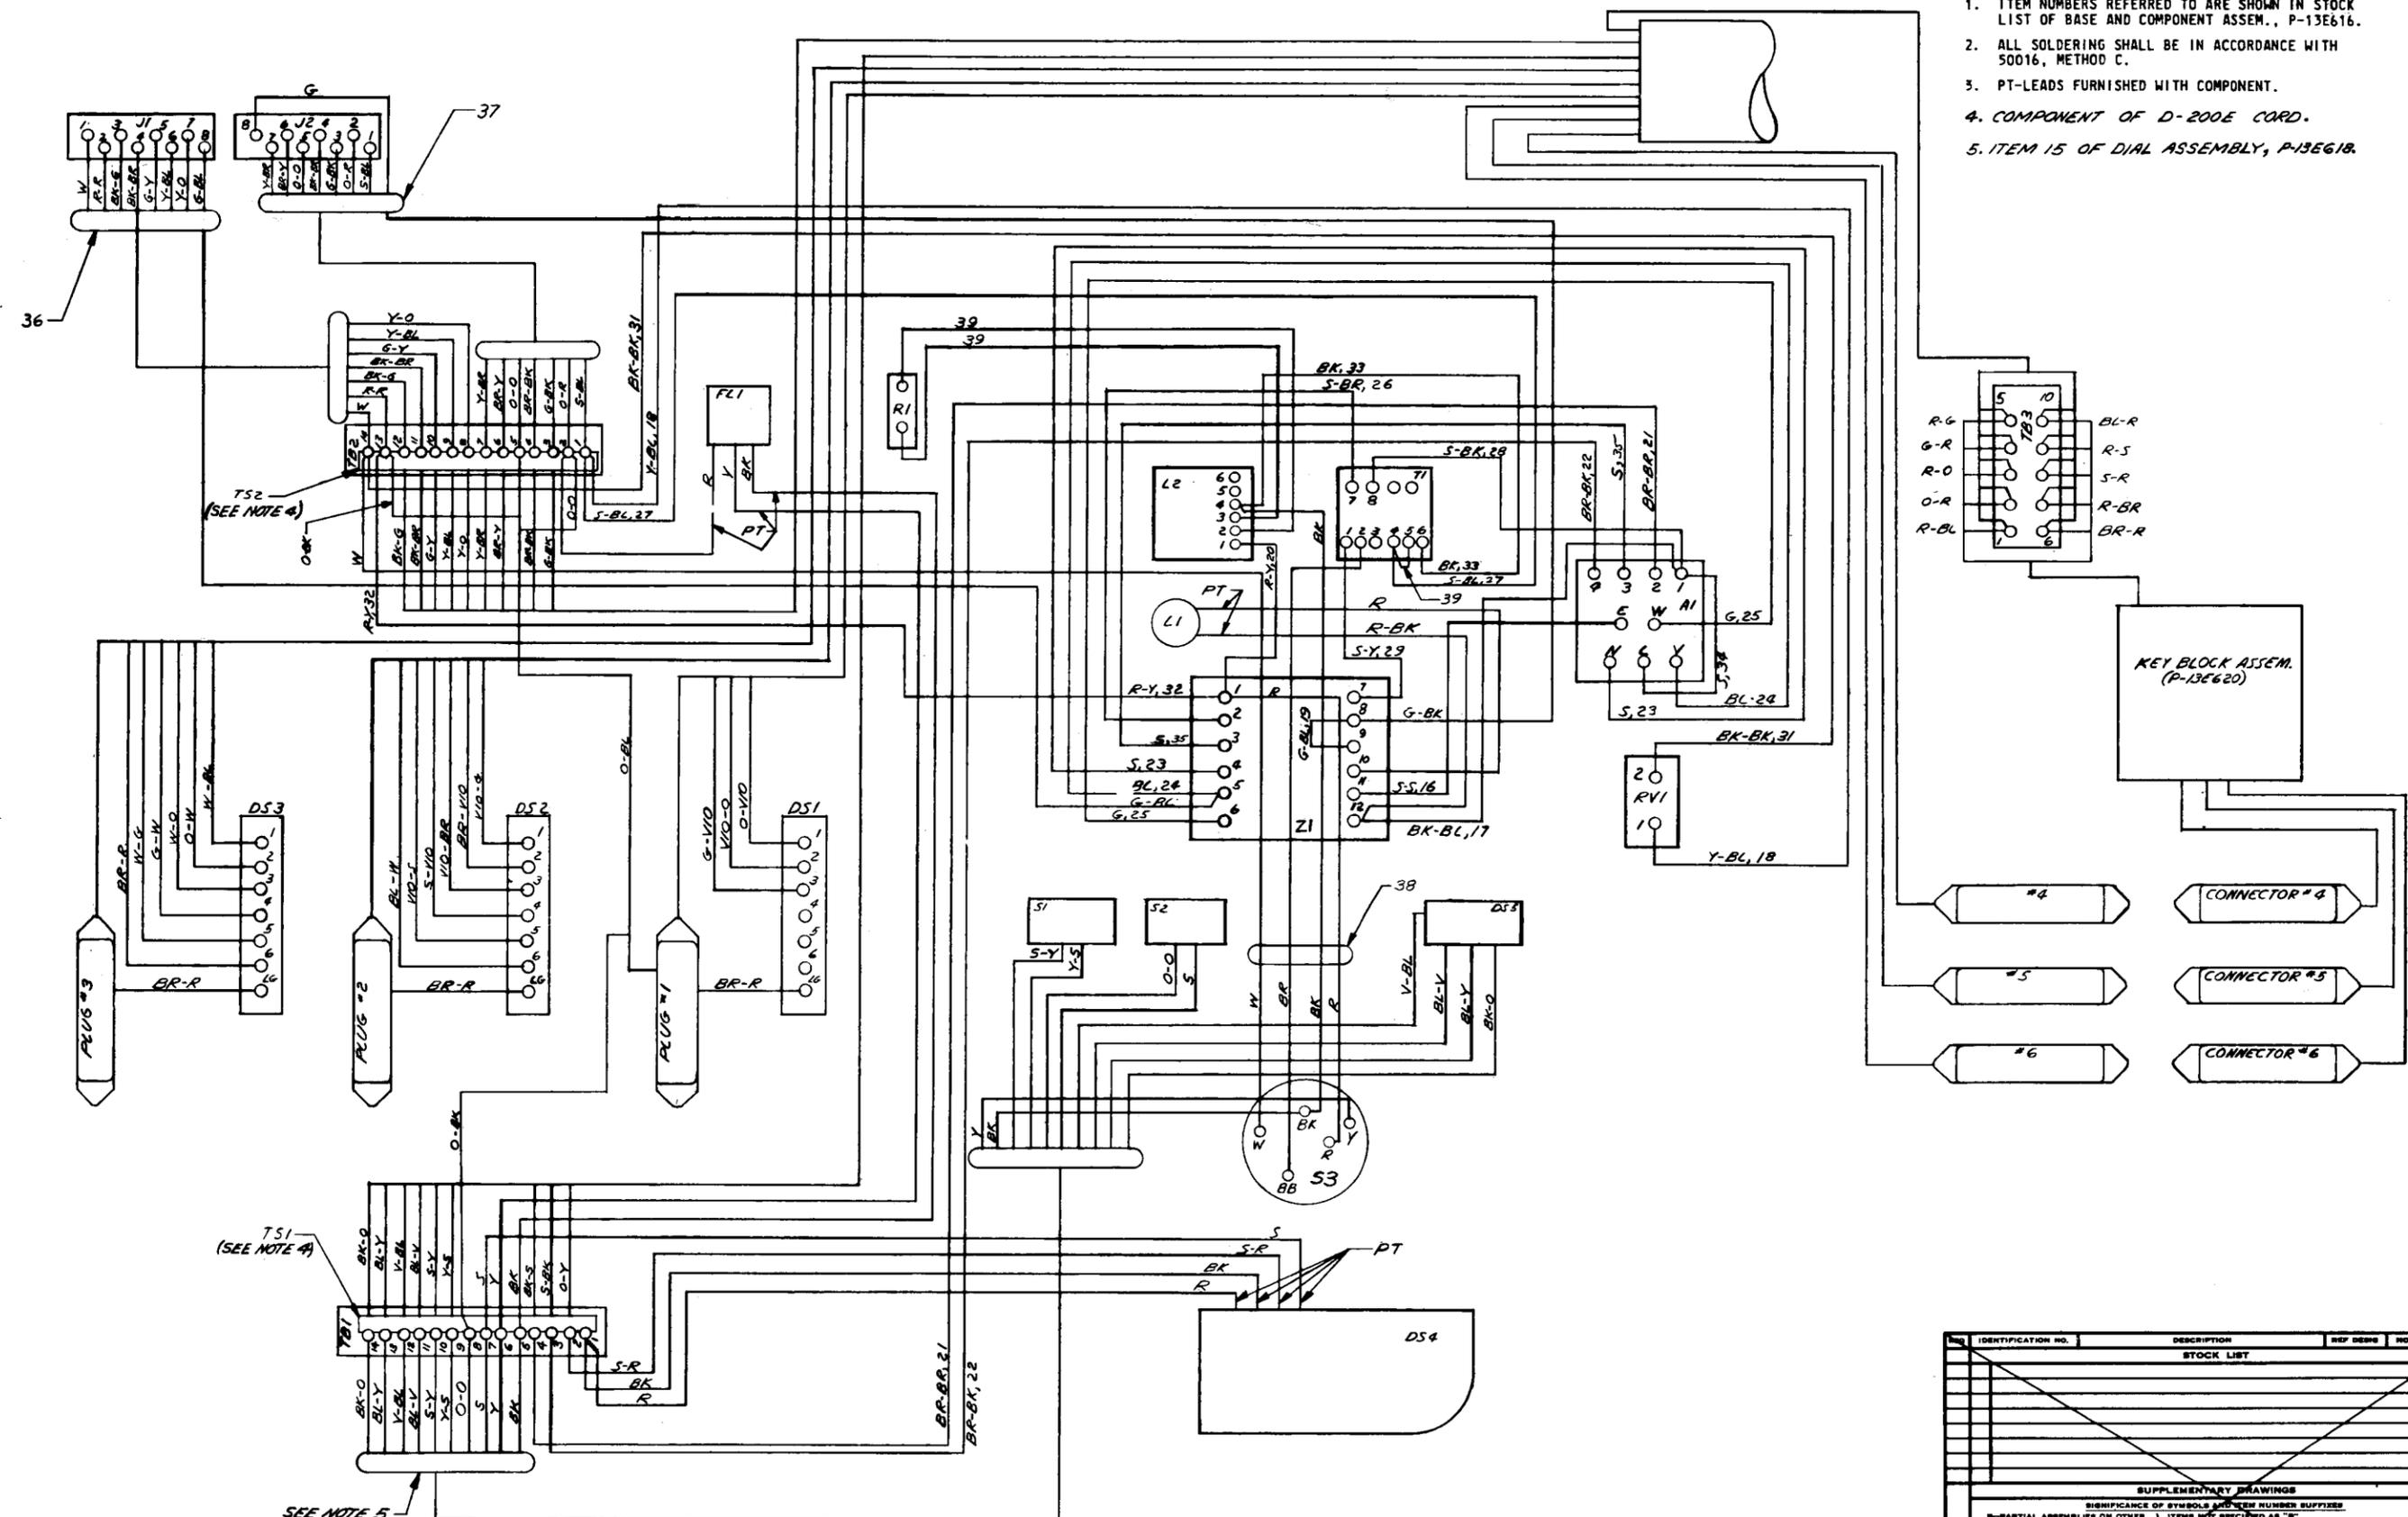

KEY BLOCK ASSEM.
(P-13E620)



90	A-579568
89	
88	
87	
86	
85	
84	
83	
82	
81	
80	
79	
78	
77	
76	
75	
74	
73	
72	
71	
70	
69	
68	
67	
66	
65	
64	
63	
62	
61	
60	
59	
58	
57	
56	
55	
54	
53	
52	
51	
50	
49	
48	
47	
46	
45	
44	
43	
42	
41	
40	
39	
38	
37	
36	
35	
34	
33	
32	
31	
30	
29	
28	
27	
26	
25	
24	
23	
22	
21	
20	
19	
18	
17	
16	
15	
14	
13	
12	
11	
10	
9	
8	
7	
6	
5	
4	
3	
2	
1	

A-579568

IDENTIFICATION NO.	DESCRIPTION	REF DESIG	NOTE	ITEM
STOCK LIST				
4A TYPE TEL CONSOLE				
SCHEMATIC				
SUPPLEMENTARY DRAWINGS				
SIGNIFICANCE OF SYMBOLS AND ITEM NUMBER SUFFIXES: B-PARTIAL ASSEMBLY OR OTHER ITEMS NOT SPECIFIED AS "B" D-DRAWING WITH STOCK LIST OR "D" PARTS IN ITEM COLUMN S-PARTS SHIPPED LOOSE WHERE ITEMS HAVE REFERENCE DESIGNATIONS, THEY MAY BE USED IN LIEU OF ITEM NUMBERS ON THE DELINEATION. ✓ IN "REQ" COLUMN OF STOCK LIST-QUANTITY AS REQUIRED ✓ IN "REQ" COLUMN OF SUPPLEMENTARY DRAWING LIST-DRAWING REQUIRED ⊗ DENOTES MANUFACTURE DISCONTINUED ⊕ DENOTES MANUFACTURE LIMITED AB-DENOTES APPARATUS BOOK DRAWINGS UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES, UNLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED: TO 2 DECIMAL PLACES ± AS ANGLES ± TO 3 DECIMAL PLACES ± FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 18,005, PART 2, SECTION 237.				
				6S