


2-28-63
 6-20-63
 11-8-63
 3-5-64
 11-8-63
 3-5-64

NOTES:

- - SOLDERED CONNECTIONS IN WIRING DIAGRAM. SOLDER IN ACCORDANCE WITH 50016 METHOD C.
- SET SHALL BE WIRED AS SHOWN IN WIRING DIAGRAM (BRIDGED, RING PARTY, TIP PARTY EXCEPT DIAL MESSAGE RATE).
- WIRING ORDER SHALL BE SUCH THAT CORDS AND RINGER LEADS CAN BE REMOVED WITH MINIMUM DISTURBANCE TO OTHER WIRING. WIRING SHALL BE SO ARRANGED THAT THERE IS NO POSSIBLE INTERFERENCE WITH ACTION OF SWITCH S2 OR RINGER.
- SLATE-BLACK LEAD BETWEEN TERMINALS (A) AND (H) ON NETWORK IS SHOWN IN STOCK LIST OF ASSEMBLY DRAWING A-580059

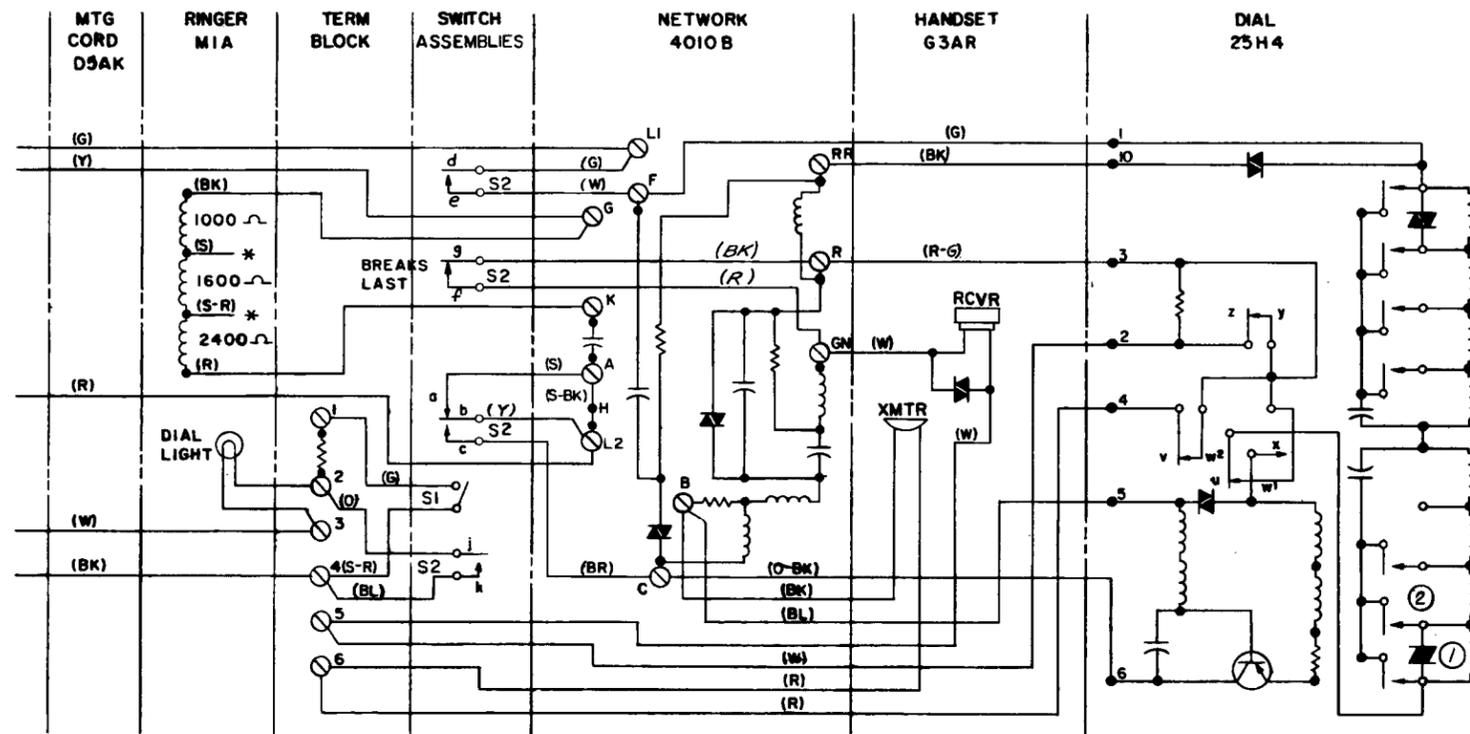

* Insulated and stored.

A-580101

USED ON DWS

CONNECTING DIAGRAM

SCALE NONE

WESTERN ELECTRIC CO. INC. DIVISION OF MANUFACTURE

MATERIAL FINISH
 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. UNLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
 TO 3 DECIMAL PLACES ± AS ANGLES ±
 TO 2 DECIMAL PLACES ±
 FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 1600, PART 2, SECTION 2.1.

6S A-580101