


NOTES:

1.  DENOTES STRAPPING TO BE DONE WITH P-314954 (#24 AWGA TINNED COPPER WIRE) AND SLEEVING P-26991.
2. ALL WIRES EXCEPT STRAPPINGS TO BE P-465781 #22 AWG BLACK WIRE CUT TO REQUIRED LENGTH. THE SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY TOP ASSEMBLY TO BE REVERSED.
3. ALL CONNECTIONS TO BE SOLDERED PER SPEC. 5006, METHOD C.
4. SPARKLEKOTE DRY STICK PAPER 60" (BUMPER STOCK) PRINTED BLACK.

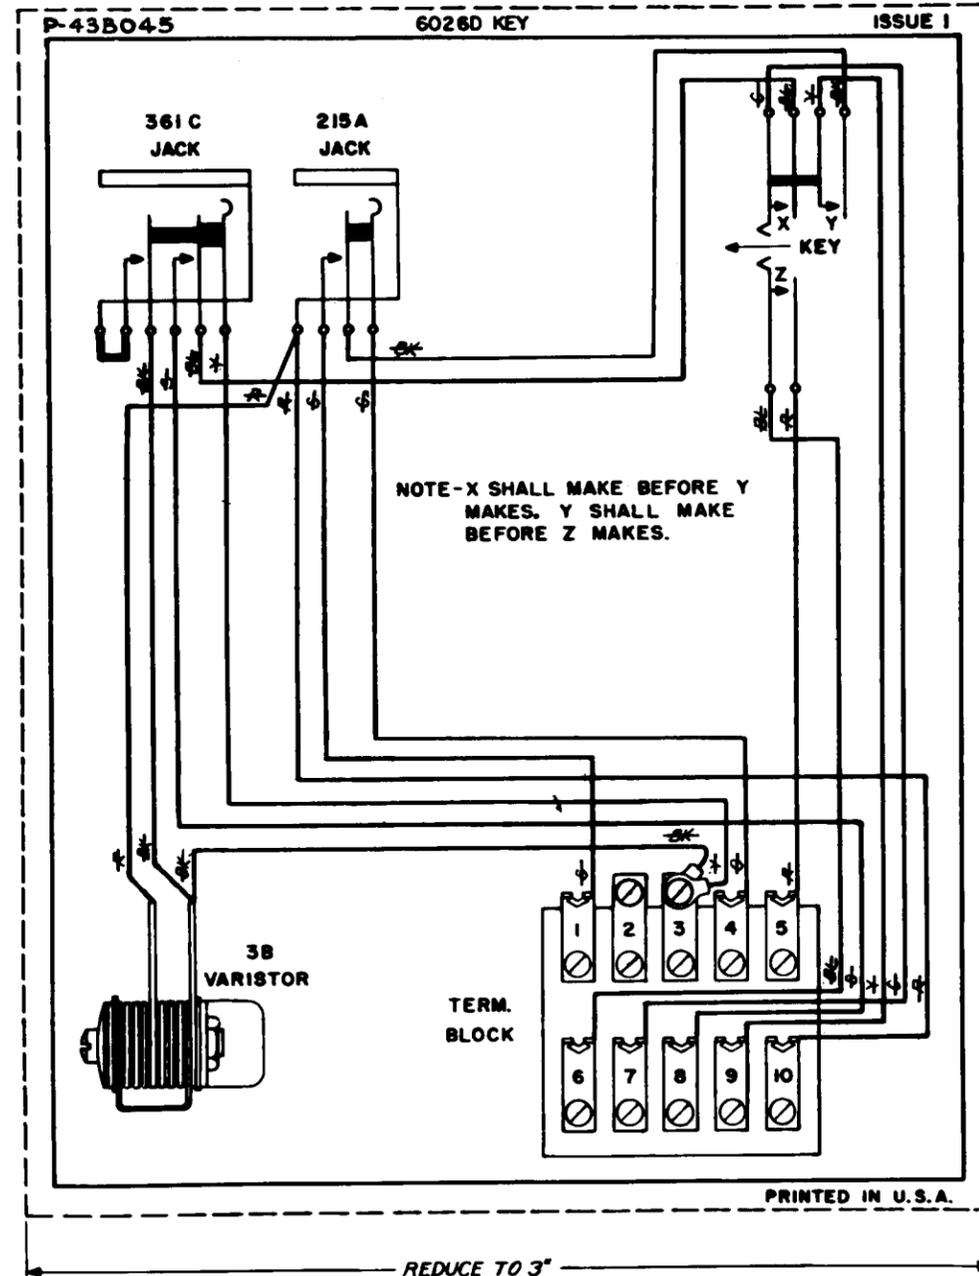

85	
84	
83	
82	
81	
80	
79	
78	
77	
76	
75	
74	
73	
72	
71	
70	
69	
68	
67	
66	
65	
64	
63	
62	
61	
60	
59	
58	
57	
56	
55	
54	
53	
52	
51	
50	
49	
48	
47	
46	
45	
44	
43	
42	
41	
40	
39	
38	
37	
36	
35	
34	
33	
32	
31	
30	
29	
28	
27	
26	
25	
24	
23	
22	
21	
20	
19	
18	
17	
16	
15	
14	
13	
12	
11	
10	
9	
8	
7	
6	
5	
4	
3	
2	
1	

A-753504

REQ	IDENTIFICATION NO.	DESCRIPTION	REF DES.	NOTE	ITEM
STOCK LIST					
		6026-D KEY	A-163182		
		USED ON	DWG		
SUPPLEMENTARY DRAWINGS					
SIGNIFICANCE OF SYMBOLS AND ITEM NUMBER SUFFIXES					
D-PARTIAL ASSEMBLIES OR OTHER DRAWINGS WITH STOCK LISTS D-PARTS SHIPPED LOOSE WHERE ITEMS HAVE REFERENCE DESIGNATIONS, THEY MAY BE USED IN LIEU OF ITEM NUMBERS ON THE DESIGNATION.			ITEMS NOT SPECIFIED AS "D" OR "D" PARTS IN ITEM COLUMN ARE INDIVIDUAL "C" PARTS. IN "REQ" COLUMN OF STOCK LIST—QUANTITY AS REQUIRED IN "REQ" COLUMN OF SUPPLEMENTARY DWG LIST—DRAWING REQUIRED ⊕ DENOTES MANUFACTURE DISCONTINUED ⊗ DENOTES MANUFACTURE LIMITED		
DIMENSIONS UP TO AND INCLUDING 75 MILLIMETERS EXPRESSED IN MILLIMETERS. DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD WITHIN PRACTICAL TOLERANCE.					
				AB	
				3S	