

35-TYPE TEST SETS

1. GENERAL

1.001 This addendum supplements Section A702.002, Issue 4.

1.002 This addendum is issued to revise Fig. 13. Fig. 13 in the section shows the BAT & GRD CO key operated and the G switch closed; the key should be shown normal and the switch open. Several minor errors and omissions in this figure are also taken care of in the revised Fig. 13. Paragraph 4.09, describing the use of the No. 360-type tool, is revised due to an incorrect figure reference.


4. METHOD OF OPERATION

The following changes apply to Part 4 of the section:

- (a) 4.09 revised
- (b) Fig. 13 revised

4.09 The No. 360-type tool shown in Fig. 16 is designed for connecting the cords to various other tools used in making connection with apparatus contacts and terminals, and is provided with a colored sleeve to indicate the cord conductor with which it is used.

CODE	CONDUCTOR	COLOR
360A	Sleeve	Red
360B	Ring	Black
360C	Tip	White

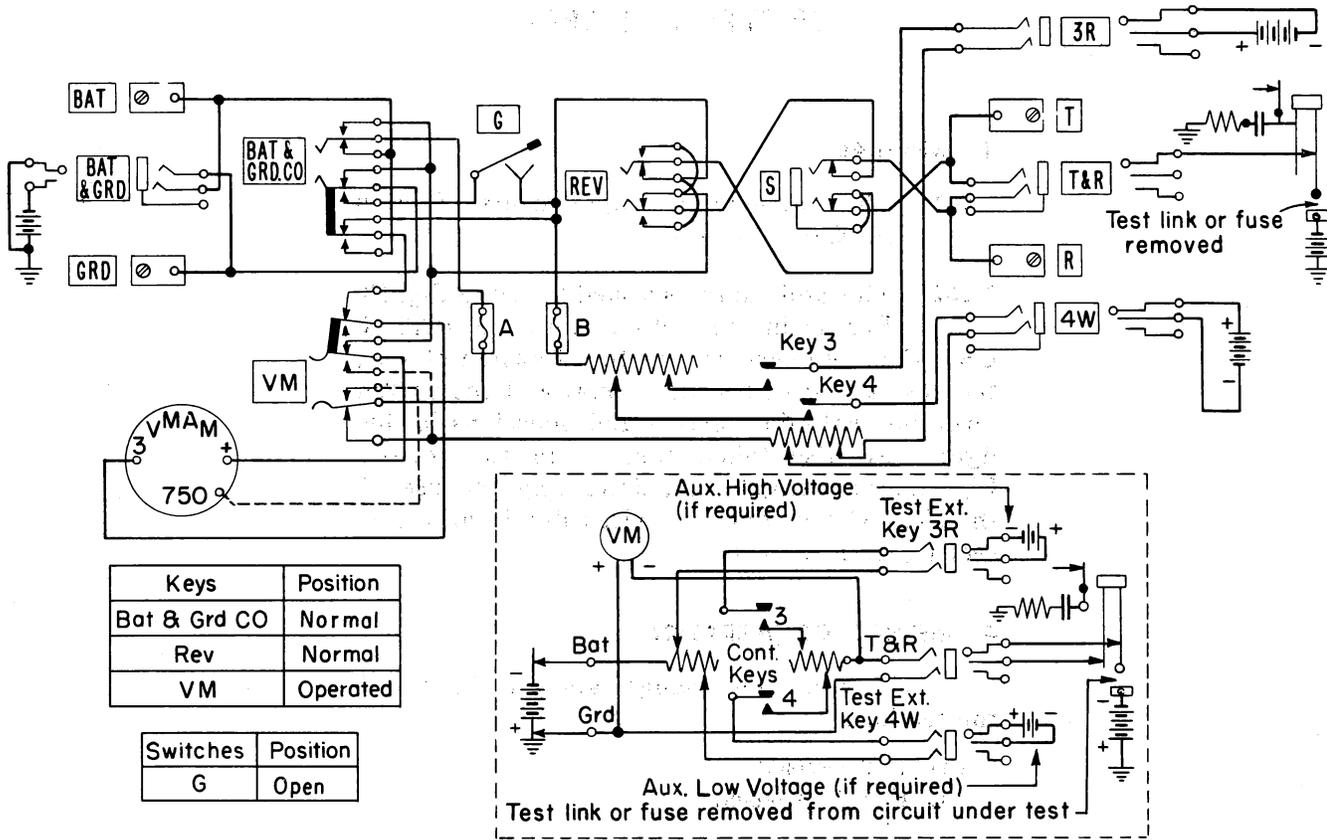

Keys	Position
Bat & Grd CO	Normal
Rev	Normal
VM	Operated

Switches	Position
G	Open

Fig. 13 – "F/V" (Fuse Voltage) Application Using No. 35D or No. 35F Test Set with Fuse or Test Link Removed from Circuit Under Test